

U24ai050 Lab-3


01 February 2026 21:06

1) Construct a star topology in the Cisco packet tracer as shown below, and check where the data packets are transferring from one system to another using ping.

```
Minimum = 4ms, Maximum = 16ms, Average = 7ms
C:\>ping 192.168.10.2
Pinging 192.168.10.2 with 32 bytes of data:
Reply from 192.168.10.2: bytes=32 time<1ms TTL=128
Reply from 192.168.10.2: bytes=32 time<1ms TTL=128
Reply from 192.168.10.2: bytes=32 time<1ms TTL=128
Reply from 192.168.10.2: bytes=32 time<1ms TTL=128
Ping statistics for 192.168.10.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>ping 192.168.10.5
Pinging 192.168.10.5 with 32 bytes of data:
Reply from 192.168.10.5: bytes=32 time<1ms TTL=128
Reply from 192.168.10.5: bytes=32 time<1ms TTL=128
Reply from 192.168.10.5: bytes=32 time<1ms TTL=128
Reply from 192.168.10.5: bytes=32 time<1ms TTL=128
Ping statistics for 192.168.10.5:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>ping 192.168.10.4
Pinging 192.168.10.4 with 32 bytes of data:
Reply from 192.168.10.4: bytes=32 time=7ms TTL=128
Reply from 192.168.10.4: bytes=32 time<1ms TTL=128
Reply from 192.168.10.4: bytes=32 time<1ms TTL=128
Reply from 192.168.10.4: bytes=32 time=1ms TTL=128
Ping statistics for 192.168.10.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 7ms, Average = 2ms
```

Time	Packet Status	Source	Destination	Type	Color	Time (sec)	Length	Count	Link	Event
	Successful	PC1	PC2	ICMP	Green	0.000	N	0	(edit)	(delete)
	Successful	PC0	PC3	ICMP	Purple	0.000	N	1	(edit)	(delete)
	Successful	PC5	PC2	ICMP	Brown	0.000	N	2	(edit)	(delete)
	Successful	PC1	PC4	ICMP	Pink	0.000	N	3	(edit)	(delete)



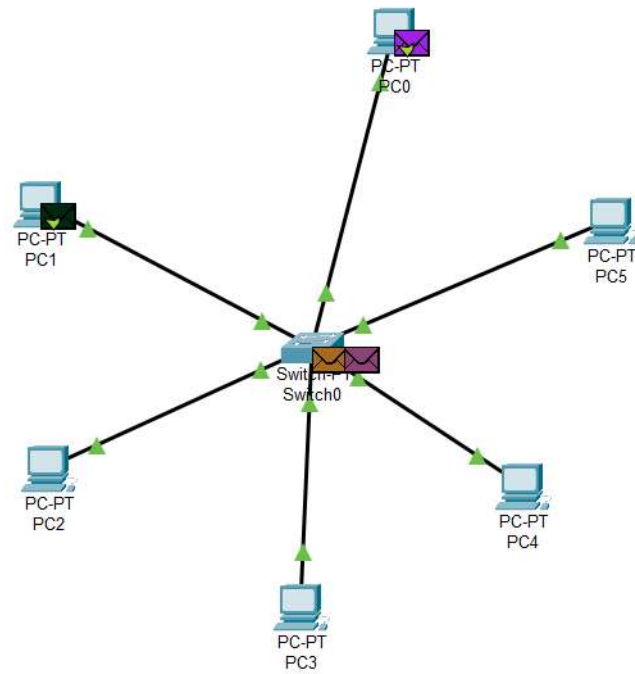

2. Construct a bus topology in the Cisco packet tracer as shown below, and check where the data packets are transferring from one system to another.

```
PC0
Physical Config Desktop Programming Attributes
Command Prompt X
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.0.2

Pinging 192.168.0.2 with 32 bytes of data:

Reply from 192.168.0.2: bytes=32 time<1ms TTL=128
Reply from 192.168.0.2: bytes=32 time<1ms TTL=128
Reply from 192.168.0.2: bytes=32 time<1ms TTL=128
Reply from 192.168.0.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>ping 192.168.0.3

Pinging 192.168.0.3 with 32 bytes of data:


Reply from 192.168.0.3: bytes=32 time<1ms TTL=128
Reply from 192.168.0.3: bytes=32 time<1ms TTL=128
Reply from 192.168.0.3: bytes=32 time<1ms TTL=128
Reply from 192.168.0.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.0.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms
C:\>ping 192.168.0.4

Pinging 192.168.0.4 with 32 bytes of data:

Reply from 192.168.0.4: bytes=32 time<1ms TTL=128
Reply from 192.168.0.4: bytes=32 time<1ms TTL=128
Reply from 192.168.0.4: bytes=32 time<1ms TTL=128
Reply from 192.168.0.4: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.0.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>
```

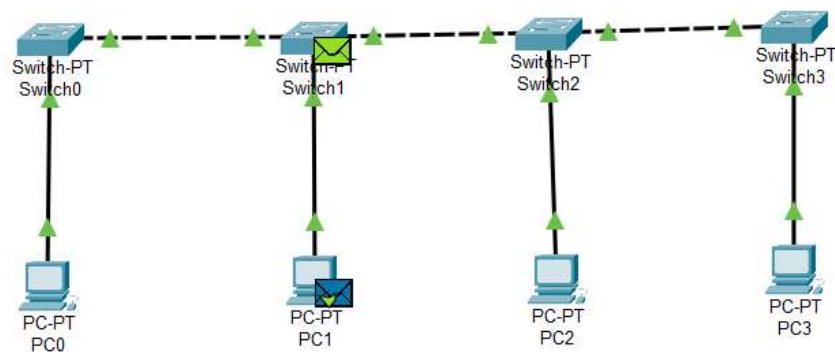

- Construct a ring topology in the Cisco packet tracer as shown below, and check where the data packets are transferring from one system to another.

```

Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.0.2

Pinging 192.168.0.2 with 32 bytes of data:

Reply from 192.168.0.2: bytes=32 time<1ms TTL=128
Reply from 192.168.0.2: bytes=32 time<1ms TTL=128
Reply from 192.168.0.2: bytes=32 time<1ms TTL=128
Reply from 192.168.0.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.0.3

Pinging 192.168.0.3 with 32 bytes of data:

Reply from 192.168.0.3: bytes=32 time<1ms TTL=128
Reply from 192.168.0.3: bytes=32 time<1ms TTL=128
Reply from 192.168.0.3: bytes=32 time<1ms TTL=128
Reply from 192.168.0.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.0.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 192.168.0.4

Pinging 192.168.0.4 with 32 bytes of data:

Reply from 192.168.0.4: bytes=32 time=6ms TTL=128
Reply from 192.168.0.4: bytes=32 time<1ms TTL=128
Reply from 192.168.0.4: bytes=32 time<1ms TTL=128
Reply from 192.168.0.4: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.0.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 6ms, Average = 1ms

C:\>
  
```

Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit	Delete
	Successful	PC0	PC2	ICMP		0.000	N	0	(edit)	(delete)
	Successful	PC1	PC3	ICMP		0.000	N	1	(edit)	(delete)
	Successful	PC0	PC1	ICMP		0.000	N	2	(edit)	(delete)
	Successful	PC2	PC1	ICMP		0.000	N	3	(edit)	(delete)

