


U24ai050 Lab-4

16 February 2026 11:24

Construct the below network in the Cisco packet tracer, as shown below, and check where the data packets transfer from one system to another using i) Static routing (STATIC) and ii) Dynamic routing (RIP), further demonstrate the use of half and full duplex in the switch in the below network.

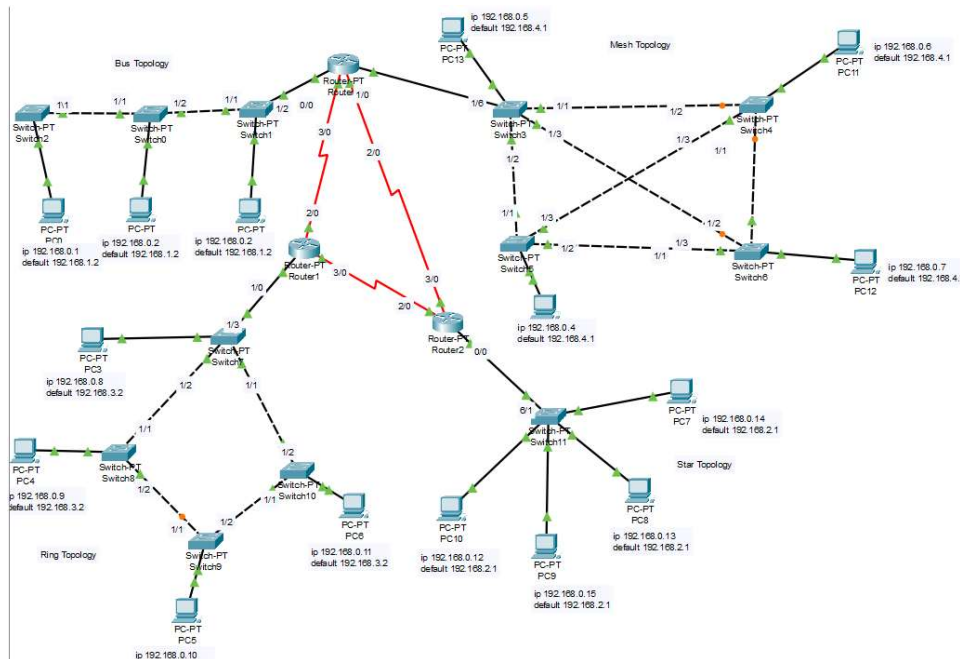

Successful	PC0	PC1	ICMP	0.000	N	25	(edit)	(delete)
Successful	PC1	PC2	ICMP	0.000	N	26	(edit)	(delete)
Successful	PC4	PC6	ICMP	0.000	N	27	(edit)	(delete)
Successful	PC11	PC12	ICMP	0.000	N	28	(edit)	(delete)

```
C:\>ping 192.168.0.2

Pinging 192.168.0.2 with 32 bytes of data:

Reply from 192.168.0.2: bytes=32 time<1ms TTL=128
Reply from 192.168.0.2: bytes=32 time<1ms TTL=128
```

```
C:\>ping 192.168.0.2

Pinging 192.168.0.2 with 32 bytes of data:

Reply from 192.168.0.2: bytes=32 time<1ms TTL=128
Reply from 192.168.0.2: bytes=32 time<1ms TTL=128
Reply from 192.168.0.2: bytes=32 time<1ms TTL=128
Reply from 192.168.0.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.0.9

Pinging 192.168.0.9 with 32 bytes of data:

Reply from 192.168.0.9: bytes=32 time<1ms TTL=128
Reply from 192.168.0.9: bytes=32 time<1ms TTL=128
Reply from 192.168.0.9: bytes=32 time=15ms TTL=128
Reply from 192.168.0.9: bytes=32 time=22ms TTL=128

Ping statistics for 192.168.0.9:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 22ms, Average = 9ms

C:\>ping 192.168.0.11

Pinging 192.168.0.11 with 32 bytes of data:

Reply from 192.168.0.11: bytes=32 time<1ms TTL=128
Reply from 192.168.0.11: bytes=32 time<1ms TTL=128
Reply from 192.168.0.11: bytes=32 time<1ms TTL=128
Reply from 192.168.0.11: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.0.11:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>|
```