



# U24ai050 Lab-7

18 March 2026 18:26

1) Construct the below network in the Cisco packet tracer and connect the server and PCs using DHCP protocol.

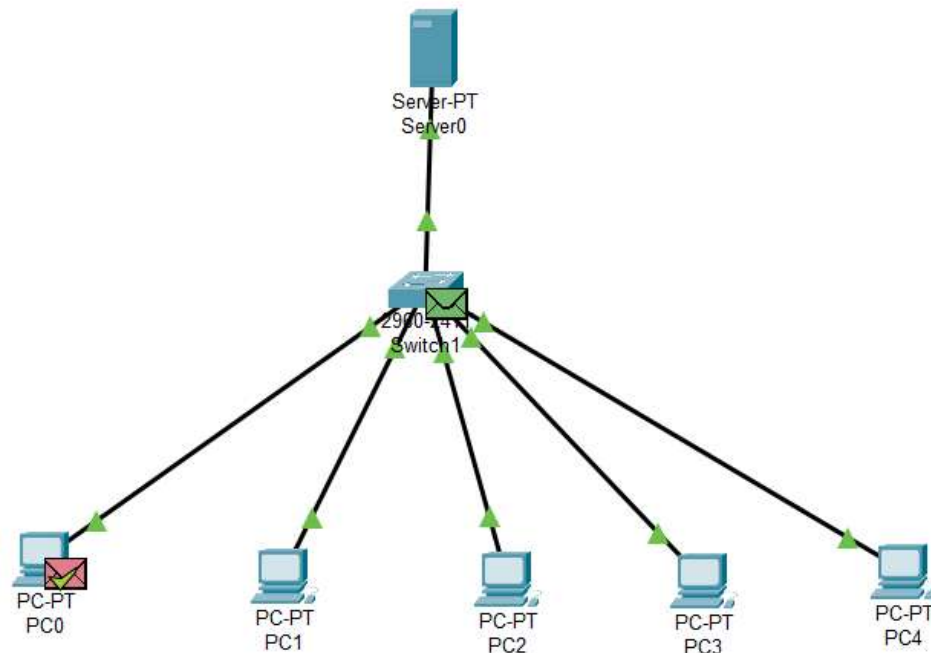

| Fire | Last Status | Source | Destination | Type | Color | Time(sec) | Periodic | Num | Edit   | Delete |
|------|-------------|--------|-------------|------|-------|-----------|----------|-----|--------|--------|
|      | Successful  | PC0    | PC1         | ICMP |       | 0.000     | N        | 0   | (edit) | (d     |
|      | Successful  | PC0    | PC4         | ICMP |       | 0.000     | N        | 1   | (edit) | (d     |
|      | Successful  | PC1    | PC3         | ICMP |       | 1.515     | N        | 2   | (edit) | (d     |

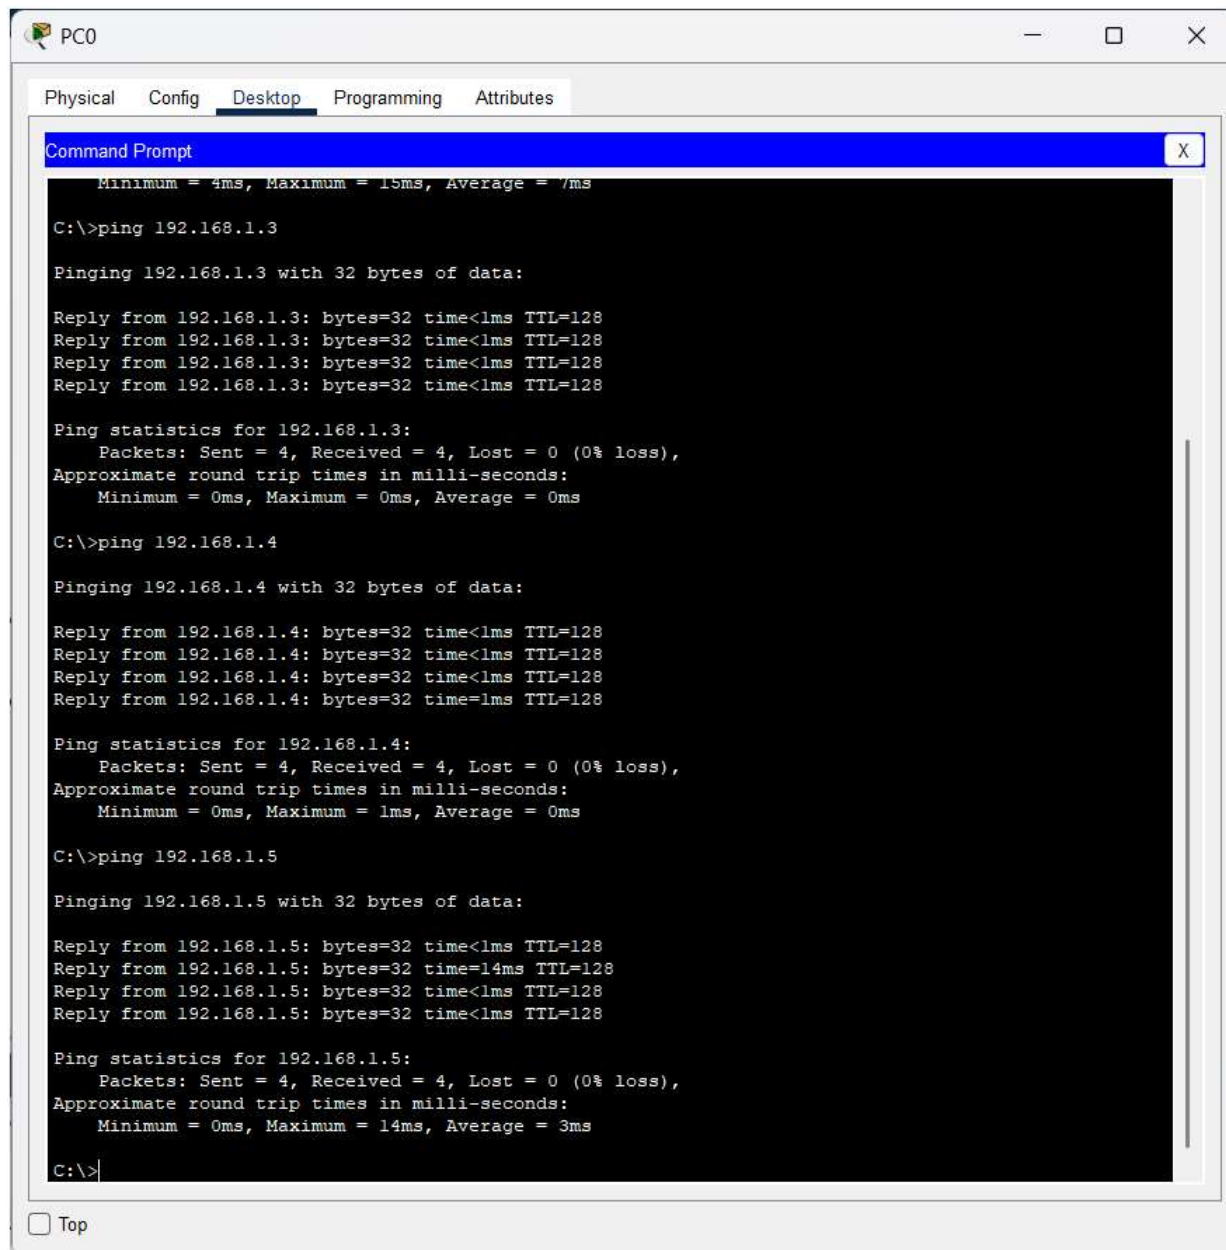

The screenshot shows a window titled "PC0" with tabs for "Physical", "Config", "Desktop", "Programming", and "Attributes". The "Desktop" tab is active, displaying a "Command Prompt" window. The Command Prompt shows the results of three ping commands executed from the C:\ prompt. Each ping command targets a different IP address: 192.168.1.3, 192.168.1.4, and 192.168.1.5. For each target, four replies are shown, each with 32 bytes of data and a time less than 1ms. Ping statistics for each target show 4 packets sent, 4 received, and 0% loss. The approximate round trip times in milliseconds are also provided for each target.

```
Minimum = 4ms, Maximum = 15ms, Average = 7ms

C:\>ping 192.168.1.3

Pinging 192.168.1.3 with 32 bytes of data:

Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.1.4

Pinging 192.168.1.4 with 32 bytes of data:

Reply from 192.168.1.4: bytes=32 time<1ms TTL=128
Reply from 192.168.1.4: bytes=32 time<1ms TTL=128
Reply from 192.168.1.4: bytes=32 time<1ms TTL=128
Reply from 192.168.1.4: bytes=32 time=1ms TTL=128

Ping statistics for 192.168.1.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 192.168.1.5


Pinging 192.168.1.5 with 32 bytes of data:

Reply from 192.168.1.5: bytes=32 time<1ms TTL=128
Reply from 192.168.1.5: bytes=32 time=14ms TTL=128
Reply from 192.168.1.5: bytes=32 time<1ms TTL=128
Reply from 192.168.1.5: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.5:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 14ms, Average = 3ms

C:\>
```

2) Construct the below network in the Cisco packet tracer and Configuring a Cisco Router as a DHCP Server

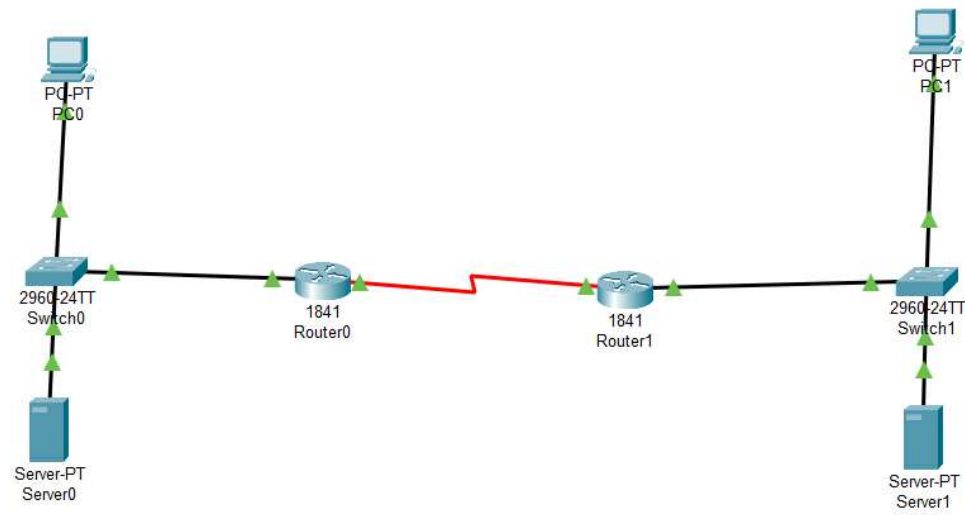

| Fire | Last Status | Source  | Destination | Type | Color | Time(sec) | Periodic | Num | Edit   | Delete   |
|------|-------------|---------|-------------|------|-------|-----------|----------|-----|--------|----------|
|      | Successful  | PC0     | PC1         | ICMP |       | 0.000     | N        | 4   | (edit) | (delete) |
|      | Failed      | Server0 | PC1         | ICMP |       | 0.000     | N        | 5   | (edit) | (delete) |
|      | Successful  | PC0     | PC1         | ICMP |       | 0.000     | N        | 6   | (edit) | (delete) |

