

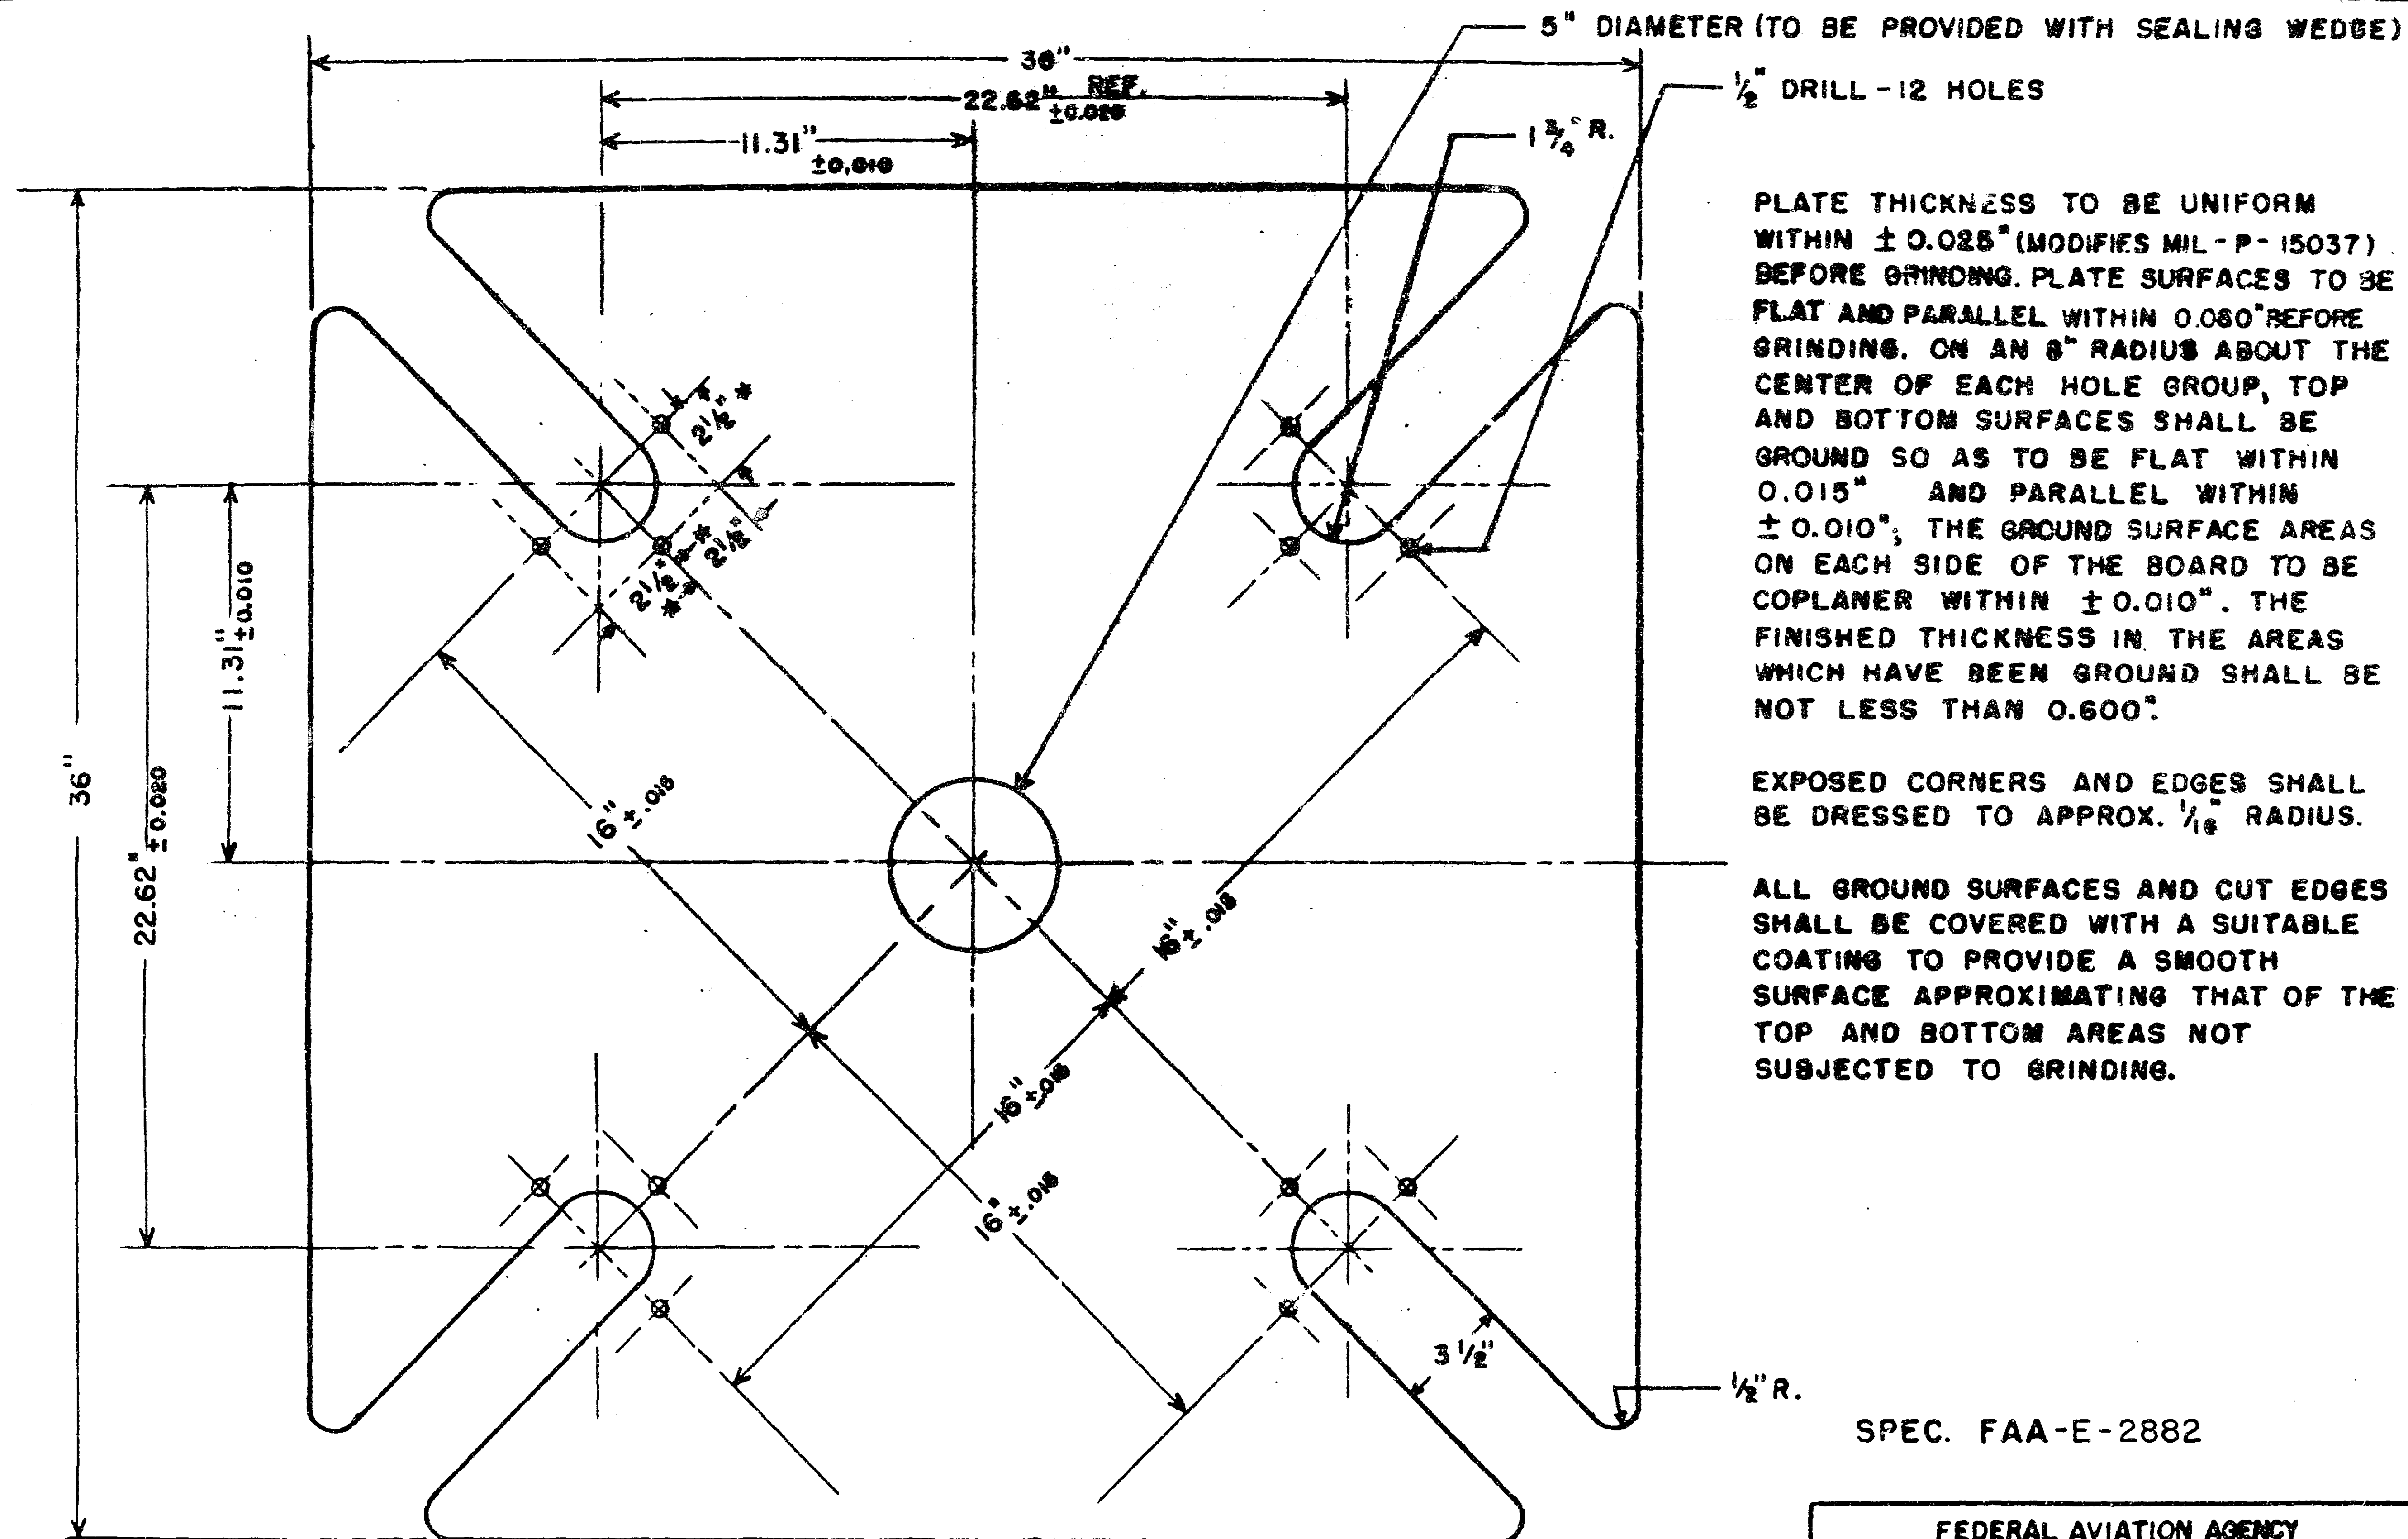


PLATE THICKNESS TO BE UNIFORM WITHIN ± 0.025 " (MODIFIES MIL-P-15037) BEFORE GRINDING. PLATE SURFACES TO BE FLAT AND PARALLEL WITHIN 0.080" BEFORE GRINDING. ON AN 8" RADIUS ABOUT THE CENTER OF EACH HOLE GROUP, TOP AND BOTTOM SURFACES SHALL BE GROUND SO AS TO BE FLAT WITHIN 0.015" AND PARALLEL WITHIN ± 0.010 ". THE GROUND SURFACE AREAS ON EACH SIDE OF THE BOARD TO BE COPLANER WITHIN ± 0.010 ". THE FINISHED THICKNESS IN THE AREAS WHICH HAVE BEEN GROUND SHALL BE NOT LESS THAN 0.600".

EXPOSED CORNERS AND EDGES SHALL BE DRESSED TO APPROX. 1/8" RADIUS.

ALL GROUND SURFACES AND CUT EDGES SHALL BE COVERED WITH A SUITABLE COATING TO PROVIDE A SMOOTH SURFACE APPROXIMATING THAT OF THE TOP AND BOTTOM AREAS NOT SUBJECTED TO GRINDING.

SPEC. FAA-E-2882

FEDERAL AVIATION AGENCY
BUREAU OF FACILITIES
NAVIGATIONAL AIDS ENGINEERING DIVISION

VOR ANTENNA
SUPPORT PLATE

C	UPDATE SPEC.	6-14-94	PM
B	CHGD. SPEC. REF. NUMBER AND ADDITION TO NOTE	1-17-64	J.C.
A	ADDED NOTES	2-16-60	ACE
LET	REVISION	DATE	CRD.

CKD.	Ro	SUBMITTED:	APPROVED: <i>[Signature]</i>
DRN. WT		DATE	2-8-59
			B-50402 B