


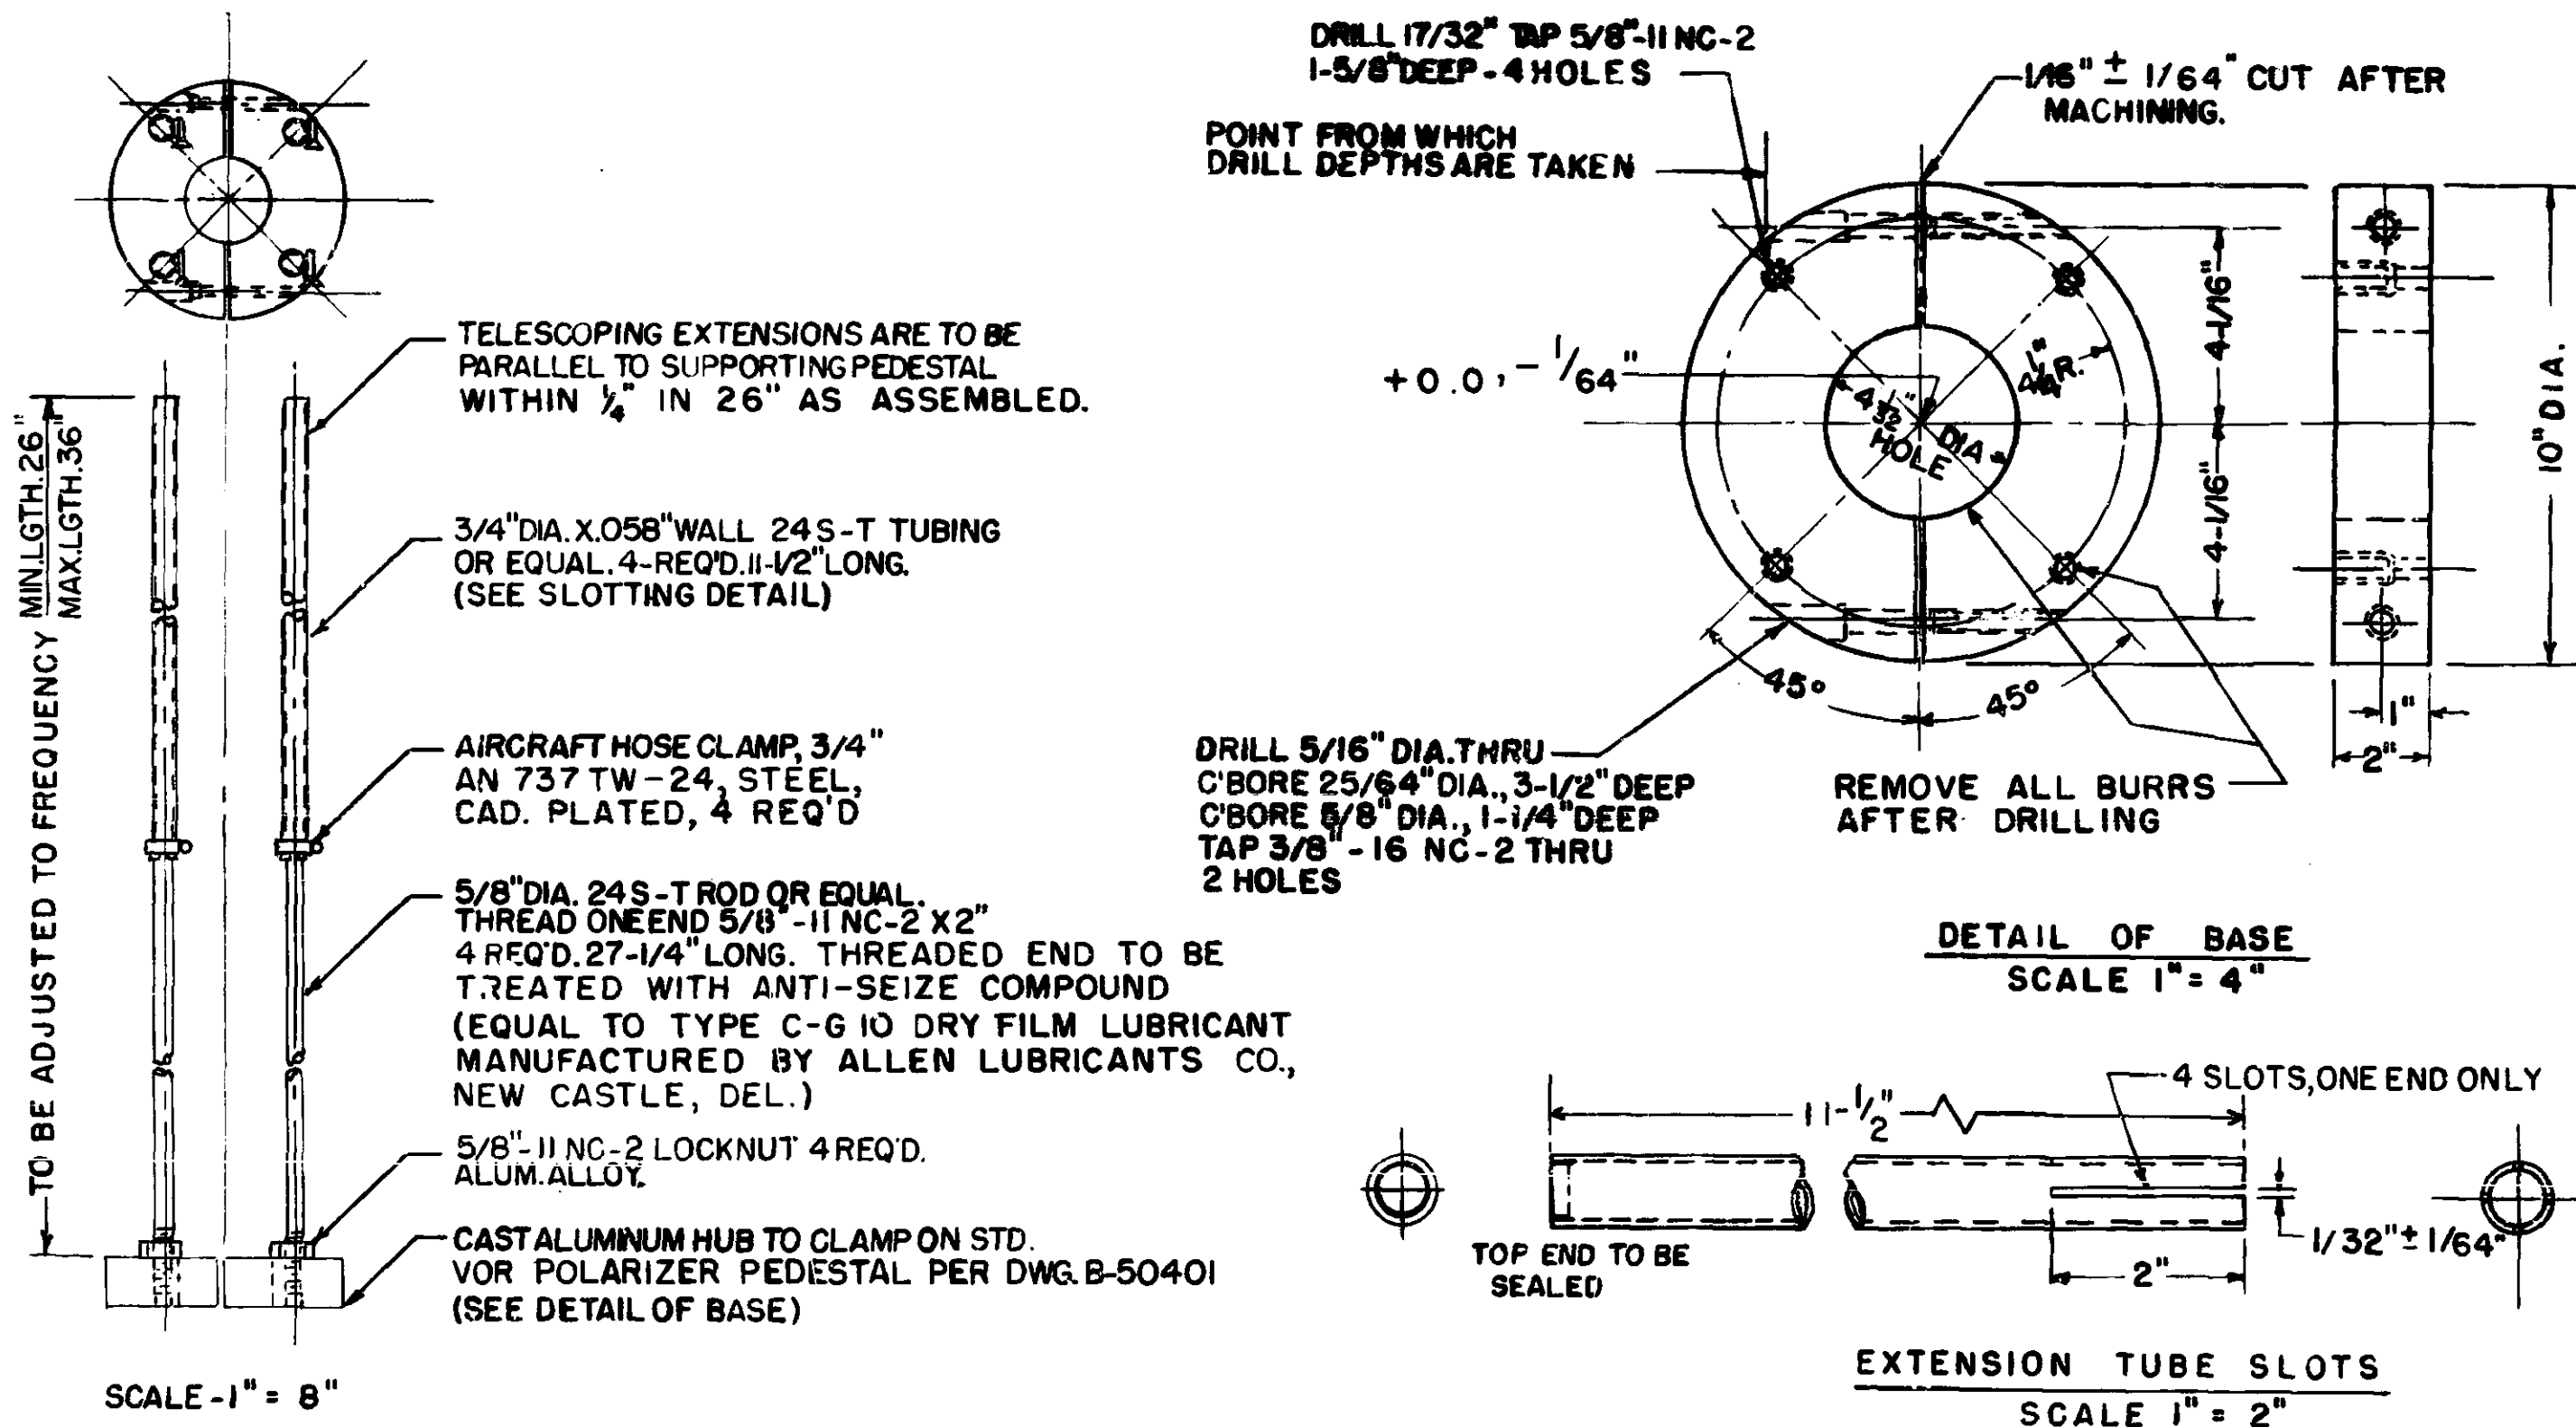

NOTE:

POLARIZER TO BE SHIPPED ASSEMBLED
ASSEMBLE BASE WITH 3/8"-16 NC-2 HEXAGON SOCKET HEAD CAP
SCREWS 3-1/2" LONG, STEEL, CADMIUM OR ZINC PLATED.
2 REQ'D. UNLESS OTHERWISE SHOWN, DIMENSIONAL
TOLERANCES ARE $\pm$ 1/32"

SPEC. FAA-R-1224b

REV. BY F.A.A.					B	CHANGE 4" DIA. HOLE TO 4 $\frac{1}{32}$ "	6-19-55	HK	AIRWAYS ENGINEERING DIVISION	
	E	ADDED NOTE & CHGD. SPEC. REF. NUMBER	1-17-64	J.C.	A	1/16" WAS 1/32", 25/64" WAS .388" REDRAWN	3085	0	VOR POLARIZER	
	D	ADDED NOTES	2-17-60	BCG		1-5/8" WAS 1-3/8", 11-1/2" WAS 12", C-21559 WAS CA-2071	6/9/54		SUBMITTED: J.C. Clark	APPROVED: J.C. Clark
	C	DELETE "4 LOOP ANT." FROM TITLE; ADD PLUG	2-2-59	HJ	LET.			DR. BY: JS	DATE: 12/15/53	DW. B-21547 E
								CK. BY: RJ		