

D





C

B

A

NOTES: UNLESS OTH NOTES: UNLESS OTHERWISE SPECIFIED

- THIS DRAWING REPRESENTS THE “NOT TO EXCEED” OUTER DIMENSIONS OF ENCLOSURE.
- INTERPRET DRAWING PER ASME Y14.5-2018/Y14.41-2019 & REF. ASSOCIATED MODEL FOR COMPLETE PRODUCT DEFINITION.
- LASER ETCHING VARIES BY PIECE.
- TWO INSTALLATION OPTIONS:
A. FLANGE UP, UTILIZE 18 COUNTERBORED HOLES: 8-32 SOCKET HEAD CAP SCREWS, A286, 160KSI YIELD, TORQUE TO 24 IN-LBS MINIMUM.
B. FLANGE DOWN, UTILIZE 18 THRU-HOLES: 8-32 SOCKET HEAD CAP SCREWS, A286, 160KSI YIELD, TORQUE TO 24 IN-LBS MINIMUM.
- RADIATING SURFACES: HARD BLACK ANODIZE PER MIL-A-8625, TYPE III, CLASS 2.
- ALL OTHER SURFACES: CHEMICAL CONVERSION COAT PER MIL-DTL-5541, TYPE 1 CLASS 3, ELECTRICALLY CONDUCTIVE YELLOW.
- VERSALINK MATE/DEMATE INSTRUCTIONS: OMNETICS MICRO-D MATE AND DEMATE INSTRUCTIONS: ALIGN PIN AND SOCKET IN THE MATCHING ORIENTATION AND ENGAGE ALL PINS AND SOCKETS AT THE SAME TIME. MAXIMUM ENGAGEING FORCE SHALL BE 6.0 OUNCES AND MINIMUM SEPARATION FORCE SHALL BE 0.5 OZ. WHEN TESTED IAW EIA-364-37. TIGHTEN SCREWS EVENLY UNTILL CONNECTOR HALFES ARE FULLY ENGAGED. TORQUE JACKSCREWS TO 3 +/- 0.5 IN-LBS.
- THERMAL DISSIPATION: 200 WATTS PLUS 5 WATTS OF ENVIRONMENTAL INPUT.
- SV THERMAL INTERFACE BELOW 40 DEG C AND IF MATERIAL > 12W/ m-k REQUIRED.
- (MASS <= 6.5kg C.G. AND MOI VARIABILITY – TBS)

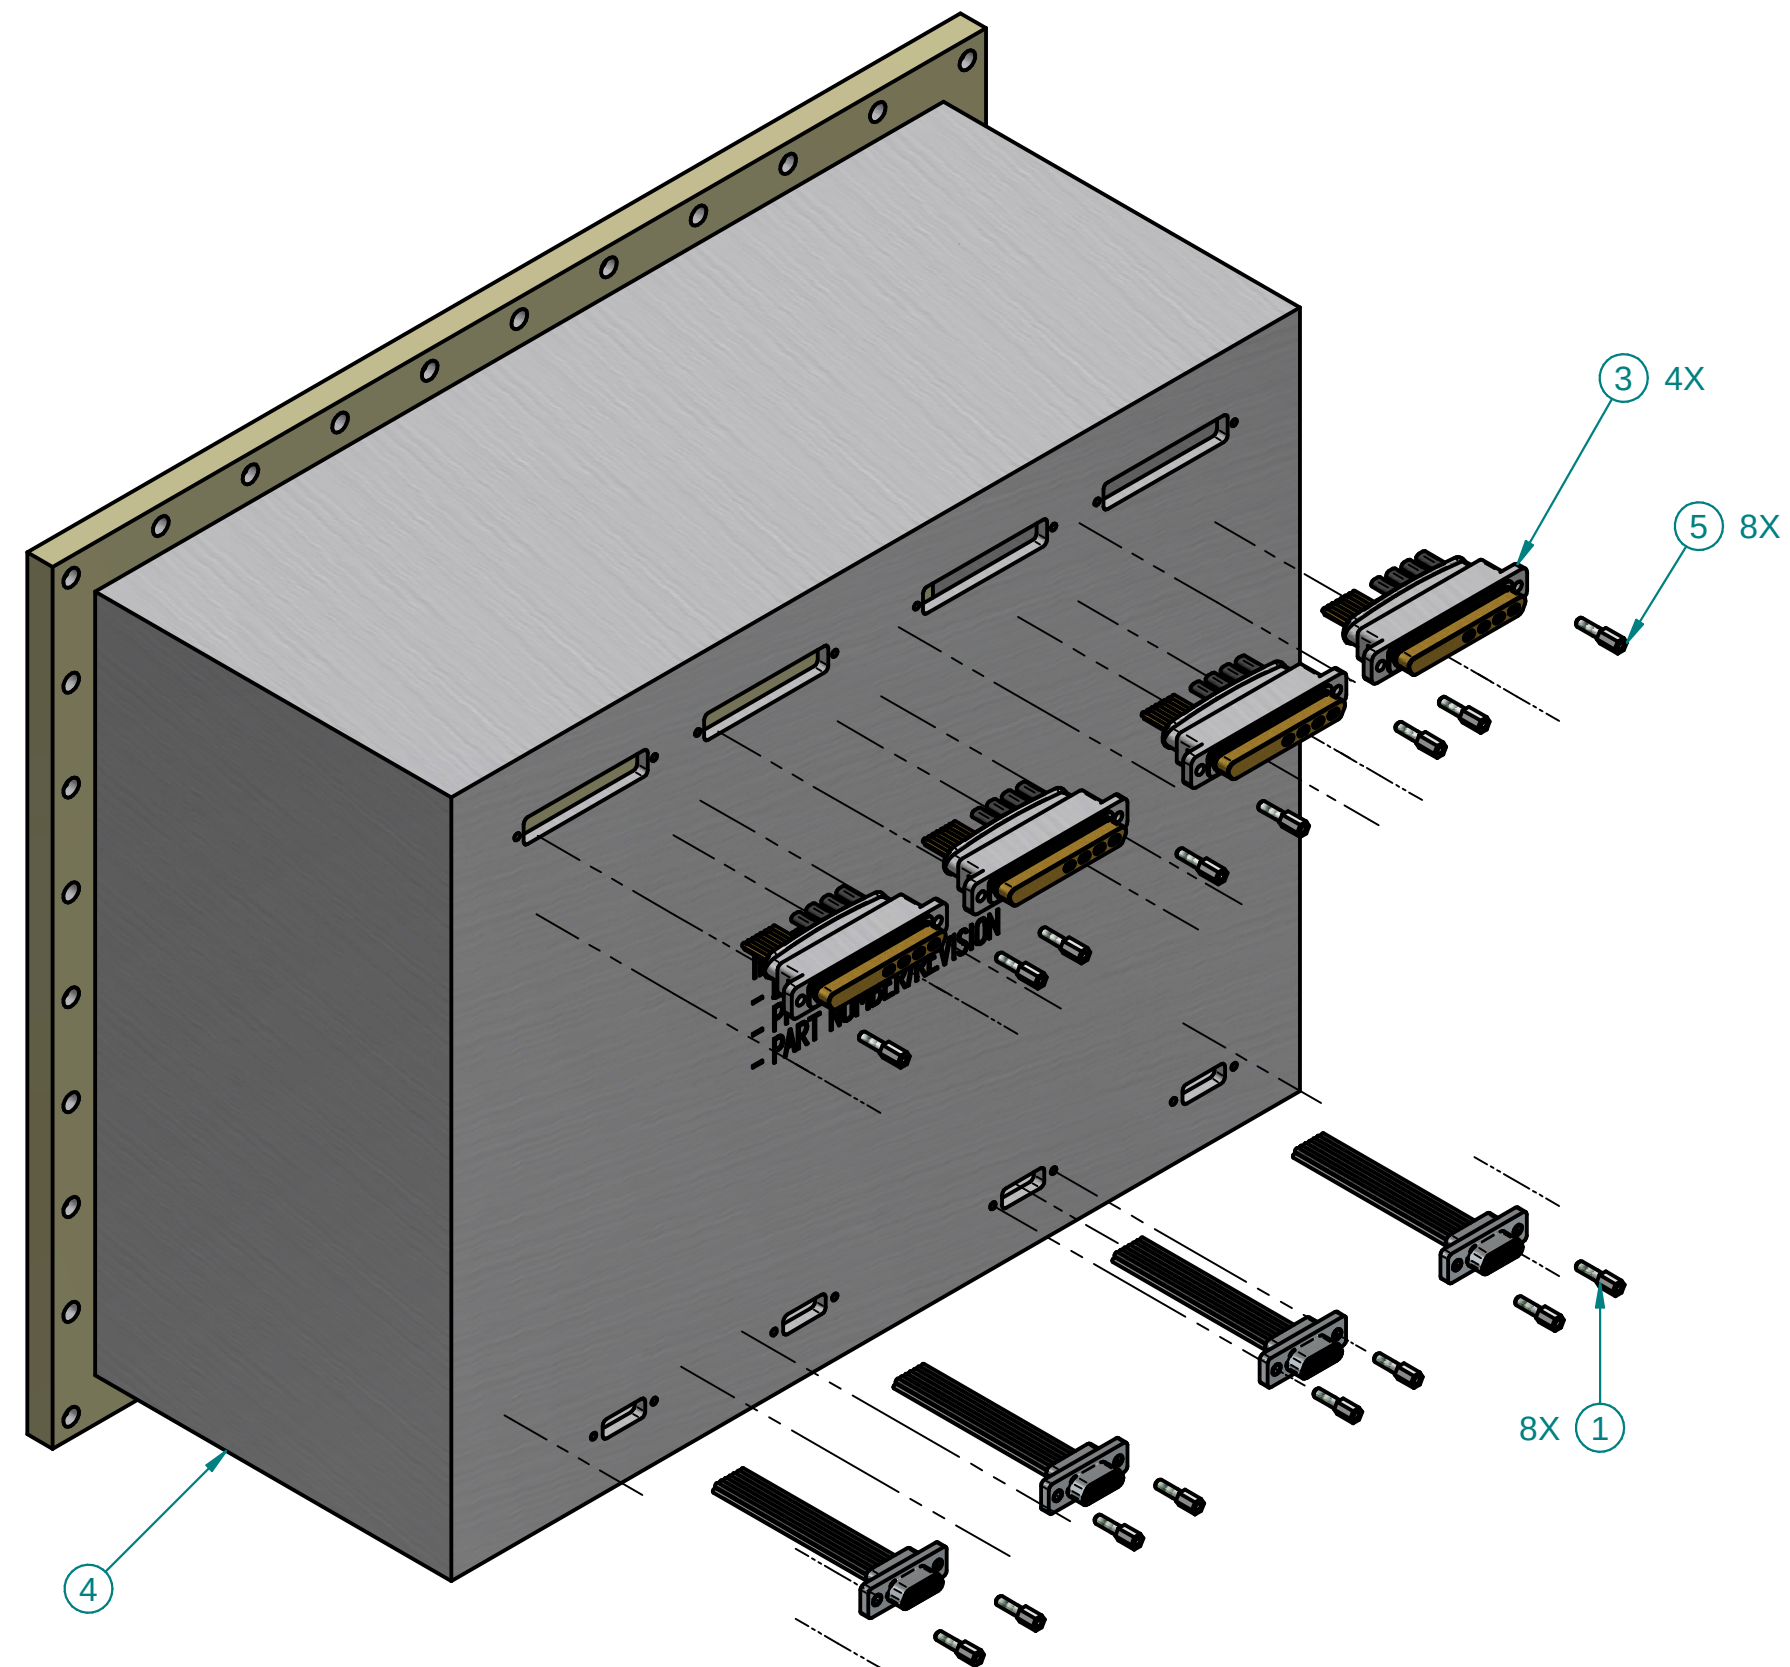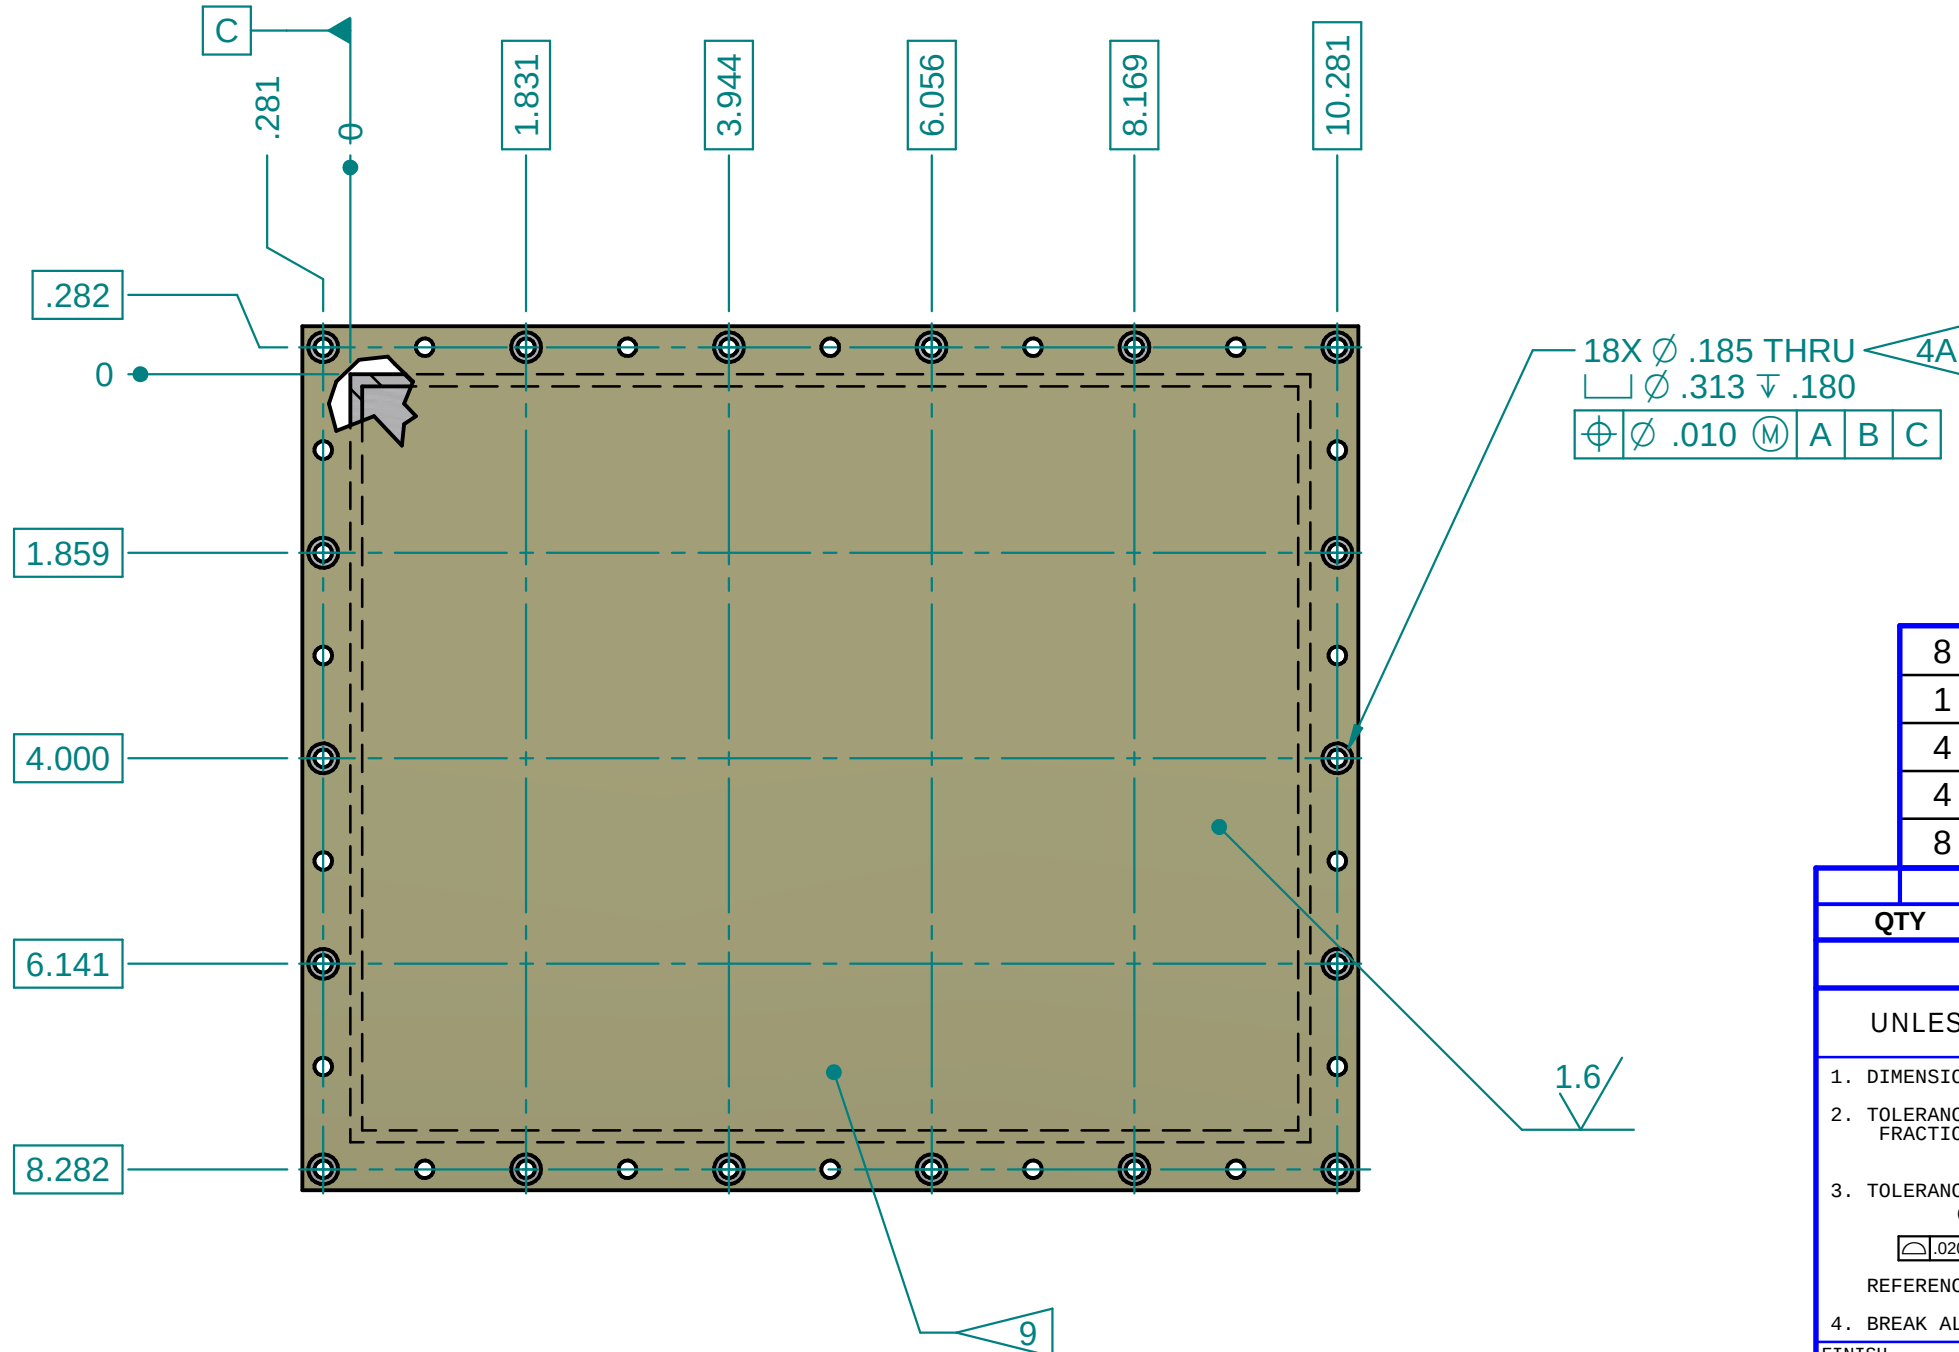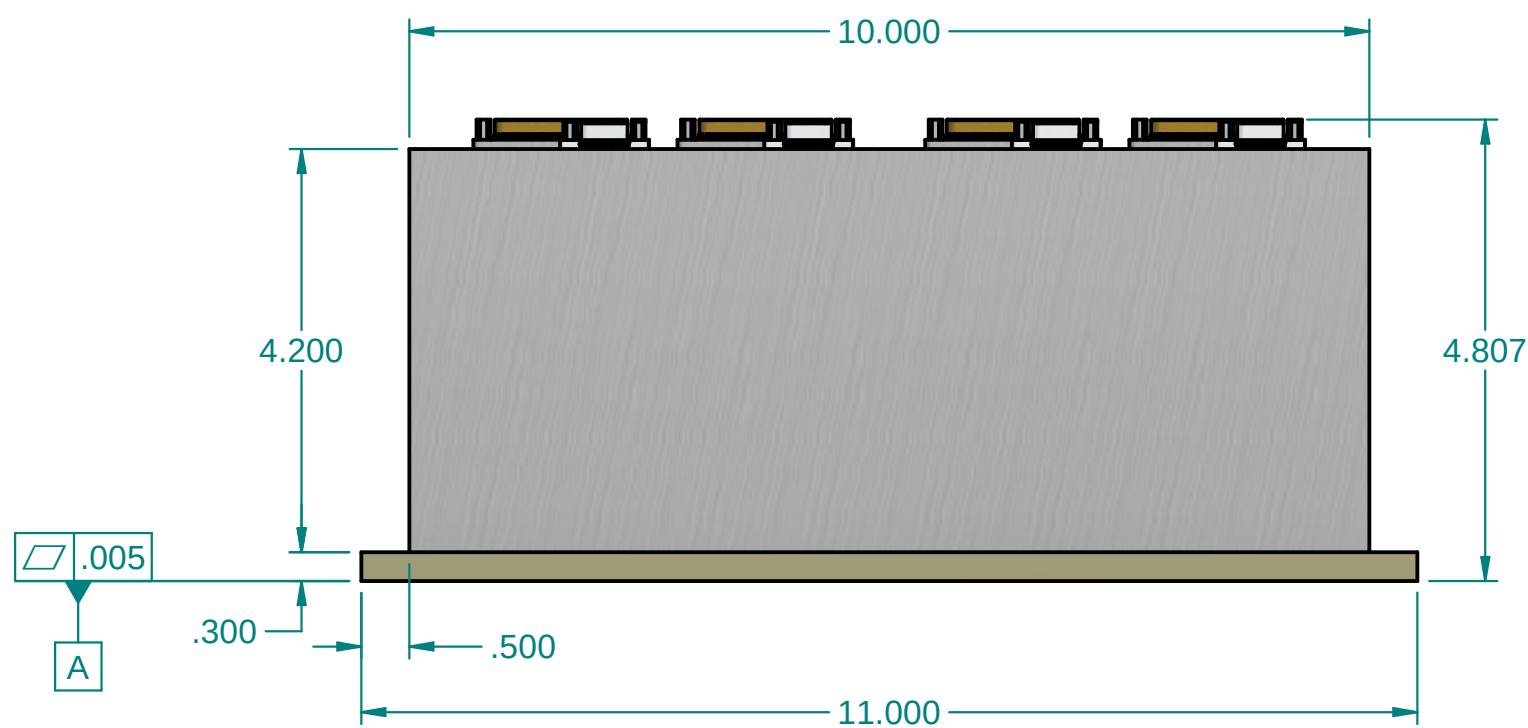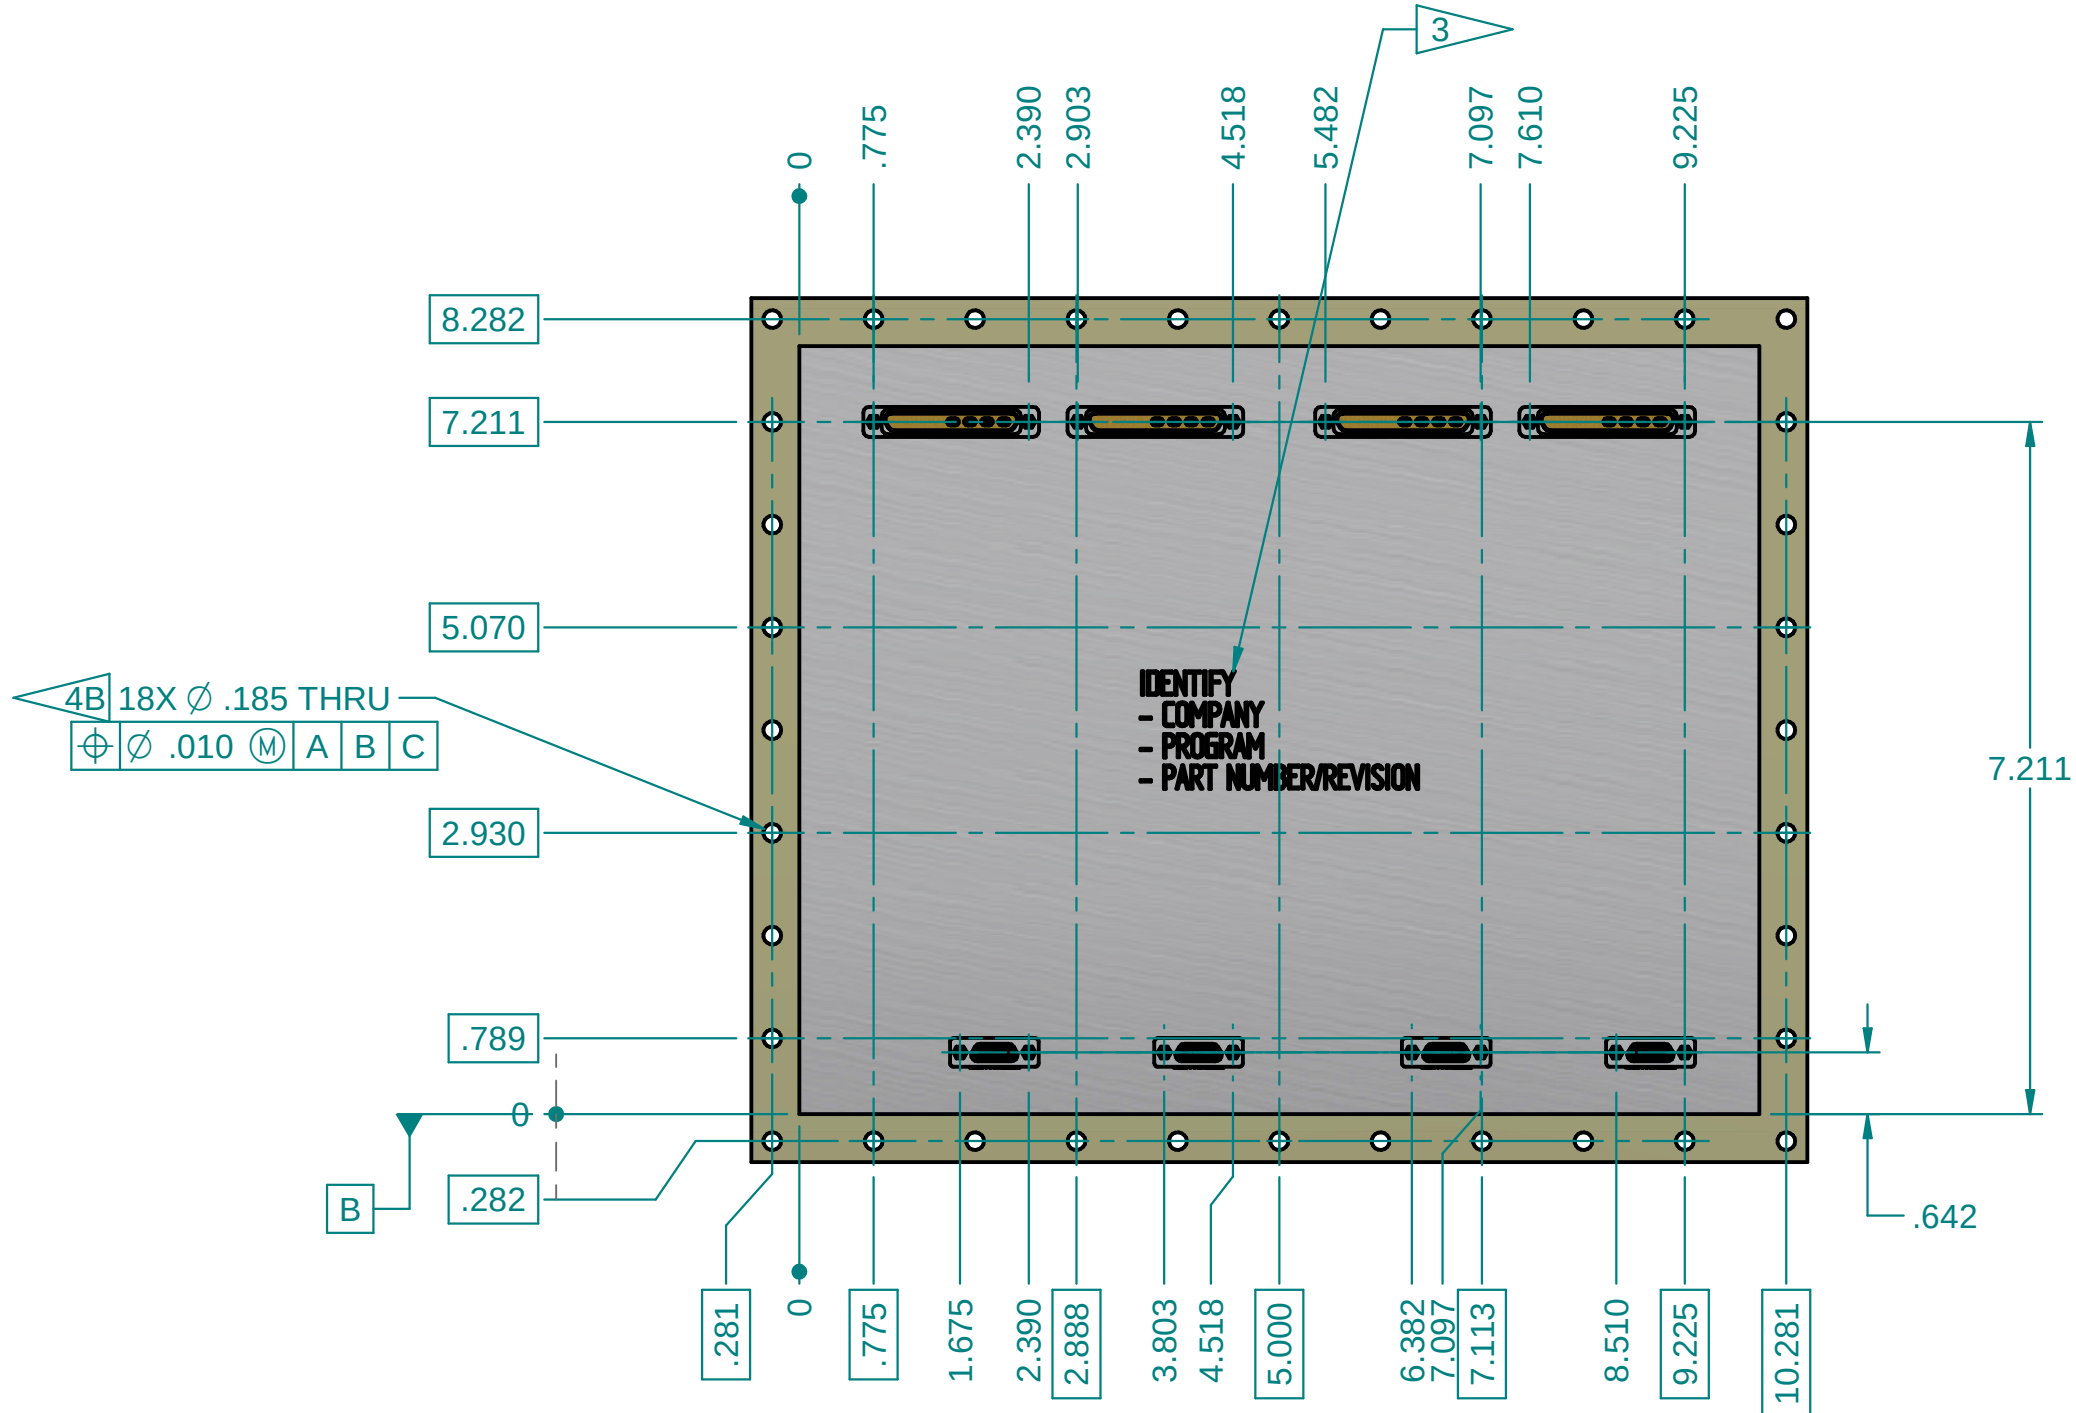

8	5	XXX???	STANDOFF, 2-56 x .288 LONG THD x .212 LONG HEAD	GLENAIR
1	4	XXX-XXXX	M3 ENCLOSURE	
4	3	GHS4-M2L-4-15-S-A-4-K-1-12	VERSALINK MICRO-D	GLENAIR
4	2*	A98003--015	MICRO-D 15 PIN CONNECTOR	OMNETICS
8	1			

QTY	ITEM	PART NUMBER	DESCRIPTION	MATERIAL SPEC/ VENDOR	
PARTS LIST					
UNLESS OTHERWISE SPECIFIED		CAGE CODE: 05924		Space Development Agency MICD, M3 ENCLOSURE	
1. DIMENSIONS ARE IN INCHES		APPROVALS	DATE		
2. TOLERANCES FOR DIMENSIONED FEATURES: FRACTIONS=1/16 .XX=0.01 ANG=.01°		DRAWN BY C.SECRIST	2023-04-25		
3. TOLERANCES FOR UNDIMENSIONED FEATURES: (IF PRESENT) 0.020 A B C D ALL OVER		DESIGN J.EIMAN	2024-04-11		
4. BREAK ALL SHARP EDGES		ENGINEERING	error: No reference		
FINISH		REFERENCE	error: No reference	SIZE	SCALE
DO NOT SCALE DRAWING		RELEASED	error: No reference	D	1/2
		Q.A.	error: No reference	Q.W. NO.	REV
		RELEASED	error: No reference	YYY-YYYY	-
		error: No reference	error: No reference	THIS DOCUMENT, WHEN PRINTED, IS FOR REFERENCE ONLY	
				KAL C.MT 0.00 kg	SHEET 1 OF 2

1

2

3

4


5

6


DWG NO.	YYY-YYYY	SH	2	REV.	-
---------	----------	----	---	------	---

8


EXAMPLE SHOWING SHORTER BOX IMPLEMENTATION WITH ADDITIONAL BRACKETS MEETING CONNECTOR LOCATIONS

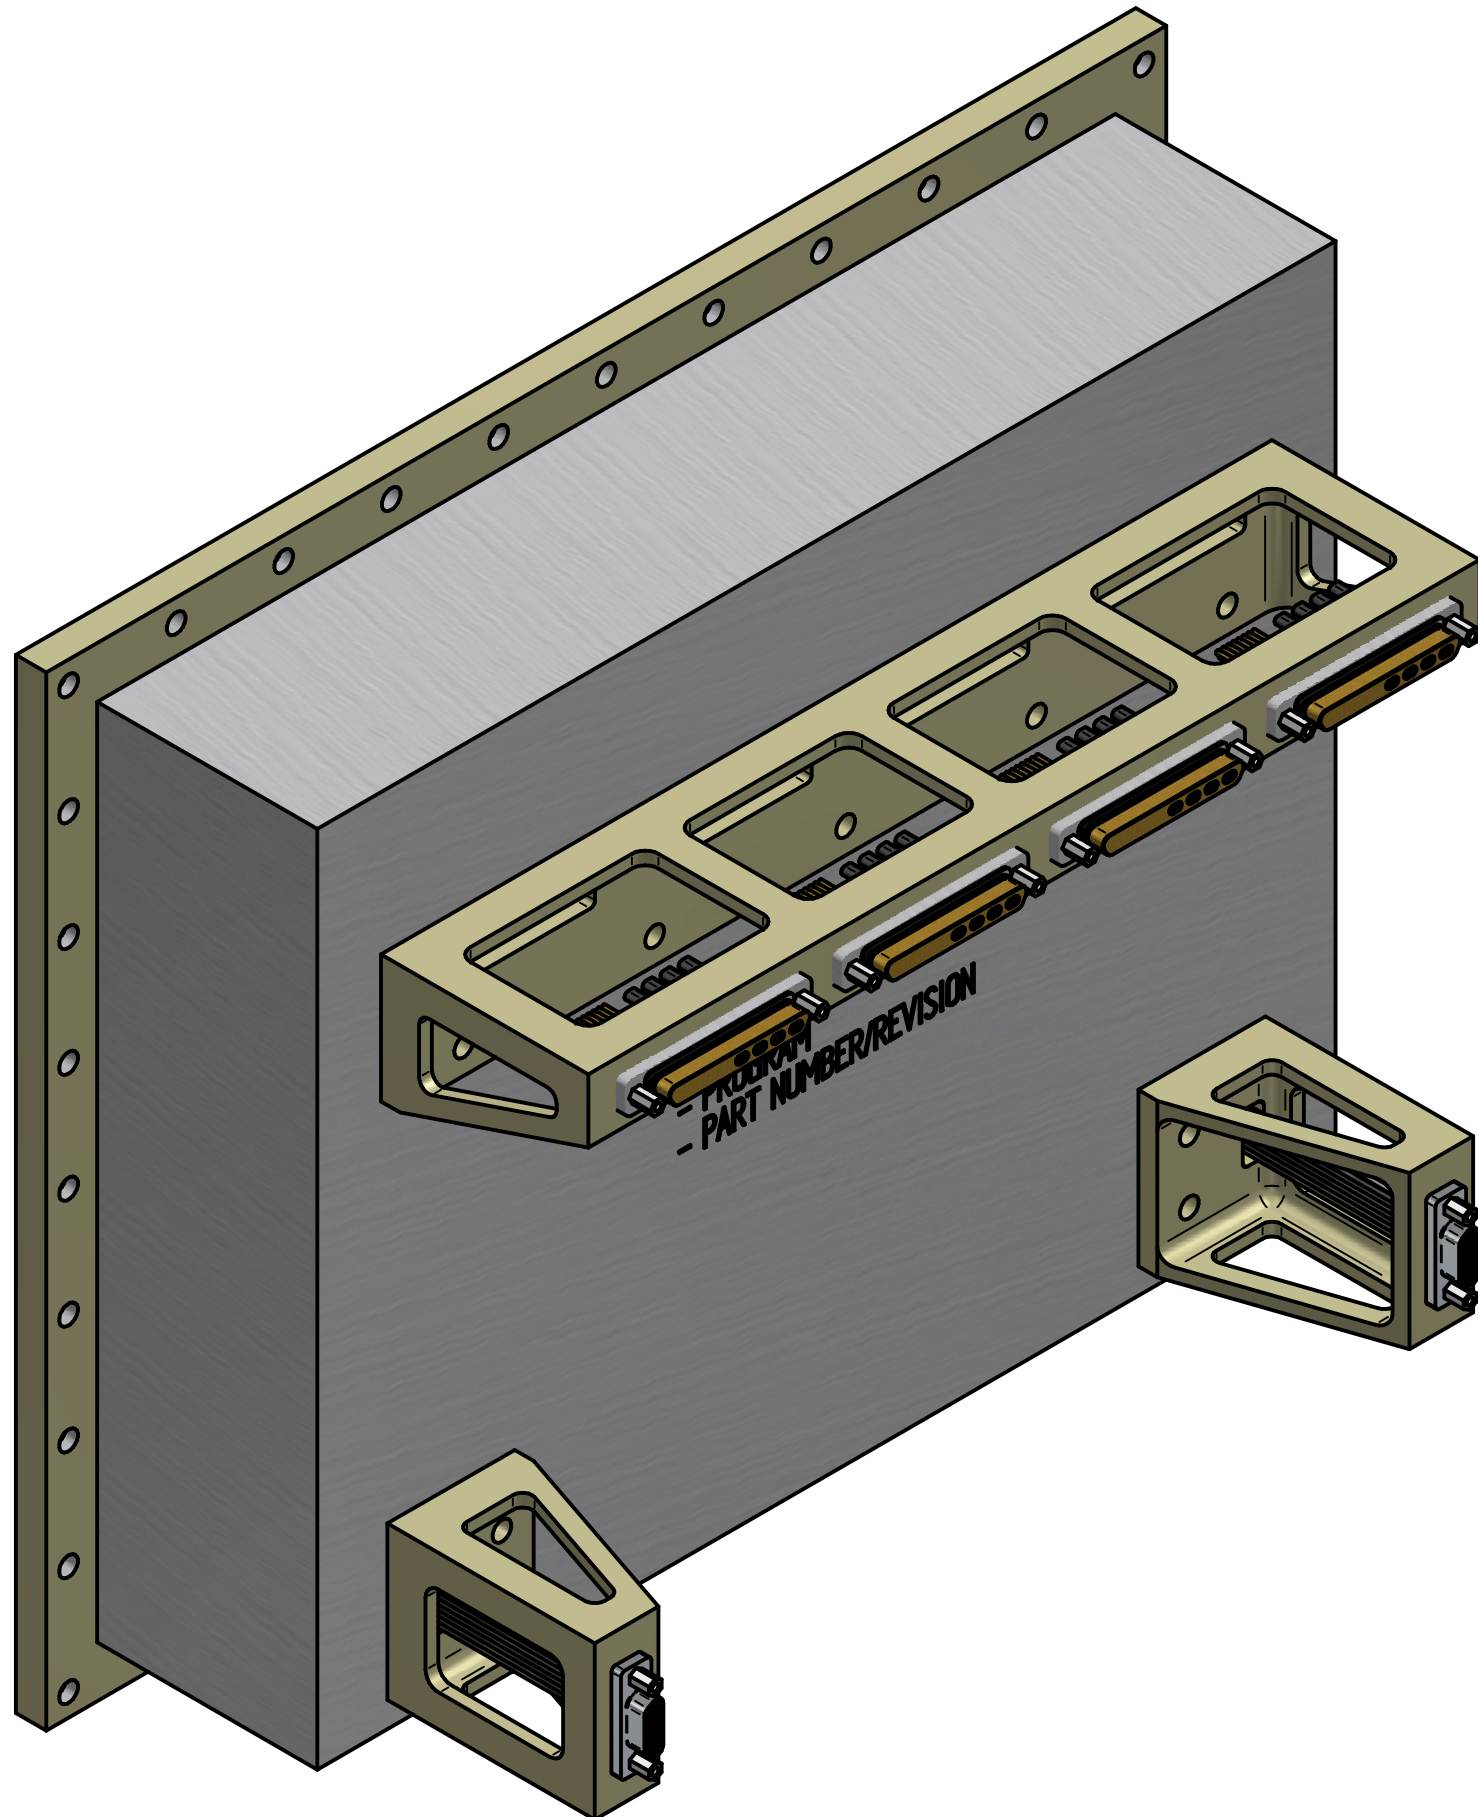

EXAMPLE SHOWING COMPOSITE PANEL IMPLEMENTATION

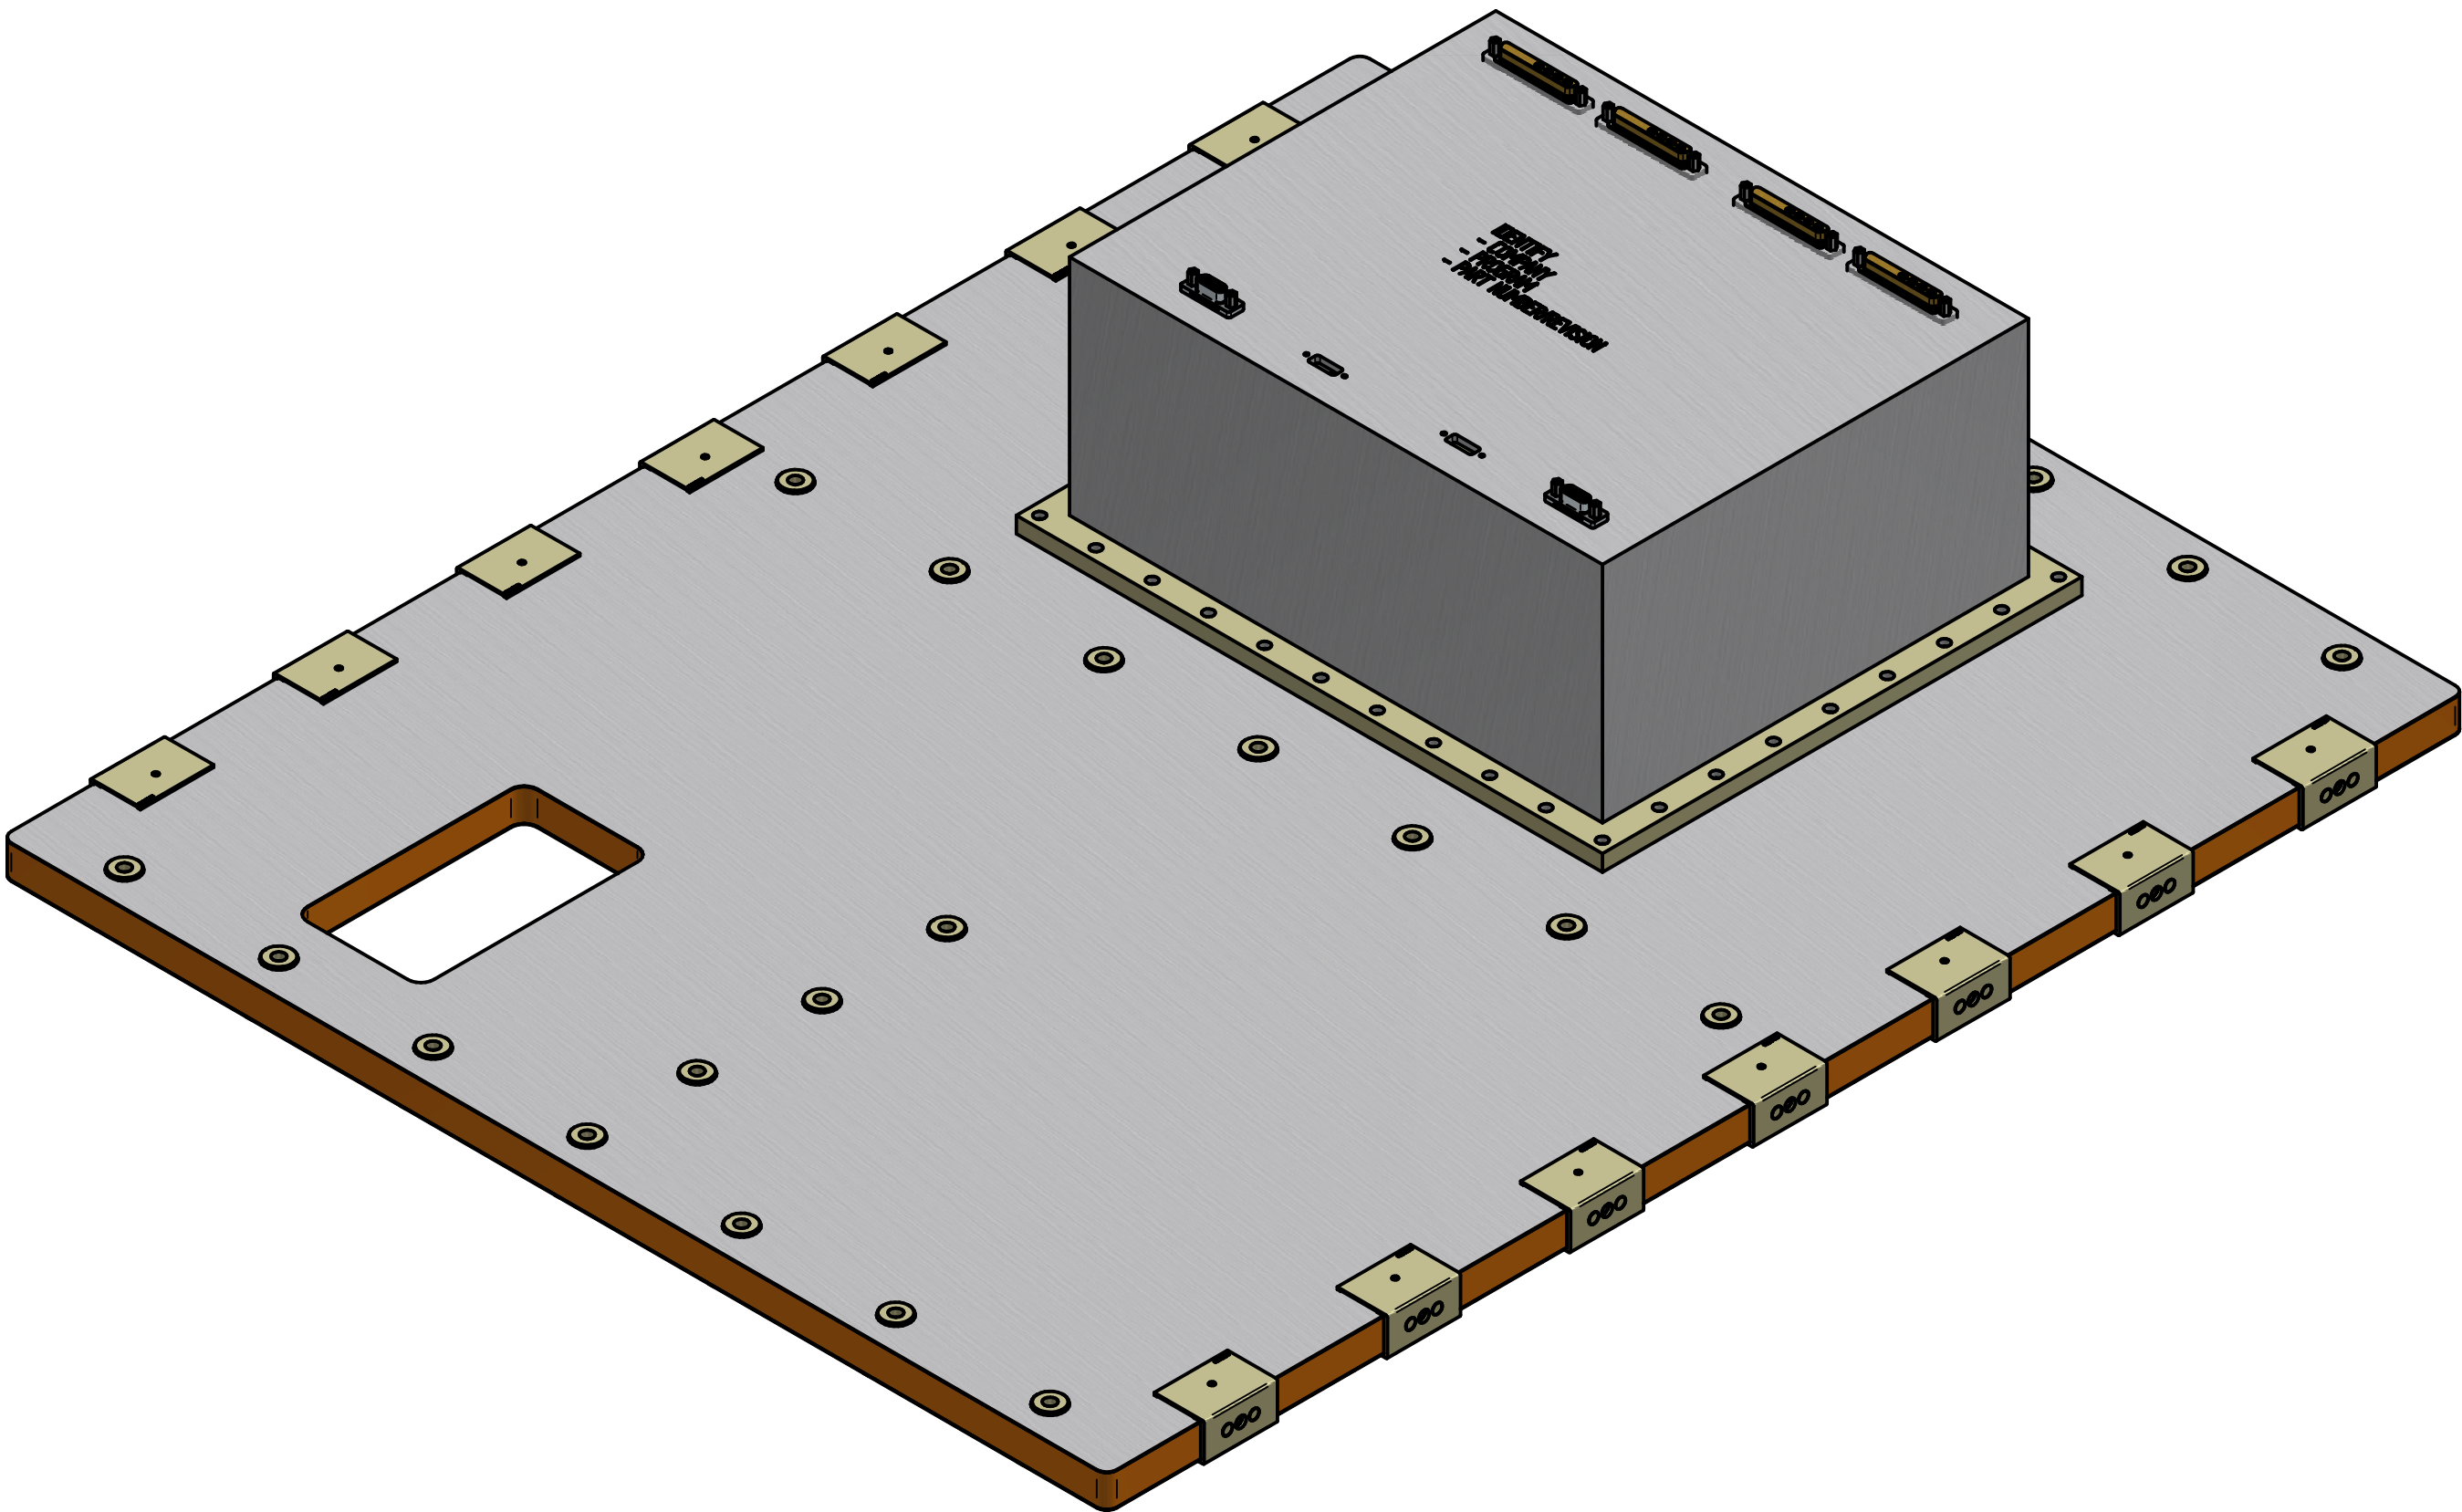

EXAMPLE SHOWING SLIDE-IN IMPLEMENTATION

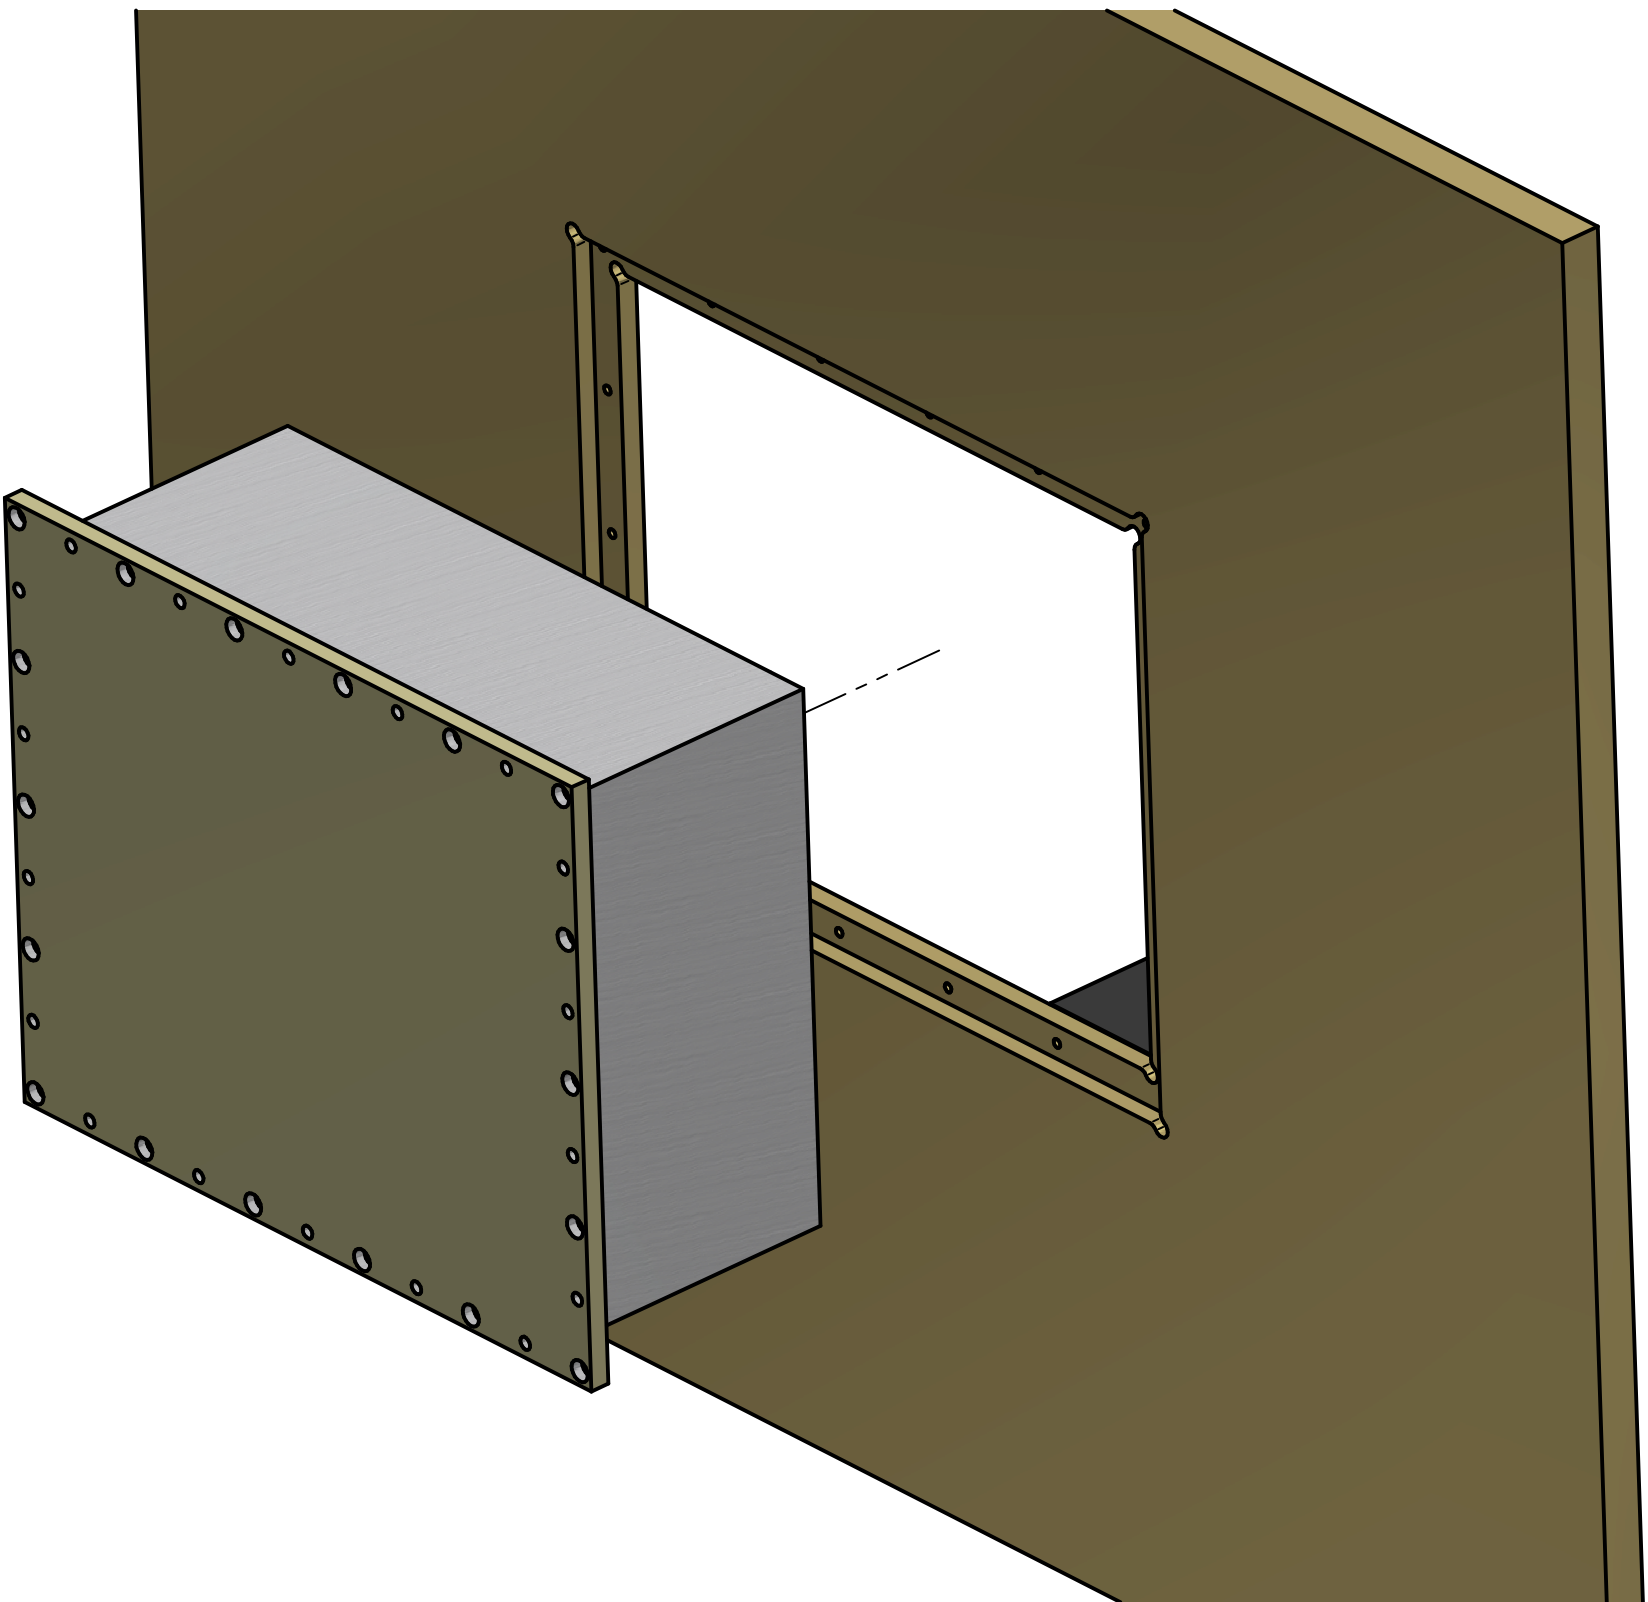

Space Development Agency

ICD, M3 ENCLOSURE DESCRIPTION

SIZE	SCALE	DWG NO.	REV.
D	-	YYY-YYYY	-
THIS DOCUMENT, WHEN PRINTED, IS FOR REFERENCE ONLY			
CALC. WT		SHEET	2 OF 2
0.000 kg			

Distribution Statement A: Approved for public release.
Distribution is unlimited