NATIONAL INSTITUTES OF HEALTH
BETHESDA, MARYLAND

DEPARTMENT OF HEALTH & HUMAN SERVICES
U.S. PUBLIC HEALTH SERVICE

BUILDING 31B NEW ROOFING AND WP OF STRUCTURE BELOW GRADE
CONSTRUCTION DOCUMENTS
ISSUED FOR CONSTRUCTION

W.R. # C116635

LSY PROJECT NO. 24024

DRAWING INDEX

VICINITY MAP

CAMPUS PLAN

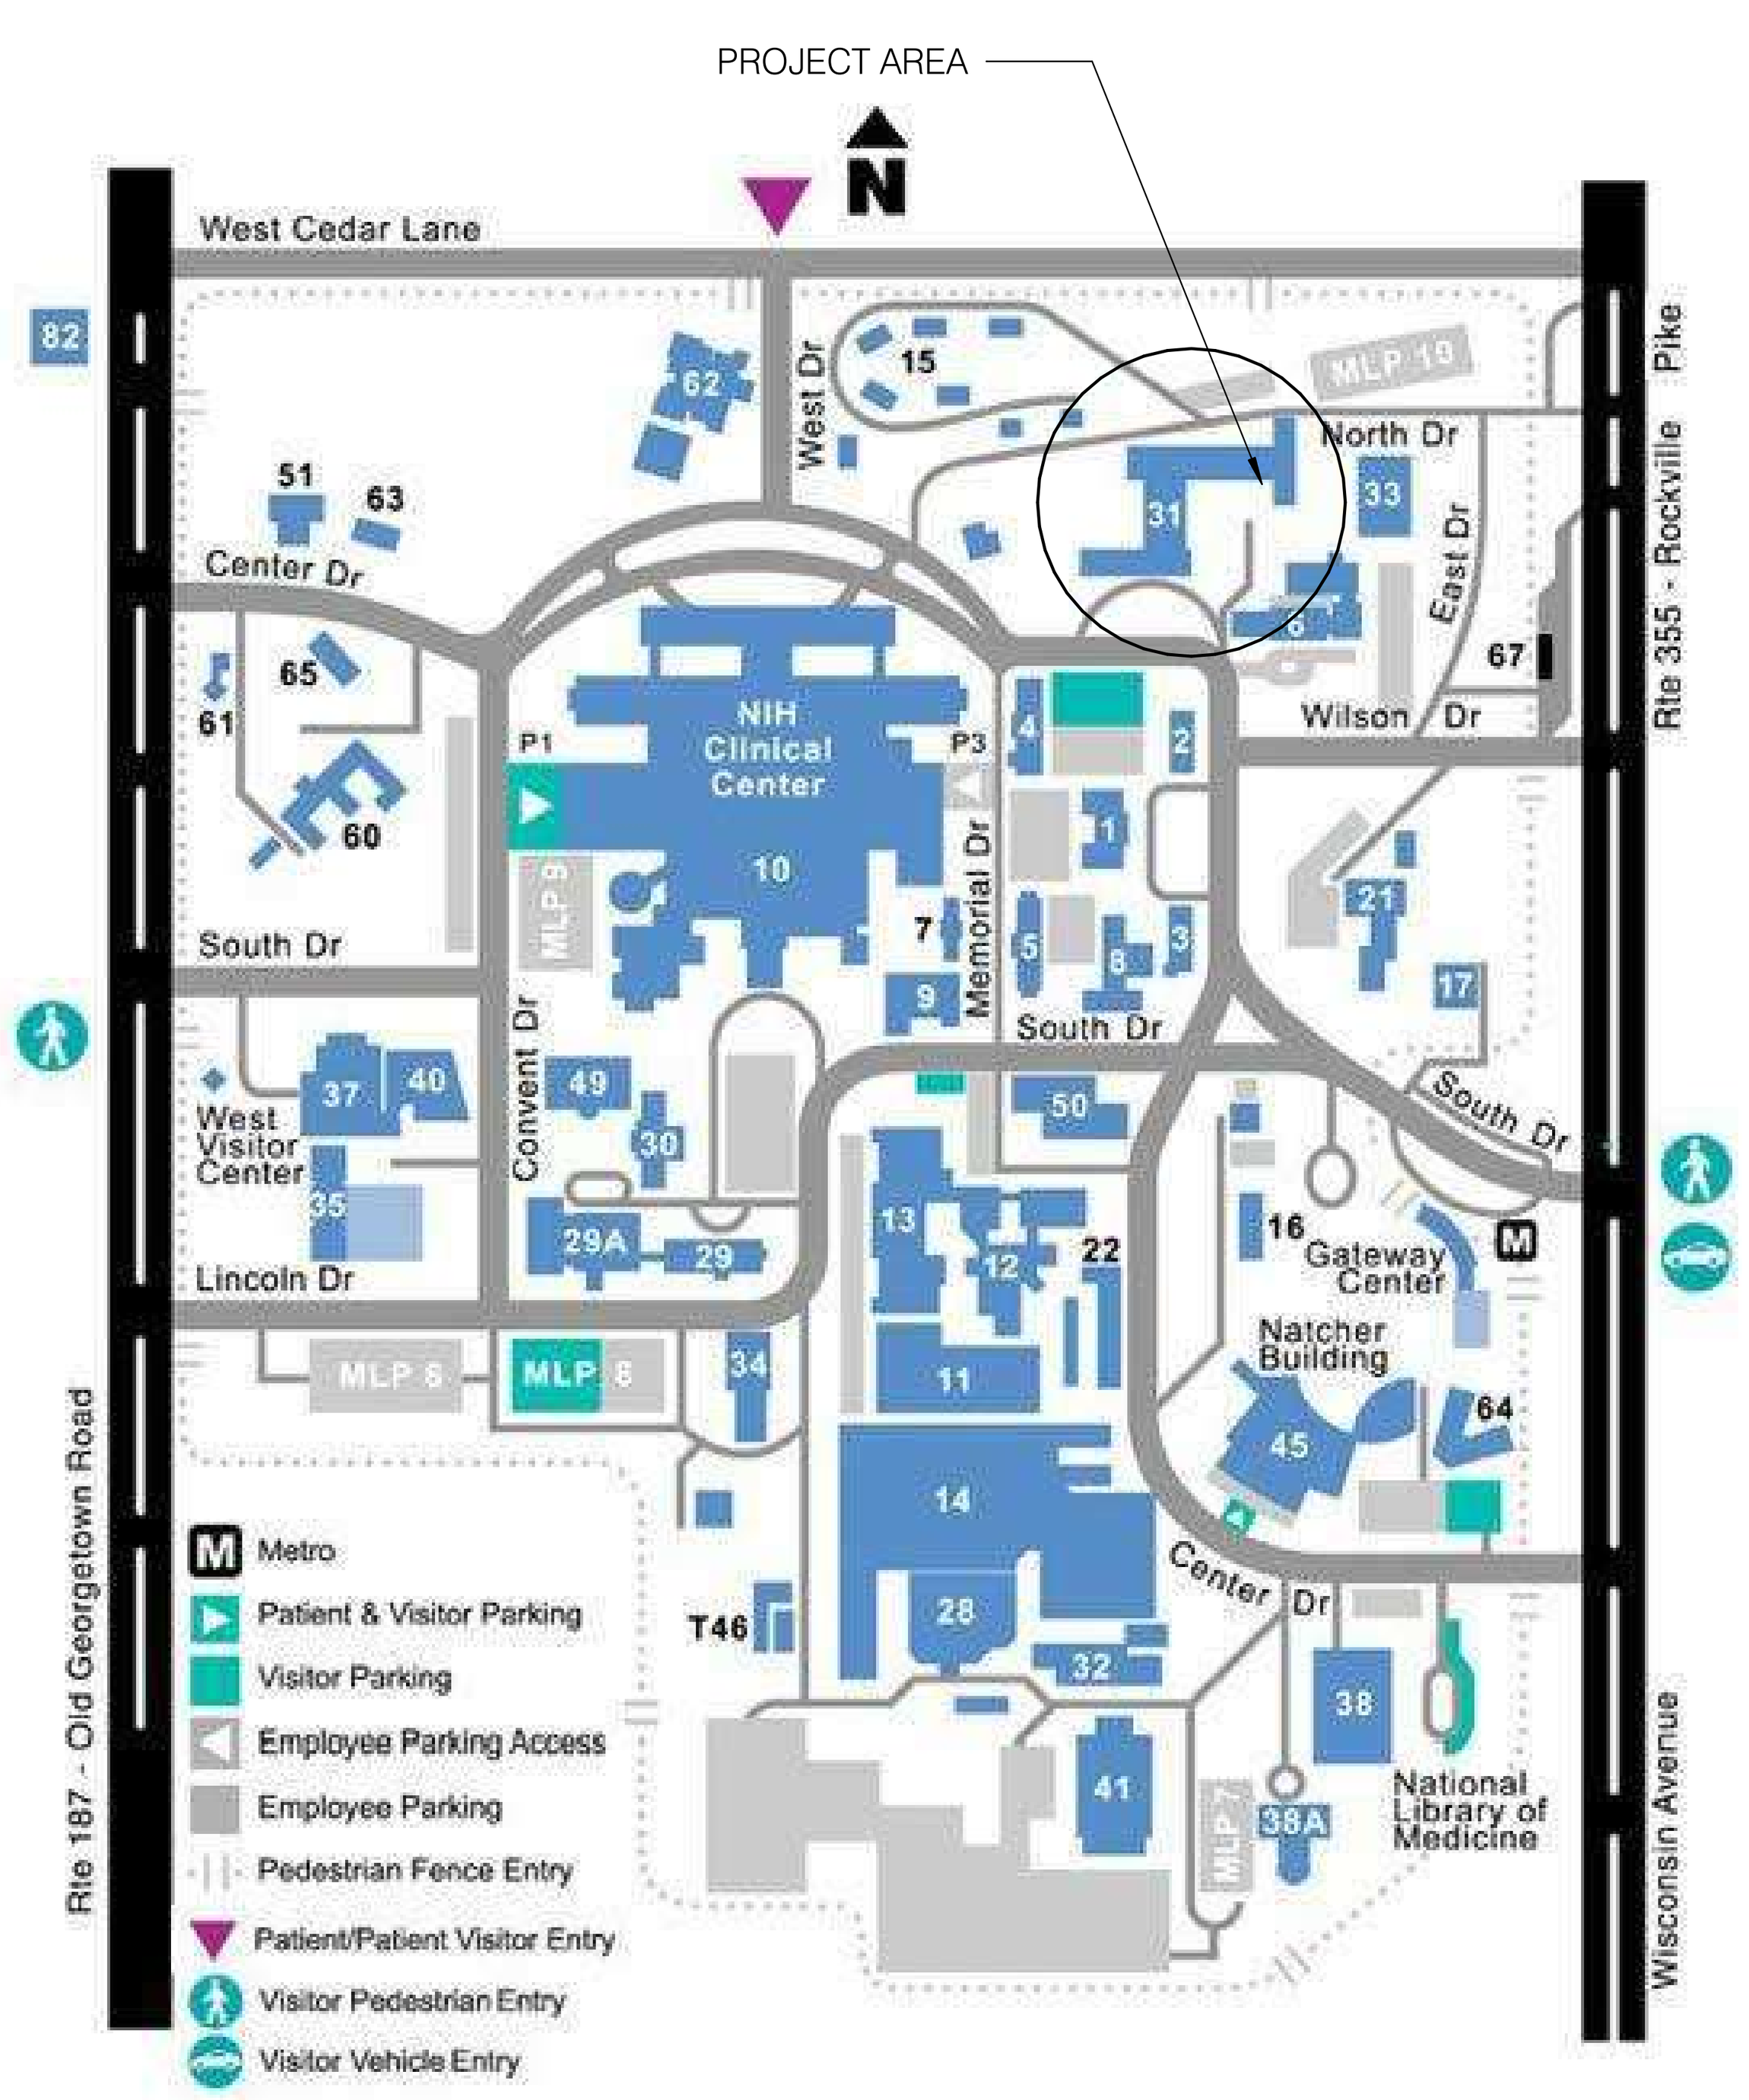

KEY PLAN

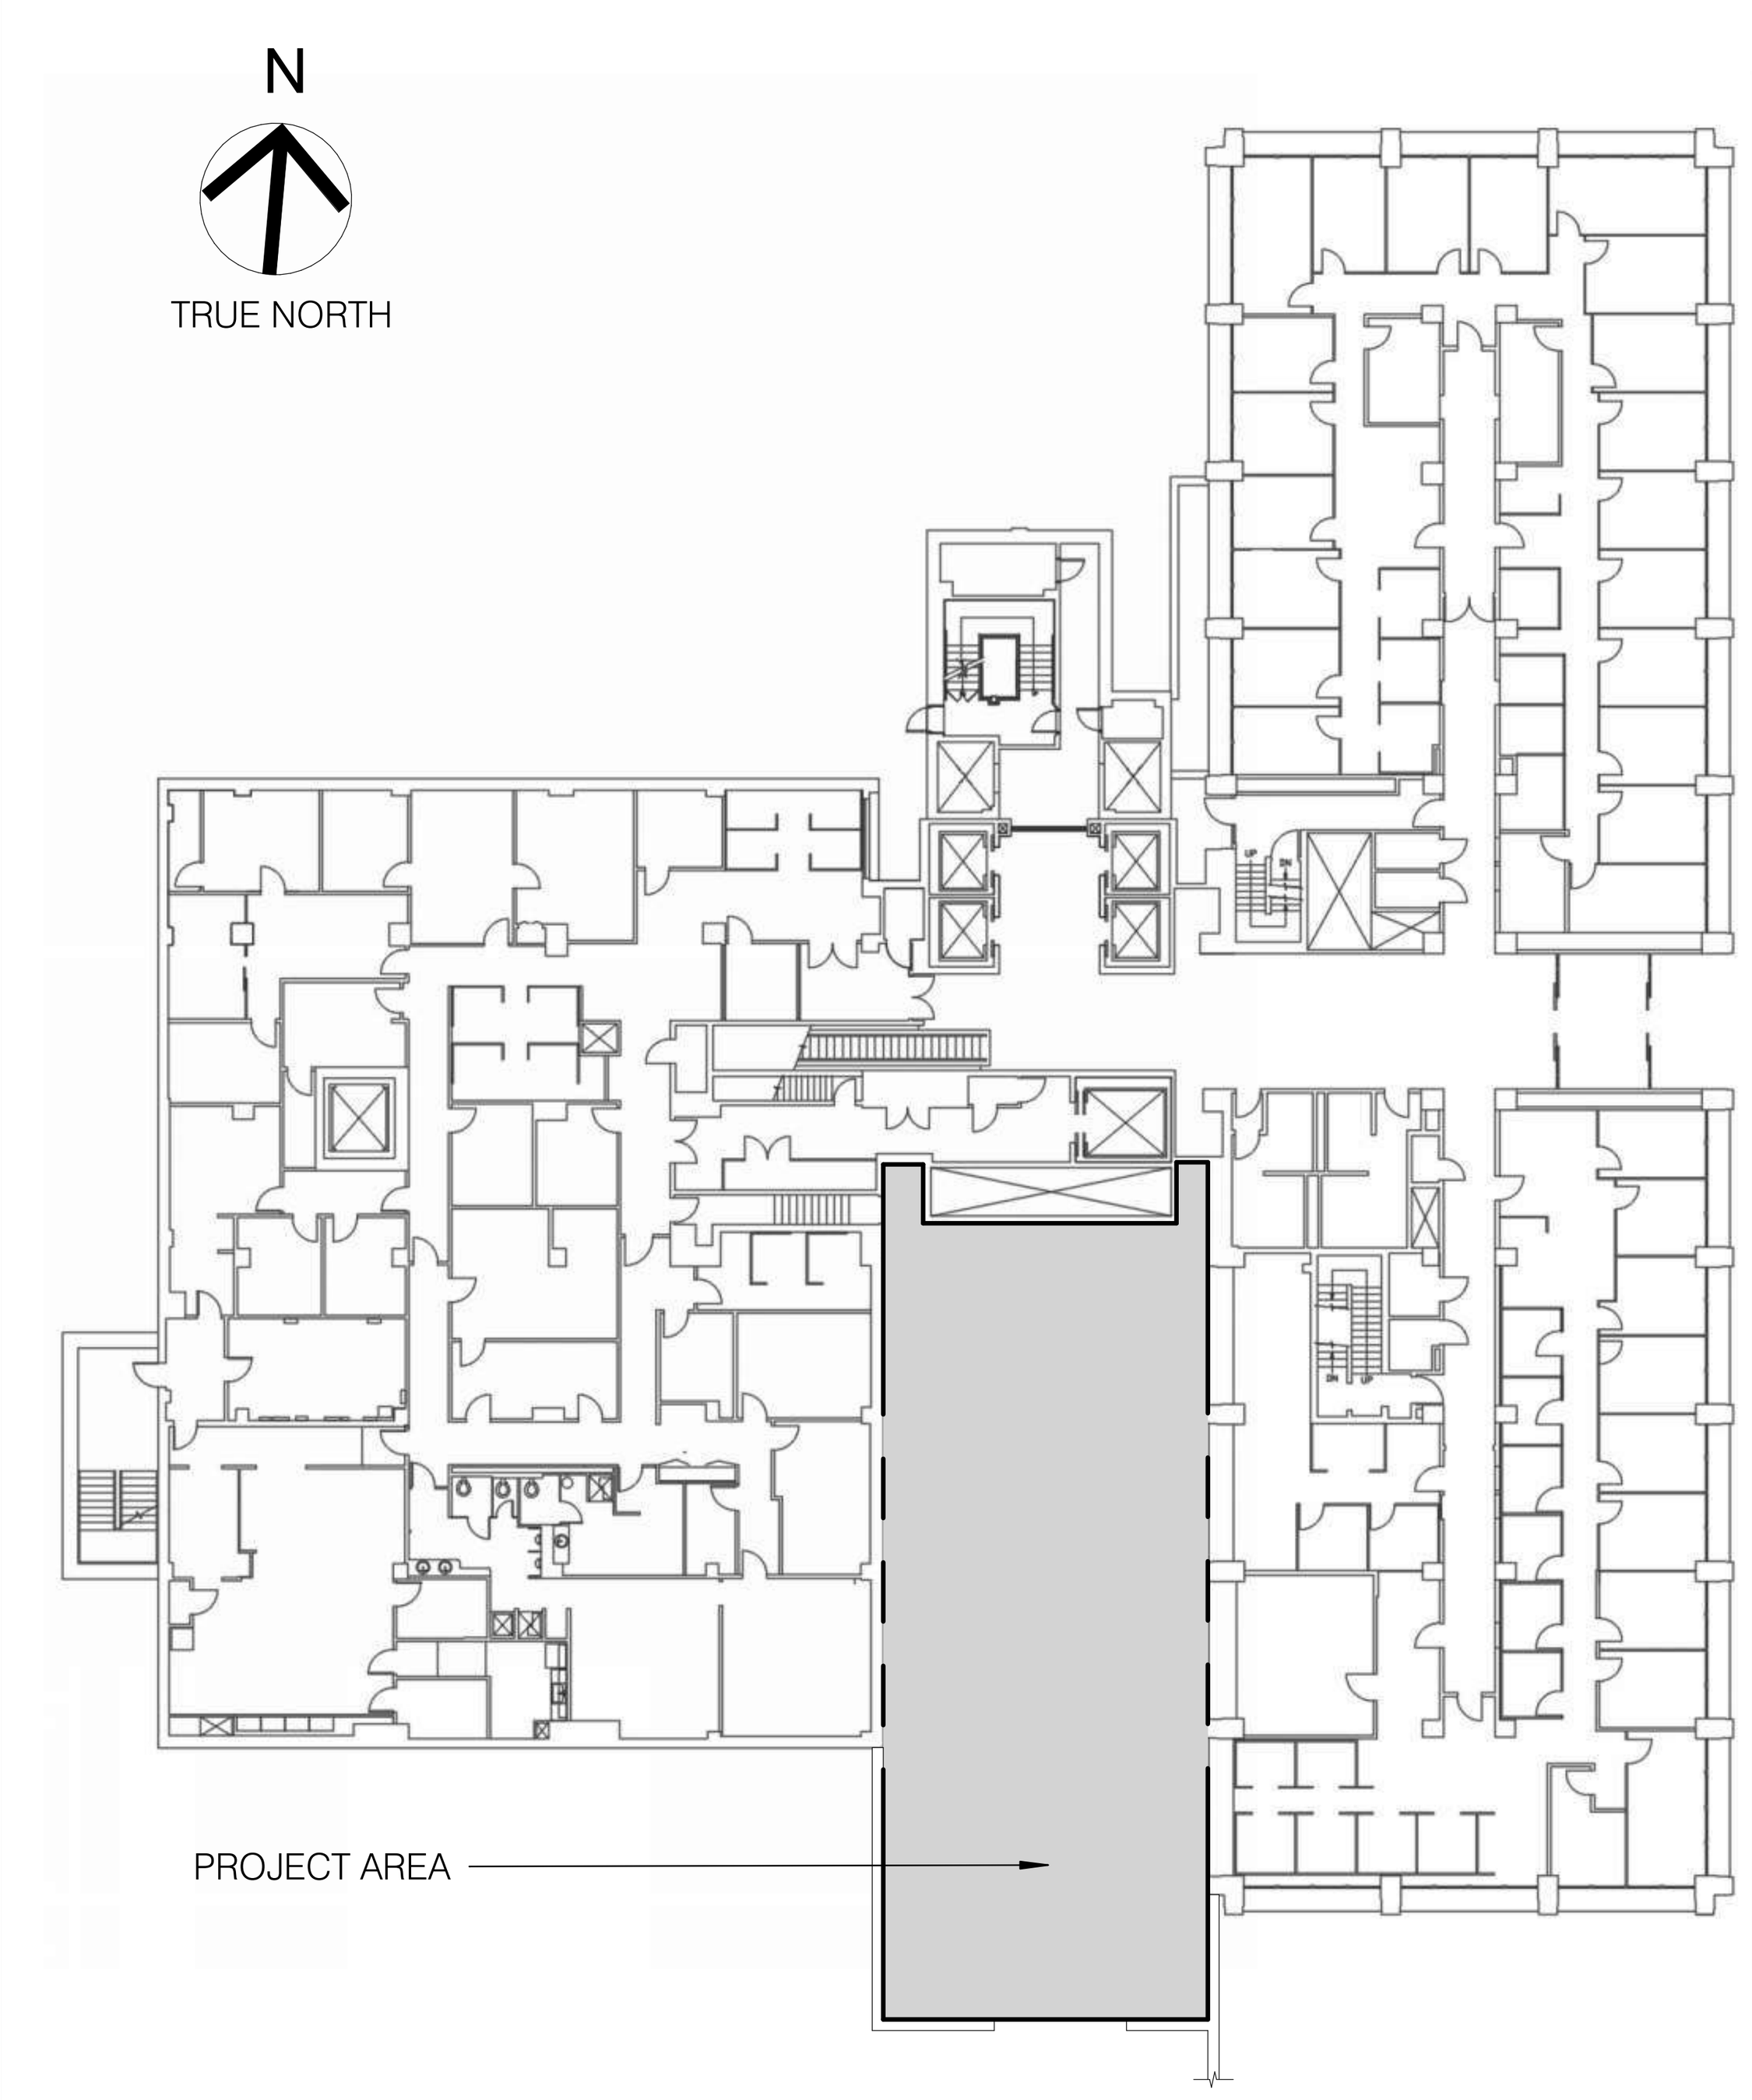

PROPERTY OF THE UNITED STATES GOVERNMENT
FOR OFFICIAL USE ONLY
Do not remove this notice
Properly destroy documents when no longer needed

LSY ARCHITECTS & LABORATORY PLANNERS

James Posey Associates

TIMMONS GROUP

SGH

ARCHITECT: LOUVIERE, STRATTON & YOKEL, LLC
8484 GEORGIA AVE, SUITE 650
SILVER SPRING, MD 20910
(301) 588-1500

MEP ENGINEER: JAMES POSEY ASSOCIATES INC
11155 RED RUN BLVD
OWINGS MILLS, MD 21117
(410) 265-6100

CIVIL ENGINEER: TIMMONS GROUP
2300 N ST NW SUITE 410B
WASHINGTON, DC 20037
(202) 919-2245

STRUCTURAL ENGINEER: SIMPSON GUMPERTZ & HEGER
1625 EYE STREET NW SUITE 900
WASHINGTON, DC 20006
(202) 239-4199

SEAL: ARCHITECT 14829 HEATHER K. JOHNSON STATE OF MARYLAND

REVISIONS

MARK	DATE	DESCRIPTION

CONTRACTORS

A/E CON. NO.	
A/E TASK NO.	
CONS. CONTR.	
CONS. WORK	
PRIME A/E	LSY ARCHITECTS
SUB A/E	JPA / TIMMONS / SGH
CONSTR. CON.	

BUILDING

FACILITY CODE	
BUILDING NO.	BUILDING 31B
NAME	NIH
STREET	9000 ROCKVILLE PIKE
CITY	BETHESDA
STATE/ZIP	MD / 20892
OTHER BUILDING NO.	

PROJECT

PROJ. NO.	24024
PROJ. OFFICER	MOHAMMED BISWAS
PROJ. MGR.	G.LEE
SUBMISSION	IFC SUBMISSION
SUB. DATE	08/26/25
WRK REQ. NO.	C116635

N

PROJECT TITLE: BUILDING 31B NEW ROOFING AND WP OF STRUCTURE BELOW GRADE

DRAWING TITLE: COVER SHEET

National Institutes of Health
OFFICE OF RESEARCH FACILITIES
DIVISION OF FACILITIES PLANNING

DESIGNED BY	G.L.
DRAWN BY	X.L.
CHECKED BY	K.C.
DATE	08/26/25
FILE NAME	

DRAWING
G-001

SHEET NUMBER OF

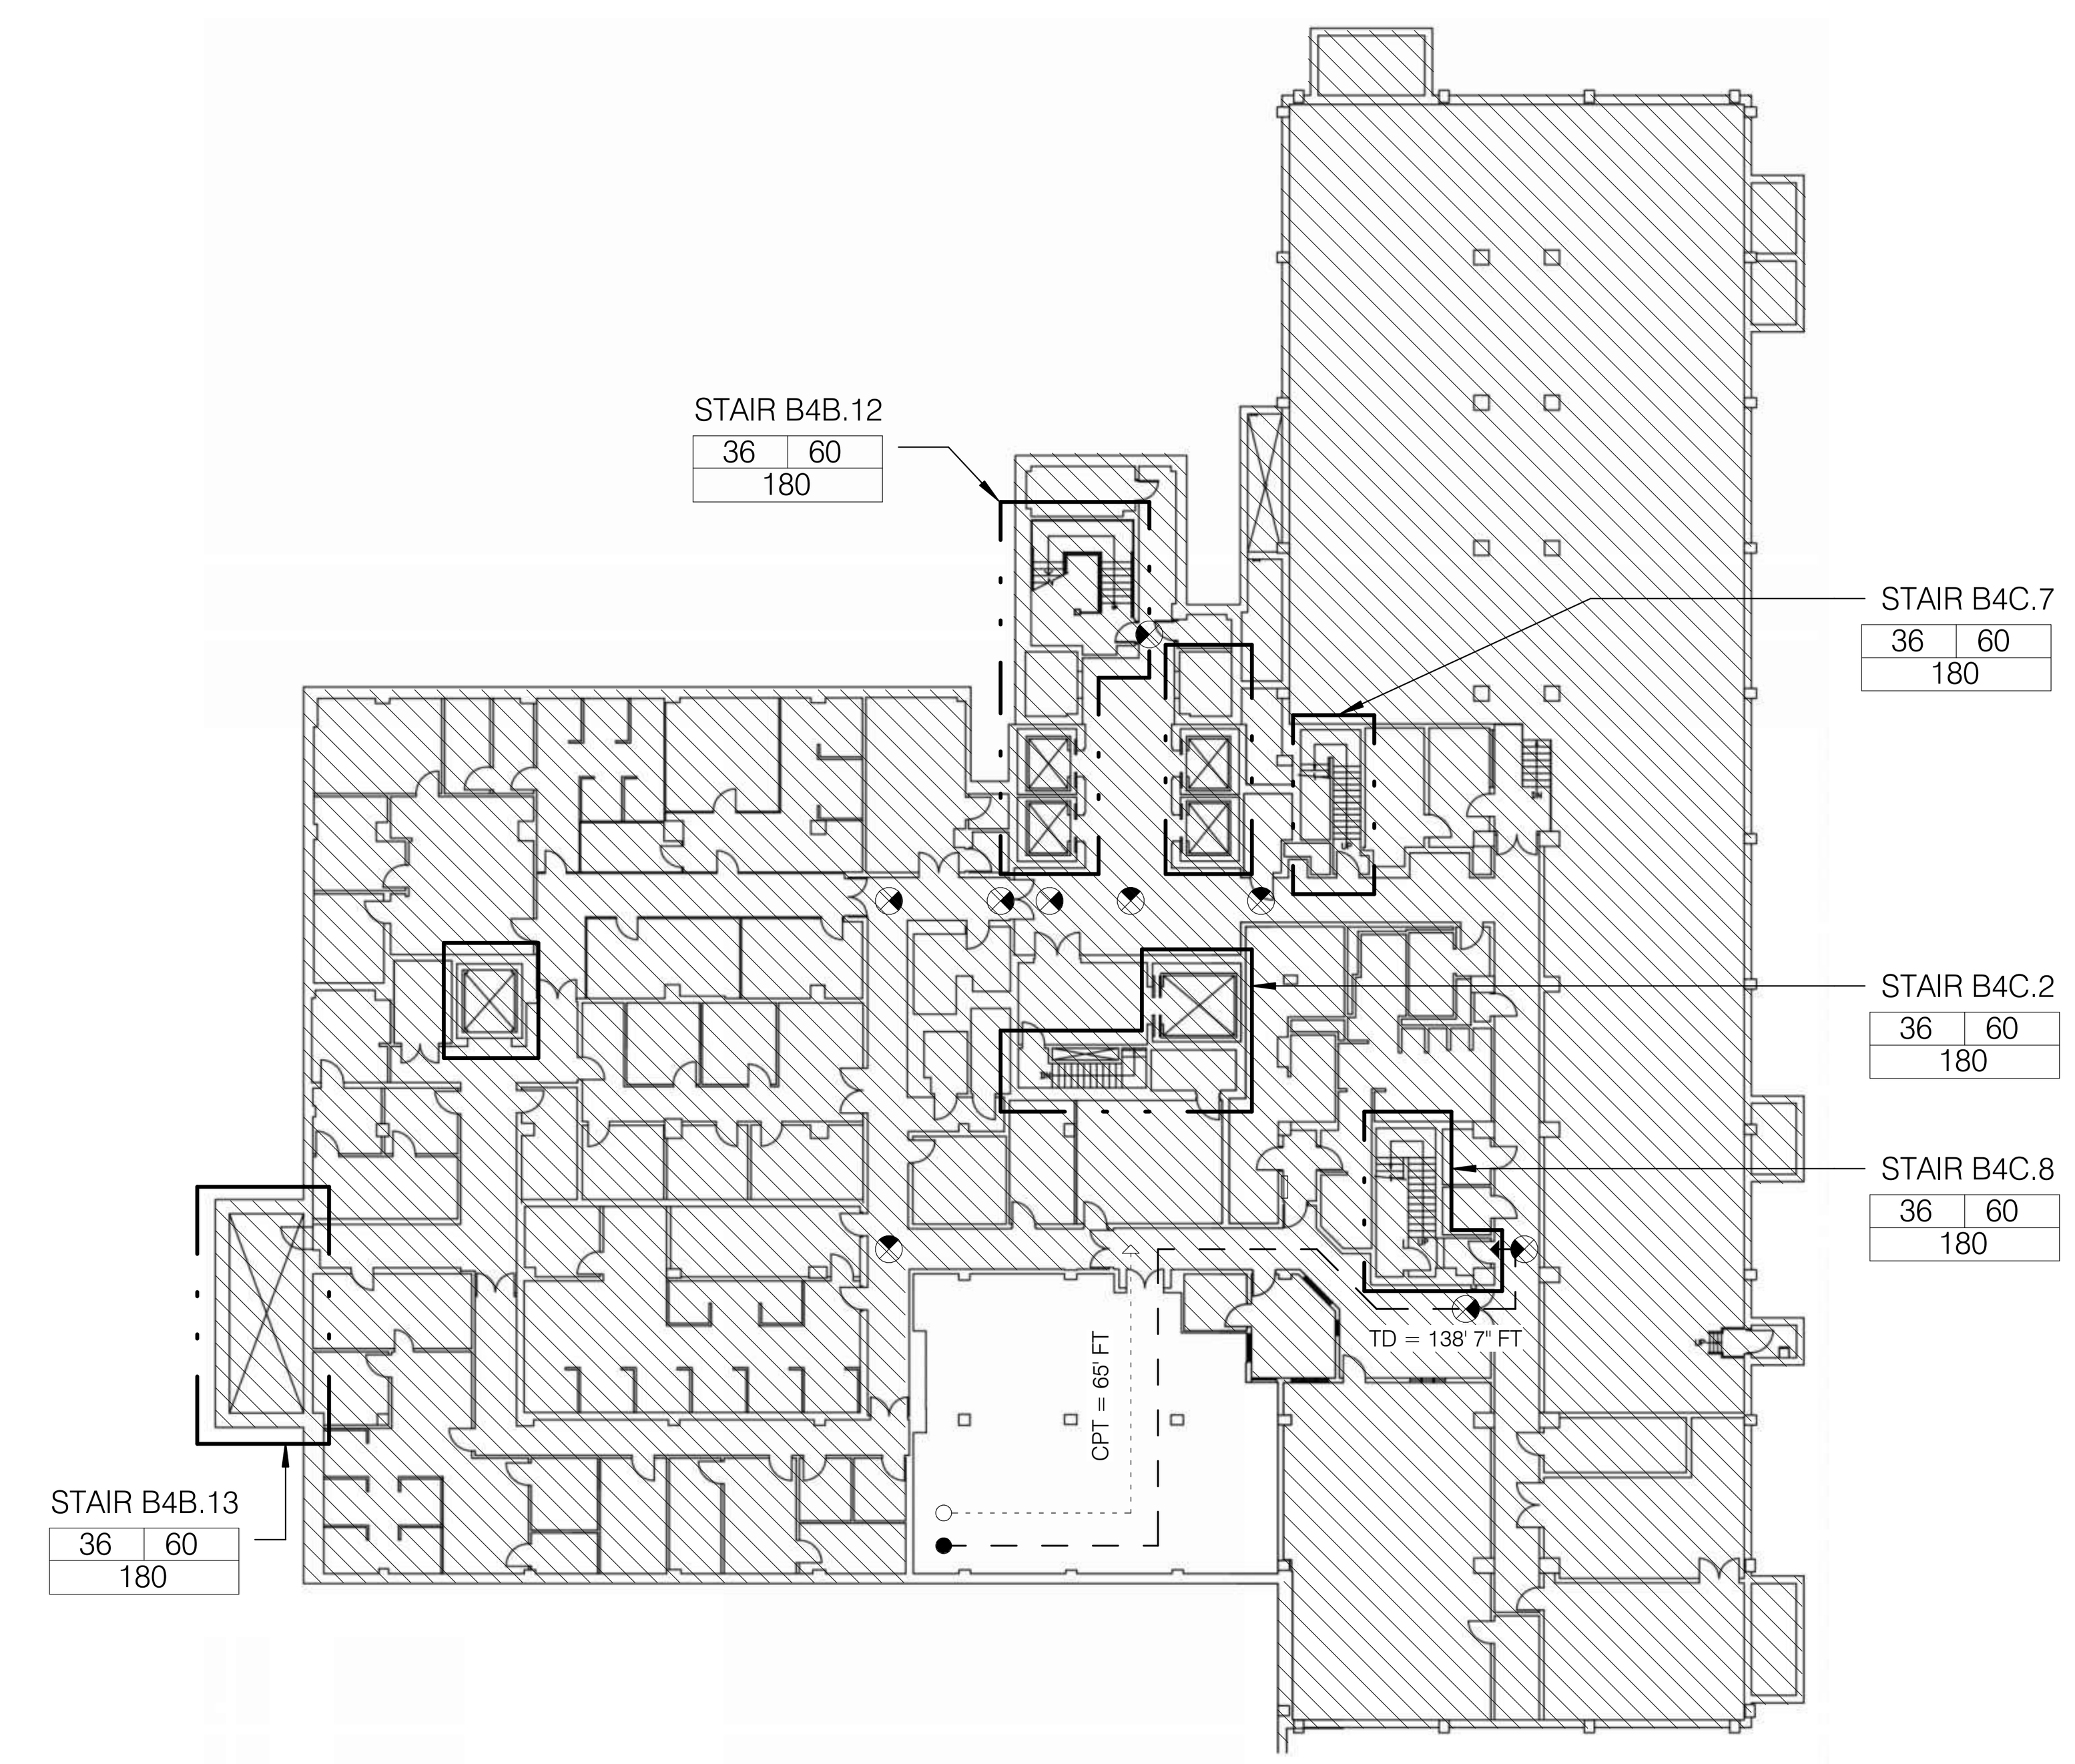

21
G-002
B4 FLOOR LIFE SAFETY PLAN
1" = 30'-0"

30 0 30 60
1" = 30'-0"
SCALE FEET

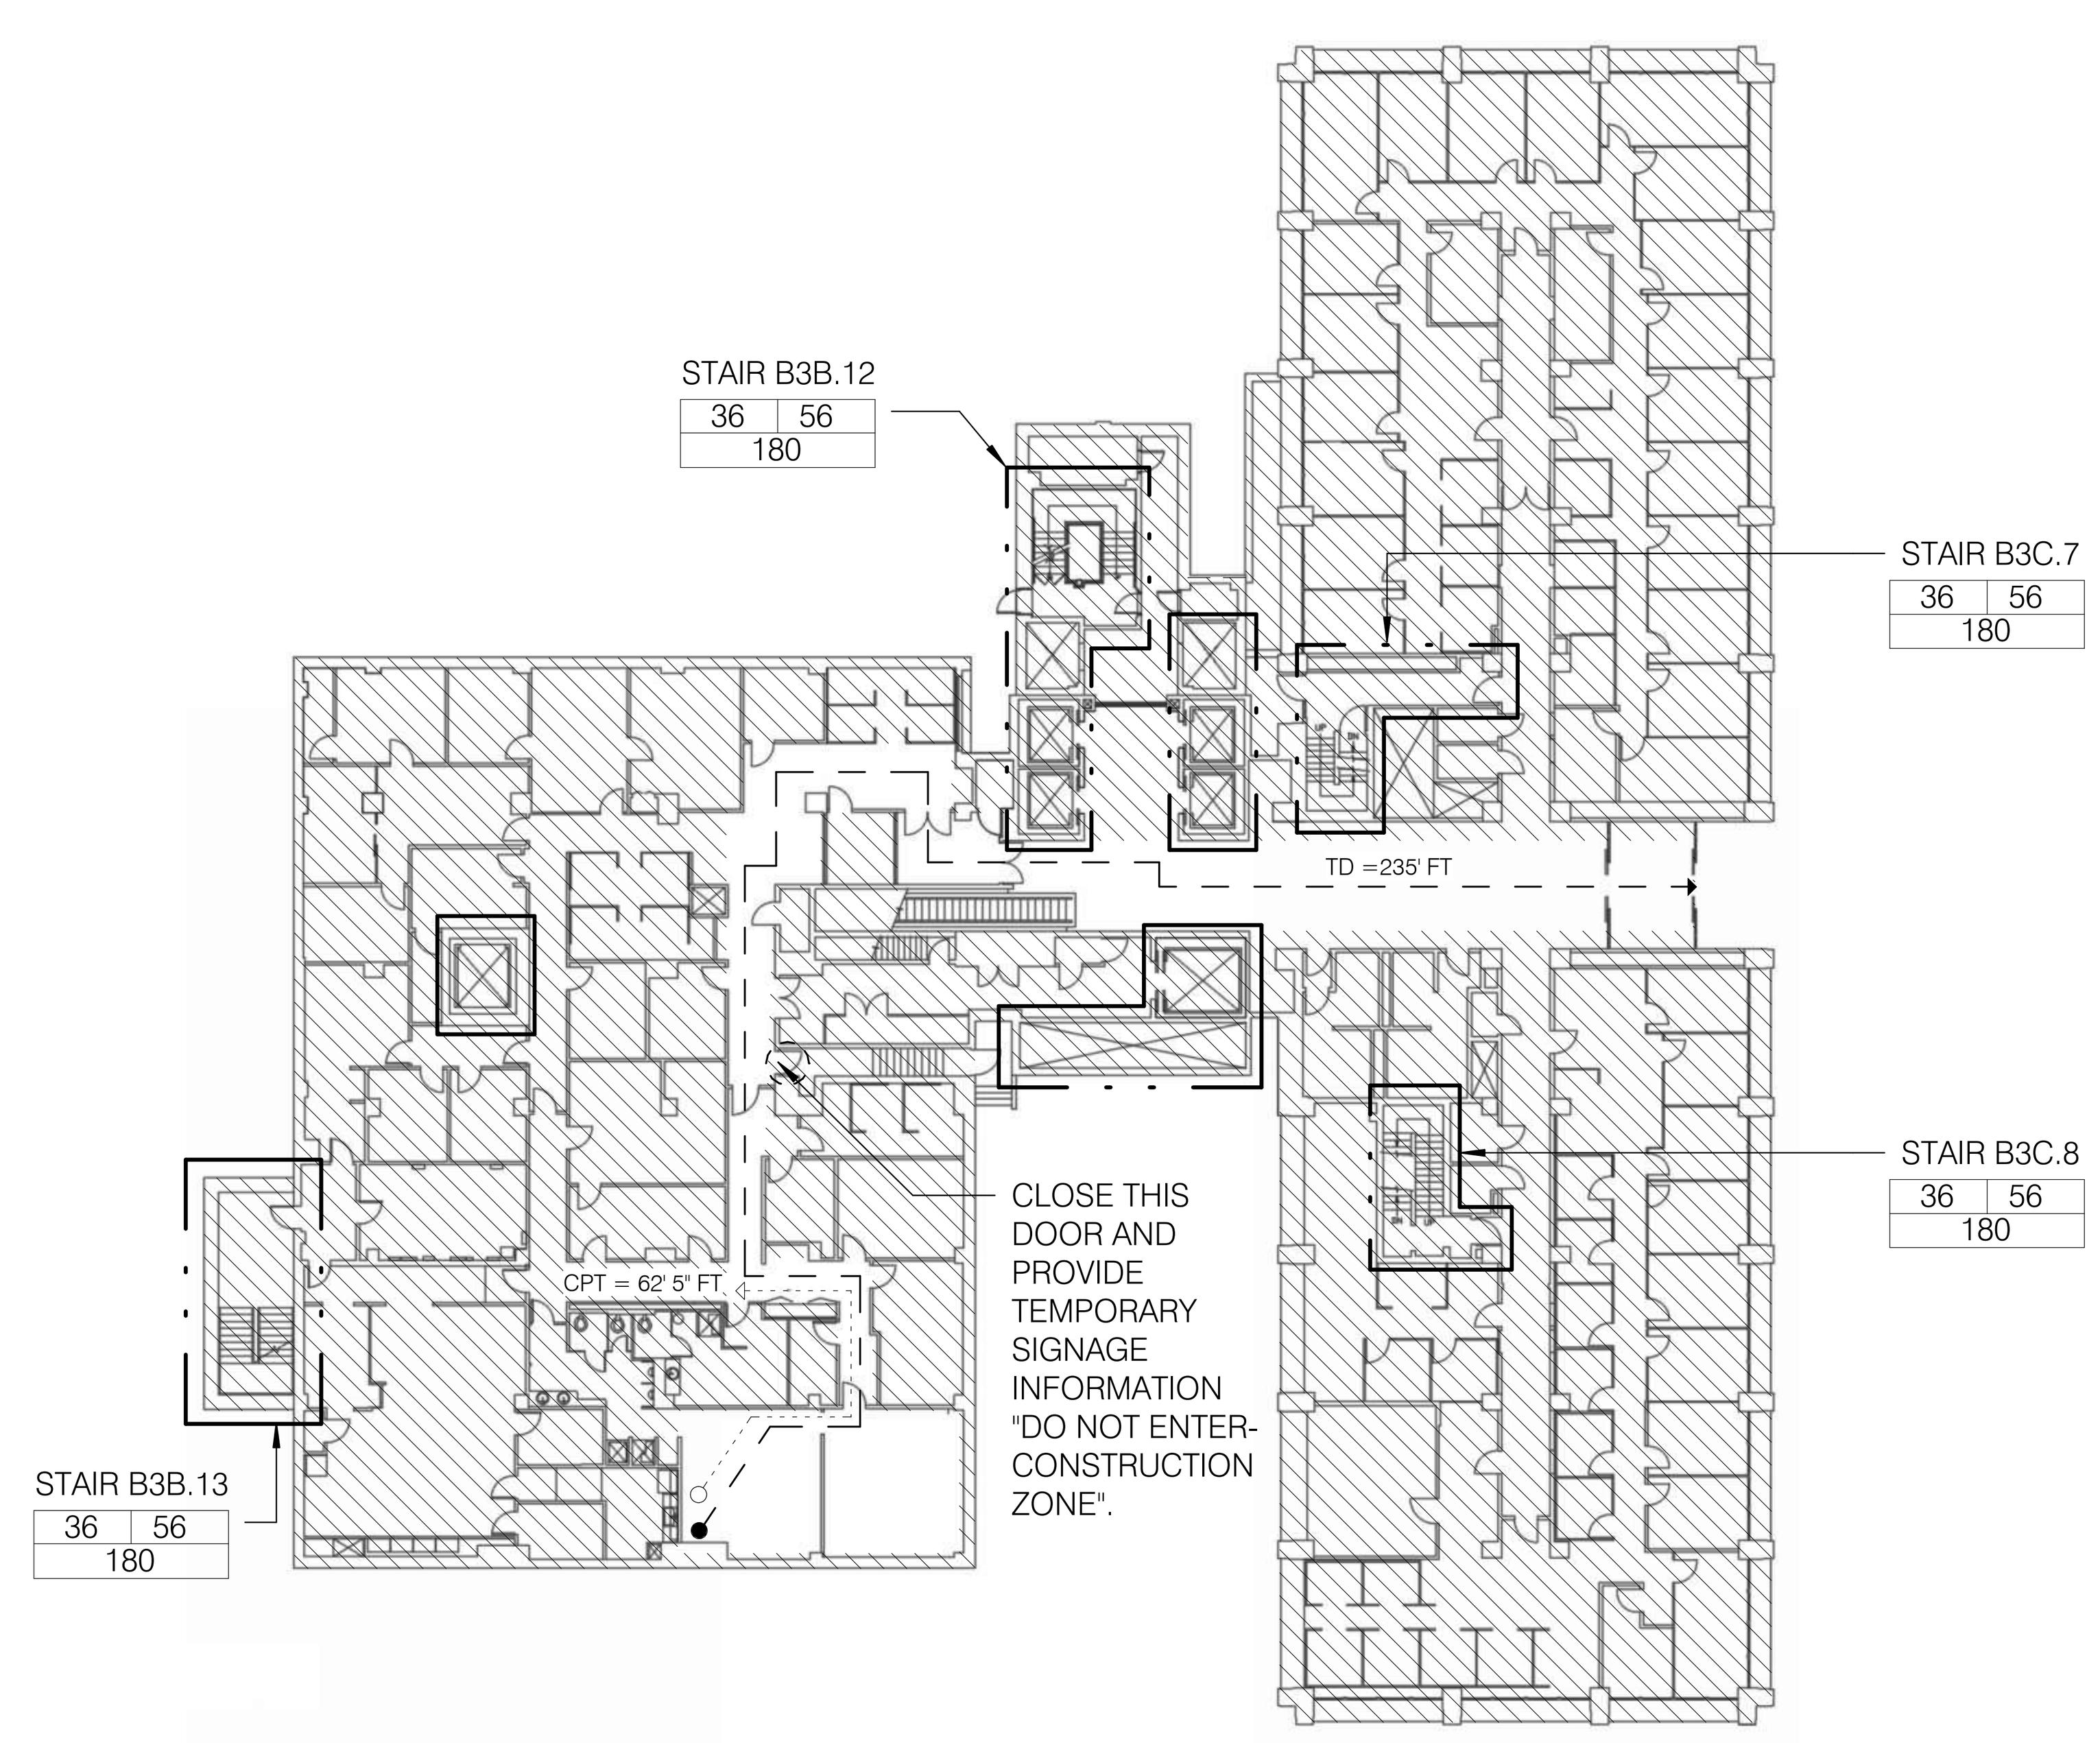

41
G-002
B3 FLOOR LIFE SAFETY PLAN
1" = 30'-0"

30 0 30 60
1" = 30'-0"
SCALE FEET

LIFE SAFETY LEGEND:

- TD = 70FT — TRAVEL DISTANCE
- CPT = 70FT — COMMON PATH OF TRAVEL
- 2 HOUR FIRE RESISTANCE RATED ASSEMBLY
- EXIT LIGHTS, REFER TO ELECTRICAL DRAWINGS
- XX | XX / #### — EGRESS WIDTH; EGRESS CAPACITY REQUIRED; EGRESS CAPACITY PROVIDED
- FIRE EXTINGUISHER CABINET
- NOT IN SCOPE

CODE ANALYSIS

GOVERNING CODES & STANDARDS

- NATIONAL INSTITUTES OF HEALTH DESIGN REQUIREMENTS MANUAL - REV. 2.1: 08.02.2024
- INTERNATIONAL BUILDING CODE (IBC) - 2024 EDITION
- INTERNATIONAL EXISTING BUILDING CODE (IEBC) - 2024 EDITION
- INTERNATIONAL MECHANICAL CODE (IMC) - 2024 EDITION
- INTERNATIONAL PLUMBING CODE (IPC) - 2024 EDITION
- INTERNATIONAL ENERGY CONSERVATION CODE (IECC) - 2021 EDITION
- INTERNATIONAL FIRE CODE (IFC) - 2024 EDITION
- NFPA STANDARD 1, FIRE PREVENTION CODE - 2024 EDITION
- NFPA STANDARD 10, PORTABLE FIRE EXTINGUISHERS - 2022 EDITION
- NFPA STANDARD 13, INSTALLATION OF SPRINKLER SYSTEMS - 2022 EDITION
- NFPA STANDARD 14, INSTALLATION OF STANDPIPE AND HOSE SYSTEM - 2024 EDITION
- NFPA STANDARD 70, NATIONAL ELECTRICAL CODE - 2023 EDITION
- NFPA STANDARD 72, NATIONAL FIRE ALARM CODE & SIGNALING CODE - 2022 EDITION
- NFPA STANDARD 101, LIFE SAFETY CODE - 2024 EDITION
- NFPA STANDARD 241, STANDARD FOR SAFEGUARDING CONSTRUCTION, ALTERATION, AND DEMOLITION OPERATIONS - 2022 EDITION
- ARCHITECTURAL BARRIERS ACT ACCESSIBILITY GUIDELINES - 2015 EDITION (ABA)
- ENERGY POLICY ACT - 2005 EDITION
- EXECUTIVE ORDER (EO) 13693 (2015), EISA 2007

BUILDING DESIGN

	EXISTING	PROJECT	REQUIRED/ ALLOWED	REFERENCE
OCCUPANCY	B	NO CHANGE	-	IBC 304.1
CONSTRUCTION TYPE	IB	NO CHANGE	-	IBC 602
HIGHRISE	NO	NO CHANGE	-	IBC 403.1
SPRINKLERS	YES	NO CHANGE	YES	IBC 403.2
ALARM SYSTEM	YES	NO CHANGE	YES	IBC 403.5, 403.6, 403.7
HEIGHT	90 FT	NO CHANGE	-	IBC T 503
FLOOR AREA	N/A	NO CHANGE	-	IBC T 503
FIRE WALLS	3 HRS	NO CHANGE	3 HRS	IBC 706
FIRE BARRIER ASSEMBLIES	2 HRS	NO CHANGE	2 HRS	IBC 707.3.9
INTERIOR COLUMNS	3 HRS	NO CHANGE	3 HRS	IBC T 601
STRUCT. WALL SUPPORTS	3 HRS	NO CHANGE	3 HRS	IBC T 601
FLOOR CONSTRUCTION	2 HRS	NO CHANGE	2 HRS	IBC T 601
ROOF CONSTRUCTION	1.5 HRS	NO CHANGE	1.5 HRS	IBC T 601
INTERIOR FINISHES - EXITS ENCLOSURES	Class B	NO CHANGE	Class B	IBC T 803.9
- EXIT ACCESS CORRIDORS	Class C	NO CHANGE	Class C	IBC T 803.9

MEANS OF EGRESS

OCCUPANT LOAD	ASSEMBLY- 15 SF	NO CHANGE	1,005 SF/15 = 67	LSC T 7.3.1.2/ IBC 301
NUMBER OF EXITS/STORY	2	NO CHANGE	2	LSC 4.5.3.1, 7.4.1.1
EGRESS CAPACITY - STAIRWAYS	EXISTING - 44" x 2 = 88	NO CHANGE	0.3" / PERSON	LSC T 7.3.3.1
OTHER EGRESS COMPONENTS	EXISTING	NO CHANGE	0.2" / PERSON	LSC T 7.3.3.1
COMMON PATH OF EGRESS TRAVEL	SEE PLAN	NO CHANGE	100' MAX W/SPRINKLER	LSC 38.2.5.3.1
DEAD END CORRIDOR	-	NO CHANGE	50' MAX W/SPRINKLER	LSC 38.2.5.3
EXIT ACCESS TRAVEL DISTANCE	SEE PLAN	NO CHANGE	300' MAX W/SPRINKLER	LSC 38.2.6.3

FIRE PROTECTION

SPRINKLER SYSTEMS	YES	NFPA 13	NFPA 13	LSC 9.7.1
STANDPIPES	YES	YES	YES	LSC 9.10
FIRE ALARM SYSTEM	YES	YES	YES	LSC 9.6

OPENINGS PROTECTIVES

OPENINGS IN 2-HOUR FIRE RESISTANCE-RATED CONSTRUCTION ARE REQUIRED TO HAVE A 1½-HOUR FIRE PROTECTION RATING. OPENINGS IN 1-HOUR FIRE RESISTANCE-RATED CONSTRUCTION ARE REQUIRED TO HAVE A 1-HOUR FIRE PROTECTION RATING WHERE USED FOR VERTICAL OPENINGS, OR A ¾-HOUR FIRE PROTECTION RATING WHERE USED ELSEWHERE.

MEANS OF EGRESS IDENTIFICATION AND ILLUMINATION

FLOORS AND OTHER WALKING SURFACES WITHIN AN EXIT AND WITHIN THE PORTIONS OF THE EXIT ACCESS AND EXIT DISCHARGE SHALL BE ILLUMINATED [7.8.1.1].

EXITS, OTHER THAN MAIN EXTERIOR EXIT DOORS THAT OBVIOUSLY AND CLEARLY ARE IDENTIFIABLE AS EXITS, SHALL BE MARKED BY AN APPROVED SIGN THAT IS READILY VISIBLE FROM ANY DIRECTION OF EXIT ACCESS [7.2.1.15.7(9)].

EMERGENCY ILLUMINATION SHALL BE PROVIDED FOR THE MEANS OF EGRESS AND SHALL BE PROVIDED FOR NOT LESS THAN 1½ HOURS IN THE EVENT OF FAILURE OF NORMAL LIGHTING [7.9.1.1].

ACCESS TO EXITS SHALL BE MARKED BY APPROVED, READILY VISIBLE SIGNS WHERE THE EXIT OR PATH TO THE EXIT IS NOT READILY APPARENT TO THE OCCUPANTS [7.2.1.15.7(9)].

EXIT SIGN PLACEMENT SHALL BE SUCH THAT NO POINT IN AN EXIT ACCESS CORRIDOR IS IN EXCESS OF THE RATED VIEWING DISTANCE OR 100 FT, WHICHEVER IS LESS, FROM THE NEAREST SIGN. [7.2.1.15.7(9)]

PORTABLE FIRE EXTINGUISHERS

FIRE EXTINGUISHERS ARE REQUIRED TO BE PROVIDED THROUGHOUT THE PROJECT AREA NFPA 10. THE MAXIMUM TRAVEL DISTANCE TO A FIRE EXTINGUISHER IS 75FT PER NFPA.

CLASS ABC (MULTIPURPOSE), 10-LB, FIRE EXTINGUISHERS SHOULD BE PROVIDED.

IDENTIFY IF THERE ANY ITEMS INCLUDING PORTABLE FIRE EXTINGUISHERS WITHIN THE PROJECT AREA THAT ARE NOT CODE COMPLIANT AND PROPOSE REMEDY FOR COMPLIANCE.

8' 4' 0' 8'
1/16" = 1' - 0"

DEPARTMENT OF HEALTH & HUMAN SERVICES USA

LSY ARCHITECTS & LABORATORY PLANNERS

James Posey Associates — Engineering Your Vision

TIMMONS GROUP

SGH

Architect and Engineer Name and LOGO

ARCHITECT: LOUVIERE, STRATTON & YOKEL, LLC, 8484 GEORGIA AVE, SUITE 650, SILVER SPRING, MD 20910, (301) 588-1500

MEP ENGINEER: JAMES POSEY ASSOCIATES INC, 11155 RED RUN BLVD, OWINGS MILLS, MD 21117, (410) 265-6100

CIVIL ENGINEER: TIMMONS GROUP, 2300 N ST NW SUITE 410B, WASHINGTON, DC 20037, (202) 919-2245

STRUCTURAL ENGINEER: SIMPSON GUMPERTZ & HEGER, 1625 EYE STREET NW SUITE 900, WASHINGTON, DC 20006, (202) 239-4199

SEAL: ARCHITECT 14829 HEATHER K. JOHNSON STATE OF MARYLAND

REVISIONS

MARK	DATE	DESCRIPTION

CONTRACTORS

A/E CON. NO.	
A/E TASK NO.	
CONS. CONTR.	
CONS. WORK	
PRIME A/E	LSY ARCHITECTS
SUB A/E	JPA / TIMMONS / SGH
CONSTR. CON.	

BUILDING

FACILITY CODE	
BUILDING NO.	BUILDING 31B
NAME	NIH
STREET	9000 ROCKVILLE PIKE
CITY	BETHESDA
STATE/ZIP	MD / 20892
OTHER BUILDING NO.	

PROJECT

PROJ. NO.	24024
PROJ. OFFICER	MOHAMMED BISWAS
PROJ. MGR.	G.LEE
SUBMISSION	IFC SUBMISSION
SUB. DATE	08/26/25
WRK REQ. NO.	C116635

N

PROJECT TITLE: BUILDING 31B NEW ROOFING AND WP OF STRUCTURE BELOW GRADE

DRAWING TITLE: LIFE SAFETY PLAN & CODE COMPLIANCE

NIH National Institutes of Health
OFFICE OF RESEARCH FACILITIES
DIVISION OF FACILITIES PLANNING

DESIGNED BY	G.L.
DRAWN BY	X.L.
CHECKED BY	K.C.
DATE	08/26/25
FILE NAME	

DRAWING
G-002
SHEET NUMBER OF

C:\Users\XLiu\Documents\24024 NIH Bldg 31B Landscape - Water Intrusion-2022_Xuan_LSY.rvt 8/26/2025 4:10:25 PM

ABBREVIATIONS:

NOTE: ALL ABBREVIATIONS MAY NOT BE USED

GENERAL ABBREVIATIONS	
&	AND
ADDN	ADDITIONAL
ADMIN	ADMINISTRATION
AFF	ABOVE FINISHED FLOOR
ALT	ALTERNATIVE
ALUM	ALUMINUM
AP	ACCESS PANEL
APPROX.	APPROXIMATE
ARCH	ARCHITECTURAL
ARW	ACID RESISTANT WASTE
ATC	ACOUSTICAL TILE CEILING
BD	BOARD
BLDG	BUILDING
BLKG	BLOCKING
BM	BEAM
BO	BOTTOM OF
BOT	BOTTOM
BRKT	BRACKET
C	CENTER LINE
CAB	CABINET
CFCI	CONTRACTOR FURNISHED, CONTRACTOR INSTALLED
CJ	CONTROL JOINT
CLG	CEILING
CLR	CLEAR
CMU	CONCRETE MASONRY UNIT
COL	COLUMN
COMP	COMPRESSIBLE
CONC	CONCRETE
CONST	CONSTRUCTION
CONT	CONTINUOUS, CONTINUATION
CONTRA	CONTRACTOR
CPT	CARPET
CT	CERAMIC TILE
CTR	CENTER
CTRTOP	COUNTER TOP
DEMO	DEMOLISH, DEMOLITION
DIA	DIAMETER
DIM	DIMENSION
DMB	DRY MARKER BOARD
DN	DOWN
DR	DOOR
DTL	DETAIL
DWG	DRAWING(S)
E	EAST
EA	EACH
EJ	EXPANSION JOINT
EL, ELEV	ELEVATION
ELEC	ELECTRICAL
EP	ELECTRICAL PANEL
EQ	EQUAL
EQUIP	EQUIPMENT
ETR	EXISTING TO REMAIN
EWC	ELECTRIC WATER COOLER
EXH	EXHAUST
EXIST	EXISTING
EXP	EXPANSION
EXST	EXISTING
EXT	EXTERIOR
FAAP	FIRE ALARM ANNUCIATOR PANEL
FACP	FIRE ALARM CONTROL PANEL
FAPS	FIRE ALARM PULL STATION
FD	FLOOR DRAIN
FE	FIRE EXTINGUISHER
FEC	FIRE EXTINGUISHER CABINET
FF	FINISHED FLOOR
FHC	FIRE HOSE CABINET
FL	FLASHING
FLR	FLOOR
FP	FILLER PANEL
FRT	FIRE RETARDENT TREATED
FT	FOOT, FEET
GA	GAUGE
GALV	GALVANIZED
GC	GENERAL CONTRACTOR
GFCI	GOVERNMENT FURNISHED, CONTRACTOR INSTALLED
GFGI	GOVERNMENT FURNISHED, GOVERNMENT INSTALLED
GH	GROMMET HOLE
GL	GLASS
GOV	GOVERNMENT
GWB	GYPSUM WALL BOARD
GYP BD	GYPSUM WALL BOARD
H	HIGH
HB	HOSE BIB
HC	HANDICAP
HDW	HARDWARE
HDWD	HARDWOOD
HEPA	HIGH EFFICIENCY PARTICULATE AIR FILTER
HM	HOLLOW METAL
HORIZ	HORIZONTAL
HP	HIGH POINT
HR	HOUR
HRA	HOT RUBBERIZED ASPHALT
HT	HEIGHT
ID	INSIDE DIAMETER

INSL	INSULATION
INST	INSTALL(ATION)
INT	INTERIOR
KBT	KEYBOARD TRAY
L	LENGTH
LB	POUND
LG	LARGE
LP	LOW POINT
LU	LEG UNIT
M	METER
MAG	MAGNETIC
MAT	MATERIAL
MAX	MAXIMUM
MDF	MEDIUM DENSITY FIBERBOARD
MECH	MECHANICAL
MED	MEDIUM
MET	METAL
MFR	MANUFACTURER
MIN	MINIMUM
MISC	MISCELLANEOUS
MO	MASONRY OPENING
MOA	MULTI OUTLET ASSEMBLY
MON	MONITOR
MR	MOISTURE RESISTANT
MTD	MOUNTED
MTL	METAL
N	NITROGEN
N/A	NOT APPLICABLE
NIC	NOT IN CONTRACT
NO	NUMBER
NP	NEW PANEL
NTS	NOT TO SCALE
OC	ON CENTER
OD	OUTSIDE DIAMETER
OFCI	OWNER FURNISHED, CONTRACTOR INSTALLED
OFOI	OWNER FURNISHED, OWNER INSTALLED
OH	OPPOSITE HAND
ORD	OVERFLOW ROOF DRAIN
ORIG	ORIGINAL
P	POWER RECEPTACLE
PART	PARTICLE BOARD
PCST	PRECAST
PLAM	PLASTIC LAMINATE
PLUMB	PLUMBING
PLYWD	PLYWOOD
PNL(S)	PANEL(S)
PRXR	PROXIMITY READER
PT	PRESSURE TREATED
PTD	PAINT, PAINTED
PTN	PARTITION
PWR	POWER
RCP	REFLECTED CEILING PLAN
REF	REFERNECE
REFRIG	REFRIGERATOR
REQ	REQUIRED
RM	ROOM
S	SOUTH
SA	SOUND ATTENUATION
SAB	SOUND ATTENUATION BLANKET
SAL	SALVAGE
SCWD	SOLID CORE WOOD DOOR
SECT	SECTION
SF	SQUARE FOOT
SHF	SHELF
SHT	SHEET
SIM	SIMILAR
SK	SINK
SM	SQUARE METER
SM	SMALL
SMR	SURFACE MOUNTED RACEWAY
SPEC	SPECIFICATION(S)
SQ	SQUARE
SS	STAINLESS STEEL
STD	STANDARD
STDP	STAND PIPE
STL	STEEL
STOR	STORAGE
STR	STRUCTURAL, STRUCTURE
SUSP	SUSPENDED
SVF	SEAMLESS VINYL FLOORING
TB	TACK BOARD
TD	TRENCH DRAIN
TEMP	TEMPORARY
THK	THICK
TO	TOP OF
TOC	TOP OF CURB
TOS	TOP OF STEEL
TYP	TYPICAL
UNO	UNLESS NOTE OTHERWISE
UTY	UTILITY
VB	VINYL BASE
VCT	VINYL COMPOSITION TILE
VEST	VESTIBULE
VIF	VERIFY IN FIELD
VIN	VINYL
VWC	VINYL WALL COVERING
W	WIDE, WEST
W/	WITH

W/O	WITHOUT
WB	WHITEBOARD
WD	WOOD
WDO	WINDOW
WR	WATER RESISTANT
LABORATORY ABBREVIATIONS	
AL	AIR LOCK
BP	BACK PANEL
CORR	CORROSIVES
CS	CUP SINK
CYL	CYLINDER
D	DATA RECEPTACLE
DCRD	DROP CORD
DI	DEIONIZED WATER
ES	EMERGENCY SHOWER
EW	EYE WASH
FLAM	FLAMMABLE
FPED	FOOT PEDALS
GFI	GROUND FAULT INTERRUPTER
HB	HIGH BENCH
IVF	ILLUMINATED FILM VIEWER
IVT	INTRAVENEOUS TRACK
LB	LOW BENCH
LN2	LIQUID NITROGEN
MHG	MAGNAHELIC GAUGE
N2	GASEOUS NITROGEN
NARC	NARCOTICS CABINET
O2	OXYGEN
PPE	PERSONAL PROTECTION EQUIPMENT
PTL	PASS THROUGH LOCKERS
PWF	PURE WATER FIXTURE
RO	REVERSE OSMOSIS
SG	SPLASH GUARD
SHR	SHOWER
UC	UNDER COUNTER
VHP	VAPROX HYDROGEN PEROXIDE
VPI	VISUAL PRESSURE INDICATOR
LABORATORY EQUIPMENT ABBREVIATIONS	
ATS	ANIMAL TRANSFER STATION
BFLR	BOTTLE FILLER
BSC	BIOSAFETY CABINET
BSC A2.4	4' CLASS II, TYPE A2 BIOSAFETY CABINET
BSC A2.6	6' CLASS II, TYPE A2 BIOSAFETY CABINET
BSC B2.4	4' CLASS II, TYPE B2 BIOSAFETY CABINET
BSC B2.6	6' CLASS II, TYPE B2 BIOSAFETY CABINET
CFS	CHLORINE FLUSH STATION
CIS	CHLORINE INJECTION STATION
CRW	CAGE @ RACK WASHER
EOXS	ETHYLENE OXIDE STERILIZER
FBB	FLUIDIZED BED BIOFILTER
ICE	ICE MACHINE
INC	INCUBATOR
PTC	PASS THROUGH CABINET
PTC (V)	VENTILATED PASS THROUGH CABINET
STER	STERILIZER
LABORATORY UTILITY SERVICE ABBREVIATIONS	
A	AIR
AGV	AIR, GAS, VACUUM
C	CARBON
CA	COMPRESSED AIR
CO2	CARBON DIOXIDE
CW	COLD WATER
G	GAS
HW	HOT WATER
PW	PURIFIED WATER
V	VACUUM

GENERAL NOTES:

1. DO NOT START CONSTRUCTION UNTIL ALL REQUIRED PERMIT APPROVALS ARE OBTAINED.
2. VISIT THE SITE PRIOR TO CONSTRUCTION TO VERIFY CONDITIONS RELATING TO CONSTRUCTION. THOROUGHLY EXAMINE AND BE FAMILIAR WITH THE DRAWINGS, DRAWING NOTES AND SPECIFICATIONS. FIELD VERIFY ALL DIMENSIONS PRIOR TO ORDERING MATERIALS. DO NOT SCALE THE DRAWINGS.
3. NOTIFY THE PROJECT OFFICER OF ANY DISCREPANCIES, OMISSIONS, OR CONFLICTS IN THE CONSTRUCTION DOCUMENTS.
4. FURNISH AND INSTALL ALL ITEMS SHOWN OR IMPLIED ON THE DRAWINGS UNLESS OTHERWISE NOTED.
5. MAINTAIN THE CONSTRUCTION SITE IN A CLEAN AND ORDERLY MANNER.
6. DIMENSIONS SHOWN ON THE DRAWINGS ARE FROM FINISH FACE OF PARTITION UNLESS OTHERWISE NOTED.
7. INFORMATION CONTAINED IN THESE DRAWINGS IS BASED ON LIMITED FIELD MEASUREMENTS AND MAY REQUIRE ADJUSTMENTS OR MODIFICATIONS TO CONFIRM WITH EXISTING CONDITIONS. IN CASES WHERE CHANGES IN DETAIL ARE NECESSARY, THESE DRAWINGS SHALL BE USED TO SHOW DESIGN INTENT ONLY. PERFORM WORK, SHOWN OR IMPLIED, THAT IS NECESSARY TO CARRY OUT THE INTENT OF THE DRAWINGS AND SPECIFICATIONS OR IS CUSTOMARILY PERFORMED AS IF FULLY AND CORRECTLY SET FORTH AND DESCRIBED IN THE DRAWINGS AND SPECIFICATIONS.
8. COORDINATE WORK SCHEDULE THROUGH THE NIH PROJECT OFFICER. SCHEDULE WORK TO MINIMIZE DISRUPTION TO OCCUPANTS OF THE BUILDING.
9. PROTECT EXISTING BUILDING ELEMENTS NOT INDICATED FOR REMOVAL FROM DEMOLITION AND CONSTRUCTION ACTIVITIES. DAMAGE RESULTING FROM CONSTRUCTION ACTIVITIES SHALL BE REPAIRED TO ORIGINAL CONDITION.
10. SHUTDOWN OF UTILITIES FOR THE WORK SHALL BE PERFORMED ONLY BY NIH PERSONNEL, AND SHALL BE EXECUTED AFTER REGULAR WORKING HOURS. REQUESTS FOR UTILITY SHUTDOWNS SHALL BE SUBMITTED TO THE PROJECT OFFICER, IN WRITING, EIGHTEEN (18) CALENDAR DAYS PRIOR TO THE REQUIRED SHUTDOWN.
11. ON SITE STORAGE IS LIMITED TO THAT AVAILABLE WITHIN THE LIMITS OF CONSTRUCTION.
12. PERFORM EXCESSIVELY NOISY AND DISRUPTIVE CONSTRUCTION TASKS & UTILITY SHUTDOWNS (AS DEFINED BY THE PROJECT OFFICER) DURING NOISE HOURS (7:00PM - 7:30AM), OR ON WEEKENDS.
13. NIH DFM (DIVISION OF THE FIRE MARSHAL) WILL PERFORM WALL AND CEILING CLOSE-IN AND FINAL INSPECTION PRIOR TO OCCUPANCY. COORDINATE SCHEDULING OF INSPECTIONS WITH CONSTRUCTION WORK.
14. CONSTRUCTION SITE MUST BE SEPARATED FROM SURROUNDING AREAS BY 1 HOUR FIRE-RATED TEMPORARY BARRIERS CONSTRUCTED OF TAPED GYPSUM DRYWALL ON METAL STUDS OR SPRINKLER SYSTEM MUST BE CODE-COMPLIANT AT ALL TIMES (CEILING REMAINS IN PLACE OR SPRINKLERS ADJUSTED PER NFPA 13) IN ACCORDANCE WITH NFPA 241 SECTION 4.13.4 AND DFM ADMINISTRATIVE INTERPRETATION 22-2.
15. PARKING FOR CONSTRUCTION VEHICLES IS LIMITED TO DESIGNATED AREAS ASSIGNED BY THE NIH PROJECT OFFICER. VEHICLES PARKED OUTSIDE THESE DESIGNATED AREAS WILL BE SUBJECT TO REMOVAL.
16. EXCAVATED SOIL MUST BE PROMPTLY REMOVED FROM THE SITE AND TRANSPORTED TO A PERMITTED OFFSITE DISPOSAL LOCATION IN COMPLIANCE WITH LOCAL, STATE, AND FEDERAL REGULATIONS. MAINTAIN ALL REQUIRED DOCUMENTATION FOR SOIL TRANSPORT AND DISPOSAL.
17. ALL EXISTING CONDITION DIMENSIONS ON THE DRAWINGS ARE FOR REFERENCE ONLY AND THAT THE CONTRACTOR SHALL FIELD VERIFY THEM.

SYMBOLS

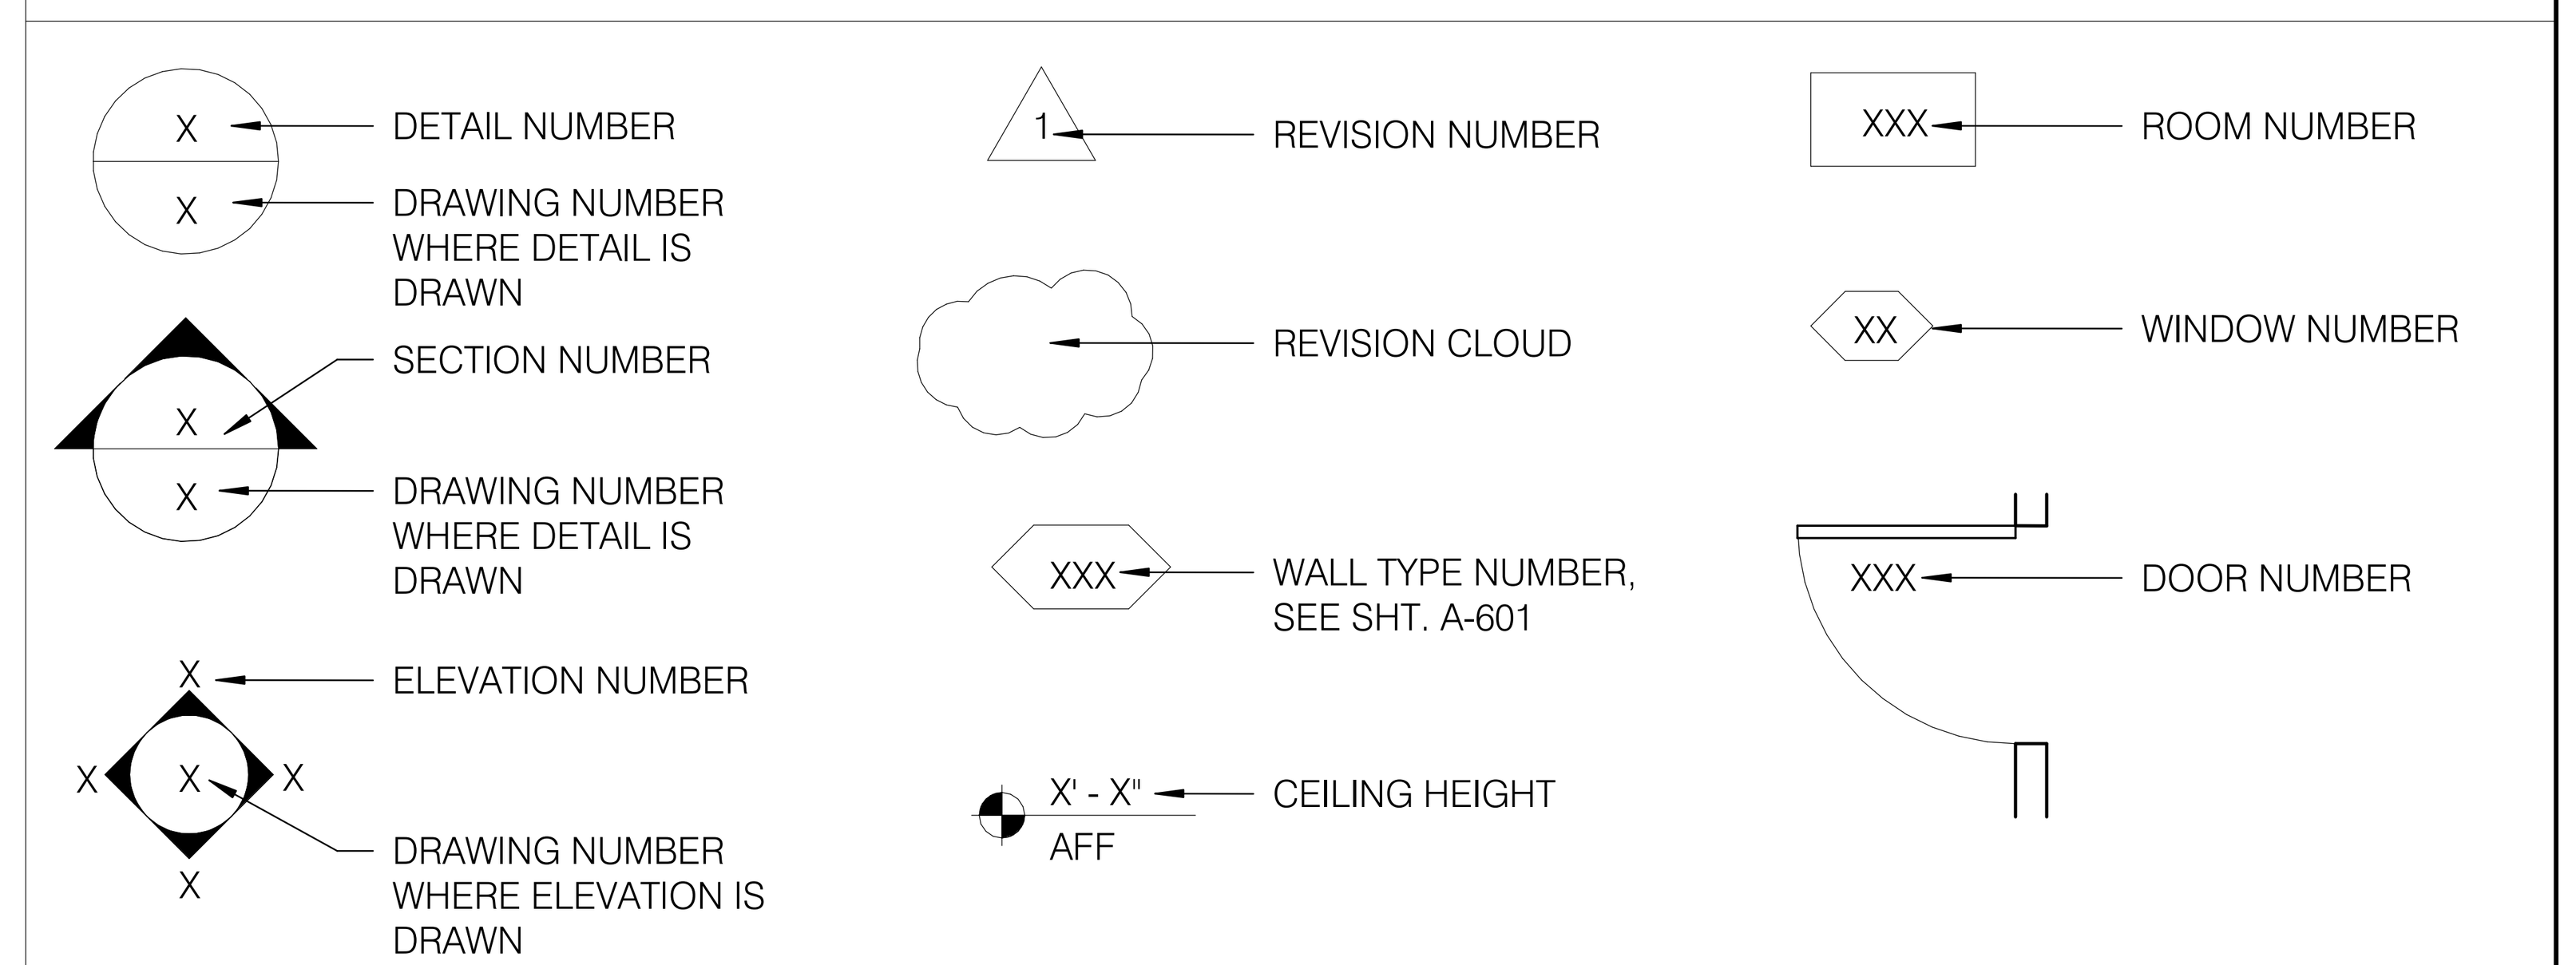

MATERIALS

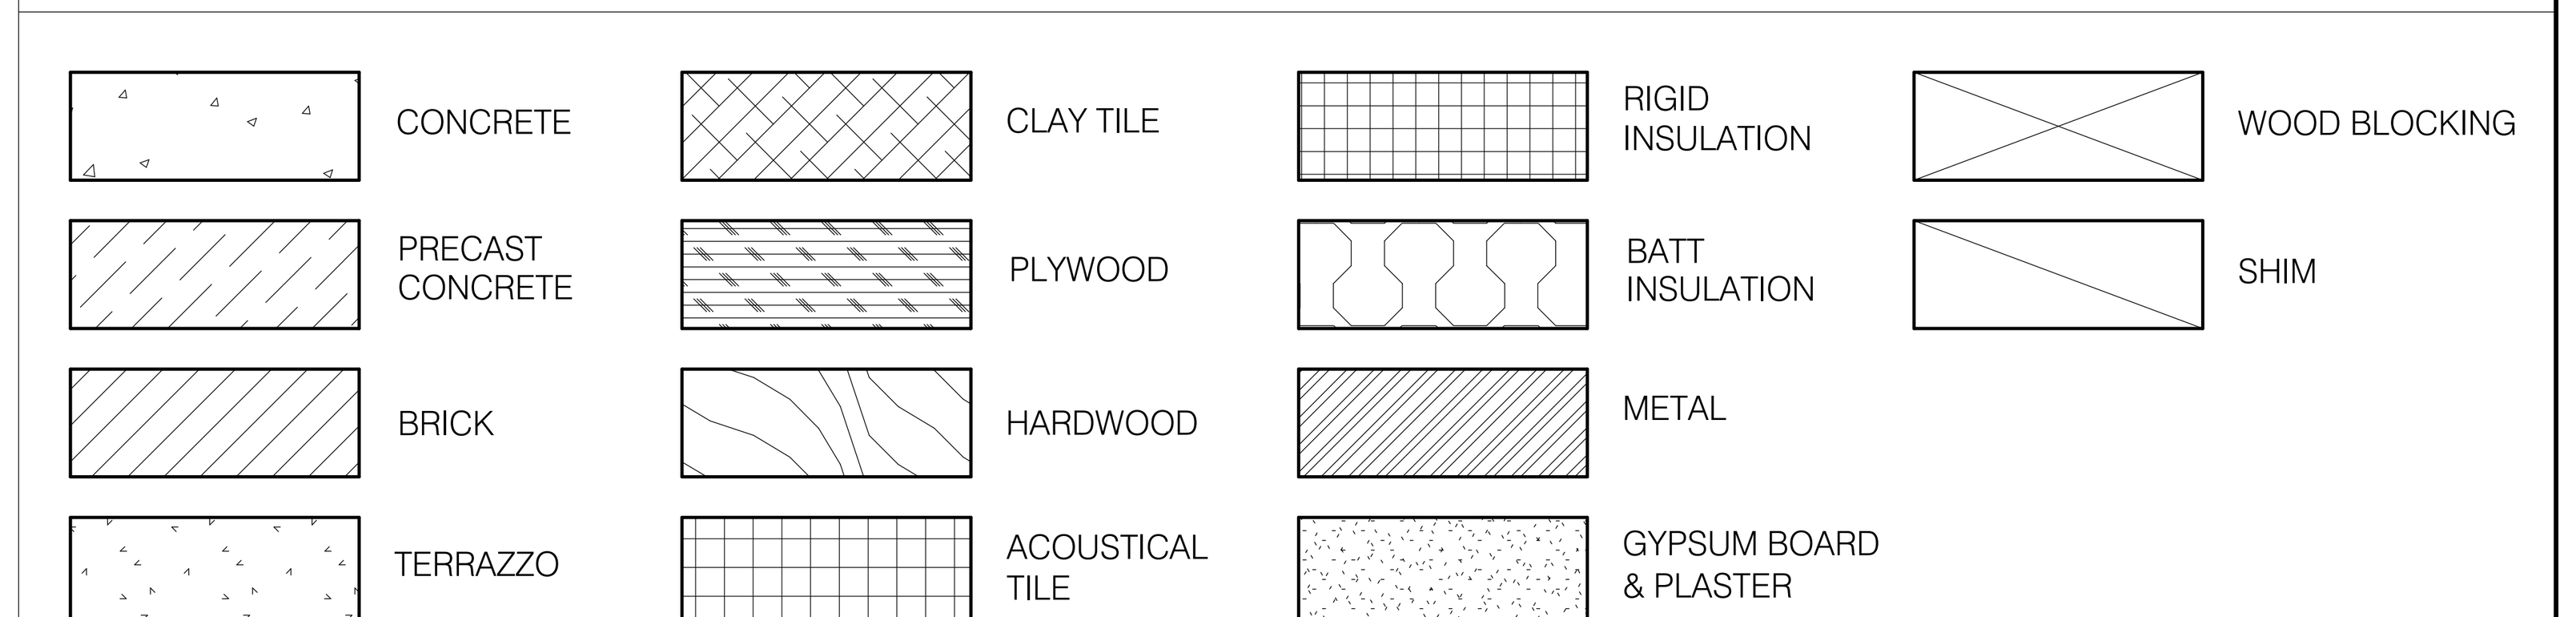

PROPERTY OF THE UNITED STATES GOVERNMENT
FOR OFFICIAL USE ONLY
Do not remove this notice
Properly destroy documents when no longer needed

DEPARTMENT OF HEALTH & HUMAN SERVICES USA

LSY
ARCHITECTS & LABORATORY PLANNERS

James Posey Associates
Engineering Your Vision

TIMMONS GROUP

SGH

Architect and Engineer Name and LOGO

ARCHITECT: LOUVIERE, STRATTON & YOKEL, LLC
8484 GEORGIA AVE, SUITE 650
SILVER SPRING, MD 20910
(301) 588-1500

MEP ENGINEER: JAMES POSEY ASSOCIATES INC
11155 RED RUN BLVD
OWINGS MILLS, MD 21117
(410) 265-6100

CIVIL ENGINEER: TIMMONS GROUP
2300 N ST NW SUITE 410B
WASHINGTON, DC 20037
(202) 919-2245

STRUCTURAL ENGINEER: SIMPSON GUMPERTZ & HEGER
1625 EYE STREET NW SUITE 900
WASHINGTON, DC 20006
(202) 239-4199

SEAL

ARCHITECT 14829
HEATHER K. JOHNSON
STATE OF MARYLAND

REVISIONS

MARK	DATE	DESCRIPTION

CONTRACTORS

A/E CON. NO.	
A/E TASK NO.	
CONS. CONTR.	
CONS. WORK	
PRIME A/E	LSY ARCHITECTS
SUB A/E	JPA / TIMMONS / SGH
CONSTR. CON.	

BUILDING

FACILITY CODE	
BUILDING NO.	BUILDING 31B
NAME	NIH
STREET	9000 ROCKVILLE PIKE
CITY	BETHESDA
STATE/ZIP	MD / 20892
OTHER BUILDING NO.	

PROJECT

PROJ. NO.	24024
PROJ. OFFICER	MOHAMMED BISWAS
PROJ. MGR.	G.LEE
SUBMISSION	IFC SUBMISSION
SUB. DATE	08/26/25
WRK REQ. NO.	C116635

N

PROJECT TITLE: BUILDING 31B NEW ROOFING AND WP OF STRUCTURE BELOW GRADE

DRAWING TITLE: ABBREVIATIONS & GENERAL NOTES

NIH
National Institutes of Health
OFFICE OF RESEARCH FACILITIES
DIVISION OF FACILITIES PLANNING

DESIGNED BY	G.L.
DRAWN BY	X.L.
CHECKED BY	K.C.
DATE	08/26/25
FILE NAME	

DRAWING

G-003

SHEET NUMBER OF

NOTES FOR POTENTIAL HAZARDS IN THE WALL

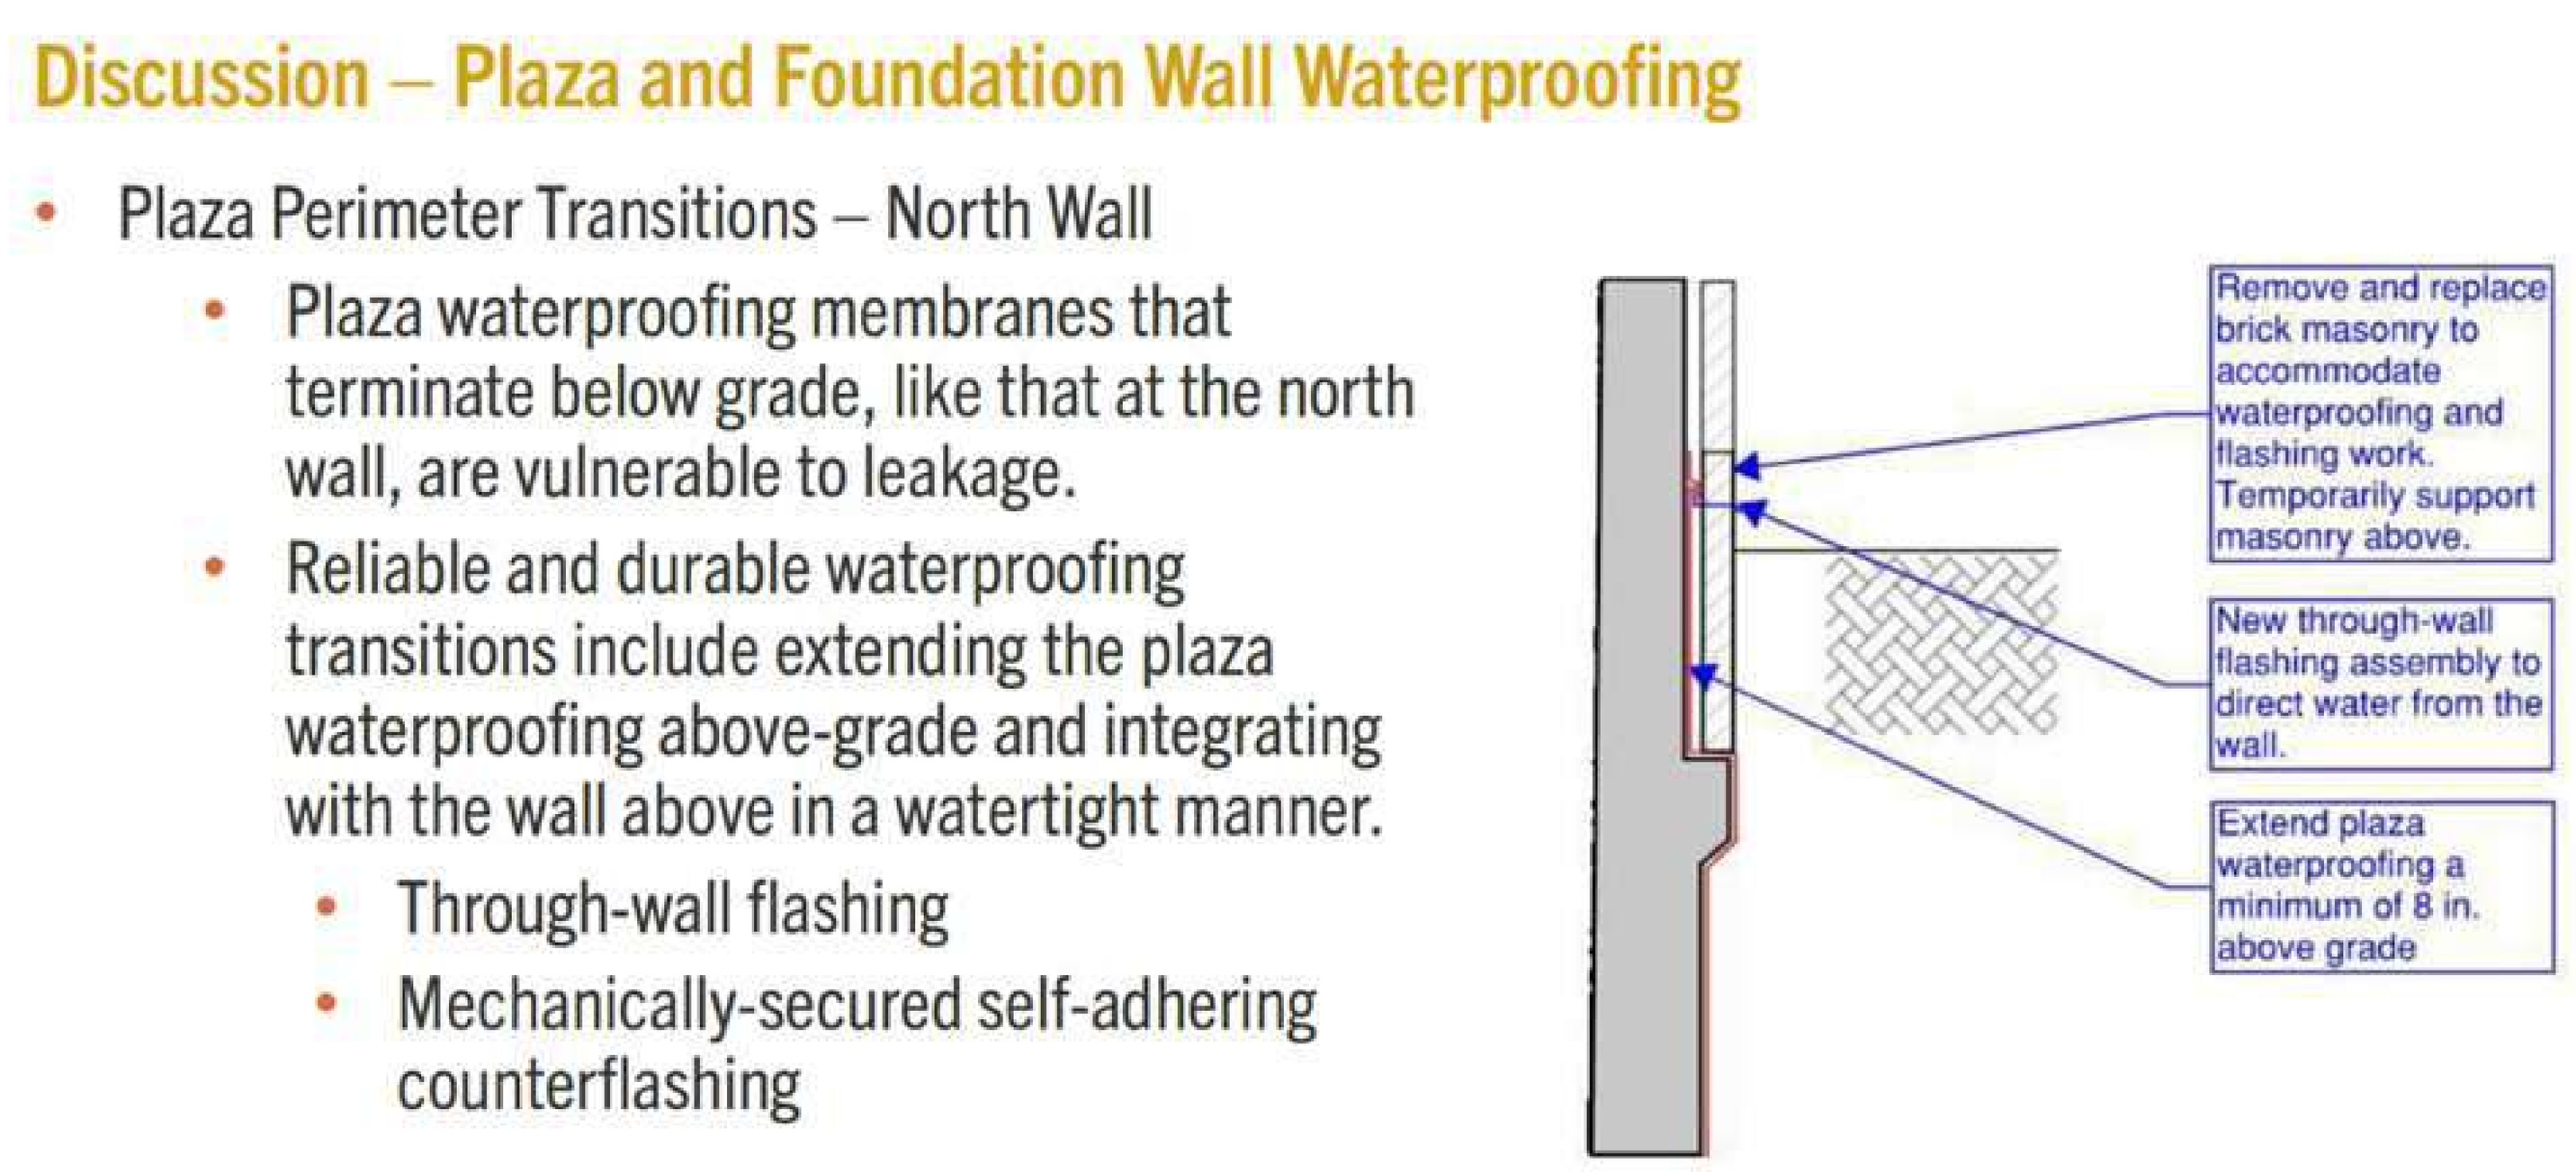

1. THERE IS POTENTIAL FOR CONTAMINATED WATER OR MOLD HAZARDS IN THE DAMAGED WALLS. CORRECT PPE MUST BE USED ACCORDING TO THE OSHA REGULATIONS:
   - -29 CFR 1910.134 (RESPIRATORY PROTECTION)
   - -29 CFR 1910.120 (HAZWOPER, FOR HAZARDOUS WASTE).
2. ALL MOLDED CONSTRUCTION MATERIAL CANNOT BE LEFT OUTSIDE WITHOUT A COVER TO AVOID EXPOSURE TO THE PUBLIC.

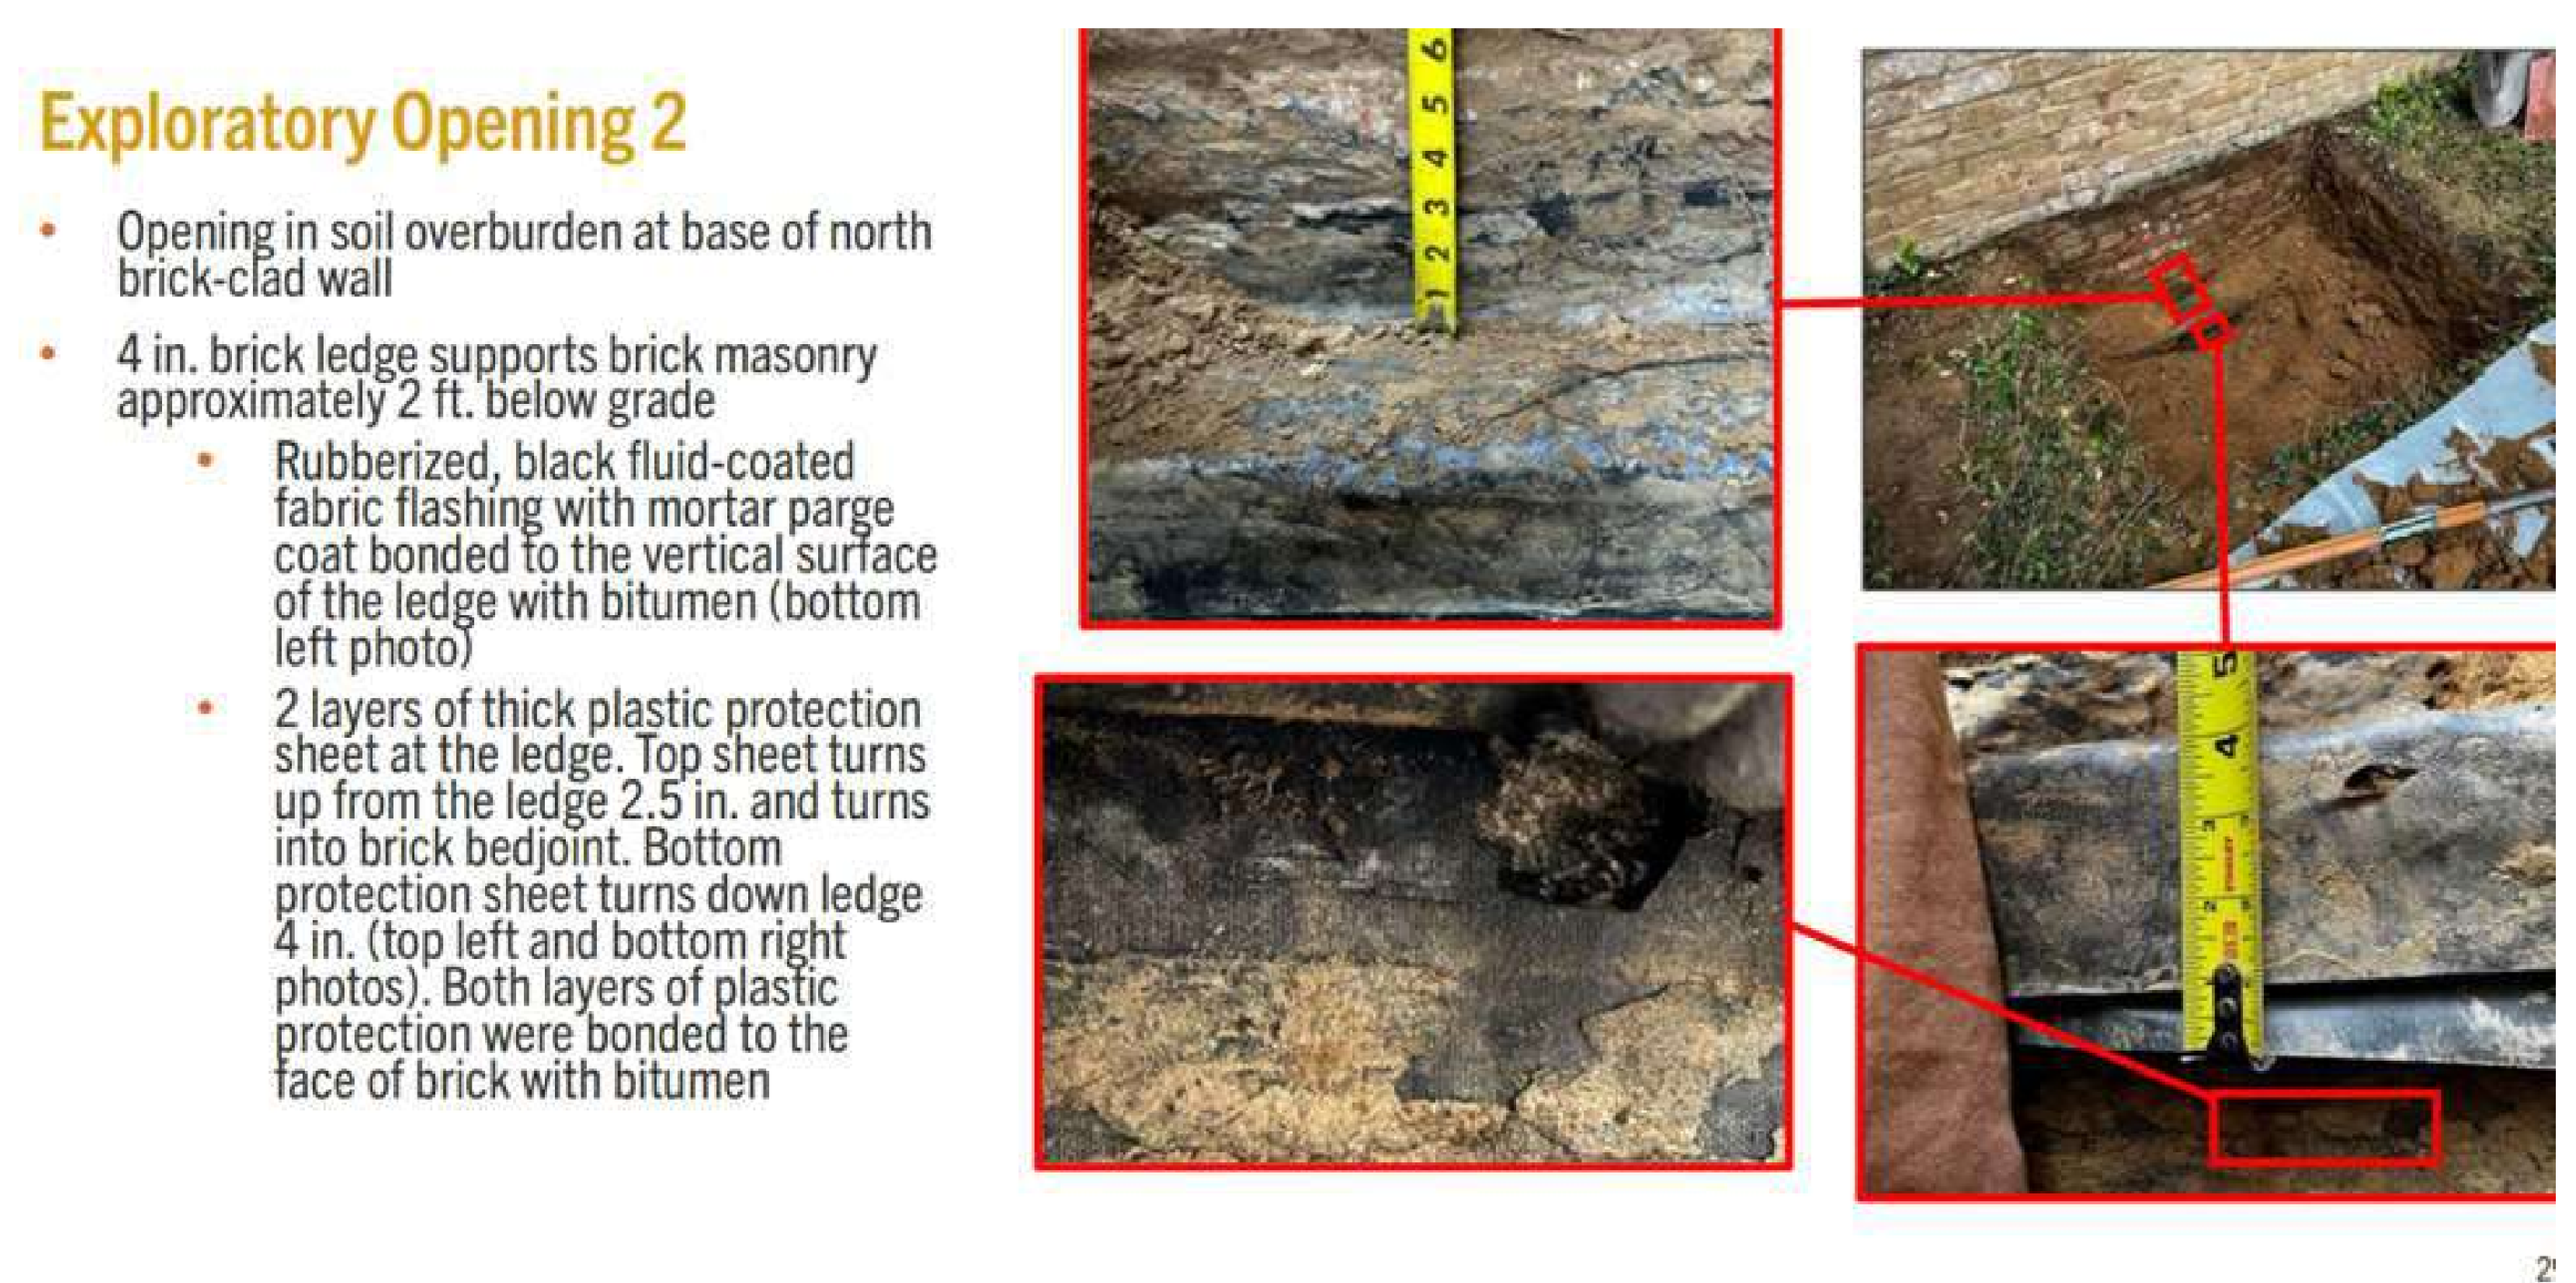

3. ALL BUILDING WINDOWS AND DOORS MUST BE CLOSED DURING THE CONSTRUCTION TO AVOID NOISE AND POTENTIAL HAZARDOUS PARTICLE EXPOSURE FOR BUILDING OCCUPANTS. ALL DEPARTMENTS AND EMPLOYEES MUST BE NOTIFIED IN ADVANCE.

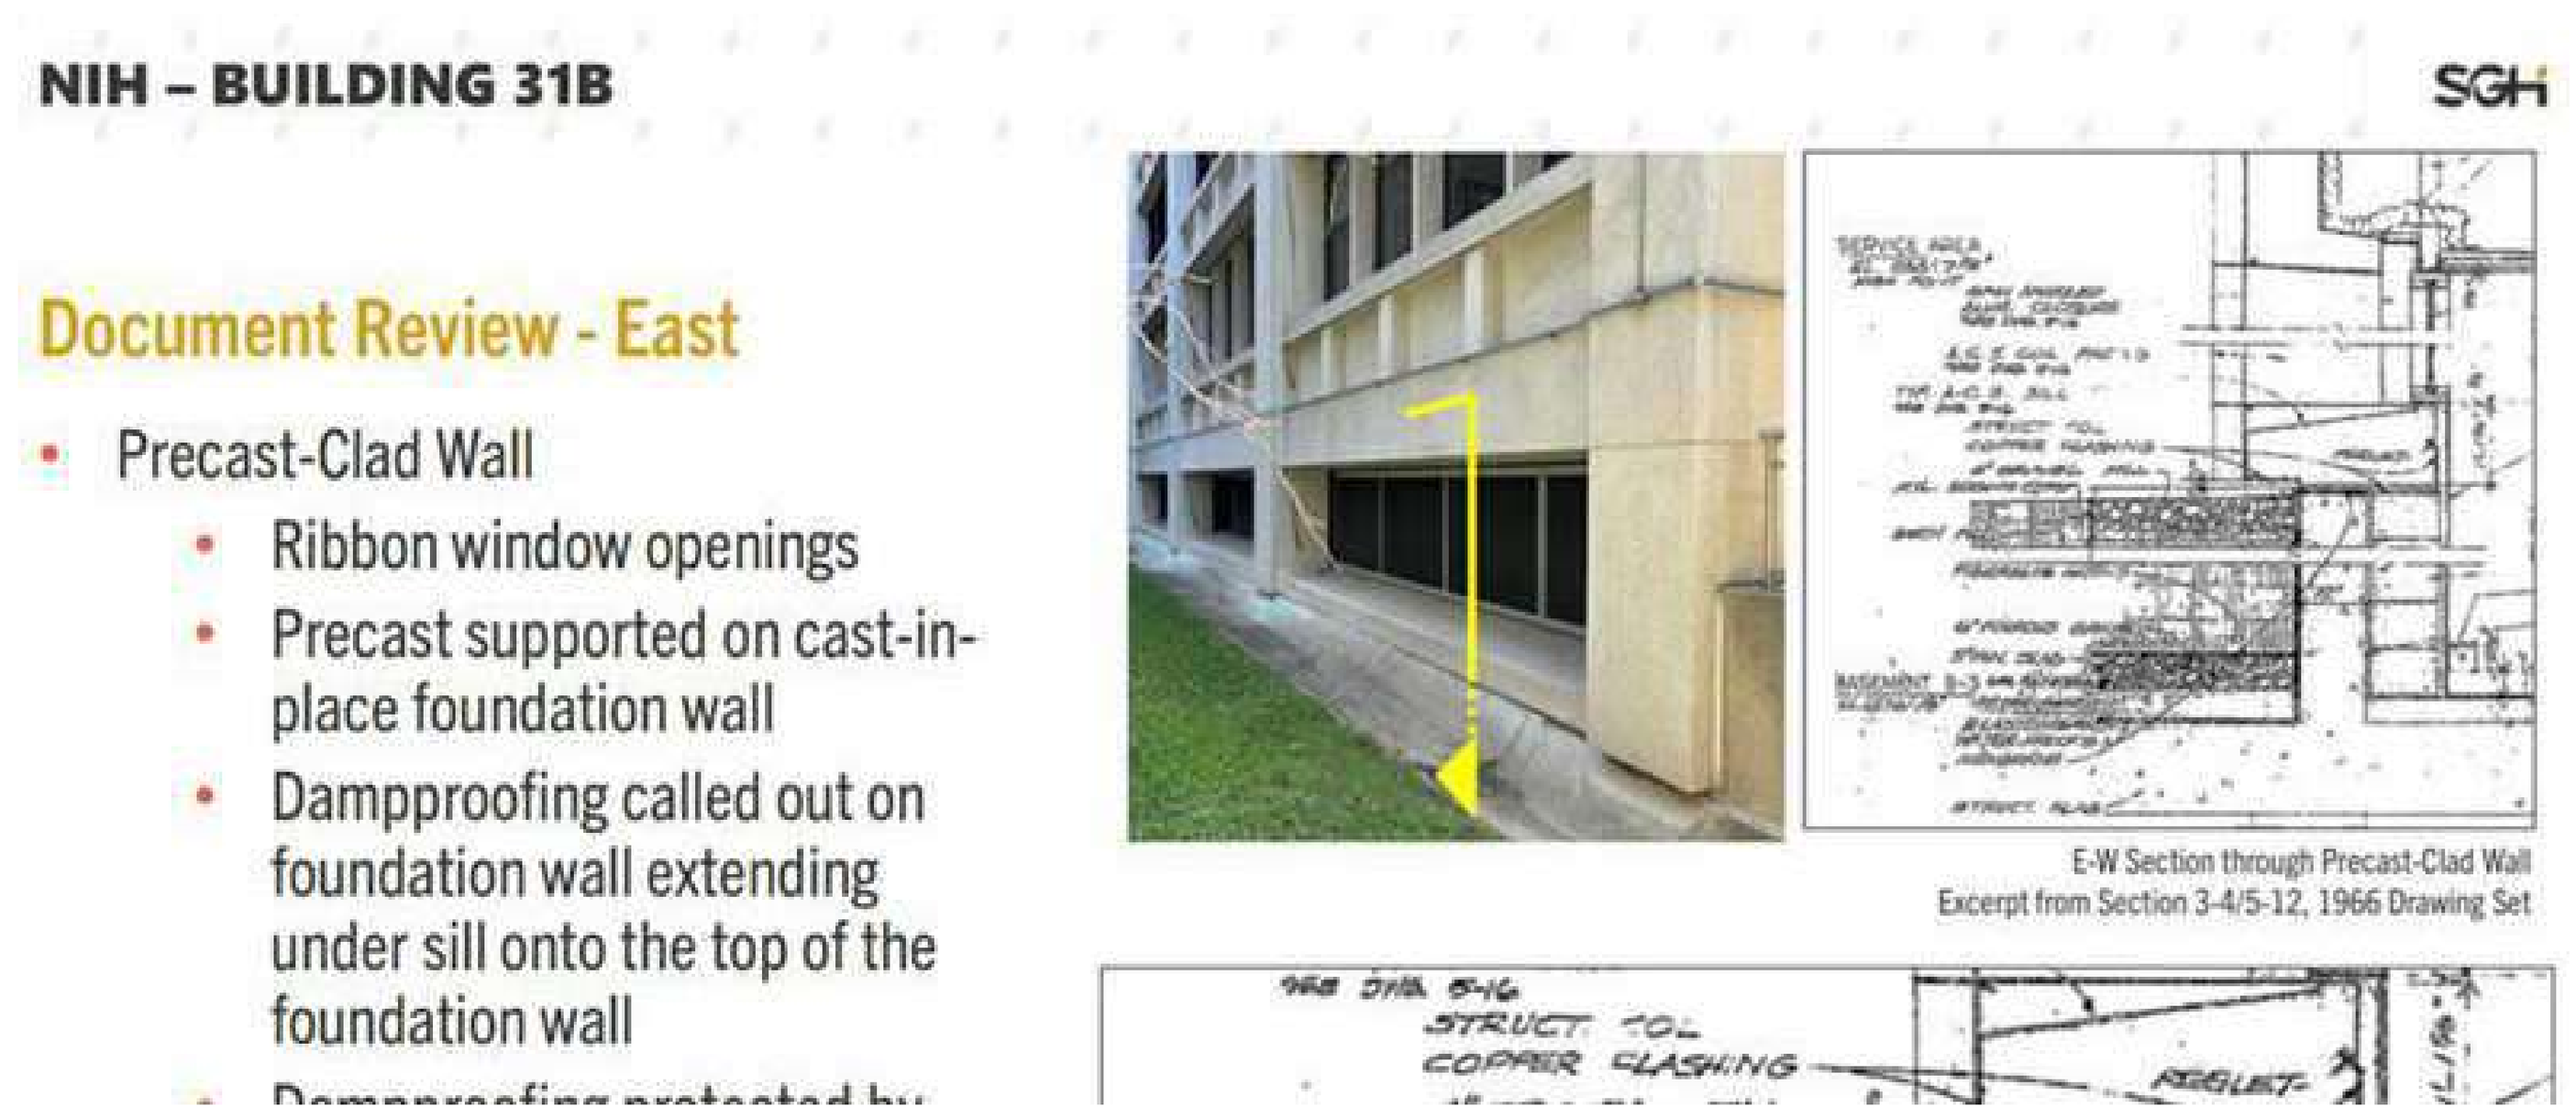

4. CONTRACTORS MUST PROVIDE COPIES OF ALL SDS FOR MATERIALS USED DURING THE CONSTRUCTION AND BE AWARE OF THEIR HAZARDS TOO. THEY MUST HAVE PROPER PPE FOR EACH MATERIAL, ESPECIALLY RESPIRATORY PROTECTION, EYE PROTECTION, AND GLOVES.

NOTES FOR EXCAVATION DURING THE RAINY SEASON

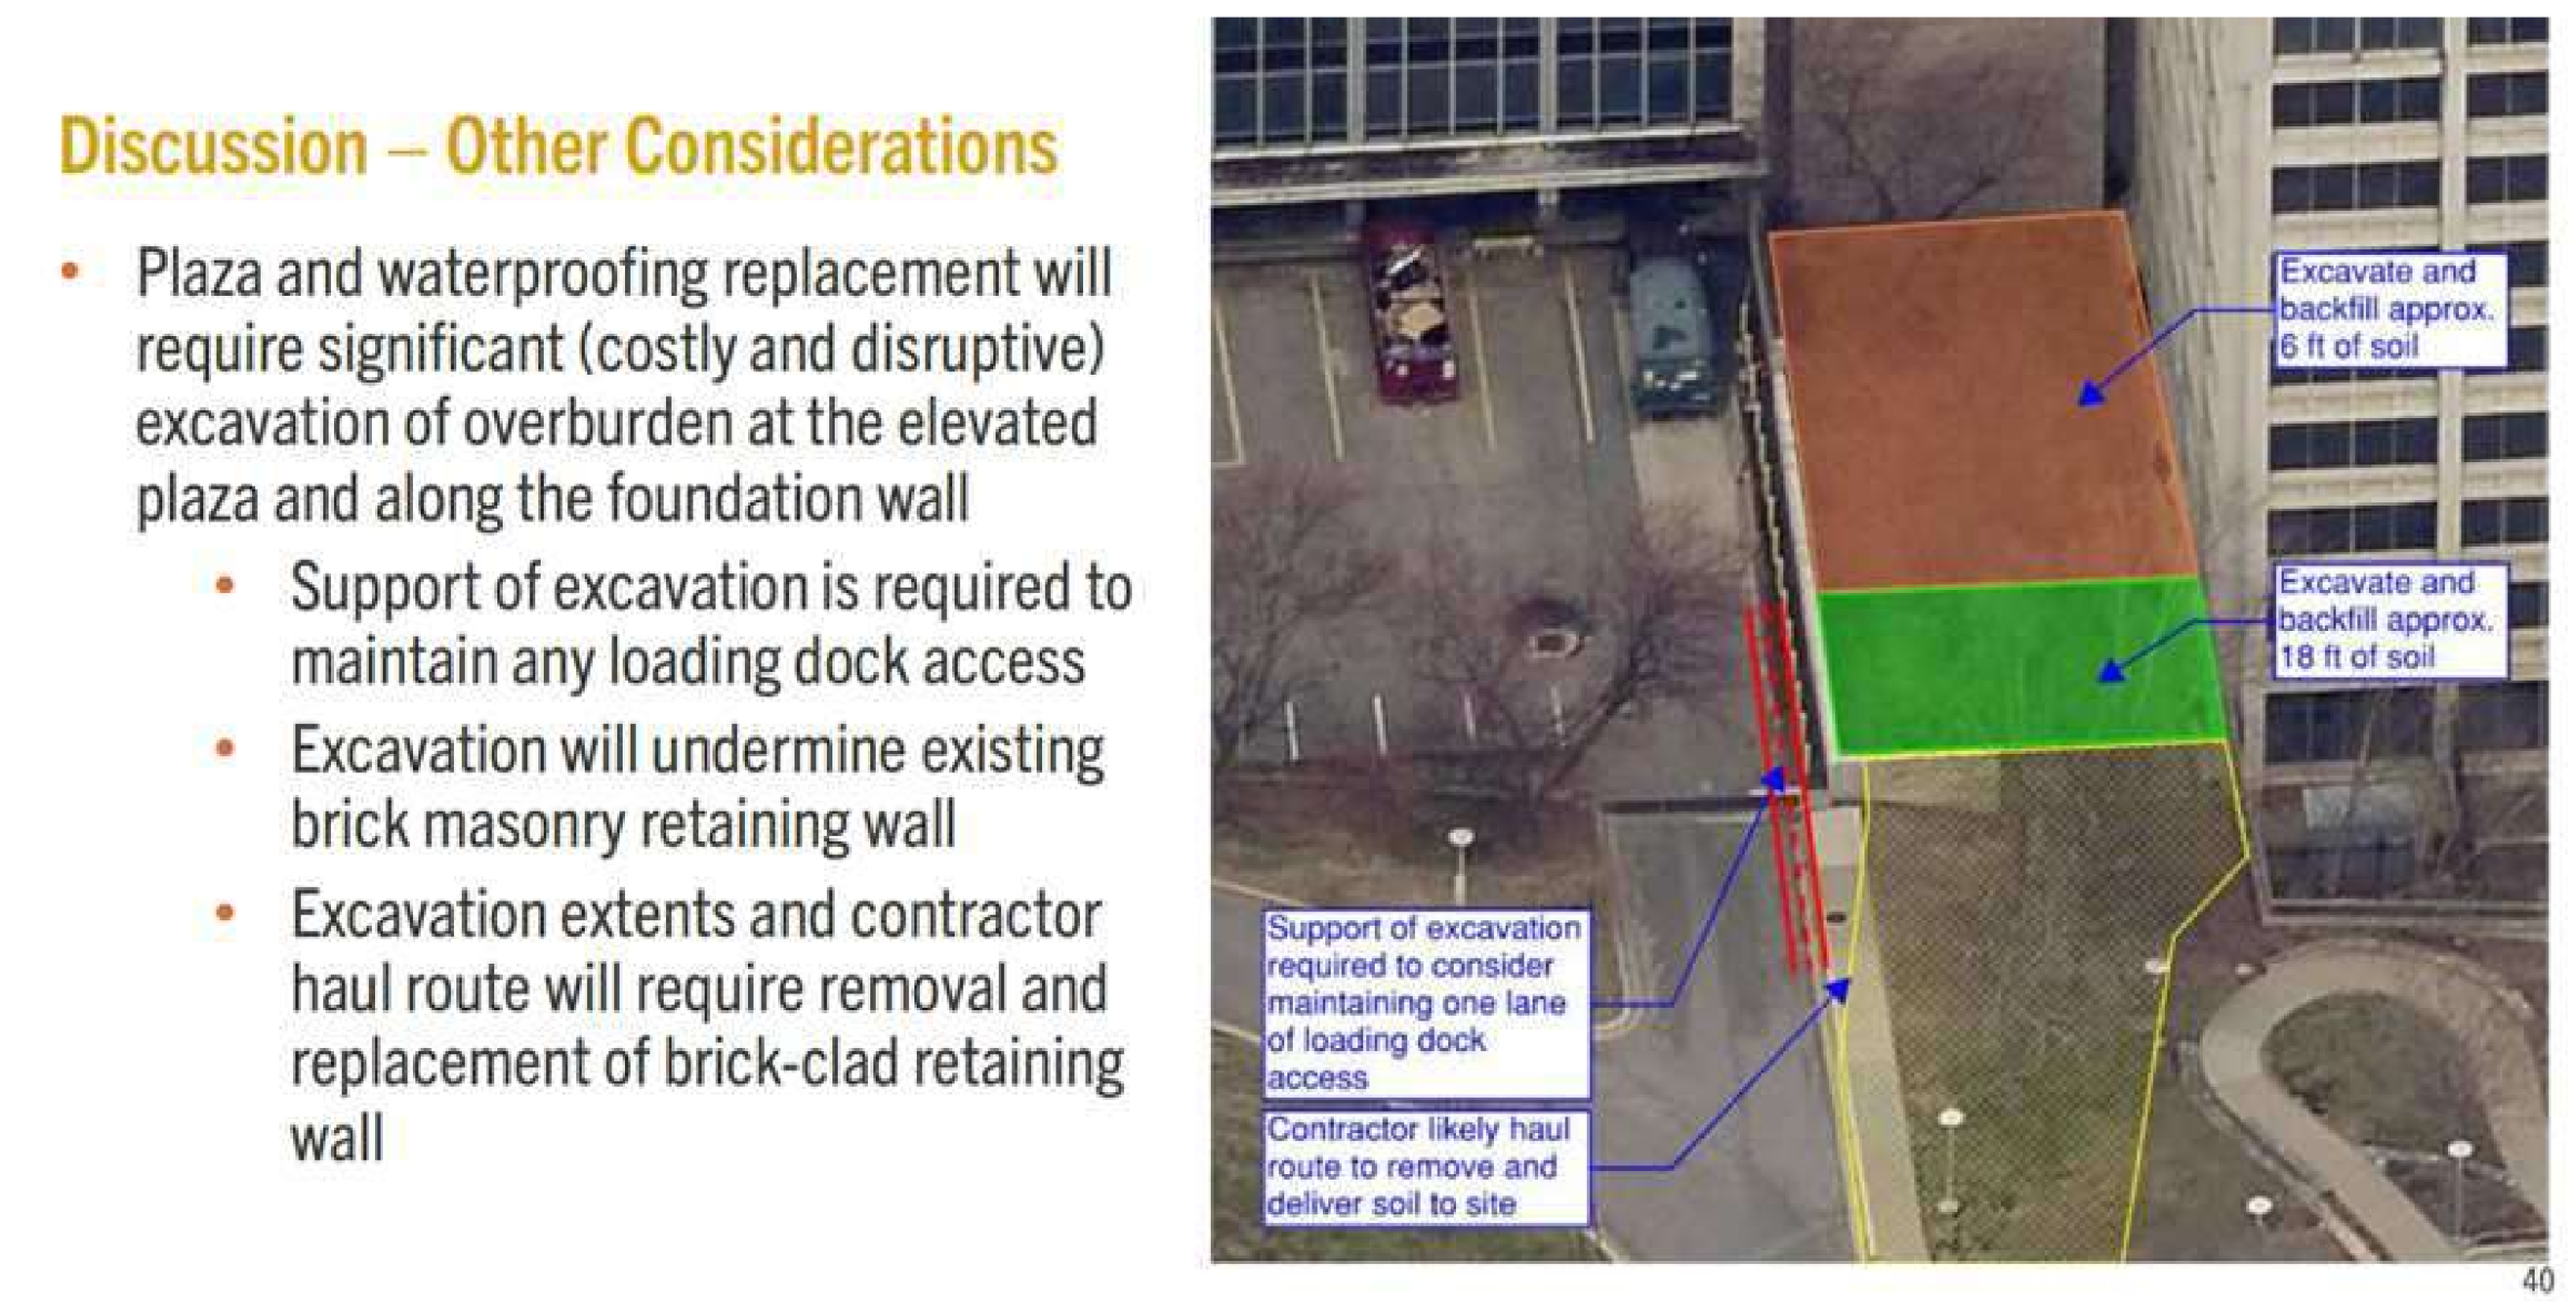

1. CONTRACTORS OR NIH EMPLOYEES MUST BE PROTECTED FROM ALL EXCAVATION AREAS. A PROTECTIVE SYSTEM IS REQUIRED FOR TRENCHES DEEPER THAN 5 FEET, UNLESS THE EXCAVATION IS MADE ENTIRELY IN STABLE ROCK. DURING THE RAINY SEASON, THE ALTERNATIVE PUMP SYSTEM MUST BE AVAILABLE. WATER MUST BE CONTROLLED OR REMOVED TO PREVENT CAVE-INS; SPECIAL SUPPORT OR SHIELDING IS REQUIRED WHEN WATER IS PRESENT.
2. ATMOSPHERIC TESTING IS REQUIRED WHEN THERE IS POTENTIAL FOR HAZARDOUS ATMOSPHERES IN EXCAVATIONS DEEPER THAN 4 FEET, ESPECIALLY IN ENCLOSED AREAS.
3. EXCAVATED MATERIALS (SPOILS) MUST BE KEPT AT LEAST 2 FEET FROM THE EDGE OF THE EXCAVATION. IS THERE ANY DESIGNATED AREA WHERE ALL EXCAVATED MATERIAL WILL BE STORED, BECAUSE IT COULD BE REUSED IN SOME LOCATIONS?
4. THE AREA MUST BE DOUBLE-CHECKED FOR ANY UNDERGROUND LINES.
5. SLOPING, BENCHING, SHORING, OR SHIELDING MUST BE USED PER OSHA'S APPENDIX B, OR DESIGNED BY A REGISTERED PROFESSIONAL ENGINEER. (29 CFR 1926 SUBPART P)
6. LADDERS, STEPS, OR RAMPS MUST BE PROVIDED IN TRENCHES 4 FEET OR DEEPER, LOCATED NO MORE THAN 25 FEET OF LATERAL TRAVEL.
7. INSPECTIONS MUST BE CONDUCTED DAILY AFTER ANY HAZARD-INCREASING EVENT (E.G., RAIN, VIBRATIONS).
8. THE GUARDRAILS MUST BE PRESENT ON THE PARKING SIDE OF THE EXCAVATION.
9. BARRICADES, FENCING, OR STOP LOGS ARE INSTALLED NEAR THE PUBLIC ACCESS OR TRAFFIC TO PREVENT ACCIDENTAL ENTRY.

NOTES FOR WATERPROOFING MATERIAL HENRY 790-11

Limitations

Must be protected by appropriate overlay. Not intended for use as a permanently exposed surface, although it will tolerate foot and incidental, light, rubber-wheeled traffic when set. Contact Henry when using in direct contact with coal-tar pitch derivatives or products containing coal-tar pitch. Do not heat above 419 °F (215 °C). Do not melt in direct fired, single-wall kettles.

NOTE: Contact with hot asphalt or applicator will cause burns. Avoid contact with all parts of body. Wear protective clothing at all times.

Use only with adequate ventilation.
Avoid breathing fumes. Asphalt fumes are an irritant and may contain traces of hydrogen sulfide.
Fumes may cause irritation to eyes, nose, throat, respiratory track, and skin.
If you experience eye watering, headaches, or dizziness leave area or increase fresh air or wear a respirator (**NIOSH/MSHA TC 23C** or equal)

Keep out of reach of children.

Clean Up

Use waterless hand cleaner on skin. Citrus based cleaners on metal and other construction surfaces.

1. THIS PRODUCT IS HAZARDOUS. WHEN IT IS APPLIED, EMPLOYEES MUST CHECK THE DIRECTION OF THE WIND TO TRY TO ELIMINATE IT FROM THE ROOFING MATERIAL APPLIED TO THE FACE.
2. WATERLESS HAND CLEANING MUST BE PRESENT ON THE WORK SIDE.
3. IF MATERIAL WILL BE STORED ON THE CONSTRUCTION SIDE, THE CORRECT STORAGE MUST BE PROVIDED WITH A TEMPERATURE OF LESS THAN 100°F (38 °C).
4. EMPLOYEES MUST ALWAYS WEAR PROPER PPE WHEN THEY WORK OR ARE LOCATED NEXT TO THE ROOFING MATERIAL. TO AVOID HAZARDOUS EXPOSURE, NIH INSPECTORS CANNOT VISIT THE CONSTRUCTION SITE DURING THE ROOFING MATERIAL APPLICATION, OR THEY MUST BE FIT TESTED FOR THE CORRECT MODELS OF INDUSTRIAL RESPIRATORS.

NOTES FOR PUMADEQ FLEX 31 MV FLASHING MEMBRANE

1. PROPER PPE MUST BE USED, AND WIND DIRECTION MUST BE CONTROLLED.
2. AN EYEWASH STATION OR AMPLE WATER SUPPLY MUST BE NEXT TO THE WORK SITE FOR IMMEDIATE APPLICATION DURING THE INCIDENT.
3. THE FIRST AID KIT MUST BE PRESENT AND AVAILABLE FOR EVERYONE ON THE CONSTRUCTION SITE.
4. THIS MATERIAL MUST BE STORED AT 50- 75°F IN A DRY AND VENTILATED AREA OUT OF DIRECT SUNLIGHT. PROPER PPE IS REQUIRED.

Appropriate engineering controls

Engineering Controls	Minimize exposure by partial enclosure of the operation or equipment and provide extract ventilation at openings.

Individual protection measures, such as personal protective equipment

Eye/face protection	Wear safety glasses with side shields (or goggles).
Skin and body protection	Wear protective gloves and protective clothing.
Respiratory protection	If exposure limits are exceeded or irritation is experienced, NIOSH/MSHA approved respiratory protection should be worn. Positive-pressure supplied air respirators may be required for high airborne contaminant concentrations. Respiratory protection must be provided in accordance with current local regulations.
General Hygiene Considerations	When using do not eat, drink or smoke. Regular cleaning of equipment, work area and clothing is recommended.

PROPERTY OF THE UNITED STATES GOVERNMENT
FOR OFFICIAL USE ONLY
Do not remove this notice
Properly destroy documents when no longer needed

LSY ARCHITECTS & LABORATORY PLANNERS

Architect and Engineer Name and LOGO

ARCHITECT: LOUVIERE, STRATTON & YOKEL, LLC
8484 GEORGIA AVE, SUITE 650
SILVER SPRING, MD 20910
(301) 588-1500

MEP ENGINEER: JAMES POSEY ASSOCIATES INC
11155 RED RUN BLVD
OWINGS MILLS, MD 21117
(410) 265-6100

CIVIL ENGINEER: TIMMONS GROUP
2300 N ST NW SUITE 410B
WASHINGTON, DC 20037
(202) 919-2245

STRUCTURAL ENGINEER: SIMPSON GUMPERTZ & HEGER
1625 EYE STREET NW SUITE 900
WASHINGTON, DC 20006
(202) 239-4199

SEAL

ARCHITECT 14829 HEATHER K. JOHNSON STATE OF MARYLAND

REVISIONS

MARK	DATE	DESCRIPTION

CONTRACTORS

A/E CON. NO.	
A/E TASK NO.	
CONS. CONTR.	
CONS. WORK	
PRIME A/E	LSY ARCHITECTS
SUB A/E	JPA / TIMMONS / SGH
CONSTR. CON.	

BUILDING

FACILITY CODE	
BUILDING NO.	BUILDING 31B
NAME	NIH
STREET	9000 ROCKVILLE PIKE
CITY	BETHESDA
STATE/ZIP	MD / 20892
OTHER BUILDING NO.	

PROJECT

PROJ. NO.	24024
PROJ. OFFICER	MOHAMMED BISWAS
PROJ. MGR.	G.LEE
SUBMISSION	IFC SUBMISSION
SUB. DATE	08/26/25
WRK REQ. NO.	C116635

N

PROJECT TITLE: BUILDING 31B NEW ROOFING AND WP OF STRUCTURE BELOW GRADE

DRAWING TITLE: OSHA NOTES

National Institutes of Health
OFFICE OF RESEARCH FACILITIES
DIVISION OF FACILITIES PLANNING

DESIGNED BY	G.L.
DRAWN BY	X.L.
CHECKED BY	K.C.
DATE	08/26/25
FILE NAME	

DRAWING
G-004

SHEET NUMBER OF

C:\Users\XLiu\Documents\24024 NIH Bldg 31B Landscape - Water Intrusion-2022_Xuan_LSY.rvt
8/26/2025 4:10:25 PM

CIVIL SYMBOL LEGEND

DETAIL SECTION BUBBLE	SURVEY BENCHMARK LOCATION
DRAINAGE AREA LABEL	SURVEY CONTROL POINT
KEYNOTES	SOIL BORING IDENTIFICATION
REVISION TRIANGLE	EXISTING ADA PARKING
NORTH ARROW	EXISTING SIGN
PLAN VIEW GRAPHIC SCALE	EXISTING DOUBLE POST SIGN
PROFILE VIEW GRAPHIC SCALE	EXISTING AIR CONDITIONING UNIT
ADA PARKING SPACE	EXISTING BOLLARD
PARKING SPACE COUNT	EXISTING DUMPSTER
CONCRETE WHEELSTOP	EXISTING FLAG POLE
BOLLARD	EXISTING HEADSTONE
SIGN	EXISTING MAILBOX
DOUBLE POST SIGN	EXISTING LIGHTED BOLLARD
AERIAL UTILITY POLE	EXISTING TRAFFIC SIGNAL POLE
CABLE TELEVISION MANHOLE	EXISTING TRAFFIC SIGNAL BOX
CABLE TELEVISION PEDESTAL	EXISTING AERIAL UTILITY POLE
SATELLITE DISH	EXISTING UTILITY MANHOLE
TELECOMM MANHOLE	EXISTING UTILITY VAULT
TELECOMM PEDESTAL	EXISTING CABLE TELEVISION MANHOLE
LIGHT POLE	EXISTING CABLE TELEVISION PEDESTAL
ELECTRIC METER	EXISTING SATELLITE DISH
ELECTRIC MANHOLE	EXISTING TELECOMM MANHOLE
GUY POLE	EXISTING TELECOMM PEDESTAL
GUY ANCHOR	EXISTING YARD LIGHT
ELECTRIC PEDESTAL	EXISTING GROUND LIGHT
SANITARY SEWER MANHOLE	EXISTING LIGHT POLE
SANITARY SEWER CLEANOUT	EXISTING ELECTRIC METER
SANITARY MANHOLE IDENTIFICATION	EXISTING ELECTRIC MANHOLE
WATERLINE PLUG	EXISTING GUY POLE
DOUBLE DETECTOR CHECK ASSEMBLY	EXISTING GUY ANCHOR
FITTING	EXISTING ELECTRIC BOX
FIRE HYDRANT ASSEMBLY	EXISTING SANITARY MANHOLE
WATER MANHOLE	EXISTING SANITARY CLEANOUT
WATER METER	EXISTING SANITARY FLOW DIRECTION
POST INDICATOR VALVE	EXISTING FIRE HYDRANT
REDUCER	EXISTING FIRE DEPARTMENT CONNECTION
FIRE DEPARTMENT CONNECTION	EXISTING SPIGOT
SPIGOT	EXISTING WATER METER
WATER VALVE	EXISTING WATER MANHOLE
WELL	EXISTING WATER VALVE
NATURAL GAS VALVE	EXISTING POST INDICATOR VALVE
STORM SEWER CLEANOUT	EXISTING WELL
STORM SEWER MANHOLE	EXISTING GAS METER
STORM SEWER IDENTIFICATION	EXISTING DRIP VALVE
STORM SEWER ENDWALL	EXISTING GAS VALVE
STORM SEWER WINGWALL	EXISTING SPRINKLER BOX
STORM SEWER END SECTION	EXISTING SPRINKLER VALVE
DOWNSPOUT	EXISTING SPRINKLER HEAD
DROP INLET / GRATE TOP INLET	EXISTING STORM MANHOLE
CURB INLET	EXISTING STORM CATCH BASIN
STORM PIPE	EXISTING DOWNSPOUT
TREE (SYMBOL VARIES)	EXISTING STORM FLOW DIRECTION

CIVIL LINETYPE LEGEND

-5.00%	SLOPE % TAG		EXISTING TREE
2.5:1	GRADE TAG		EXISTING SHRUB
SWK 389.84'	SPOT DESCRIPTION SPOT ELEVATION	EX +/- 389.84'	EXISTING GRADE SPOT ELEVATION
	REVISION CLOUD		
	CREEK/STREAM CENTERLINE		
	CREAK/STREAM EDGE OF WATER		
RCA	RESOURCE CONSERVATION AREA		
RPA	RESOURCE PROTECTION AREA		
	DITCH CENTERLINE		
	POND EDGE OF WATER		
150	MAJOR CONTOUR		
149	MINOR CONTOUR		
UD	STORM SEWER UNDERDRAIN		
	WETLANDS BOUNDARY		
	MAJOR DRAINAGE AREA BOUNDARY		
	MINOR DRAINAGE AREA BOUNDARY		
	TIME OF CONCENTRATION		
	FLOODPLAIN		
X	FENCE		
	SECURITY FENCE		
	PROPERTY LINE		
	PROPERTY SETBACKS		
	PROPERTY ZONE		
	RAILWAY		
	ROAD CENTERLINE		
	GUARDRAIL		
	EDGE OF GRAVEL		
	SIGHT DISTANCE		
	EDGE OF UNPAVED SURFACE		
	EDGE OF SHRUB		
	EDGE OF TREES		
3	COLUMN GRID AND IDENTIFICATION [REFER TO ARCHITECTURAL DRAWINGS]		
OCATV	OVERHEAD CABLE TV		
UCATV	UNDERGROUND CABLE TV		
OFO	OVERHEAD FIBER OPTIC		
UFO	UNDERGROUND FIBER OPTIC		
OHT	OVERHEAD TELECOMM		
UGT	UNDERGROUND TELECOMM		
BAS	BUILDING AUTOMATION SYSTEM		
G	NATURAL GAS SERVICE		
OHP	OVERHEAD POWER		
UGP	UNDERGROUND POWER		
OH P/C	OVERHEAD POWER + CABLE		
OH P/T/C	OVERHEAD POWER + TELECOMM + CABLE		
OH P/T	OVERHEAD POWER + TELECOMM		
OH T/C	OVERHEAD TELECOMM + CABLE		
UG P/C	UNDERGROUND POWER + CABLE		
UG P/T/C	UNDERGROUND POWER + TELECOMM + CABLE		
UG P/T	UNDERGROUND POWER + TELECOMM		
UG T/C	UNDERGROUND TELECOMM + CABLE		
FM	SANITARY SEWER FORCE MAIN		
SAN	SANITARY SEWER PIPE		
6"SAN	SANITARY SEWER PIPE WITH SIZE		

W	WATER SERVICE
F	FIRE PROTECTION SERVICE
6"W	WATER SERVICE WITH SIZE
6"F	FIRE PROTECTION SERVICE WITH SIZE
CHWR	CHILLED/HOT WATER RETURN
CHWS	CHILLED/HOT WATER SERVICE
CWR	CHILLED WATER RETURN
CWS	CHILLED WATER SERVICE
HWR	HOT WATER RETURN
HWS	HOT WATER SERVICE
	EXISTING CREEK/STREAM CENTERLINE
	EXISTING DITCH CENTERLINE
	EXISTING FLOODPLAIN
	EXISTING INUNDATION ZONE
	EXISTING POND EDGE OF WATER
	EXISTING STORM SEWER PIPE
150	EXISTING MAJOR CONTOUR
149	EXISTING MINOR CONTOUR
X	EXISTING FENCE
	EXISTING EDGE OF SHRUB
	EXISTING EDGE OF TREES
	EXISTING ADJOINING PROPERTY LINE
	EXISTING PROPERTY LINE
	EXISTING PROPERTY LOTS
	EXISTING PROPERTY SETBACKS
	EXISTING RAILWAY
	EXISTING RIGHT-OF-WAY
	EXISTING EDGE OF ASPHALT
	EXISTING ROAD CENTERLINE
	EXISTING GUARDRAIL
	EXISTING EDGE OF GRAVEL
	EXISTING EDGE OF UNPAVED SURFACE
UFO	FIBER OPTIC PAINT MARKING
OFO	EXISTING OVERHEAD FIBER OPTIC
UGT	TELECOMM PAINT MARKING
OHT	EXISTING OVERHEAD TELECOMM
G	NATURAL GAS SERVICE PAINT MARKING
UGP	POWER PAINT MARKING
OHP	EXISTING OVERHEAD POWER
SAN	SANITARY SEWER PAINT MARKING
6" SAN	EXISTING SANITARY SEWER PIPE WITH SIZE
UTL	UNKNOWN UTILITY PAINT MARKING
W	WATER SERVICE PAINT MARKING
6" W	EXISTING WATER SERVICE WITH SIZE

CIVIL ABBREVIATIONS

A
AASHTO AMERICAN ASSOCIATION OF STATE HIGHWAY AND TRANSPORTATION OFFICIALS
A/C UNIT AIR CONDITIONING UNIT
ACP ASBESTOS CONCRETE PIPE
ADA AMERICANS WITH DISABILITIES ACT
ABA ARCHITECTURAL BARRIERS ACT
ADJ ADJACENT
ADV ADVANCE
AFF ABOVE FINISHED FLOOR
AFG ABOVE FINISHED GRADE
ANSI AMERICAN NATIONAL STANDARDS INSTITUTE
APPR APPROXIMATE
APPROX APPROXIMATE
ARCH ARCHITECT or ARCHITECTURAL
ASSY ASSEMBLY
ASTM AMERICAN SOCIETY FOR TESTING AND MATERIALS
AT/FP ANTI-TERRORISM / FORCE PROTECTION
AWWA AMERICAN WATER WORKS ASSOCIATION

B
BC BACK OF CURB
BFF BELOW FINISHED FLOOR
BFG BELOW FINISHED GRADE
BFP BACKFLOW PREVENTOR
BL BASE LINE
BLDG BUILDING
BM BENCHMARK
BMP BEST MANAGEMENT PRACTICE
BOV BLOW OFF VALVE
BV BUTTERFLY VALVE
BW BOTTOM OF WALL

C
CATV CABLE TELEVISION
CBR CALIFORNIA BEARING RATIO
CG CURB AND GUTTER
CHH COMMUNICATION HANDHOLE
CI CAST IRON
CL CLASS
CLF CHAINLINK FENCE
CMP CORRUGATED METAL PIPE
CO CLEAN OUT
COE CORPS OF ENGINEERS
COMM COMMUNICATIONS
CONC CONCRETE
CONN CONNECTION
CY CUBIC YARD

D
DEPT DEPARTMENT
DET DETAIL
DI DROP INLET
DIA DIAMETER
DIP DUCTILE IRON PIPE
DIR DIRECTION
DMH DOGHOUSE MANHOLE
DNE DO NOT ENTER
DR DRIVE
DS DOWNSPOUT
DWG DRAWING

E
E ELECTRIC
EA EACH
EG EXISTING GRADE
EHH ELECTRIC HANDHOLE
EL ELEVATION
ELEC ELECTRIC
ELEV ELEVATION
EMH ELECTRIC MANHOLE
EOI END OF INFORMATION
EP EDGE OF PAVEMENT
EPA UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
EQ EQUAL
ESD ENVIRONMENTAL SITE DESIGN
ESMT EASEMENT
EUE EXISTING UNDERGROUND ELECTRIC
EUT EXISTING UNDERGROUND TELEPHONE
EW EXISTING WATER
EX EXISTING
E&SC EROSION AND SEDIMENT CONTROL

F
FC FACE OF CURB
FDC FIRE DEPARTMENT CONNECTION
FEV FUEL EFFICIENT VEHICLES
FFE FINISHED FLOOR ELEVATION
FG FINISHED GRADE
FH FIRE HYDRANT
FL FIRE LANE
FL FLOW LINE
FM FORCE MAIN
FT FOOT
FVO FIRE VEHICLES ONLY

G
G GAS
GIS GEOGRAPHIC INFORMATION SYSTEM
GM GAS METER
GND GROUND
GPIN GEOGRAPHIC PARCEL IDENTIFICATION NUMBER
GPS GLOBAL POSITION SYSTEM
GRVL GRAVEL
GTI GRATE TOP INLET
GTS GAS TEST STATION
GV GATE VALVE

H
HD HEAVY DUTY
HDPE HIGH DENSITY POLYETHYLENE
HH HANDHOLE
HORIZ HORIZONTAL
HOV HIGH OCCUPANCY VEHICLES
HP HIGH POINT
HRA HOT RUBBERIZED ASPHALT

I
IBC INTERNATIONAL BUILDING CODE
ID INTERNAL DIAMETER
IFC INTERNATIONAL FIRE CODE
INV INVERT
IPC INTERNATIONAL PLUMBING CODE
ISO INSURANCE SERVICES OFFICE, INC

L
LD LIGHT DUTY
LF LINEAR FEET
LOC LOCATION
LOC LIMITS OF CONSTRUCTION
LOD LIMITS OF DISTURBANCE
LOW LIMITS OF WORK
LP LOW POINT

M
MAX MAXIMUM
MDE MARYLAND DEPARTMENT OF THE ENVIRONMENT
MECH MECHANICAL
MG MATCH GRADE
MH MANHOLE
MIN MINIMUM
MJ MECHANICAL JOINT
MUTCD MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES

N
NAD NORTH AMERICAN DATUM
NAVD NORTH AMERICAN VERTICAL DATUM
N/F NOW OR FORMERLY
NFF NEEDED FIRE FLOW
NIC NOT IN CONTRACT
NIH NATIONAL INSTITUTES OF HEALTH
NO NUMBER
NPZ NO PARKING ZONE
NTS NOT TO SCALE
NWI NATIONAL WETLANDS INVENTORY

O
OC ON CENTER
OD OUTSIDE DIAMETER
OHE OVERHEAD ELECTRIC
OHP OVERHEAD POWER
OHT OVERHEAD TELEPHONE
OS&Y OUTSIDE STEM AND YOKE
OSHA OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION
OVHD OVERHEAD

P
PB PLAT BOOK
PC POINT OF CURVATURE
PCC POINT OF COMPOUND CURVATURE
PCC PORTLAND CEMENT CONCRETE
PED PEDESTAL
PG PAGE
PH PHASE
PI POINT OF INTERSECTION
PIV POST INDICATOR VALVE
PL PROPERTY LINE
POA POINT OF ANALYSIS
POI POINT OF INTEREST
PP POWER POLE
PRC POINT OF REVERSE CURVATURE
PRV PRESSURE REDUCING VALVE
PT POINT OF TANGENT
PVC POLYVINYL CHLORIDE PIPE
PVMT PAVEMENT
PWR POWER

Q
QLx QUALITY LEVEL [A, B, C, D]

R
RCA RESOURCE CONSERVATION AREA
RCP REINFORCED CONCRETE PIPE
RD ROOF DRAIN
REQ REQUIRED
RJ RESTRAINED JOINT
RMA RESOURCE MANAGEMENT AREA
ROW RIGHT-OF-WAY
RPA RESOURCE PROTECTION AREA
RPZ REDUCED PRESSURE ZONE

S
S SLOPE
SAN SANITARY SEWER
SCH SCHEDULE
SDR STANDARD DIMENSION RATIO
SF SILT FENCE
SF SQUARE FEET
SHA STATE HIGHWAY ADMINISTRATION
SMH STANDARD MANHOLE
SPT SPOT GRADE
STA STATION
STD STANDARD
STM STORM
STMH STORM SEWER MANHOLE
SUE SUBSURFACE UTILITY EXPLORATION
SWK SIDEWALK
SWL SWALE
SY SQUARE YARDS

T
T TELEPHONE / TELECOMM
TB TOP OF BOX
TBR TO BE REMOVED
TBRL TO BE RELOCATED
TBD TO BE DETERMINED
TBM TELEPHONE BENCHMARK
TC TOP OF CURB
TCM TELECOMMUNICATIONS MANHOLE
TCP TERRACOTTA CLAY PIPE
TEL TELEPHONE
THH TELEPHONE HANDHOLE
TMH TELEPHONE MANHOLE
TP TREE PROTECTION
TRANS TRANSFORMER
TW TOP OF WALL
TYP TYPICAL

U
UG UNDERGROUND
UGE UNDERGROUND ELECTRIC
UGP UNDERGROUND POWER
UNK UNKNOWN
UNO UNLESS NOTED (INDICATED) OTHERWISE
UTL UTILITY

V
VAR VARIABLE
VCP VITRIFIED CLAY PIPE
VERT VERTICAL

W
W WATER
W/ WITH
W/L WATERLINE
WAT WATER
WLK WALKWAY
WM WATER METER
WUS WATERS OF THE US
WV WATER VALVE

X
X-ING CROSSING

SYMBOLS
Ø DIAMETER
≈ APPROXIMATELY EQUAL
≠ NOT EQUAL
± PLUS/MINUS
℄ CENTERLINE
⅊ PROPERTY LINE
Δ DELTA ANGLE
@ AT

PROFESSIONAL CERTIFICATION
I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND,
NAME: P.E. OSVALDO RAMOS
LICENSE: No. 57602
EXPIRATION DATE: 05-04-2027

STATE OF MARYLAND — OSVALDO A. RAMOS — 57602 — PROFESSIONAL ENGINEER

MDE NO. 25-SF-0127
DATE: 08/26/2025

DEPARTMENT OF HEALTH & HUMAN SERVICES, USA

LSY ARCHITECTS & LABORATORY PLANNERS
James Posey Associates
TIMMONS GROUP
SGH

ARCHITECT: LOUVIERE, STRATTON & YOKEL, LLC, 8484 GEORGIA AVE, SUITE 850, SILVER SPRING, MD 20910, (301) 588-1500
MEP ENGINEER: JAMES POSEY ASSOCIATES INC, 11155 RED RUN BLVD, OWINGS MILLS, MD 21117, (410) 265-6100
CIVIL ENGINEER: TIMMONS GROUP, 20110 ASHBROOK PL, SUITE 100, ASHBURN, VA 20147, (703) 554-6700
STRUCTURAL ENGINEER: SIMPSON GUMPERTZ & HEGER, 1625 EYE STREET NW SUITE 900, WASHINGTON, DC 20006, (202) 239-4199

MARK	DATE	DESCRIPTION

PRIME A/E: LSY ARCHITECTS JPA / TIMMONS / SGH

BUILDING NO.	BUILDING 31B
NAME	NIH
STREET	9000 ROCKVILLE PIKE
CITY	BETHESDA
STATE/ZIP	MD / 20892
PROJ. NO.	24024
PROJ. OFFICER	MOHAMMED BISWAS
PROJ. MGR.	G.LEE
SUBMISSION	IFC SUBMISSION
SUB. DATE	08/26/2025
WRK REQ. NO.	C116635

N

PROJECT TITLE: BUILDING 31B LANDSCAPE WATER INTRUSION
DRAWING TITLE: LEGENDS & SYMBOLS

NIH National Institutes of Health
OFFICE OF RESEARCH FACILITIES
DIVISION OF FACILITIES PLANNING

DESIGNED BY	OR
DRAWN BY	SA
CHECKED BY	OR
DATE	08/26/2025
FILE NAME	
DRAWING NO.	C-100

1 of 19

SHA (STATE HIGHWAY ADMINISTRATION) GENERAL CONSTRUCTION NOTES

1. METHODS AND MATERIALS USED SHALL CONFORM TO CURRENT NIH AND SHA STANDARDS AND SPECIFICATIONS.
2. ALL UTILITIES, INCLUDING ALL POLES, ARE TO BE RELOCATED AT THE CONTACTOR'S EXPENSE. COORDINATION IS THE RESPONSIBILITY OF THE CONTRACTOR.
3. OPEN CUTTING OF PAVED OR SURFACE TREATED SHA ROADS MUST BE APPROVED AND COORDINATED WITH SHA PRIOR TO COMMENCING WITH WORK. ALL UTILITIES WHICH WILL BE PLACED UNDER EXISTING STREETS ARE TO BE BORED OR JACKED, IF FEASIBLE. ANY EXCEPTIONS, DUE TO EXTENUATING CIRCUMSTANCES, ARE TO BE ADDRESSED AT THE PERMIT STAGE AND APPROVED BY THE OWNER.
4. THE CONTRACTOR IS RESPONSIBLE FOR ANY DAMAGE TO EXISTING ROADS AND UTILITIES WHICH OCCUR AS A RESULT OF PROJECT CONSTRUCTION WITHIN OR CONTIGUOUS TO THE EXISTING RIGHT OF WAY.
5. A SMOOTH GRADE SHALL BE MAINTAINED FROM THE CENTERLINE OF THE EXISTING ROAD TO PROPOSED EDGE OF PAVEMENT TO PRECLUDE THE FORMING OF FALSE GUTTERS AND /OR THE PONDING OF ANY WATER IN THE ROADWAY.
6. STANDARD GUARDRAILS AND/OR HANDRAILS SHALL BE INSTALLED AT HAZARDOUS LOCATIONS AS DESIGNATED DURING FIELD REVIEW BY OWNERS INSPECTOR OR SHA.
7. THE CONTRACTOR IS RESPONSIBLE FOR ALL TRAFFIC CONTROL. THE CONTRACTOR SHALL SUBMIT A SIGNING, STRIPING AND/OR SIGNALIZATION PLAN TO SHA AS REQUIRED.
8. CBR (CALIFORNIA BEARING RATIO) TEST SHALL BE PERFORMED PRIOR TO DETERMINATION OF FINAL SUBGRADE ELEVATION. PAVEMENT SECTION IS BASED ON A CBR VALUE OF 4 UNLESS OTHERWISE NOTED. SOILS TEST OF SUBGRADE MUST BE SUBMITTED FOR ACTUAL DETERMINATION OF REQUIRED SUBBASE THICKNESS PRIOR TO CONSTRUCTION. ALL SUBGRADE TO BE COMPACTED TO 95% DENSITY AT 2% OF OPTIMUM MOISTURE CONTENT PER AASHTO-T99 METHOD. FINAL PAVEMENT DESIGN BASED ON THE ACTUAL CBR VALUES SHALL BE SUBMITTED TO THE ENGINEER FOR APPROVAL. CONTRACTOR TO REQUEST CBR TESTS A MINIMUM ONE MONTH PRIOR TO PAVING OPERATIONS.
9. ADDITIONAL DITCH LININGS OR SILTATION AND EROSION CONTROL MEASURES SHALL BE PROVIDED, AT THE OWNER'S EXPENSE, AS DETERMINED NECESSARY BY SHA AND/OR MDE DURING FIELD REVIEW.
10. OVERLAY OF EXISTING PAVEMENT SHALL BE MINIMUM OF 1.5" DEPTH; ANY COSTS ASSOCIATED WITH PAVEMENT OVERLAY, OR THE MILLING OF EXISTING PAVEMENT TO OBTAIN REQUIRED DEPTH, SHALL BE ASSUMED BY THE CONTRACTOR.
11. OWNER IS RESPONSIBLE FOR DESIGN AND CONSTRUCTION OF ANY TRAFFIC SIGNAL INSTALLATION OR MODIFICATION WHICH WILL BE NECESSARY AS A RESULT OF DEVELOPMENT OF THIS SITE.
12. ALL RIGHT OF WAY DEDICATED TO PUBLIC USE SHALL BE CLEAR AND UNENCUMBERED.
13. TRAFFIC CONTROL DEVICES OR ADVISORY SIGNS, SUCH AS MULTIWAY STOPS, SPEED LIMITS, DEAF CHILD, CHILDREN AT PLAY, ETC., SHALL NOT BE INSTALLED UNLESS SPECIFICALLY SHOWN ON THESE PLANS OR A SHA APPROVED REVISION. SHOULD UNAPPROVED SIGNS BE NOTED AT THE TIME OF SHA INSPECTION, THE ROAD ACCEPTANCE PROCESS SHALL BE TERMINATED IMMEDIATELY AND NOT RECOMMENDED UNTIL A DETERMINATION IS MADE REGARDING THE APPROVAL OF ANY ADDITIONAL SIGNS. IMMEDIATE REMOVAL OF SUCH SIGNS SHALL NOT NEGATE FOR THE SUBMISSION OF A REVISION.
14. LANDSCAPING AND IRRIGATION SYSTEMS SHALL NOT BE INSTALLED WITHIN THE PUBLIC RIGHT OF WAY EXCEPT AS SHOWN ON THESE PLANS OR A SHA APPROVED REVISION.
15. CONTRACTOR TO REFER APPROVED SHA ACCESS PLAN FOR MORE INFORMATION REGARDING THE PROPOSED COMMERCIAL ENTRANCE AND FRONTAGE IMPROVEMENT, AS WELL AS FOR THE APPROVED TRAFFIC CONTROL PLAN.

GENERAL CONSTRUCTION NOTES:

1. ALL CONSTRUCTION SHALL BE IN ACCORDANCE WITH THE STANDARDS SET FORTH IN THE LATEST VERSION OF THE NIH DESIGN REQUIREMENTS HANDBOOK, NIH FACILITIES DEVELOPMENT HANDBOOK , MARYLAND STORMWATER DESIGN MANUAL, WASHINGTON SUBURBAN SANITATION COMMISSION, STATE HIGHWAY ADMINISTRATION ACCESS MANUAL, MARYLAND DEPARTMENT OF THE ENVIRONMENT REGULATIONS, AND FEDERAL STANDARDS.
2. ALL FILL, BASE AND SUBBASE MATERIAL SHALL BE COMPACTED TO 95% OF THEORETICAL MAXIMUM DENSITY AS DETERMINED BY AASHTO T-99 METHOD A WITHIN PLUS OR MINUS 2% OF OPTIMUM MOISTURE FOR THE FULL WIDTH OF ANY DEDICATED RIGHT-OF-WAY.
3. THE CONTRACTOR SHALL HIRE A PRIVATE UTILITY LOCATOR PROVIDER AND SHALL HAVE APPROXIMATE UNDERGROUND UTILITY LOCATIONS PRIOR TO THE START OF EXCAVATION. VERIFY LOCATION AND ELEVATION OF ALL UNDERGROUND UTILITIES IN AREA OF CONSTRUCTION PRIOR TO STARTING WORK. CONTACT THE ARCHITECT/ENGINEER IMMEDIATELY IF LOCATION OR ELEVATION IS DIFFERENT FROM THAT INDICATED.
4. ACQUIRE ANY AND ALL NECESSARY CONSTRUCTION PERMITS REQUIRED TO COMPLETE THE SITEWORK, AND FURNISH COPIES TO THE OWNER.
5. ALL DIMENSIONS ARE TO FACE OF CURB UNLESS OTHERWISE NOTED.
6. ALL WORK SHALL BE SUBJECT TO INSPECTION BY DESIGNATED NIH OFFICIALS. NOTIFY THE CHIEF INSPECTOR 48 HOURS PRIOR TO START OF WORK.
7. DRAIN ALL DISTURBED AREAS TO APPROVED SEDIMENT CONTROL MEASURES AT ALL TIMES DURING LAND DISTURBING ACTIVITIES AND DURING SITE DEVELOPMENT UNTIL FINAL STABILIZATION IS ACHIEVED.
8. ALL PIPE LENGTHS ARE MEASURED FROM CENTER OF STRUCTURES.
9. BURNING OF CONSTRUCTION OR DEMOLITION MATERIALS IS NOT PERMITTED ON SITE.
10. THE APPROVAL OF THESE PLANS SHALL IN NO WAY RELIEVE THE OWNER OF COMPLYING WITH OTHER APPLICABLE LOCAL, STATE AND FEDERAL REQUIREMENTS.
11. ALL TEST PITS SHALL BE PERFORMED 10 DAYS PRIOR TO CONSTRUCTION AND ANY DISCREPANCY IN THE RESULTS FORWARDED TO THE ENGINEER FOR A REDESIGN. SUCH REDESIGNS ARE SUBJECT TO OWNER APPROVAL.
12. CONTROLLED FILLS:
    A. CONTROLLED COMPACTION SHALL OCCUR IN ALL FILL SECTIONS FOR PAVEMENTS, TRENCHES FOR UTILITIES, AND IN ANY AREA DESIGNATED ON THE DRAWINGS.
    B. CONTROLLED FILLS MUST BE COMPACTED TO 95% DENSITY AS DETERMINED BY METHODS AS PER STANDARD PROCTOR AASHTO-T99 OR ASTM-D698. DENSITY MUST BE VERIFIED BY A QUALIFIED SOILS ENGINEER.
    C. CONTROLLED FILLS SHALL BE COMPACTED IN EIGHT (8) INCH LIFTS (LOOSE THICKNESS) TO THE SPECIFIED DENSITY, BEGINNING FROM THE EXISTING GROUND SURFACE. UNLESS OTHERWISE APPROVED IN WRITING BY A QUALIFIED SOILS ENGINEER.
    D. THE SURFACE AREA DIRECTLY BENEATH AREAS TO RECEIVE CONTROLLED FILLS OF LESS THAN FIVE (5) FEET IS TO BE DENUDED OF ALL VEGETATION AND SCARIFIED AND COMPACTED TO A DEPTH OF SIX (6) INCHES TO THE SAME DENSITY AS THE CONTROLLED FILL TO BE PLACED THEREON.
13. ALL RETAINING WALLS 30" AND HIGHER TO HAVE 42" SAFETY RAILING. RAILING MATERIAL, STYLE AND COLOR TO BE APPROVED BY OWNER/ARCHITECT PRIOR TO INSTALLATION.
14. THE CONTRACT DOCUMENTS ARE COMPLEMENTARY AND WHAT IS REQUIRED BY ONE SHALL BE AS BINDING AS IF REQUIRED BY ALL. IN THE CASE OF A CONFLICT, DISAGREEMENT, OR AMBIGUITY, PROVIDE THE BETTER QUALITY. IN THE CASE OF A CONFLICT, DISAGREEMENT, OR AMBIGUITY, PROVIDE THE GREATER QUANTITY OF WORK.

STORM SEWER CONSTRUCTION NOTES

1. ALL CONSTRUCTION AND MATERIALS SHALL CONFORM WHERE APPLICABLE TO THE CURRENT SHA, MDE OR NIH STANDARDS AND SPECIFICATIONS.
2. ALL CONCRETE SHALL BE CLASS A3 IF CAST IN PLACE, CLASS A4 IF PRECAST.
3. MANHOLES AND DROP INLETS SHALL BE CONSTRUCTED FROM INVERT TO TOP AS FOLLOWS:
    A. MANHOLES TO EIGHT FEET DEEP.
        - BLOCK CONSTRUCTION - MINIMUM EIGHT INCH WALLS.
        - POURED IN PLACE CONCRETE - MINIMUM EIGHT INCH WALLS AND NONREINFORCED.
        - PRECAST - MINIMUM EIGHT INCH WALLS IN CONJUNCTION WITH PRECAST THROAT AND PRECAST BASE SLAB.
        - PRECAST.
    B. MANHOLES OVER EIGHT FEET DEEP.
        - PRECAST.
        - POURED IN PLACE REINFORCED CONCRETE.
        - SPECIAL DESIGN, I.E., BENDS, PRECAST TEES, PRECAST BOXES, WYES.
4. DROP INLETS AND CURB INLETS SHALL HAVE STEPS. THE MAXIMUM DIMENSION FROM FINISH GRADE TO THE FIRST STEP IN THE INLET SHALL NOT EXCEED THREE FEET.
5. UNLESS STATED ON THE APPROVED PLANS, SYMMETRICAL CHANNELS SHALL BE PERFORMED IN THE INVERT OF ALL STRUCTURES ACCORDING TO SHA OR MCDOT STANDARDS IS-1 TO PREVENT STANDING OR PONDING OF WATER.
6. IF BLOCK CONSTRUCTION IS USED, THE INSIDE AND OUTSIDE WALLS, AS THEY ARE LAID, SHALL BE PLASTERED WITH MORTAR A MINIMUM OF 1/2" THICK.
7. ALL PRECAST DROP INLETS, CURB INLETS AND MANHOLES SHALL CONFORM TO ASTM C-478.
8. THE OPENING IN PRECAST STORM SEWER STRUCTURES FOR ALL SIZE PIPE SHALL BE A MINIMUM OF FOUR INCHES AND A MAXIMUM OF SIX INCHES LARGER THAN THE OUTSIDE DIAMETER OF THE PIPE.
9. ALL PIPES ARE MEASURED FROM CENTER OF STRUCTURE TO CENTER OF STRUCTURE.
10. ALL FILL BENEATH SEWER PIPES AND WATERLINES IS TO BE CONTROLLED FILL OR BETTER. CONTROLLED FILLS MUST BE COMPACTED TO 100% DENSITY AS DETERMINED BY AASHTO T99 OR ASTM d-698. DENSITY MUST BE VERIFIED BY A QUALIFIED SOILS ENGINEER. CONTROLLED FILLS SHALL BE COMPACTED IN EIGHT-INCH LIFTS (LOOSE THICKNESS) TO THE SPECIFIED DENSITY, BEGINNING FROM THE EXISTING GROUND SURFACE, UNLESS OTHERWISE APPROVED IN WRITING BY A QUALIFIED SOILS ENGINEER.
11. ALL FILL BENEATH MANHOLES IS TO BE SELECT FILL. SELECT FILL MATERIAL SHALL CONSIST SHA OR MCDOT STANDARDS AND MUST BE COMPACTED TO 100% DENSITY AS DETERMINED BY AASHTO T99 OR ASTM d-698. DENSITY MUST BE VERIFIED BY A QUALIFIED SOILS ENGINEER. SELECT FILLS SHALL BE COMPACTED IN EIGHT-INCH LIFTS (LOOSE THICKNESS) TO THE SPECIFIED DENSITY, BEGINNING FROM THE EXISTING GROUND SURFACE, UNLESS OTHERWISE APPROVED IN WRITING BY A QUALIFIED SOILS ENGINEER.

MATERIAL NOTES:

1. ALL CONCRETE PIPE SHALL BE IN ACCORDANCE WITH SHA STANDARDS AND SPECIFICATIONS. ALL PIPE BEDDING SHALL BE IN ACCORDANCE WITH SHA STANDARDS AND SPECIFICATIONS.
2. ALL STORM SEWER STRUCTURES, PIPES, AND APPURTENANCES SHALL BE WATER TIGHT.

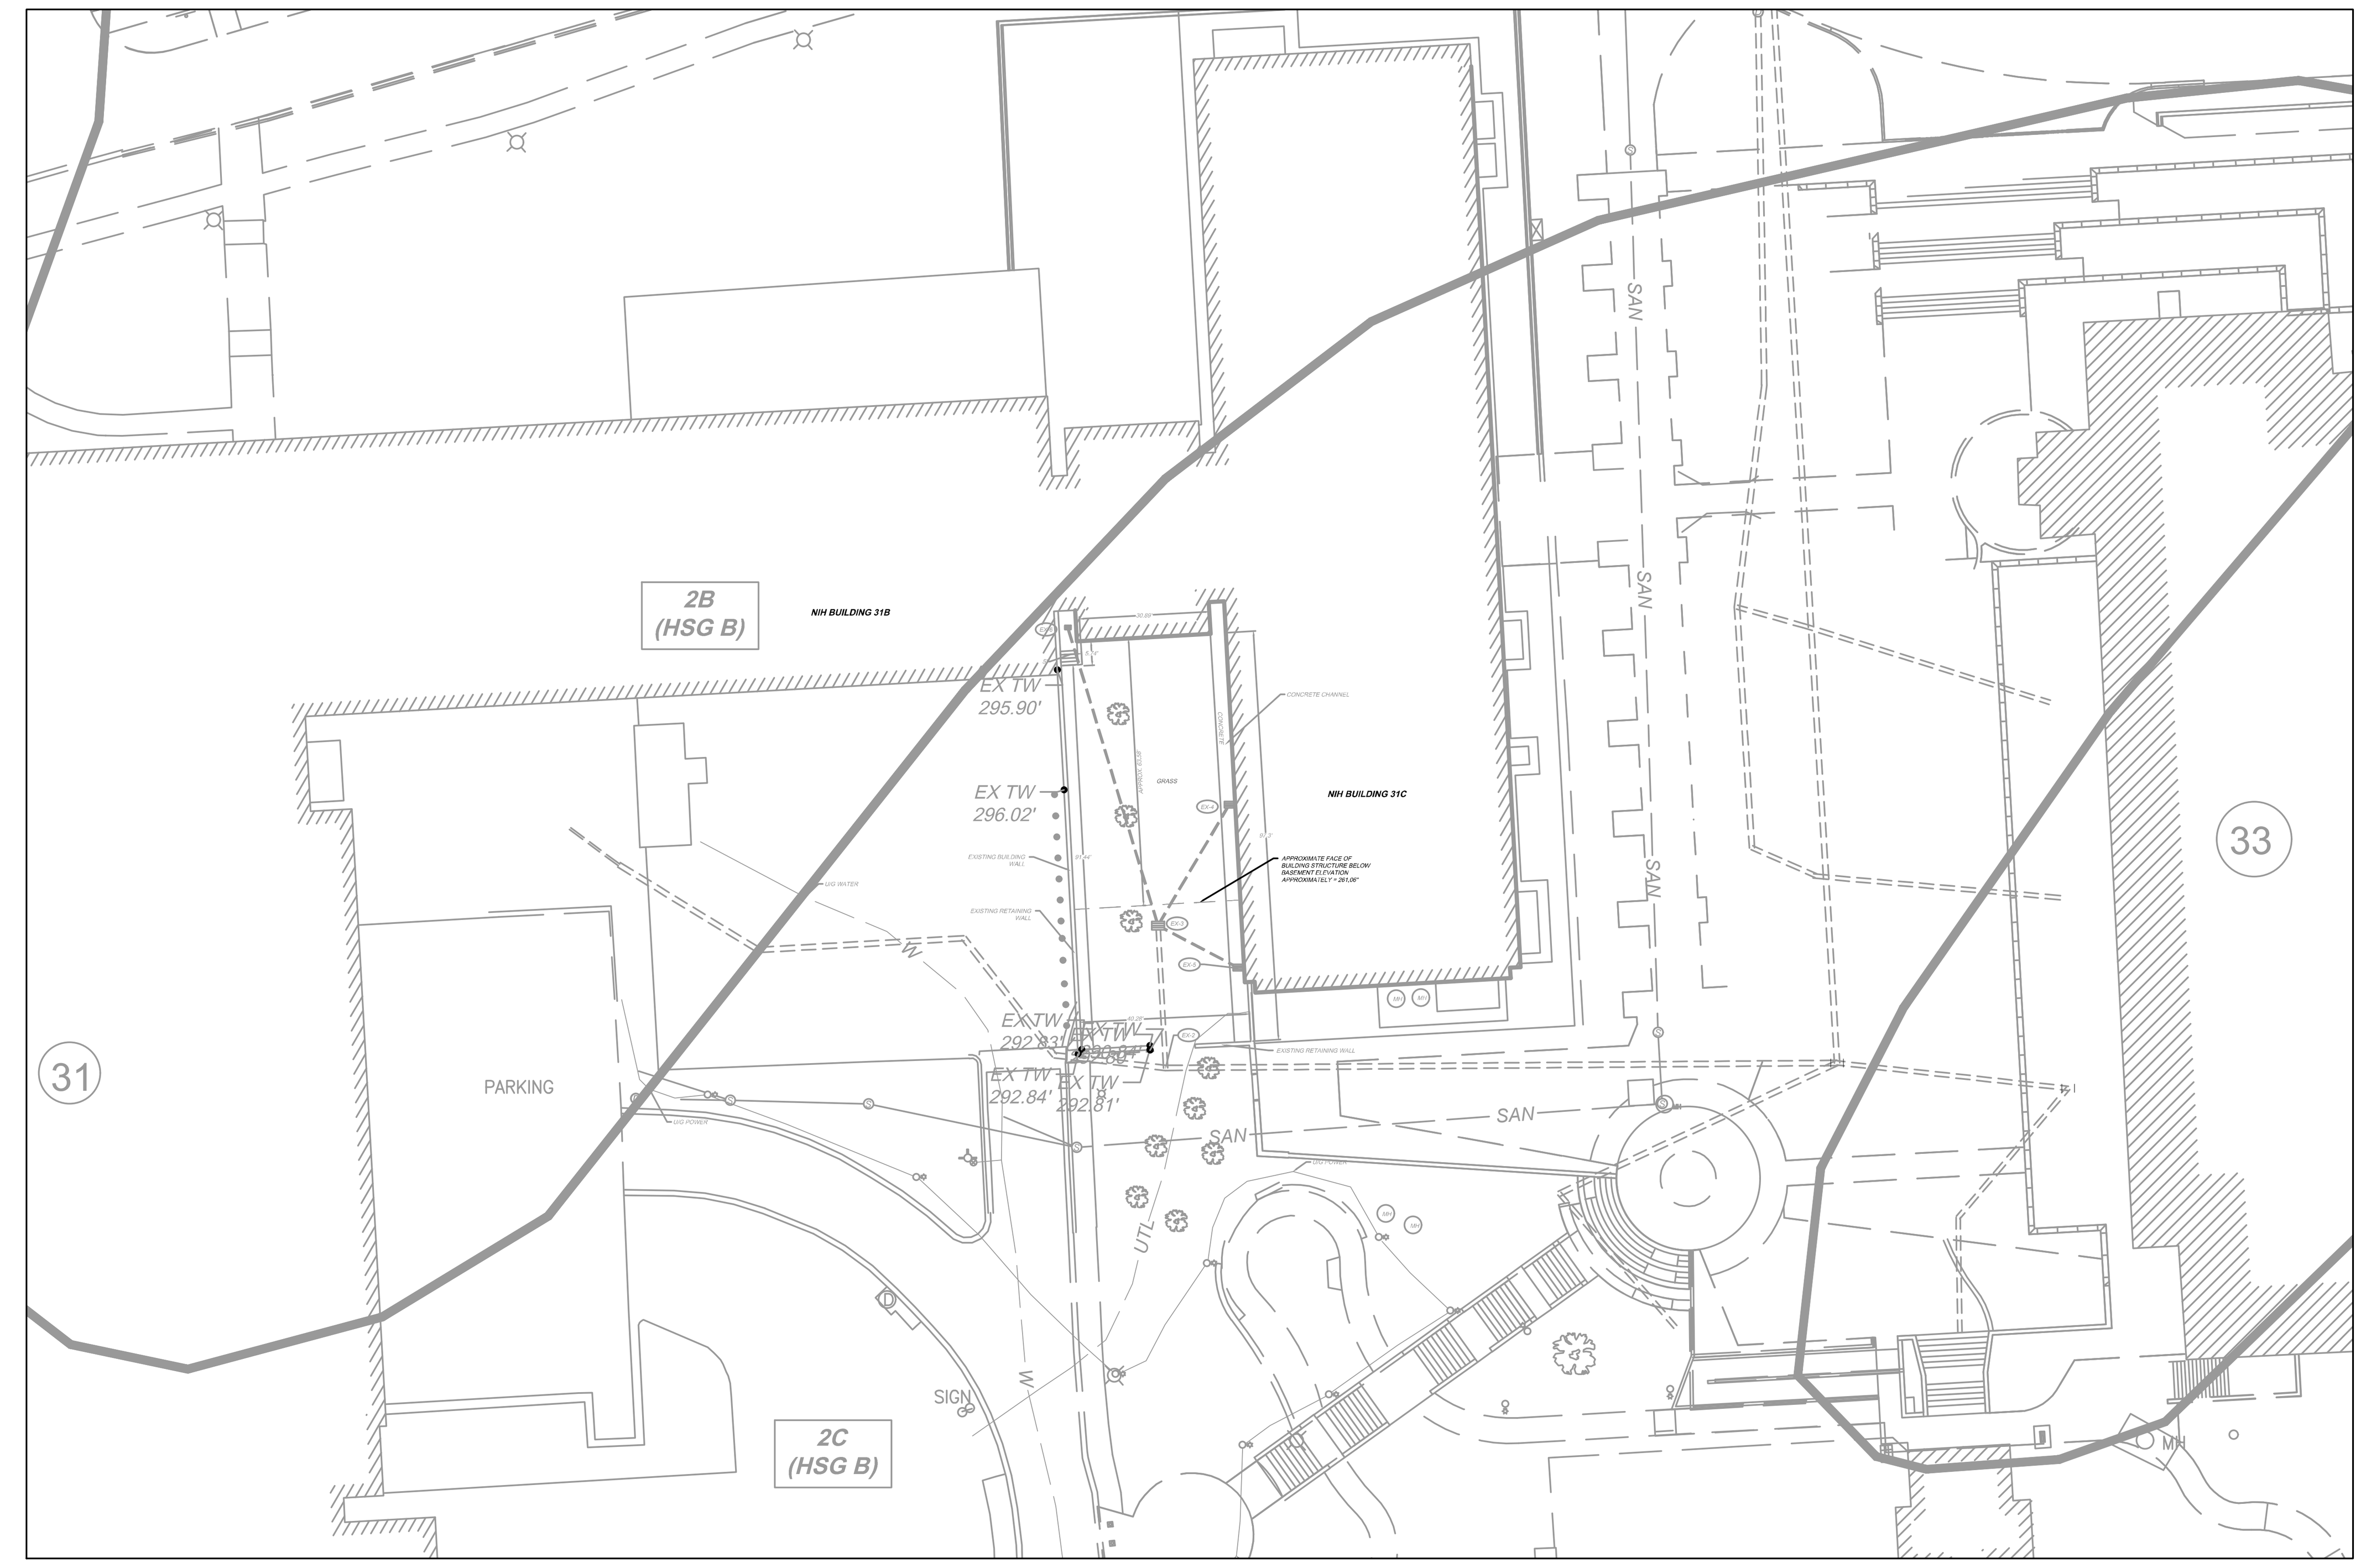

SOILS MAP

SCALE 1"=40'
0 40' 80'

MD COORDINATE SYSTEM NAD 83/91

SOIL TABLE						
SOIL IDEN	SOIL NAME	SOIL SLOPE	HYDROLOGIC GROUP	HYDRIC SOIL	K-FACTOR	CLASS
2B	Glenelg Silt Loam	3-8%	B	NO	0.37	I
2C	Glenelg Silt Loam	8-15%	B	NO	0.37	I

PROFESSIONAL CERTIFICATION
I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.
NAME: P.E. OSVALDO RAMOS
LICENSE: No. 57602
EXPIRATION DATE: 05-04-2027

STATE OF MARYLAND OSVALDO A. RAMOS 57602 PROFESSIONAL ENGINEER

O Ramos

MDE NO. 25-SF-0127

DATE: 08/26/2025

PROPERTY OF THE UNITED STATES GOVERNMENT
FOR OFFICIAL USE ONLY
Do not remove this notice
Properly destroy documents when no longer needed

DEPARTMENT OF HEALTH & HUMAN SERVICES, USA

LSY ARCHITECTS & LABORATORY PLANNERS

James Posey Associates Engineering Your Vision

TIMMONS GROUP

SGH

Architect and Engineer Name and LOGO

ARCHITECT:	LOUVIERE, STRATTON & YOKEL, LLC 8484 GEORGIA AVE, SUITE 650 SILVER SPRING, MD 20910 (301) 588-1500
MEP ENGINEER:	JAMES POSEY ASSOCIATES INC 11155 RED RUN BLVD OWINGS MILLS, MD 21117 (410) 265-6100
CIVIL ENGINEER:	TIMMONS GROUP 20110 ASHBROOK PL, SUITE 100 ASHBURN, VA 20147 (703) 554-6700
STRUCTURAL ENGINEER:	SIMPSON GUMPERTZ & HEGER 1625 EYE STREET NW SUITE 900 WASHINGTON, DC 20006 (202) 239-4199

SEAL

REVISIONS

MARK	DATE	DESCRIPTION

CONTRACTORS

A/E CON. NO.	
A/E TASK NO.	
CONS. CONTR.	
CONS. WORK	
PRIME A/E	LSY ARCHITECTS
SUB A/E	JPA / TIMMONS / SGH
CONSTR. CON.	

BUILDING

FACILITY CODE	
BUILDING NO.	BUILDING 31B
NAME	NIH
STREET	9000 ROCKVILLE PIKE
CITY	BETHESDA
STATE/ZIP	MD / 20892
OTHER BUILDING NO.	

PROJECT

PROJ. NO.	24024
PROJ. OFFICER	MOHAMMED BISWAS
PROJ. MGR.	G.LEE
SUBMISSION	IFC SUBMISSION
SUB. DATE	08/26/2025
WRK REQ. NO.	C116635

N

PROJECT TITLE: BUILDING 31B LANDSCAPE WATER INTRUSION

DRAWING TITLE: GENERAL NOTES & DETAILS

NIH National Institutes of Health
OFFICE OF RESEARCH FACILITIES
DIVISION OF FACILITIES PLANNING

DESIGNED BY	OR
DRAWN BY	SA
CHECKED BY	OR
DATE	08/26/2025
FILE NAME	

DRAWING NO. C-101

2 OF 19

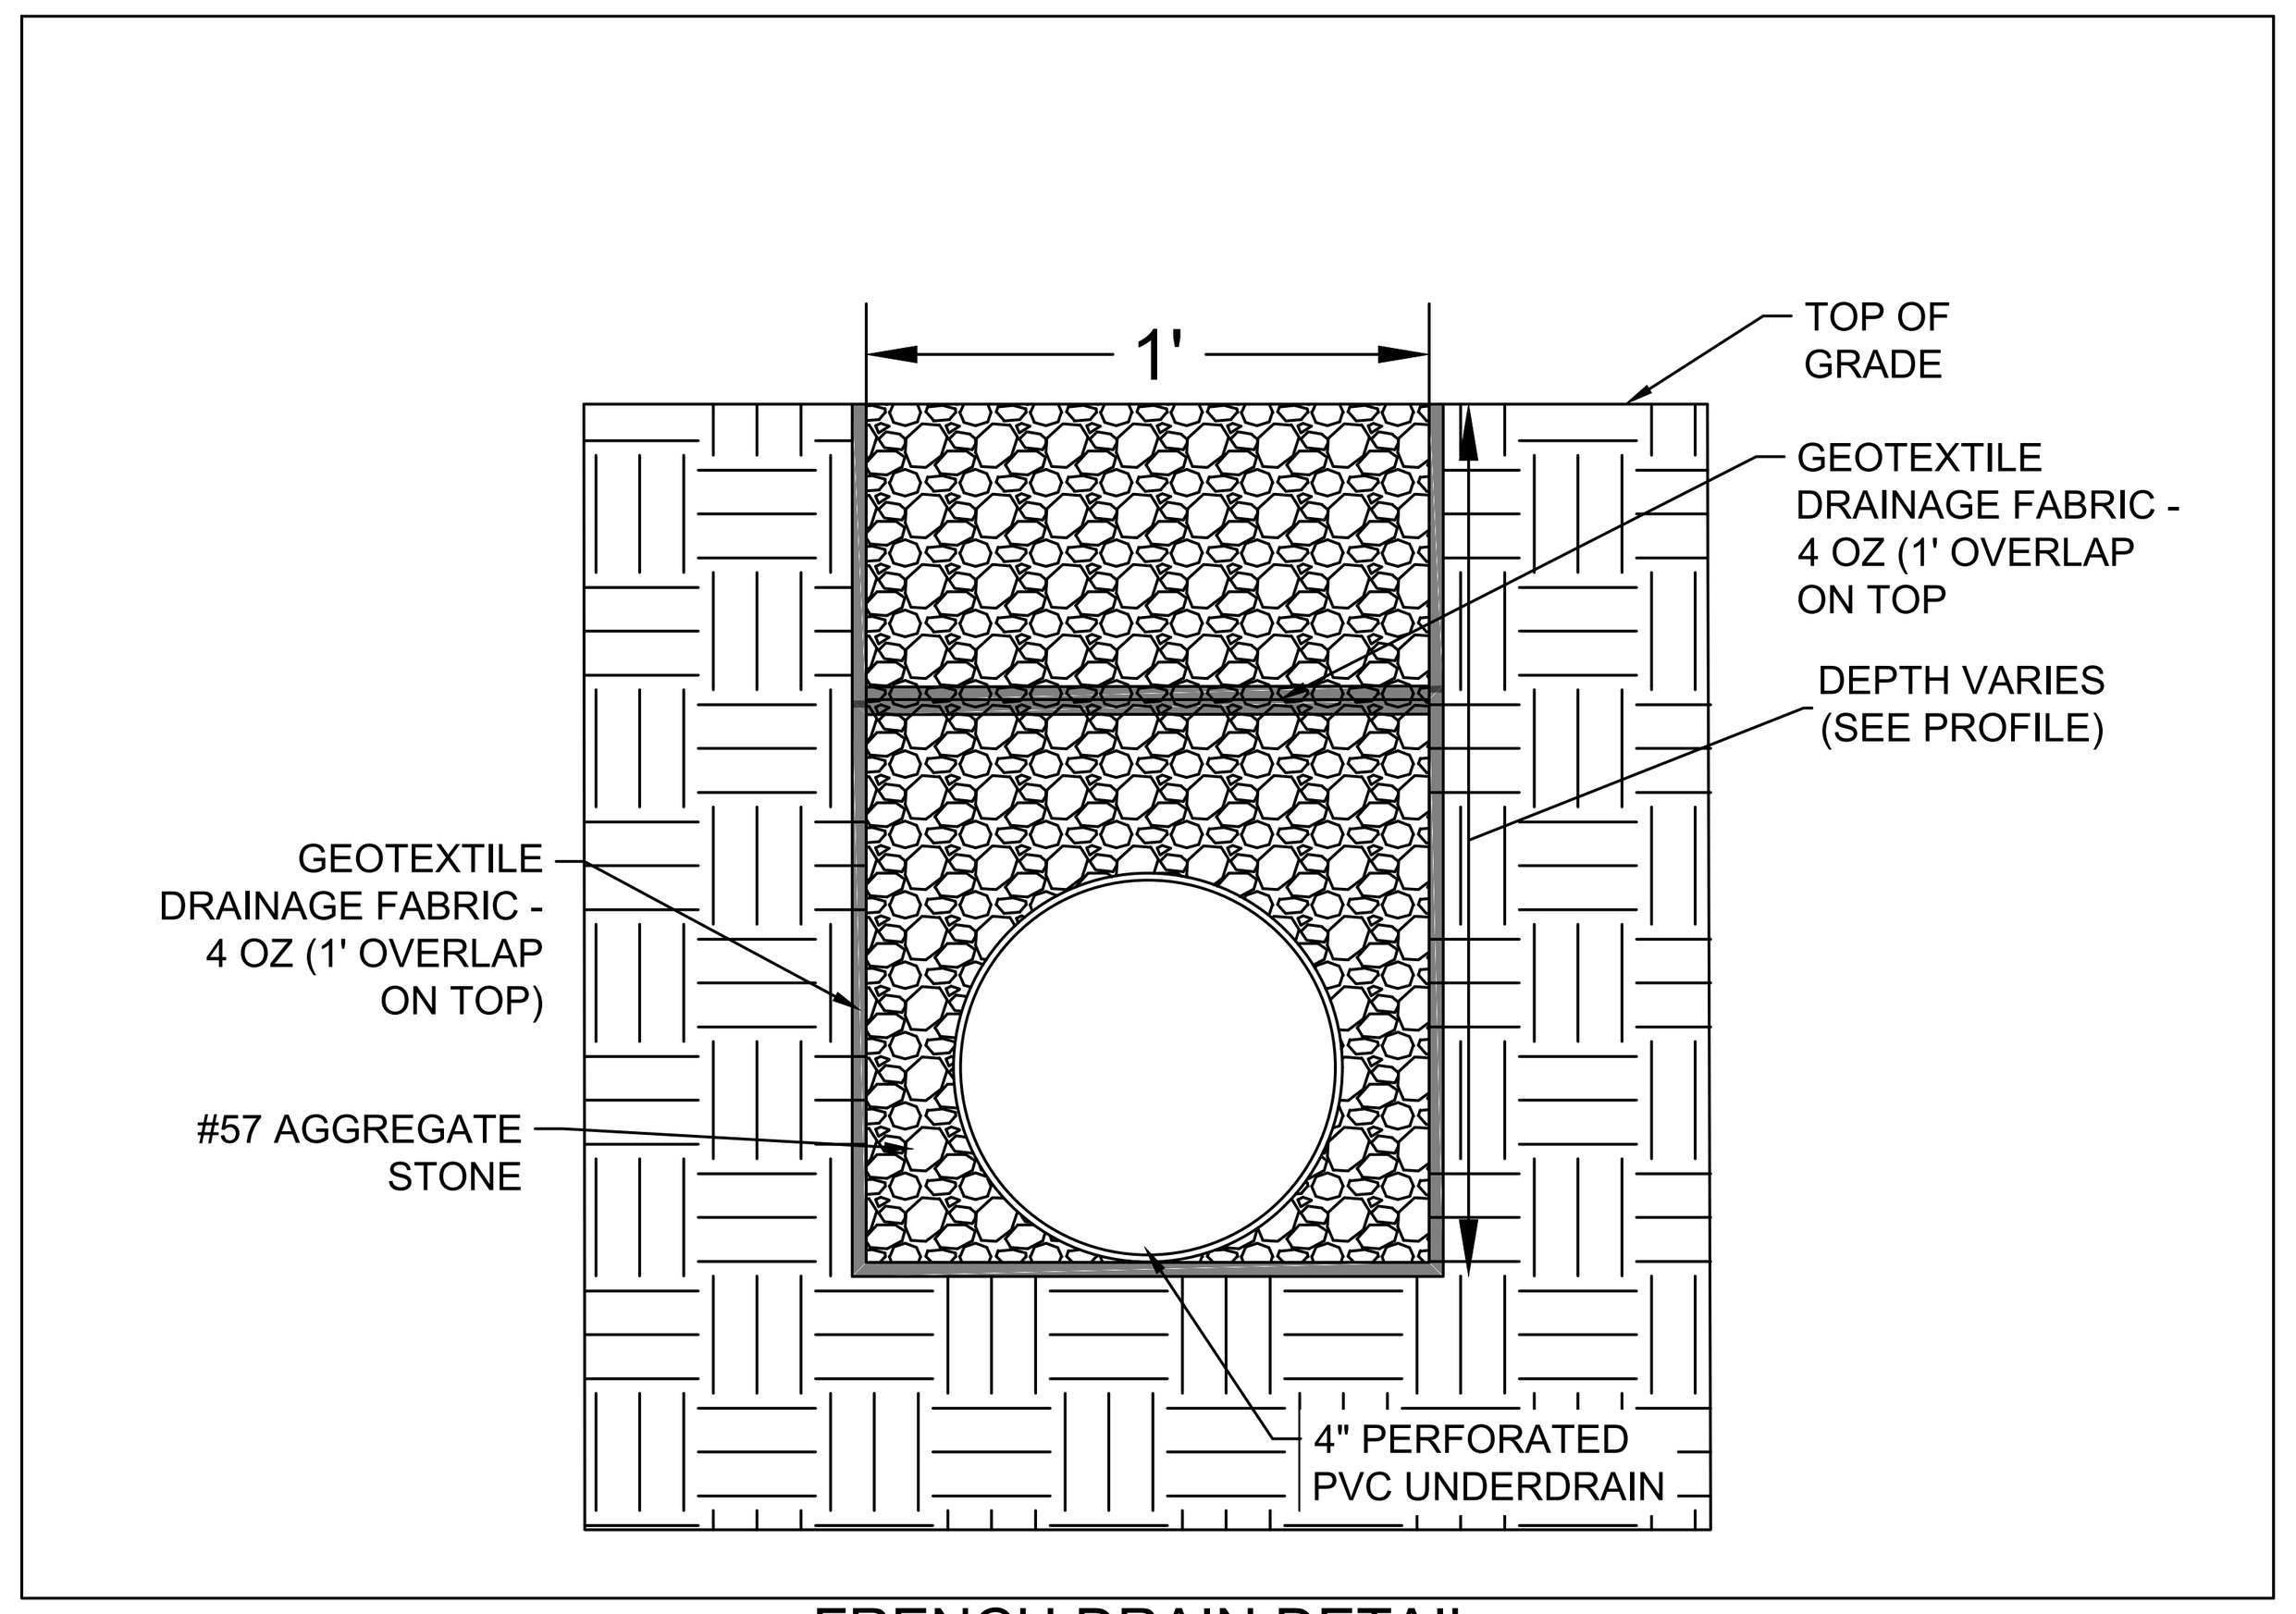

OR APPROVED EQUIVALENT

FRENCH DRAIN DETAIL
N.T.S

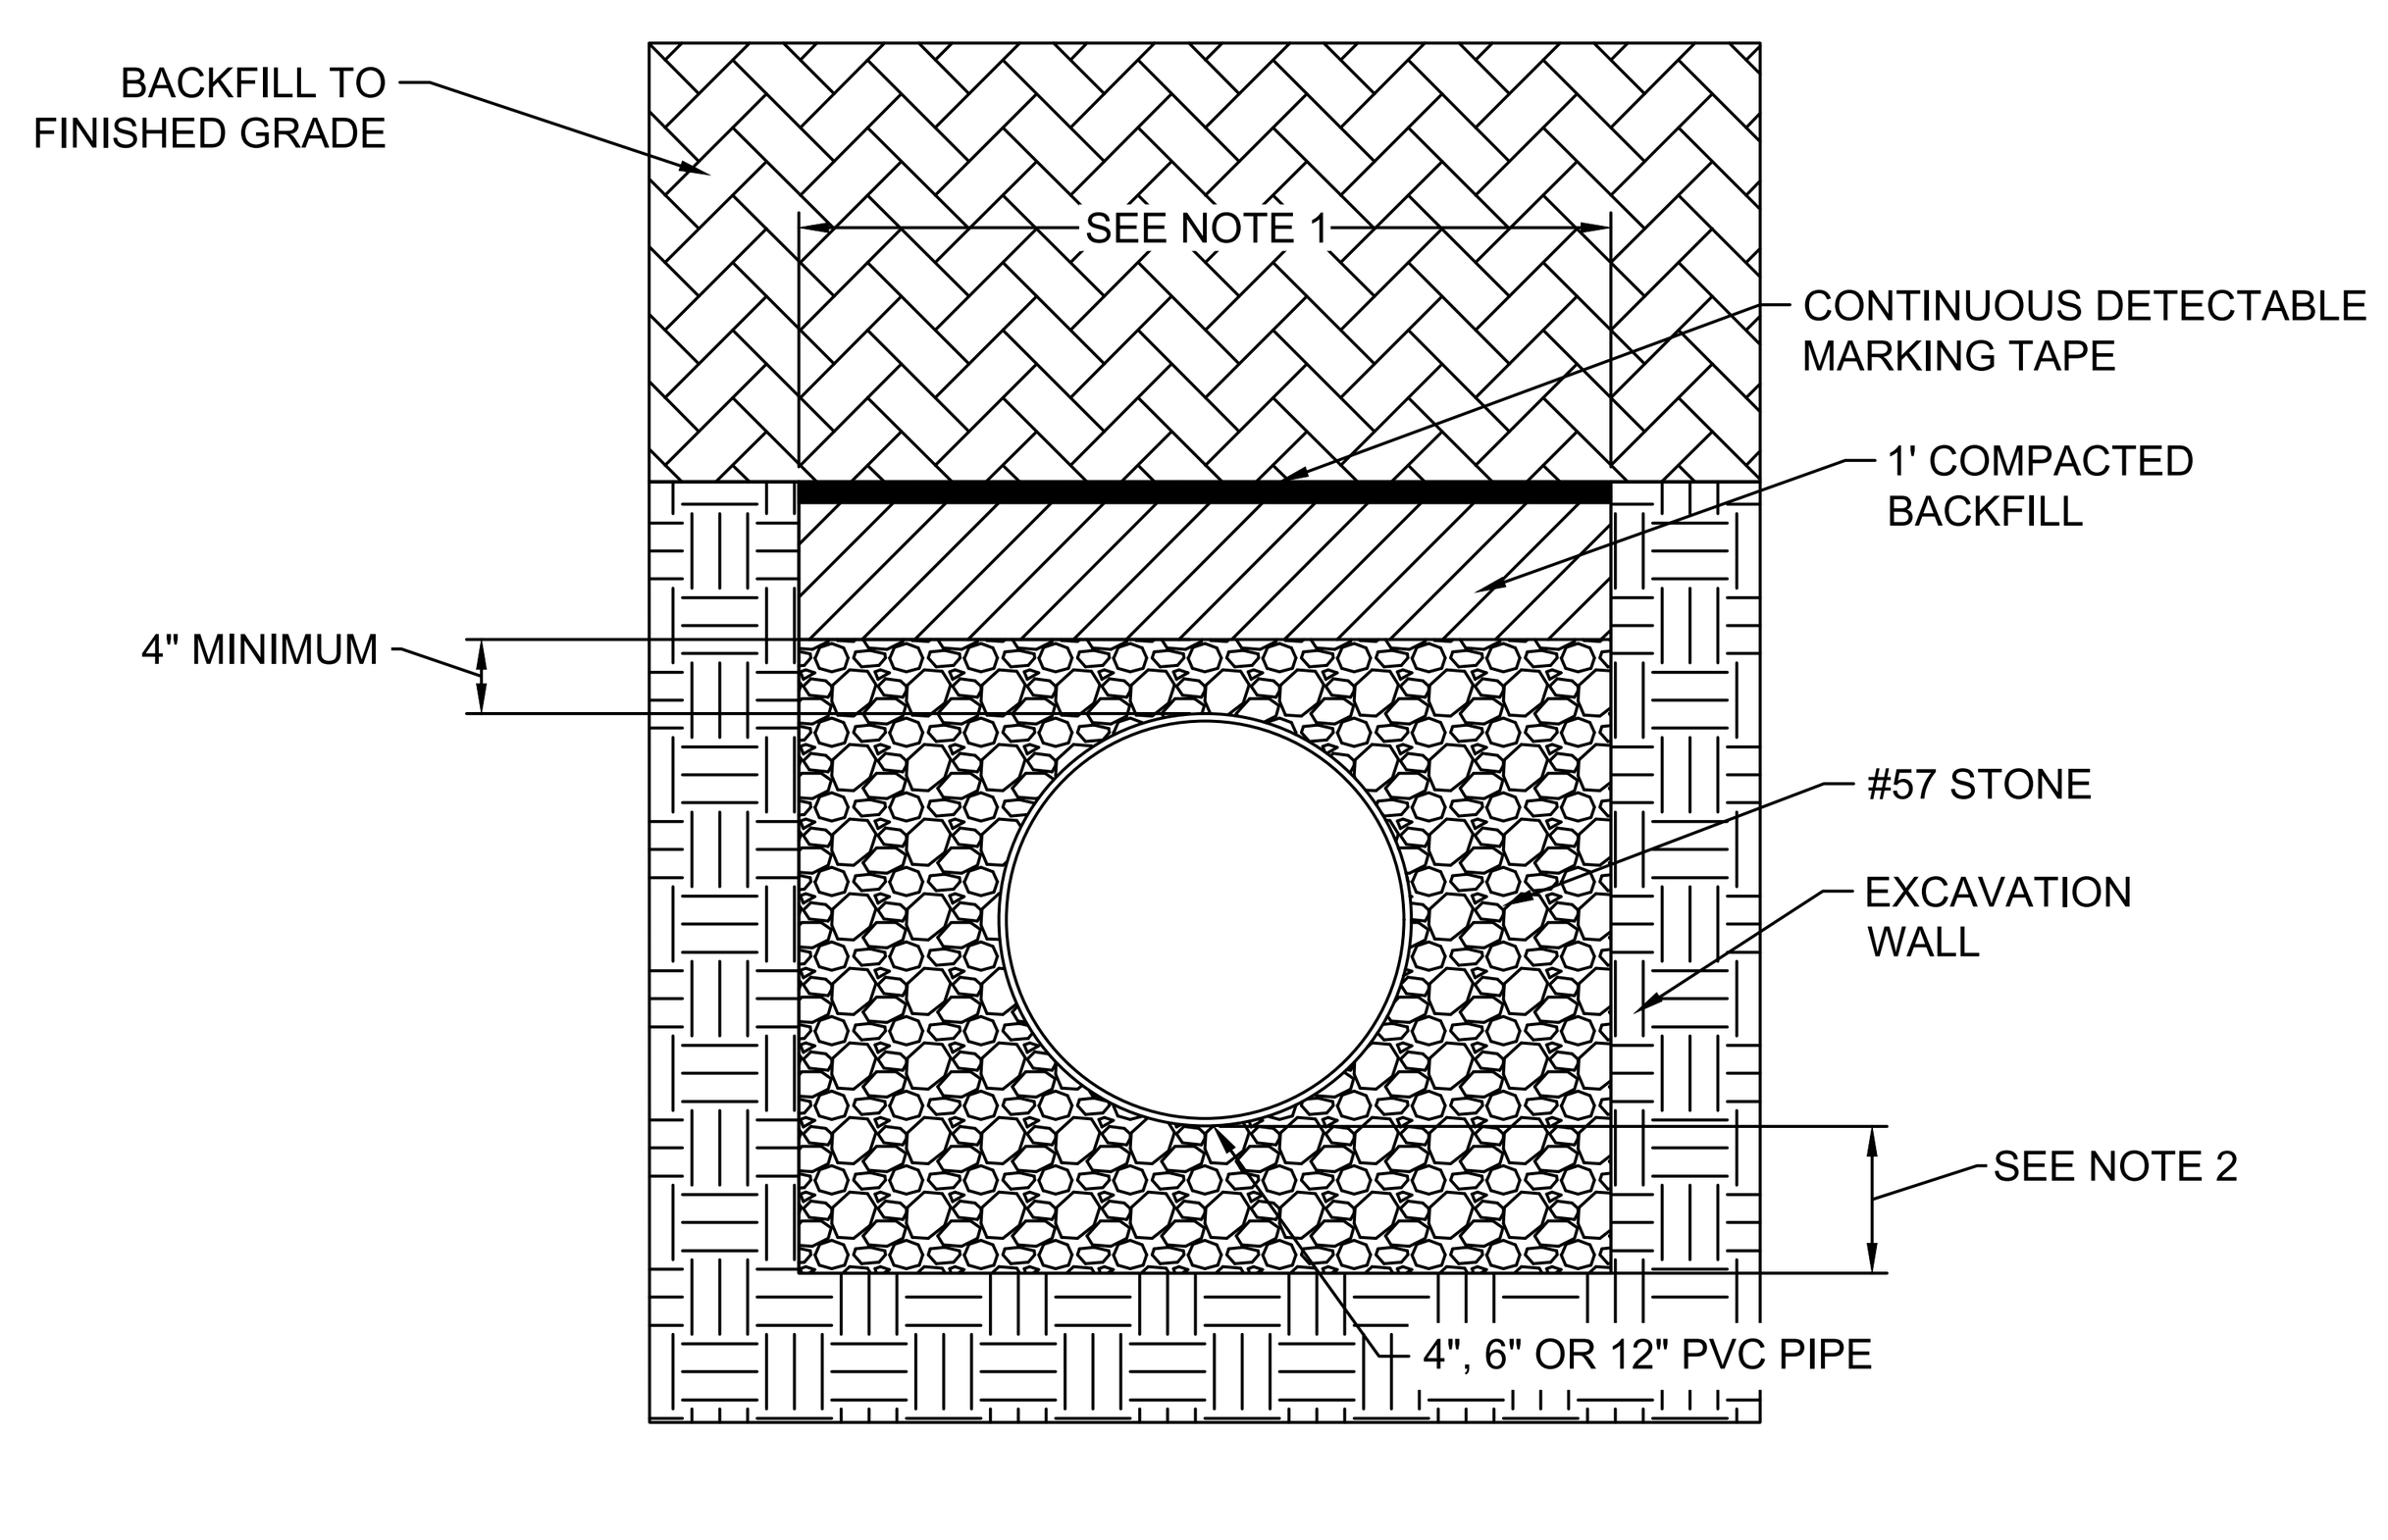

NOTES:
1. MINIMUM TRENCH WIDTH: PIPE DIAMETER +12"
2. MINIMUM DEPTH IS 10" FROM THE BOTTOM OF THE PIPE TO THE BOTTOM OF STONE FILL

OR APPROVED EQUIVALENT

PIPE TRENCH DETAIL
N.T.S

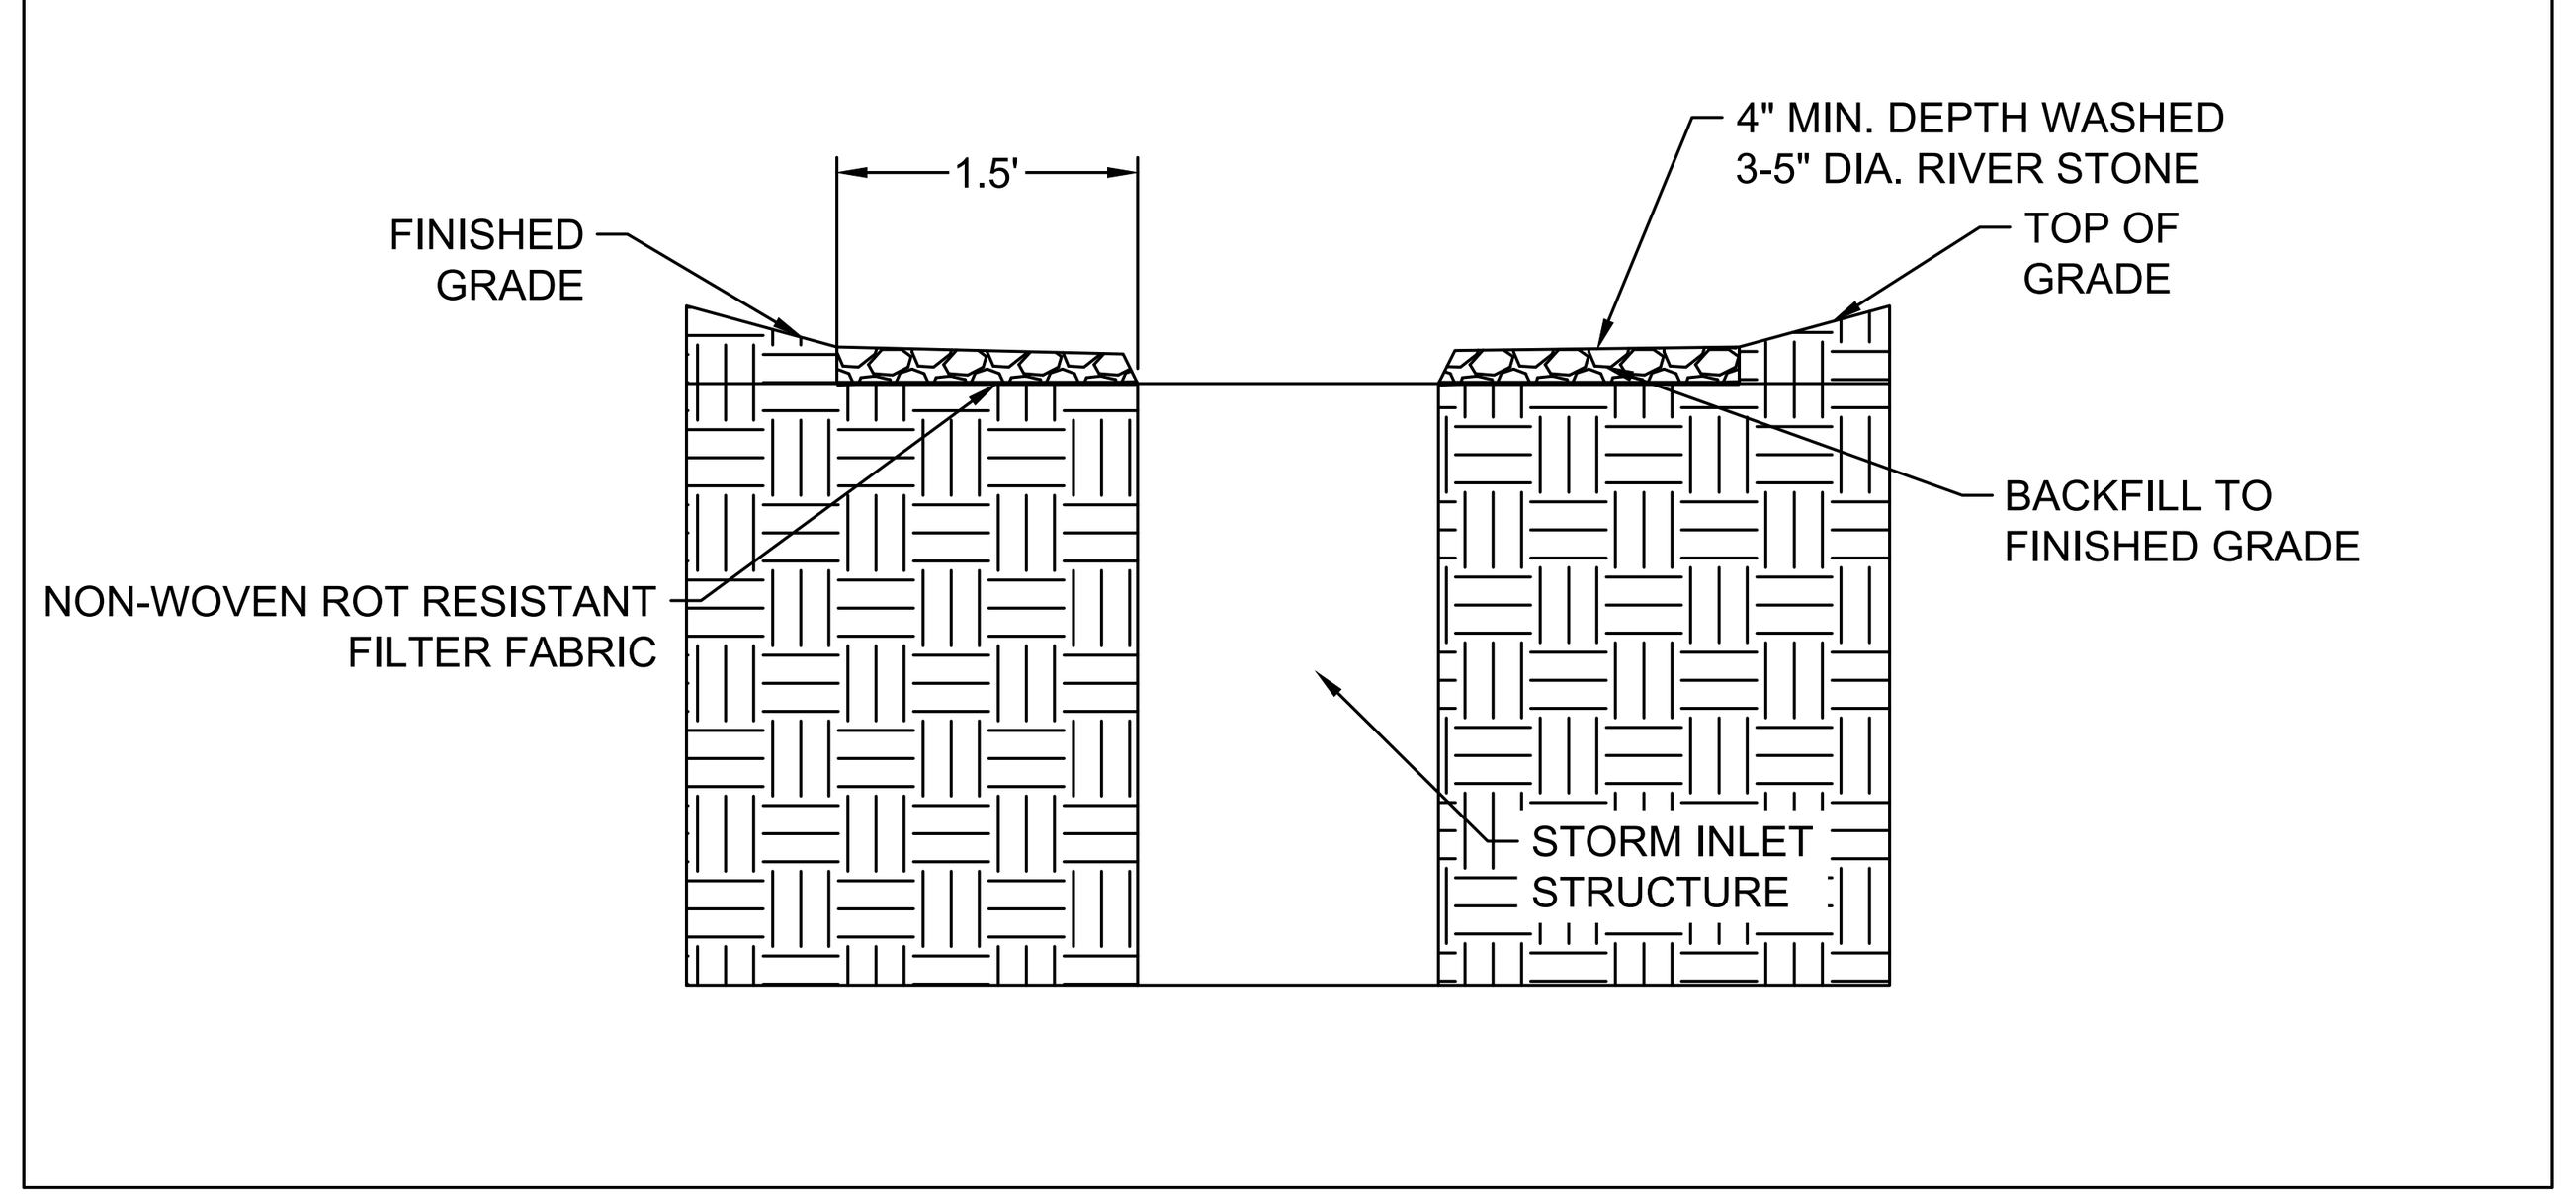

OR APPROVED EQUIVALENT

RIVER STONE BASIN DETAIL
N.T.S

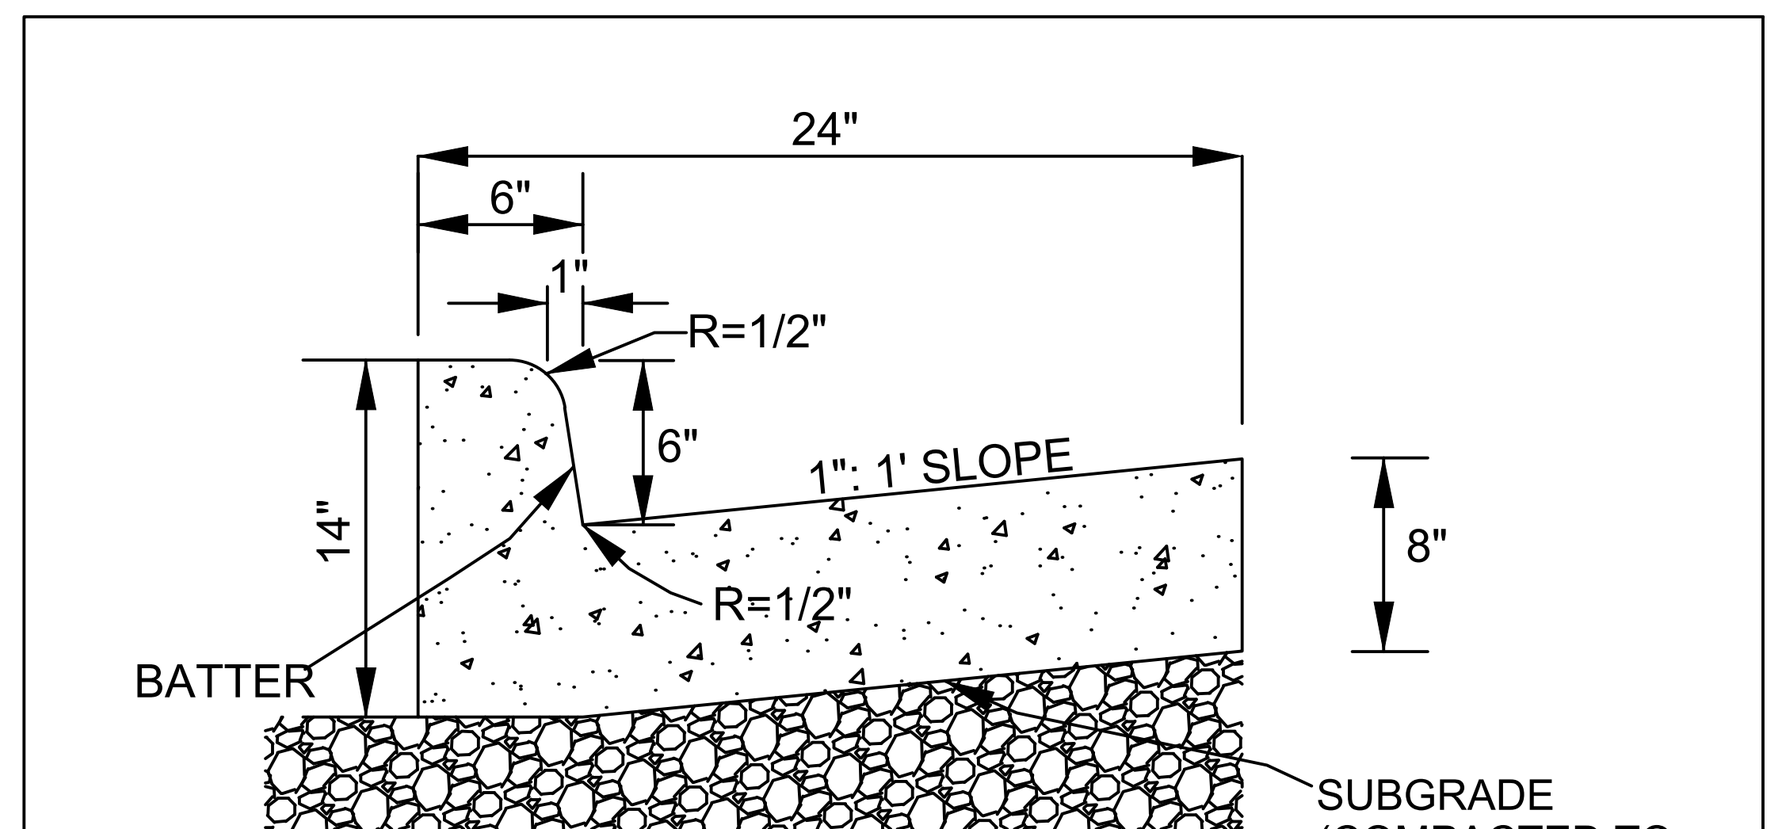

CURB & GUTTER
NO SCALE

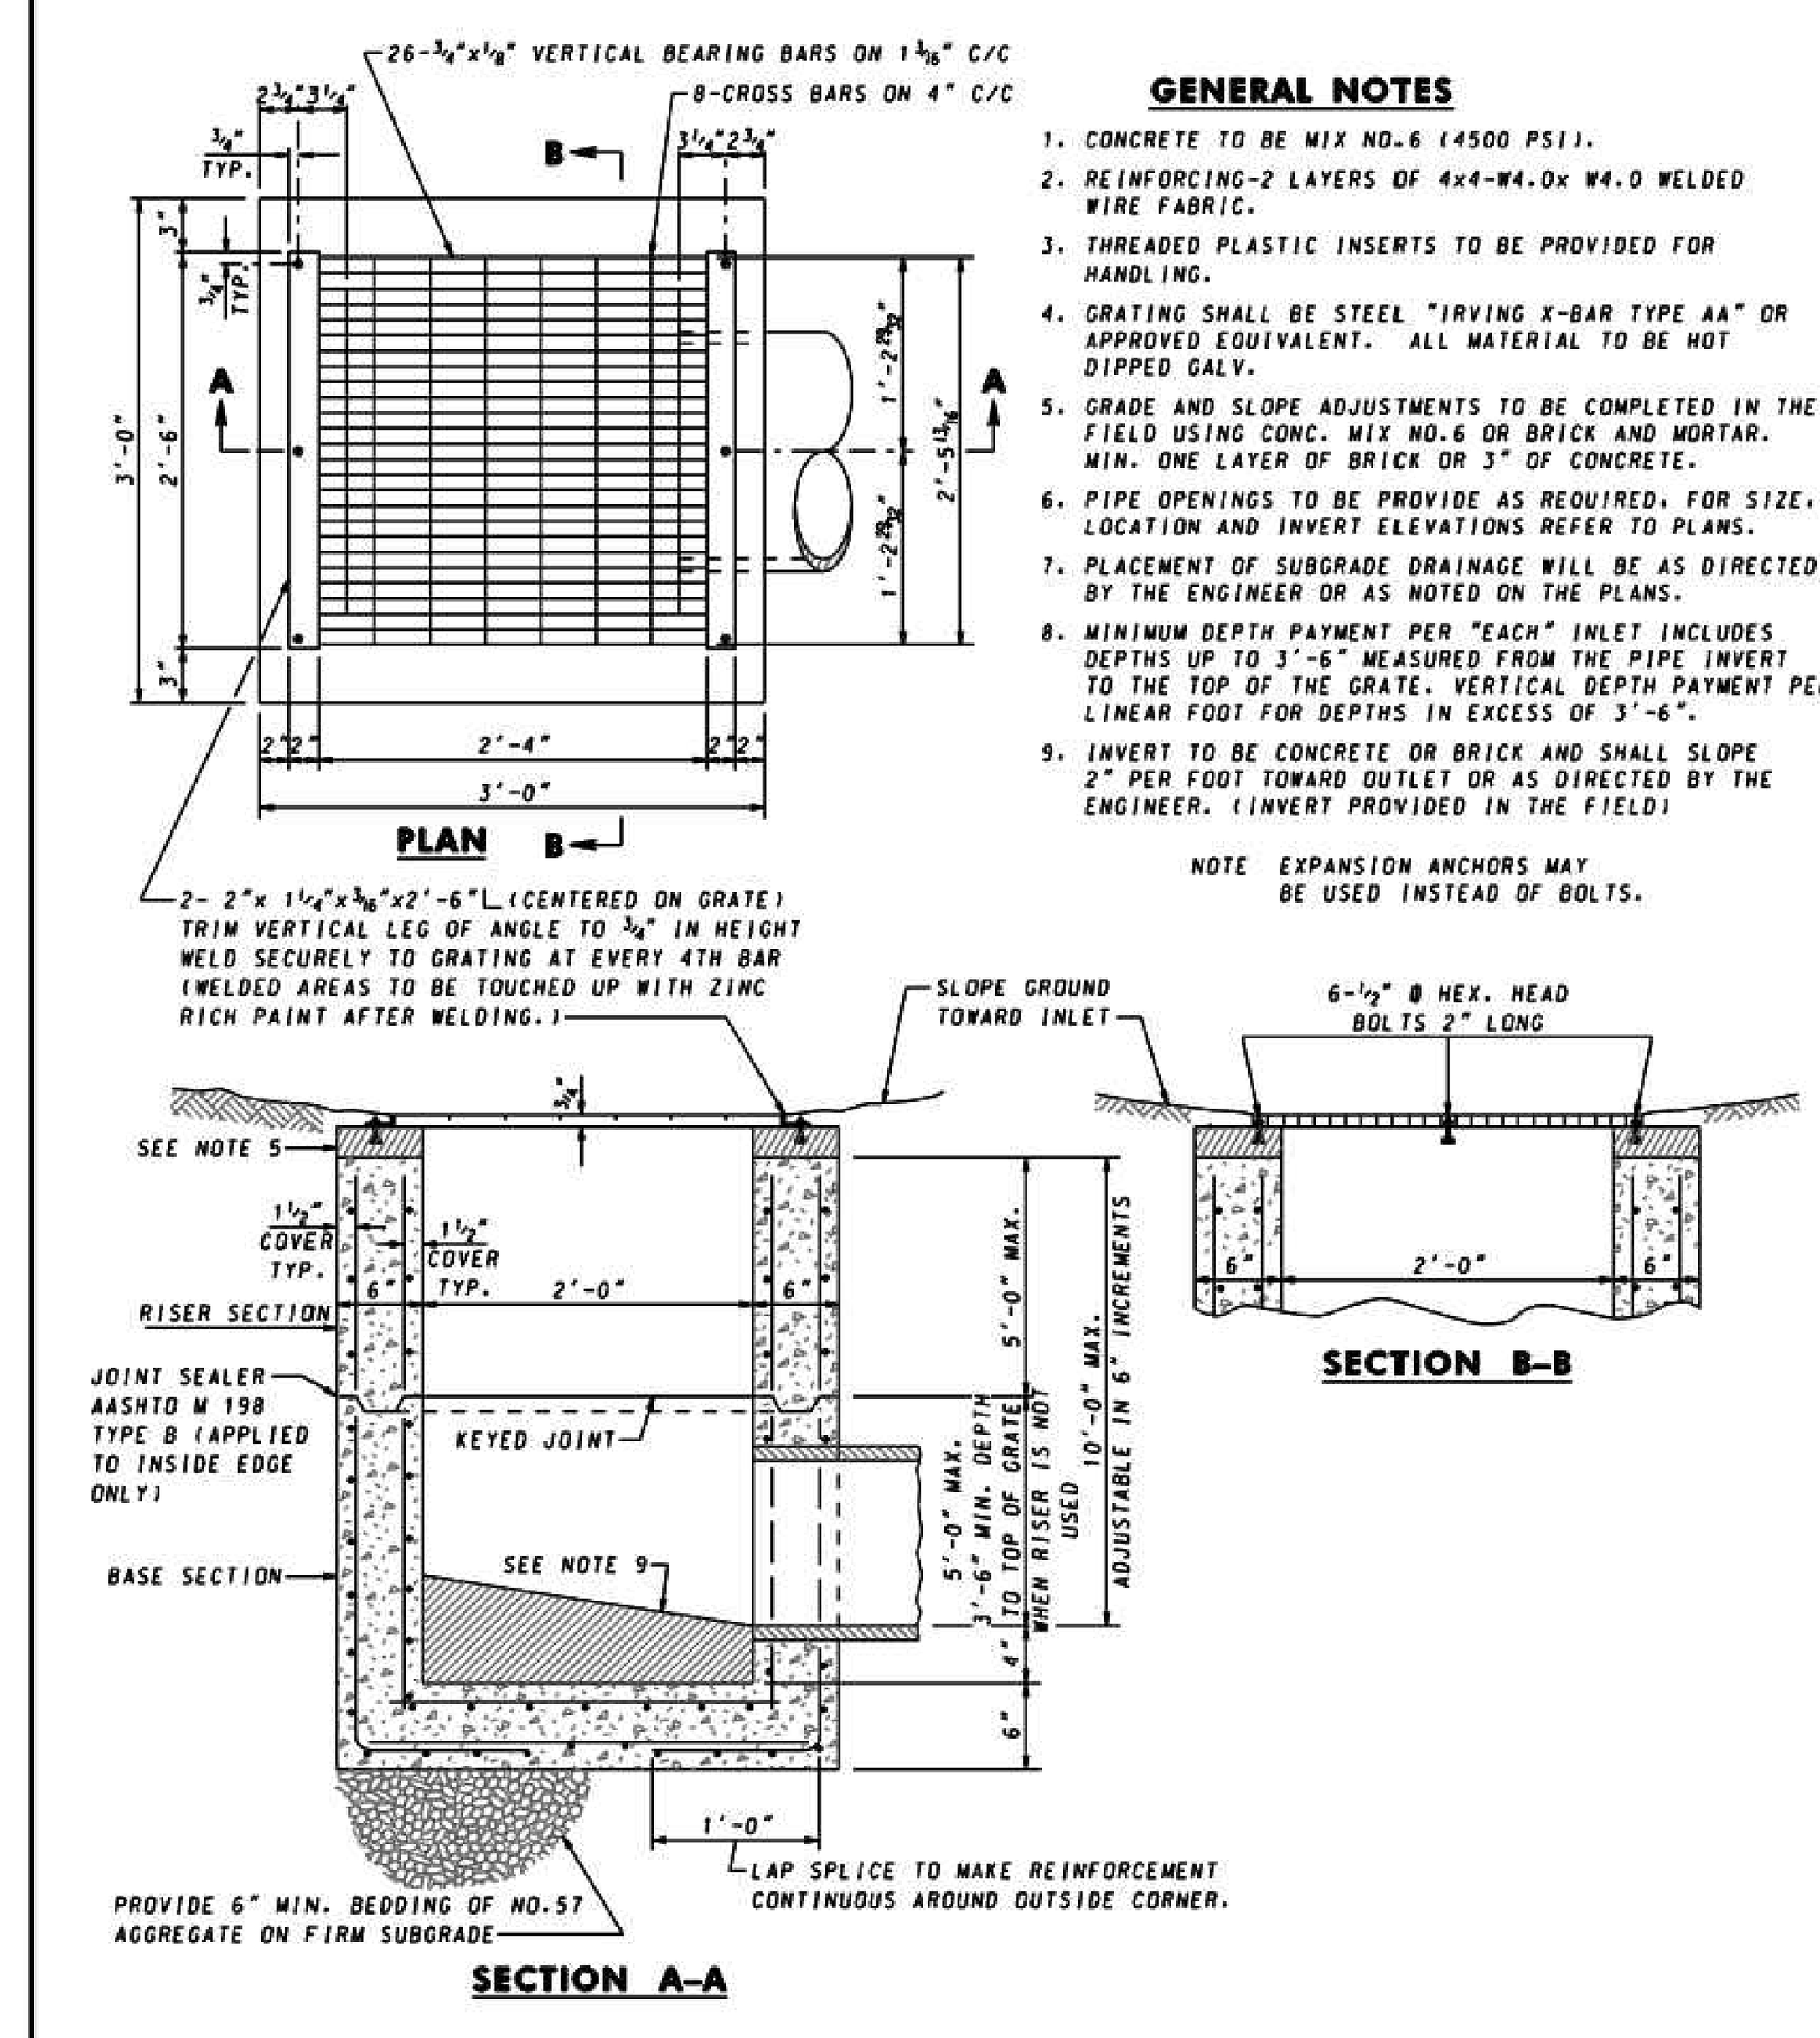

GENERAL NOTES
1. CONCRETE TO BE MIX NO.6 (4500 PSI).
2. REINFORCING-2 LAYERS OF 4x4-W4.0x W4.0 WELDED WIRE FABRIC.
3. THREADED PLASTIC INSERTS TO BE PROVIDED FOR HANDLING.
4. GRATING SHALL BE STEEL "IRVING X-BAR TYPE AA" OR APPROVED EQUIVALENT. ALL MATERIAL TO BE HOT DIPPED GALV.
5. GRADE AND SLOPE ADJUSTMENTS TO BE COMPLETED IN THE FIELD USING CONC. MIX NO.6 OR BRICK AND MORTAR. MIN. ONE LAYER OF BRICK OR 3" OF CONCRETE.
6. PIPE OPENINGS TO BE PROVIDE AS REQUIRED. FOR SIZE, LOCATION AND INVERT ELEVATIONS REFER TO PLANS.
7. PLACEMENT OF SUBGRADE DRAINAGE WILL BE AS DIRECTED BY THE ENGINEER OR AS NOTED ON THE PLANS.
8. MINIMUM DEPTH PAYMENT PER "EACH" INLET INCLUDES DEPTHS UP TO 3'-6" MEASURED FROM THE PIPE INVERT TO THE TOP OF THE GRATE. VERTICAL DEPTH PAYMENT PER LINEAR FOOT FOR DEPTHS IN EXCESS OF 3'-6".
9. INVERT TO BE CONCRETE OR BRICK AND SHALL SLOPE 2" PER FOOT TOWARD OUTLET OR AS DIRECTED BY THE ENGINEER. (INVERT PROVIDED IN THE FIELD)

NOTE EXPANSION ANCHORS MAY BE USED INSTEAD OF BOLTS.

SPECIFICATION 305	CATEGORY CODE ITEMS	Maryland Department of Transportation STATE HIGHWAY ADMINISTRATION STANDARDS FOR HIGHWAYS AND INCIDENTAL STRUCTURES
APPROVED	DIRECTOR - OFFICE OF HIGHWAY DEVELOPMENT	PRECAST YARD INLET
	APPROVAL 4-8-87 / REVISED 10-1-01	STANDARD NO. MD 381.02

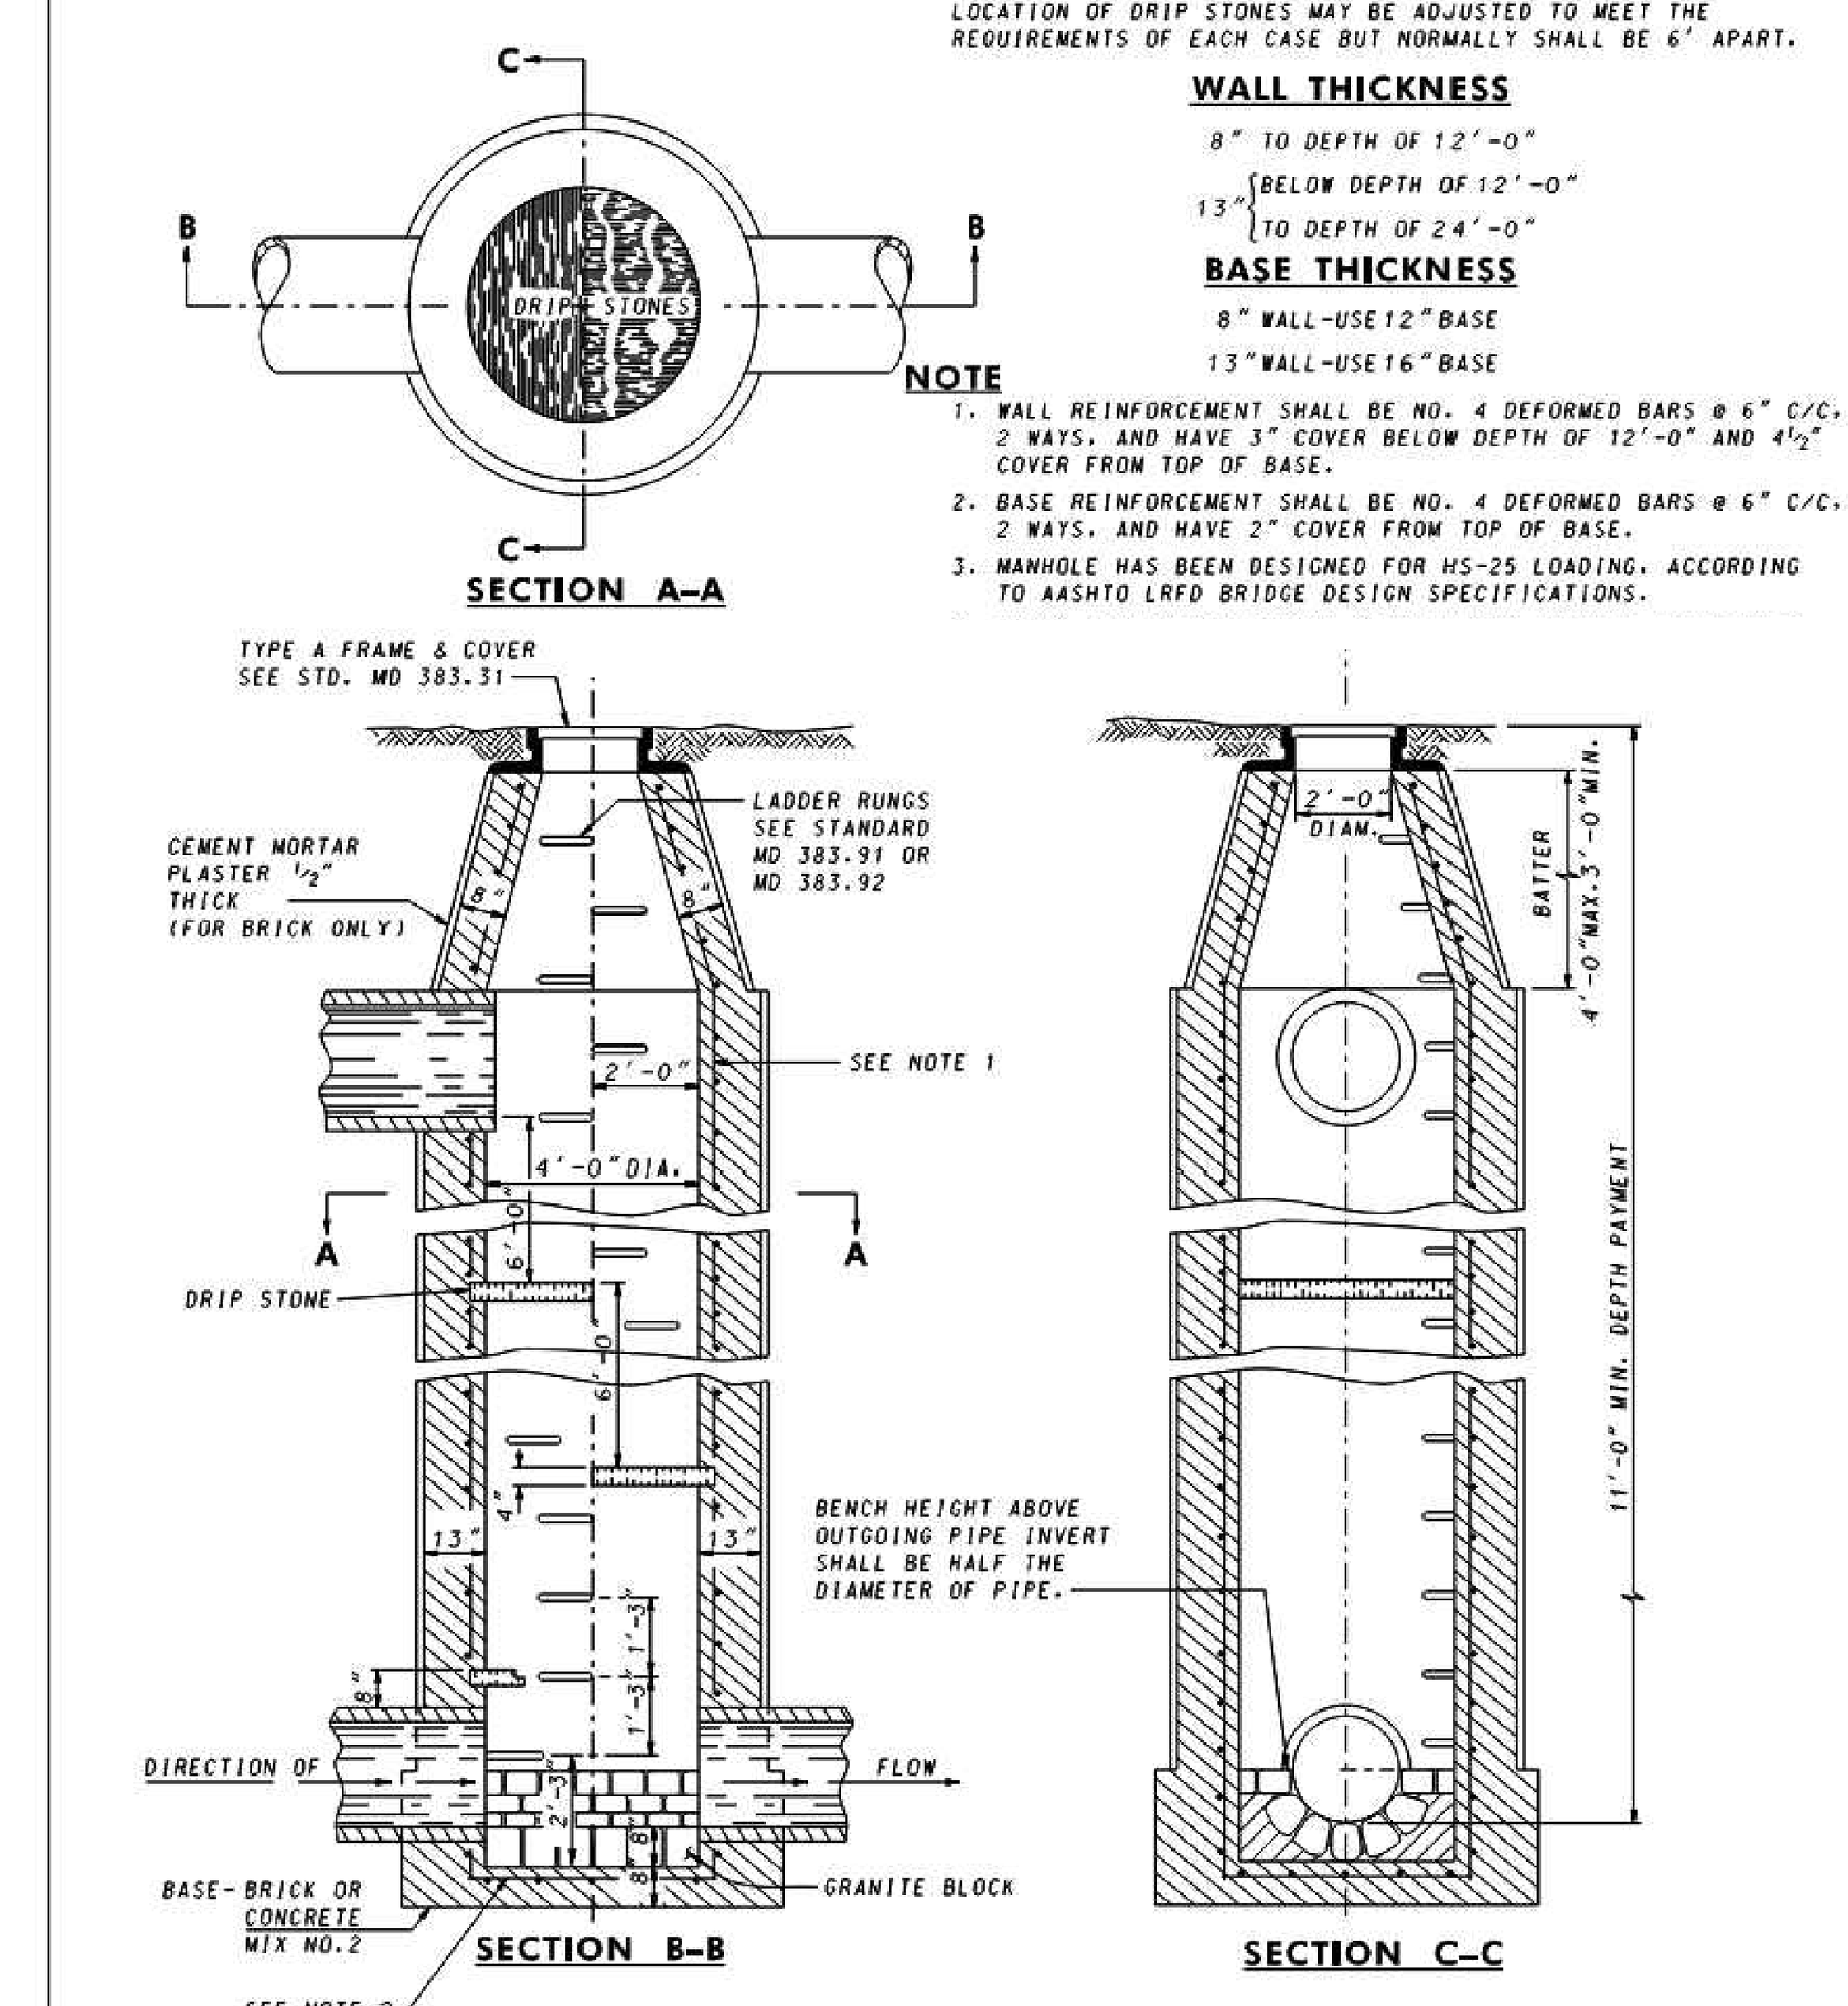

GRANITE DRIP STONES ARE PREFERABLE BUT IF NOT AVAILABLE SOME OTHER APPROVED TYPE MAY BE USED.
LOCATION OF DRIP STONES MAY BE ADJUSTED TO MEET THE REQUIREMENTS OF EACH CASE BUT NORMALLY SHALL BE 6' APART.

WALL THICKNESS

8" TO DEPTH OF 12'-0"
13" BELOW DEPTH OF 12'-0" TO DEPTH OF 24'-0"

BASE THICKNESS

8" WALL-USE 12" BASE
13" WALL-USE 16" BASE

NOTE
1. WALL REINFORCEMENT SHALL BE NO. 4 DEFORMED BARS @ 6" C/C, 2 WAYS, AND HAVE 3" COVER BELOW DEPTH OF 12'-0" AND 4 1/2" COVER FROM TOP OF BASE.
2. BASE REINFORCEMENT SHALL BE NO. 4 DEFORMED BARS @ 6" C/C, 2 WAYS, AND HAVE 2" COVER FROM TOP OF BASE.
3. MANHOLE HAS BEEN DESIGNED FOR HS-25 LOADING, ACCORDING TO AASHTO LRFD BRIDGE DESIGN SPECIFICATIONS.

SPECIFICATION 305	CATEGORY CODE ITEMS	Maryland Department of Transportation STATE HIGHWAY ADMINISTRATION STANDARDS FOR HIGHWAYS AND INCIDENTAL STRUCTURES
APPROVED	DIRECTOR - OFFICE OF HIGHWAY DEVELOPMENT	STANDARD DROP MANHOLE
	APPROVAL 7-23-74 / REVISED 10-1-01 / REVISED 10-7-14	STANDARD NO. MD 383.11

PROFESSIONAL CERTIFICATION
I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND,
NAME: P.E. OSVALDO RAMOS
LICENSE: No. 57602
EXPIRATION DATE: 05-04-2027

STATE OF MARYLAND OSVALDO A. RAMOS 57602 PROFESSIONAL ENGINEER

MDE NO. 25-SF-0127 DATE: 08/26/2025

DEPARTMENT OF HEALTH & HUMAN SERVICES, USA

LSY ARCHITECTS & LABORATORY PLANNERS
James Posey Associates
TIMMONS GROUP
SGH

ARCHITECT:	LOUVIERE, STRATTON & YOKEL, LLC 8484 GEORGIA AVE, SUITE 850 SILVER SPRING, MD 20910 (301) 588-1500
MEP ENGINEER:	JAMES POSEY ASSOCIATES INC 11155 RED RUN BLVD OWINGS MILLS, MD 21117 (410) 265-6100
CIVIL ENGINEER:	TIMMONS GROUP 20110 ASHBROOK PL. SUITE 100 ASHBURN, VA 20147 (703) 554-6700
STRUCTURAL ENGINEER:	SIMPSON GUMPERTZ & HEGER 1625 EYE STREET NW SUITE 900 WASHINGTON, DC 20006 (202) 239-4199

MARK	DATE	DESCRIPTION

PRIME A/E	LSY ARCHITECTS
SUB A/E	JPA / TIMMONS / SGH
BUILDING NO.	BUILDING 31B
NAME	NIH
STREET	9000 ROCKVILLE PIKE
CITY	BETHESDA
STATE/ZIP	MD / 20892
PROJ. NO.	24024
PROJ. OFFICER	MOHAMMED BISWAS
PROJ. MGR.	G.LEE
SUBMISSION	IFC SUBMISSION
SUB. DATE	08/26/2025
WRK REQ. NO.	C116635

N

PROJECT TITLE: BUILDING 31B LANDSCAPE WATER INTRUSION

DRAWING TITLE: GENERAL NOTES & DETAILS

NIH National Institutes of Health
OFFICE OF RESEARCH FACILITIES
DIVISION OF FACILITIES PLANNING

DESIGNED BY	OR
DRAWN BY	SA
CHECKED BY	OR
DATE	08/26/2025
FILE NAME	

DRAWING NO. C-102

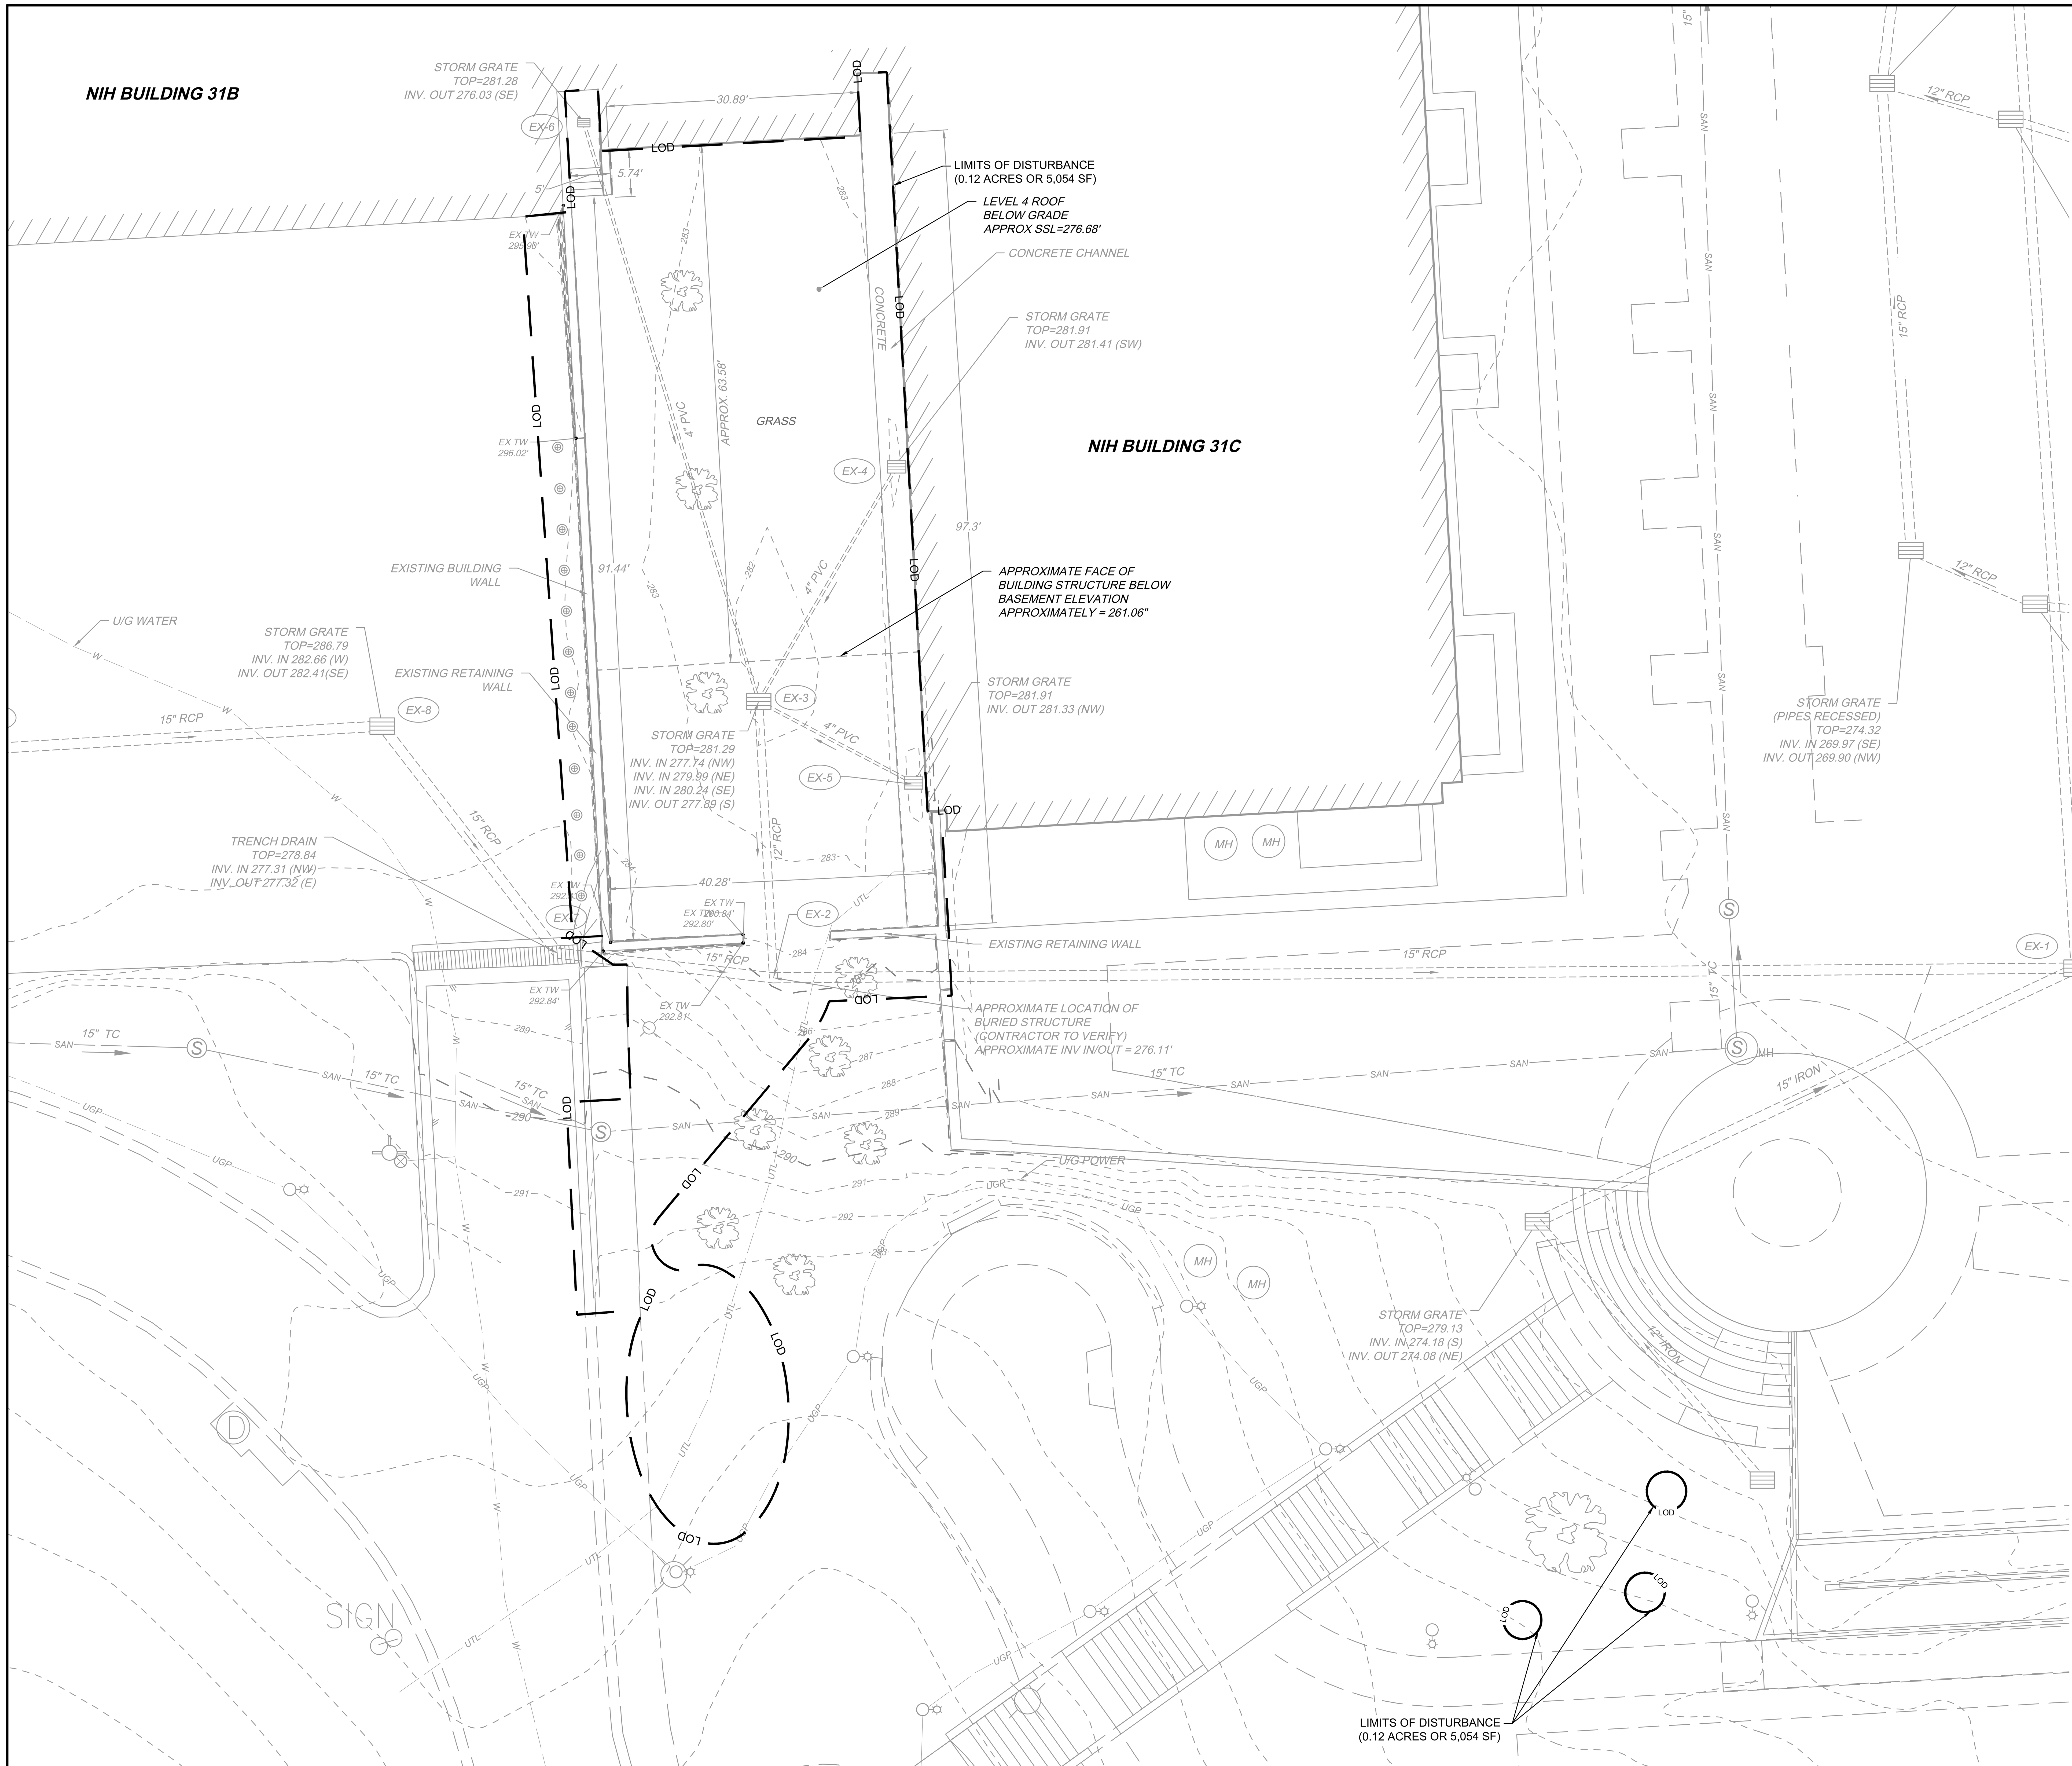

MD COORDINATE SYSTEM NAD 83/91

SCALE 1"=10'

0 10' 20'

LEGEND

- EXISTING STORM GRATE
- EXISTING STORM MANHOLE
- EXISTING BOLLARDS
- EXISTING SEWER MANHOLE
- EXISTING DECIDUOUS TREE
- EXISTING CONTROL POINT
- EXISTING STORM PIPE
- EXISTING SEWER PIPE
- EXISTING CURB AND GUTTER
- EXISTING BUILDING LINE

THIS TOPOGRAPHIC SURVEY WAS COMPLETED UNDER THE DIRECT AND RESPONSIBLE CHARGE OF JEFFREY SMERALDO PROF. L.S., FROM AN ACTUAL GROUND SURVEY MADE UNDER MY SUPERVISION AND THAT THE SURVEYING WORK REFLECTED ON THIS SURVEY IS IN COMPLIANCE WITH COMAR 09.13.06.04. THE ORIGINAL DATA WAS OBTAINED IN OCTOBER 2024. THIS PLAT, MAP AND DIGITAL GEOSPATIAL DATA INCLUDING METADATA MEETS MINIMUM ACCURACY STANDARDS UNLESS OTHERWISE NOTED.

SURVEY NOTES:

1. THIS SURVEY WAS PREPARED WITHOUT THE BENEFIT OF A TITLE REPORT. NO BOUNDARY INFORMATION IS SHOWN HEREON.
2. BASIS OF MERIDIAN: MD NAD83/91
   VERTICAL DATUM: NAVD88
   DATUM AND MERIDIAN WERE ESTABLISHED BY GPS OBSERVATIONS.
3. TOPOGRAPHIC FIELD WORK COMPLETED SEPTEMBER 19, 2024.
4. STORM AND SANITARY PIPE DIRECTION/CONNECTIONS ARE SHOWN PER PROVIDED RECORD CAD FILES AND FIELD VERIFIED IN AS SO MUCH AS POSSIBLE.

U/G UTILITY DESIGNATION NOTES:

1) U/G UTILITY DESIGNATION PERFORMED BY TIMMONS GROUP AND COMPLETED IN OCTOBER OF 2024.

2) ALL U/G UTILITIES FOUND ON-SITE ARE DESIGNATED AS QUALITY LEVEL B UNLESS OTHERWISE NOTED.

EOI = END OF INFORMATION FOR CONDUCTIVE UTILITY FIELD SIGNALS.

QLD - DATR = QUALITY LEVEL D DATA ACCORDING TO RECORDS.

QLC = QUALITY LEVEL C SHOWING AN APPROXIMATE LOCATION OF U/G UTILITY LINES BASED ON ABOVE GROUND UTILITY APPURTENANCES AND MAPPING (QLD).

PROFESSIONAL CERTIFICATION

I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND,
NAME: P.E. OSVALDO RAMOS
LICENSE: No. 57602
EXPIRATION DATE: 05-04-2027

STATE OF MARYLAND
OSVALDO A. RAMOS
57602
PROFESSIONAL ENGINEER

MDE NO. 25-SF-0127 **DATE: 08/26/2025**

DEPARTMENT OF HEALTH & HUMAN SERVICES, USA

LSY ARCHITECTS & LABORATORY PLANNERS

James Posey Associates — Engineering Your Vision

TIMMONS GROUP

SGH

Architect and Engineer Name and LOGO

ARCHITECT:	LOUVIERE, STRATTON & YOKEL, LLC 8484 GEORGIA AVE, SUITE 650 SILVER SPRING, MD 20910 (301) 588-1500
MEP ENGINEER:	JAMES POSEY ASSOCIATES INC 11155 RED RUN BLVD OWINGS MILLS, MD 21117 (410) 265-6100
CIVIL ENGINEER:	TIMMONS GROUP 20110 ASHBROOK PL, SUITE 100 ASHBURN, VA 20147 (703) 554-6700
STRUCTURAL ENGINEER:	SIMPSON GUMPERTZ & HEGER 1625 EYE STREET NW SUITE 900 WASHINGTON, DC 20006 (202) 239-4199

SEAL

REVISIONS

MARK	DATE	DESCRIPTION

CONTRACTORS

A/E CON. NO.	
A/E TASK NO.	
CONS. CONTR.	
CONS. WORK	
PRIME A/E	LSY ARCHITECTS
SUB A/E	JPA / TIMMONS / SGH
CONSTR. CON.	

BUILDING

FACILITY CODE	
BUILDING NO.	BUILDING 31B
NAME	NIH
STREET	9000 ROCKVILLE PIKE
CITY	BETHESDA
STATE/ZIP	MD / 20892
OTHER BUILDING NO.	

PROJECT

PROJ. NO.	24024
PROJ. OFFICER	MOHAMMED BISWAS
PROJ. MGR.	G.LEE
SUBMISSION	IFC SUBMISSION
SUB. DATE	08/26/2025
WRK REQ. NO.	C116635

N

PROJECT TITLE: BUILDING 31B LANDSCAPE WATER INTRUSION

DRAWING TITLE: EXISTING CONDITIONS PLAN

NIH
National Institutes of Health
OFFICE OF RESEARCH FACILITIES
DIVISION OF FACILITIES PLANNING

DESIGNED BY	OR
DRAWN BY	SA
CHECKED BY	OR
DATE	08/26/2025
FILE NAME	

DRAWING NO. C-200

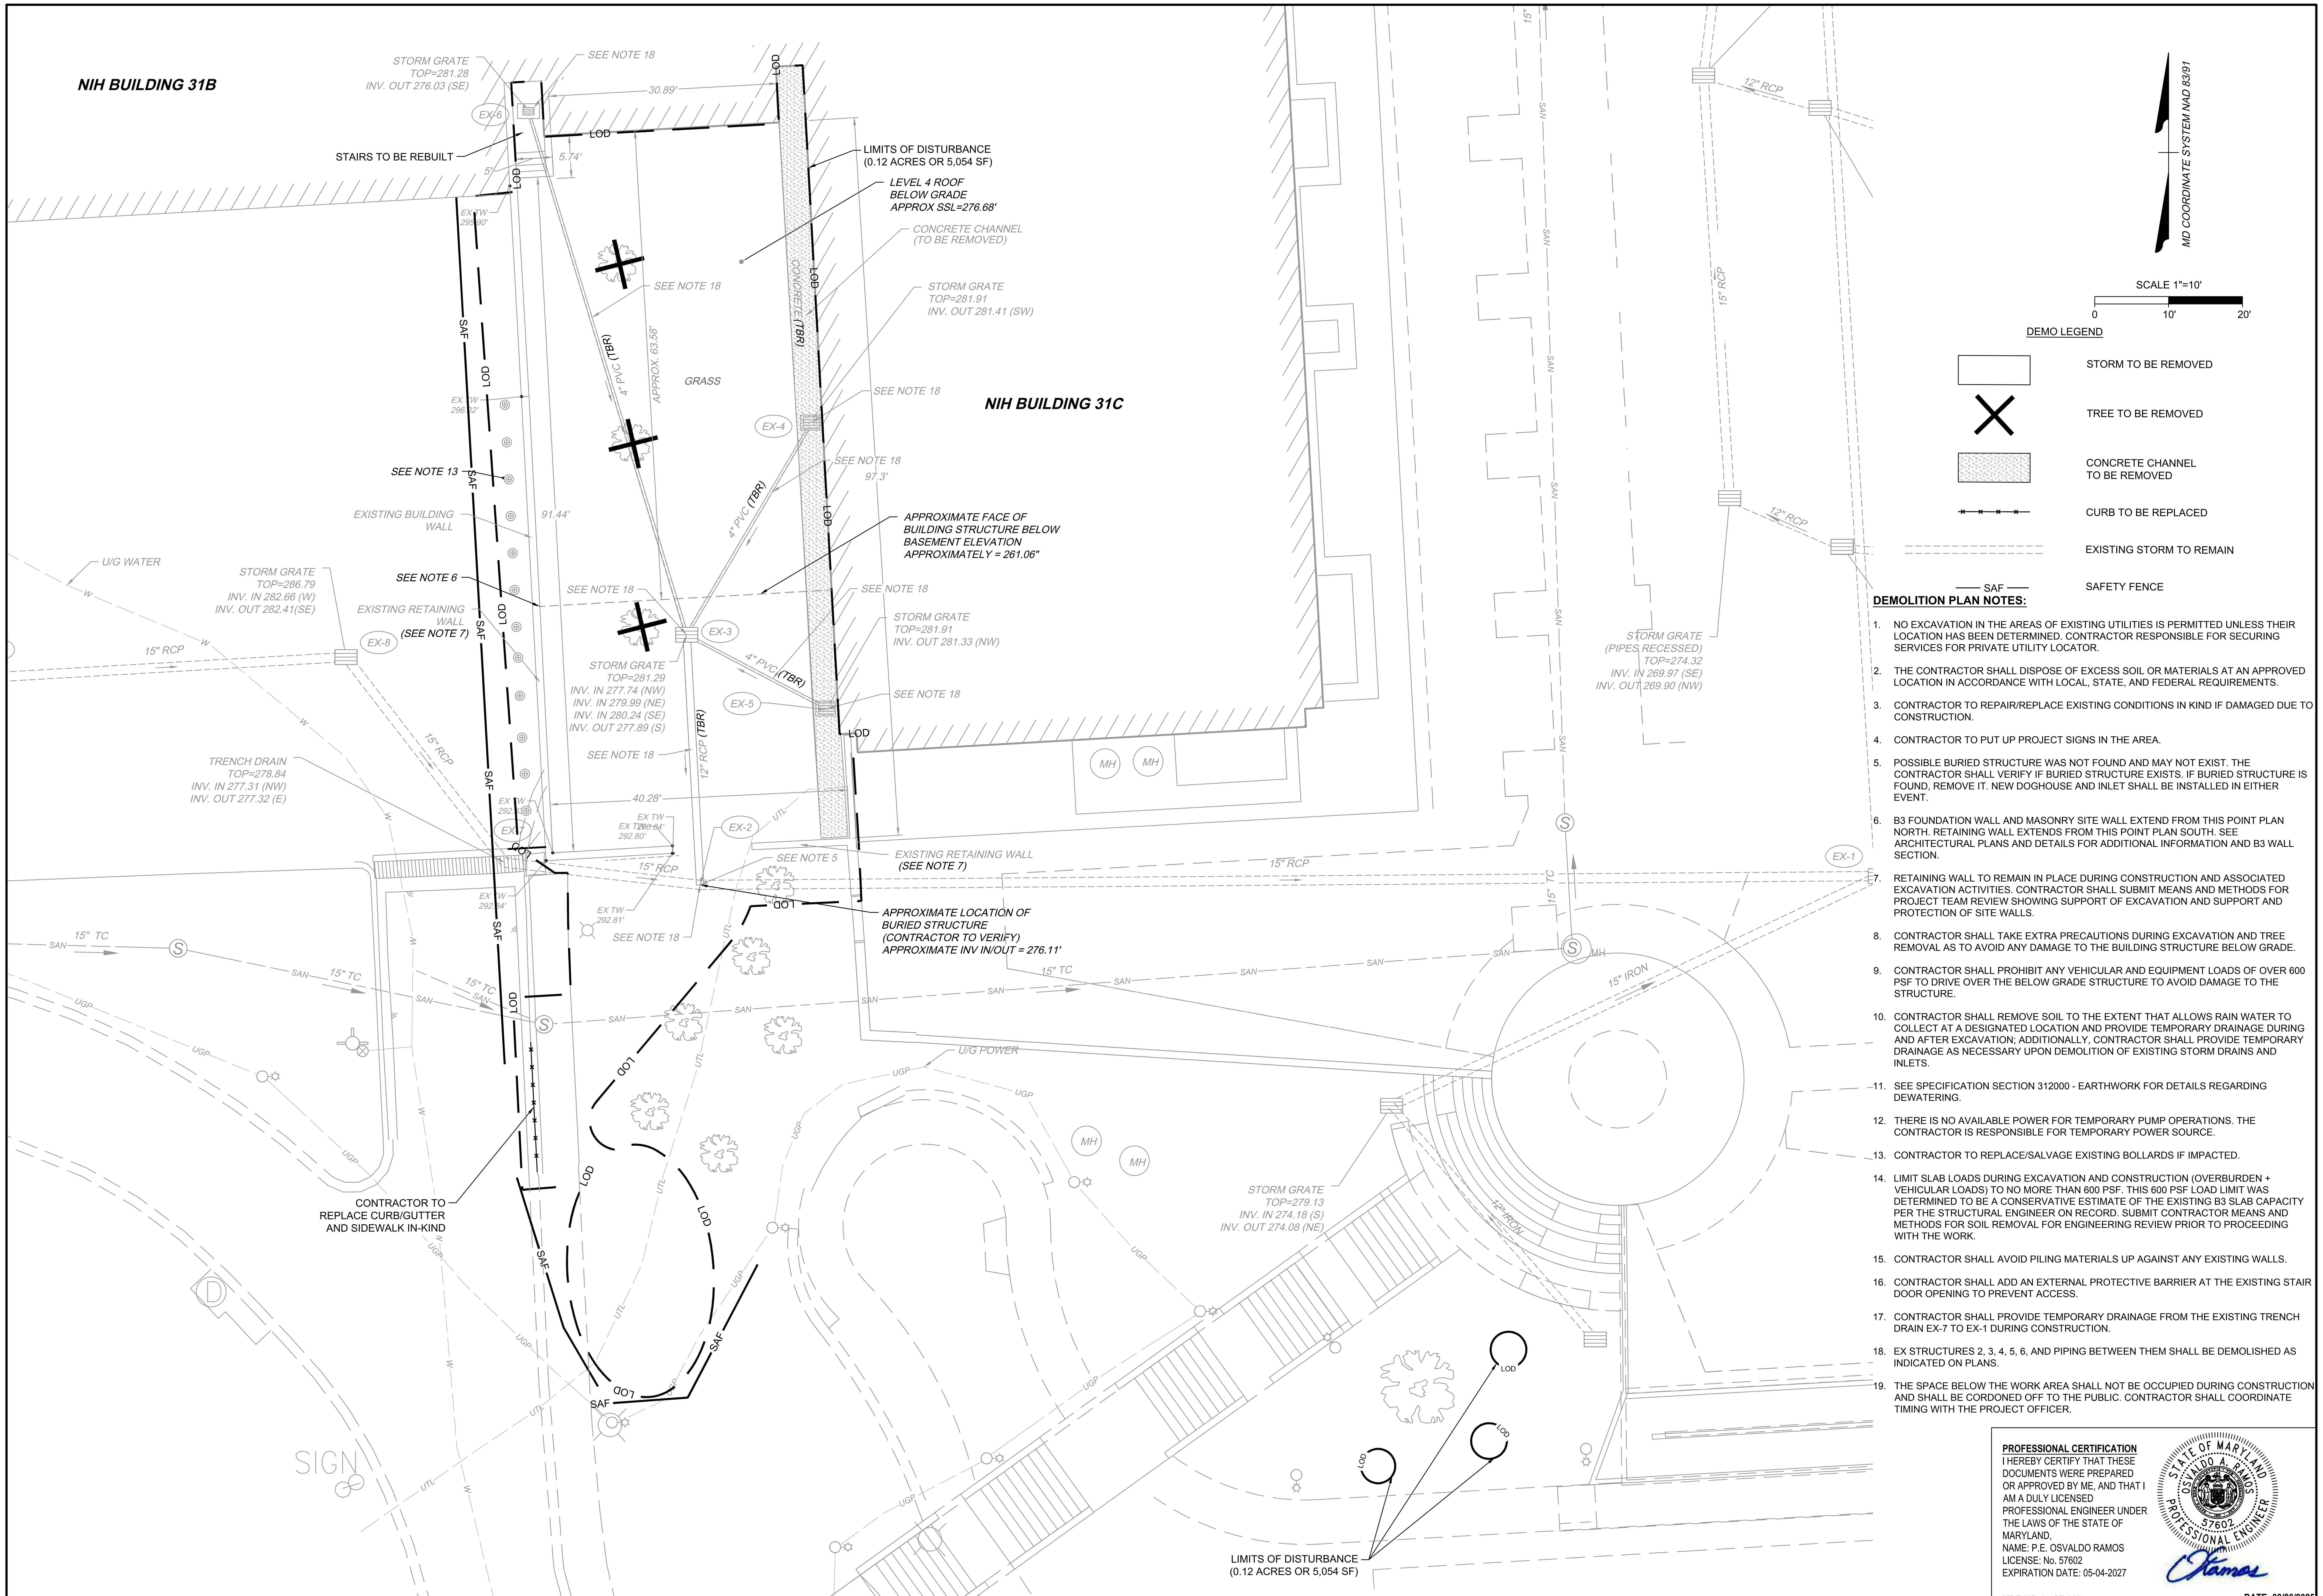

DEMO LEGEND

	STORM TO BE REMOVED
	TREE TO BE REMOVED
	CONCRETE CHANNEL TO BE REMOVED
	CURB TO BE REPLACED
	EXISTING STORM TO REMAIN
SAF	SAFETY FENCE

DEMOLITION PLAN NOTES:

1. NO EXCAVATION IN THE AREAS OF EXISTING UTILITIES IS PERMITTED UNLESS THEIR LOCATION HAS BEEN DETERMINED. CONTRACTOR RESPONSIBLE FOR SECURING SERVICES FOR PRIVATE UTILITY LOCATOR.
2. THE CONTRACTOR SHALL DISPOSE OF EXCESS SOIL OR MATERIALS AT AN APPROVED LOCATION IN ACCORDANCE WITH LOCAL, STATE, AND FEDERAL REQUIREMENTS.
3. CONTRACTOR TO REPAIR/REPLACE EXISTING CONDITIONS IN KIND IF DAMAGED DUE TO CONSTRUCTION.
4. CONTRACTOR TO PUT UP PROJECT SIGNS IN THE AREA.
5. POSSIBLE BURIED STRUCTURE WAS NOT FOUND AND MAY NOT EXIST. THE CONTRACTOR SHALL VERIFY IF BURIED STRUCTURE EXISTS. IF BURIED STRUCTURE IS FOUND, REMOVE IT. NEW DOGHOUSE AND INLET SHALL BE INSTALLED IN EITHER EVENT.
6. B3 FOUNDATION WALL AND MASONRY SITE WALL EXTEND FROM THIS POINT PLAN NORTH. RETAINING WALL EXTENDS FROM THIS POINT PLAN SOUTH. SEE ARCHITECTURAL PLANS AND DETAILS FOR ADDITIONAL INFORMATION AND B3 WALL SECTION.
7. RETAINING WALL TO REMAIN IN PLACE DURING CONSTRUCTION AND ASSOCIATED EXCAVATION ACTIVITIES. CONTRACTOR SHALL SUBMIT MEANS AND METHODS FOR PROJECT TEAM REVIEW SHOWING SUPPORT OF EXCAVATION AND SUPPORT AND PROTECTION OF SITE WALLS.
8. CONTRACTOR SHALL TAKE EXTRA PRECAUTIONS DURING EXCAVATION AND TREE REMOVAL AS TO AVOID ANY DAMAGE TO THE BUILDING STRUCTURE BELOW GRADE.
9. CONTRACTOR SHALL PROHIBIT ANY VEHICULAR AND EQUIPMENT LOADS OF OVER 600 PSF TO DRIVE OVER THE BELOW GRADE STRUCTURE TO AVOID DAMAGE TO THE STRUCTURE.
10. CONTRACTOR SHALL REMOVE SOIL TO THE EXTENT THAT ALLOWS RAIN WATER TO COLLECT AT A DESIGNATED LOCATION AND PROVIDE TEMPORARY DRAINAGE DURING AND AFTER EXCAVATION; ADDITIONALLY, CONTRACTOR SHALL PROVIDE TEMPORARY DRAINAGE AS NECESSARY UPON DEMOLITION OF EXISTING STORM DRAINS AND INLETS.
11. SEE SPECIFICATION SECTION 312000 - EARTHWORK FOR DETAILS REGARDING DEWATERING.
12. THERE IS NO AVAILABLE POWER FOR TEMPORARY PUMP OPERATIONS. THE CONTRACTOR IS RESPONSIBLE FOR TEMPORARY POWER SOURCE.
13. CONTRACTOR TO REPLACE/SALVAGE EXISTING BOLLARDS IF IMPACTED.
14. LIMIT SLAB LOADS DURING EXCAVATION AND CONSTRUCTION (OVERBURDEN + VEHICULAR LOADS) TO NO MORE THAN 600 PSF. THIS 600 PSF LOAD LIMIT WAS DETERMINED TO BE A CONSERVATIVE ESTIMATE OF THE EXISTING B3 SLAB CAPACITY PER THE STRUCTURAL ENGINEER ON RECORD. SUBMIT CONTRACTOR MEANS AND METHODS FOR SOIL REMOVAL FOR ENGINEERING REVIEW PRIOR TO PROCEEDING WITH THE WORK.
15. CONTRACTOR SHALL AVOID PILING MATERIALS UP AGAINST ANY EXISTING WALLS.
16. CONTRACTOR SHALL ADD AN EXTERNAL PROTECTIVE BARRIER AT THE EXISTING STAIR DOOR OPENING TO PREVENT ACCESS.
17. CONTRACTOR SHALL PROVIDE TEMPORARY DRAINAGE FROM THE EXISTING TRENCH DRAIN EX-7 TO EX-1 DURING CONSTRUCTION.
18. EX STRUCTURES 2, 3, 4, 5, 6, AND PIPING BETWEEN THEM SHALL BE DEMOLISHED AS INDICATED ON PLANS.
19. THE SPACE BELOW THE WORK AREA SHALL NOT BE OCCUPIED DURING CONSTRUCTION AND SHALL BE CORDONED OFF TO THE PUBLIC. CONTRACTOR SHALL COORDINATE TIMING WITH THE PROJECT OFFICER.

PROFESSIONAL CERTIFICATION
I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND,
NAME: P.E. OSVALDO RAMOS
LICENSE: No. 57602
EXPIRATION DATE: 05-04-2027

STATE OF MARYLAND · OSVALDO A. RAMOS · 57602 · PROFESSIONAL ENGINEER

MDE NO. 25-SF-0127 DATE: 08/26/2025

PROPERTY OF THE UNITED STATES GOVERNMENT
FOR OFFICIAL USE ONLY
Do not remove this notice
Properly destroy documents when no longer needed

DEPARTMENT OF HEALTH & HUMAN SERVICES, USA

LSY ARCHITECTS & LABORATORY PLANNERS

James Posey Associates — Engineering Your Vision

TIMMONS GROUP

SGH

Architect and Engineer Name and Logo

SEAL

ARCHITECT:	LOUVIERE, STRATTON & YOKEL, LLC 8484 GEORGIA AVE, SUITE 650 SILVER SPRING, MD 20910 (301) 588-1500
MEP ENGINEER:	JAMES POSEY ASSOCIATES INC 11155 RED RUN BLVD OWINGS MILLS, MD 21117 (410) 265-6100
CIVIL ENGINEER:	TIMMONS GROUP 20110 ASHBROOK PL, SUITE 100 ASHBURN, VA 20147 (703) 554-6700
STRUCTURAL ENGINEER:	SIMPSON GUMPERTZ & HEGER 1625 EYE STREET NW SUITE 900 WASHINGTON, DC 20006 (202) 239-4199

REVISIONS

MARK	DATE	DESCRIPTION

CONTRACTORS

A/E CON. NO.	
A/E TASK NO.	
CONS. CONTR.	
CONS. WORK	
PRIME A/E	LSY ARCHITECTS
SUB A/E	JPA / TIMMONS / SGH
CONSTR. CON.	

BUILDING

FACILITY CODE	
BUILDING NO.	BUILDING 31B
NAME	NIH
STREET	9000 ROCKVILLE PIKE
CITY	BETHESDA
STATE/ZIP	MD / 20892
OTHER BUILDING NO.	

PROJECT

PROJ. NO.	24024
PROJ. OFFICER	MOHAMMED BISWAS
PROJ. MGR.	G.LEE
SUBMISSION	IFC SUBMISSION
SUB. DATE	08/26/2025
WRK REQ. NO.	C116635

N

PROJECT TITLE: BUILDING 31B LANDSCAPE WATER INTRUSION

DRAWING TITLE: DEMOLITION PLAN

NIH National Institutes of Health
OFFICE OF RESEARCH FACILITIES
DIVISION OF FACILITIES PLANNING

DESIGNED BY	OR
DRAWN BY	SA
CHECKED BY	OR
DATE	08/26/2025
FILE NAME	

DRAWING NO. C-201

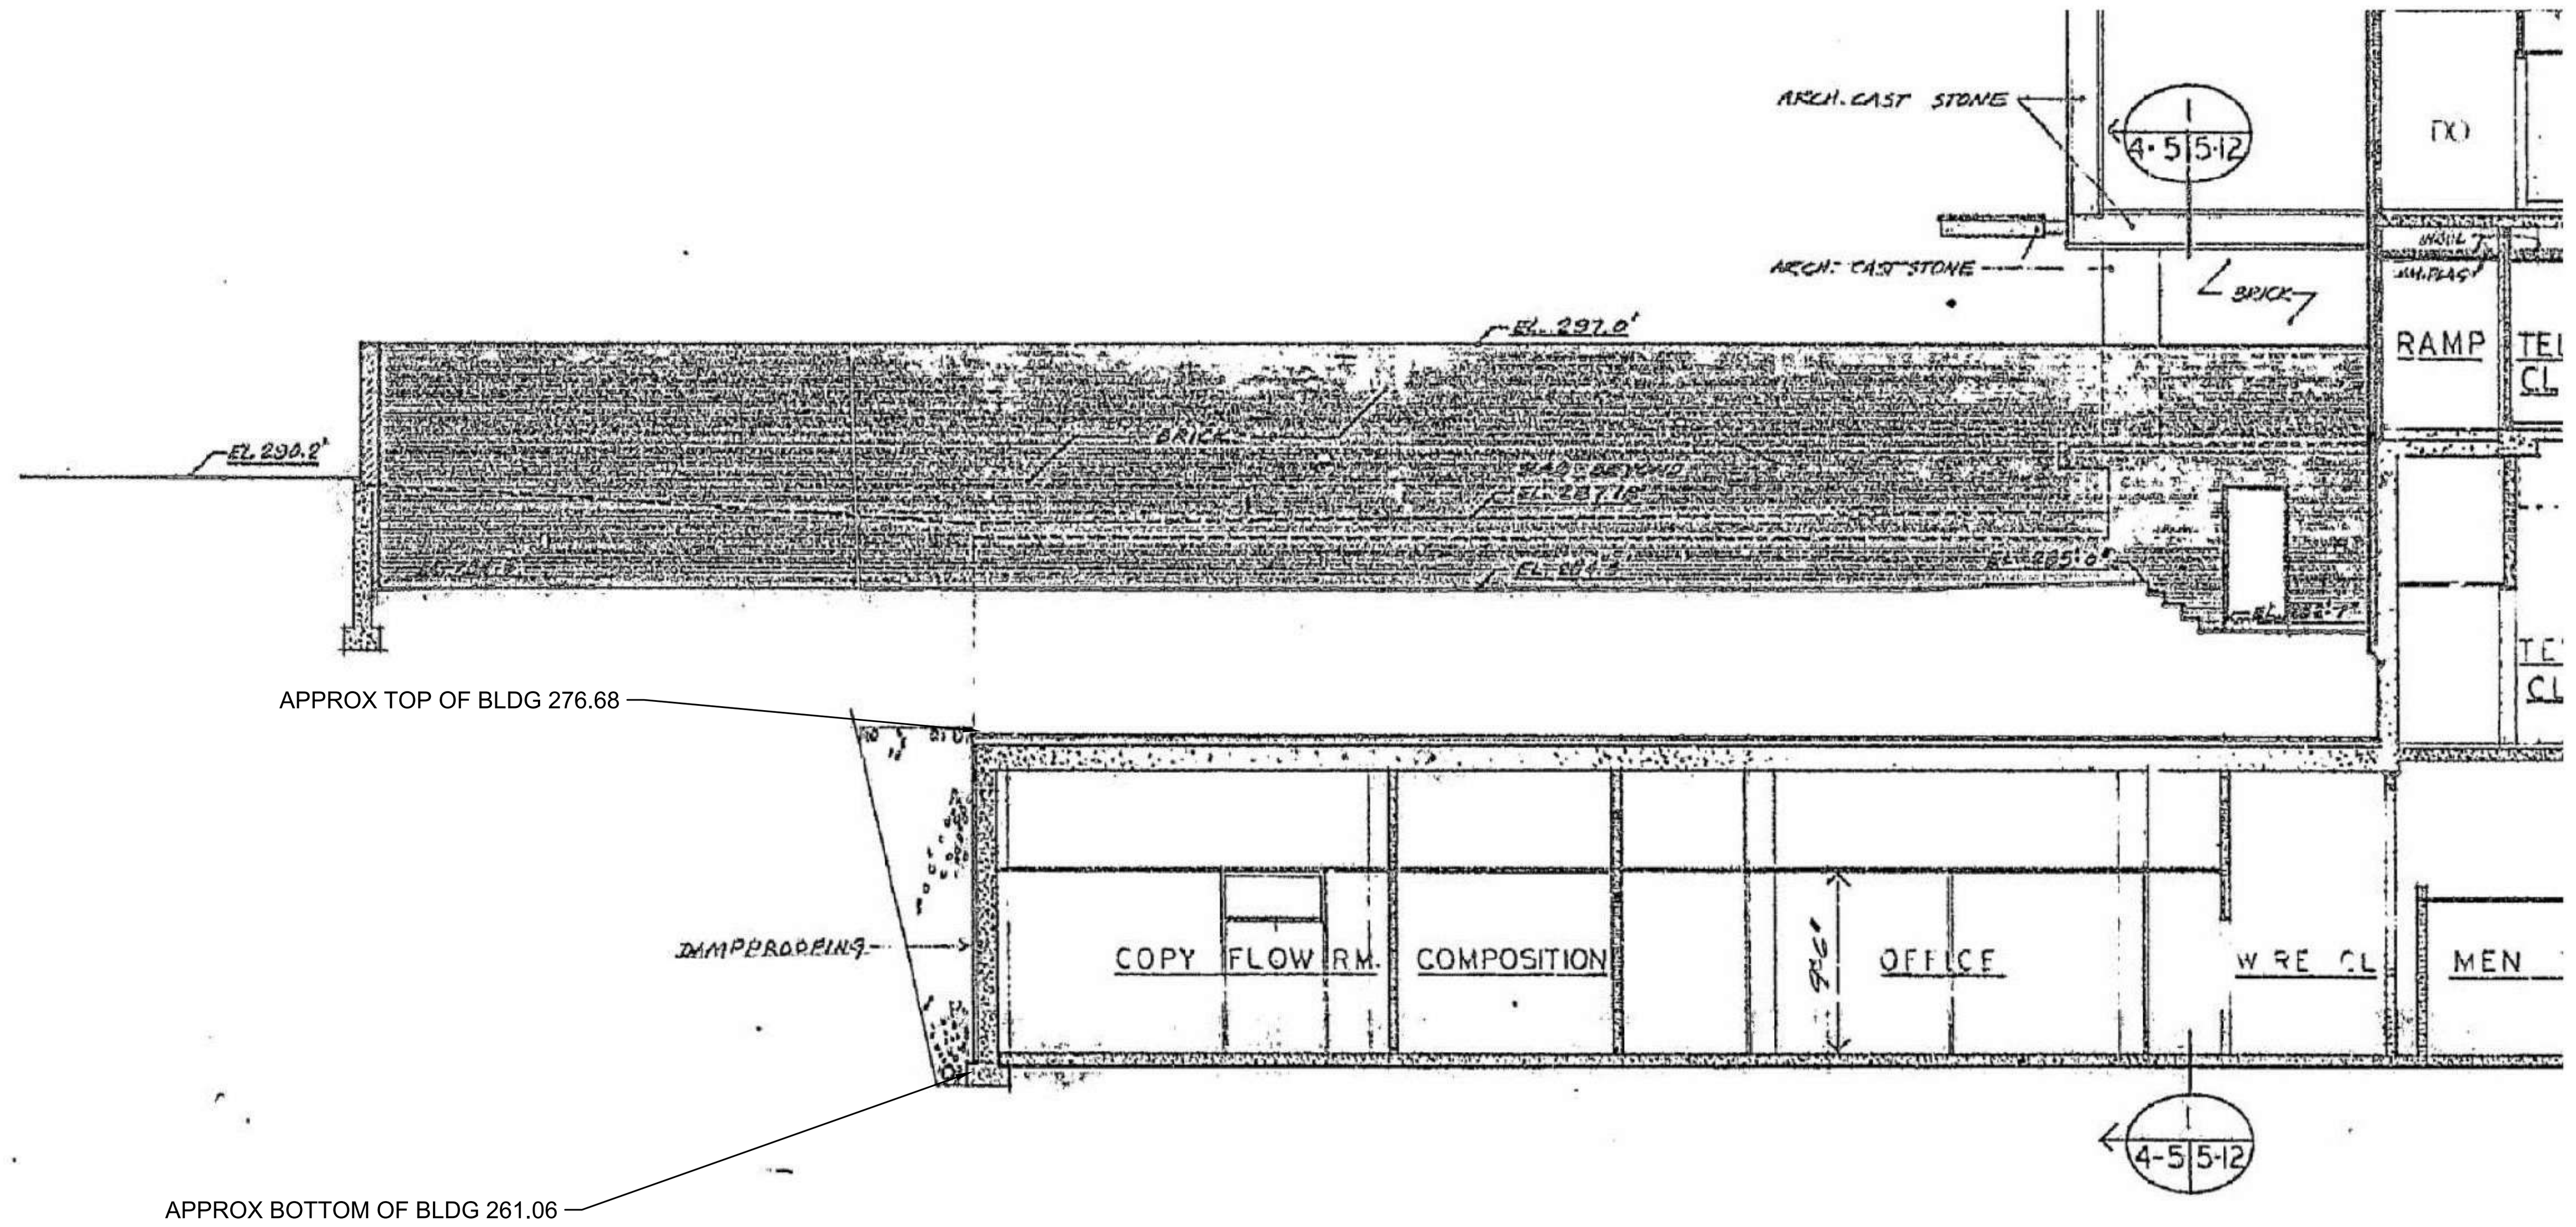

APPROX TOP OF BLDG 276.68

APPROX BOTTOM OF BLDG 261.06

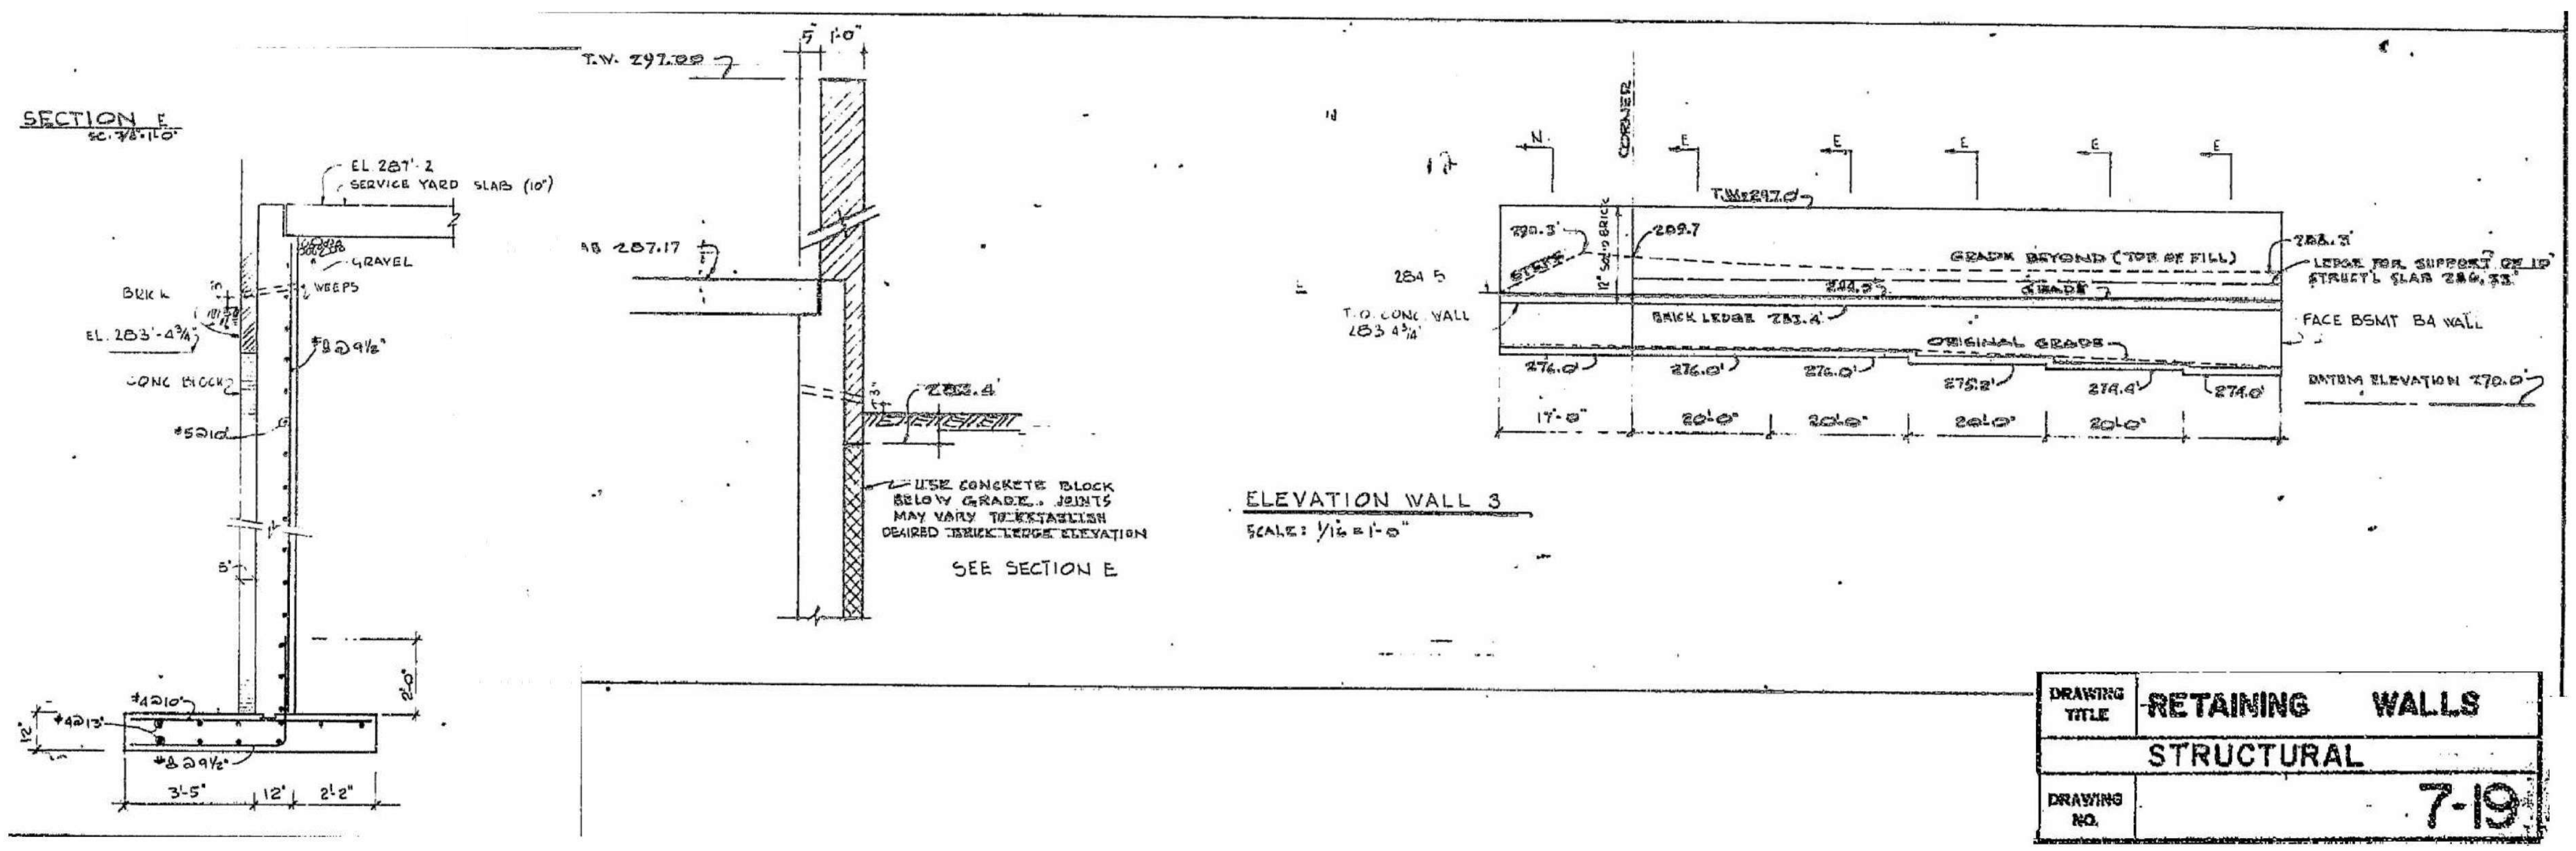

ORIGINAL BUILDING DETAILS. THIS IS FOR INFORMATIONAL PURPOSES ONLY.

PROFESSIONAL CERTIFICATION
I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND,
NAME: P.E. OSVALDO RAMOS
LICENSE: No. 57602
EXPIRATION DATE: 05-04-2027

STATE OF MARYLAND OSVALDO A. RAMOS 57602 PROFESSIONAL ENGINEER

MDE NO. 25-SF-0127

DATE: 08/26/2025

DEPARTMENT OF HEALTH & HUMAN SERVICES, USA

LSY ARCHITECTS & LABORATORY PLANNERS

James Posey Associates Engineering Your Vision

TIMMONS GROUP

SGH

Architect and Engineer Name and LOGO

ARCHITECT:	LOUVIERE, STRATTON & YOKEL, LLC 8484 GEORGIA AVE, SUITE 650 SILVER SPRING, MD 20910 (301) 588-1500
MEP ENGINEER:	JAMES POSEY ASSOCIATES INC 11155 RED RUN BLVD OWINGS MILLS, MD 21117 (410) 265-6100
CIVIL ENGINEER:	TIMMONS GROUP 20110 ASHBROOK PL, SUITE 100 ASHBURN, VA 20147 (703) 554-6700
STRUCTURAL ENGINEER:	SIMPSON GUMPERTZ & HEGER 1625 EYE STREET NW SUITE 900 WASHINGTON, DC 20006 (202) 239-4199

SEAL

REVISIONS

MARK	DATE	DESCRIPTION

CONTRACTORS

A/E CON. NO.	
A/E TASK NO.	
CONS. CONTR.	
CONS. WORK	
PRIME A/E	LSY ARCHITECTS
SUB A/E	JPA / TIMMONS / SGH
CONSTR. CON.	

BUILDING

FACILITY CODE	
BUILDING NO.	BUILDING 31B
NAME	NIH
STREET	9000 ROCKVILLE PIKE
CITY	BETHESDA
STATE/ZIP	MD / 20892
OTHER BUILDING NO.	

PROJECT

PROJ. NO.	24024
PROJ. OFFICER	MOHAMMED BISWAS
PROJ. MGR.	G.LEE
SUBMISSION	IFC SUBMISSION
SUB. DATE	08/26/2025
WRK REQ. NO.	C116635

N

PROJECT TITLE: BUILDING 31B LANDSCAPE WATER INTRUSION

DRAWING TITLE: EXISTING BUILDING DETAILS

NIH National Institutes of Health
OFFICE OF RESEARCH FACILITIES
DIVISION OF FACILITIES PLANNING

DESIGNED BY	OR
DRAWN BY	SA
CHECKED BY	OR
DATE	08/26/2025
FILE NAME	

DRAWING NO. C-202

EROSION AND SEDIMENT CONTROL LEGEND

SYMBOL	DESCRIPTION	MDE #
SCE	CONSTRUCTION ENTRANCE WITH WASH RACK	B-1, B-2
LOD	LIMITS OF DISTURBANCE	
	STANDARD INLET PROTECTION (TYPE A)	E-9-1
TP	TREE PROTECTION	
SSF	SUPER SILT FENCE	E-3
	DRAINAGE DIVIDE	
SAF	SAFETY FENCE	

EROSION AND SEDIMENT CONTROL NOTES:

1. NO EXCAVATION IN THE AREAS OF EXISTING UTILITIES IS PERMITTED UNLESS THEIR LOCATION HAS BEEN DETERMINED. CALL "MISS UTILITY" AT 1-800-257-7777, 48 HOURS PRIOR TO WORK.
2. CONTRACTOR IS RESPONSIBLE FOR DISPOSING OF EXCESS SOIL OR MATERIALS AT AN APPROVED LOCATION IN ACCORDANCE WITH LOCAL, STATE, AND FEDERAL REQUIREMENTS.
3. SEE SEQUENCE OF CONSTRUCTION ON C-302.
4. ANY EXCESS SOIL THAT WILL NOT BE REUSED ON THE SITE SHALL BE HAULED OFF.
5. LIMIT SLAB LOADS DURING EXCAVATION AND CONSTRUCTION (OVERBURDEN + VEHICULAR LOADS) TO NO MORE THAN 600 PSF. SUBMIT CONTRACTOR MEANS AND METHODS FOR SOIL REMOVAL FOR ENGINEERING REVIEW PRIOR TO PROCEEDING WITH THE WORK.
6. IMMEDIATELY REMOVE STONE AND/OR SEDIMENT SPILLED, DROPPED, OR TRACKED ONTO ADJACENT ROADWAY BY VACUUMING, SCRAPING, AND/OR SWEEPING. WASHING ROADWAY TO REMOVE MUD TRACKED ONTO PAVEMENT IS NOT ACCEPTABLE UNLESS WASH WATER IS DIRECTED TO AN APPROVED SEDIMENT CONTROL PRACTICE.
7. CONTRACTOR SHALL COORDINATE LOCATION OF CONSTRUCTION ENTRANCE RIPRAP TO AVOID DAMAGE TO THE EXISTING WALLS AND OTHER NEARBY OBJECTS.

PROFESSIONAL CERTIFICATION
I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND.
NAME: P.E. OSVALDO RAMOS
LICENSE: No. 57602
EXPIRATION DATE: 05-04-2027

STATE OF MARYLAND · OSVALDO A. RAMOS · 57602 · PROFESSIONAL ENGINEER

MDE NO. 25-SF-0127

DATE: 08/26/2025

DEPARTMENT OF HEALTH & HUMAN SERVICES, USA

LSY ARCHITECTS & LABORATORY PLANNERS

James Posey Associates — Engineering Your Vision

TIMMONS GROUP

SGH

Architect and Engineer Name and LOGO

ARCHITECT:	LOUVIERE, STRATTON & YOKEL, LLC 8484 GEORGIA AVE, SUITE 650 SILVER SPRING, MD 20910 (301) 588-1500
MEP ENGINEER:	JAMES POSEY ASSOCIATES INC 11155 RED RUN BLVD OWINGS MILLS, MD 21117 (410) 265-6100
CIVIL ENGINEER:	TIMMONS GROUP 20110 ASHBROOK PL, SUITE 100 ASHBURN, VA 20147 (703) 554-6700
STRUCTURAL ENGINEER:	SIMPSON GUMPERTZ & HEGER 1625 EYE STREET NW SUITE 900 WASHINGTON, DC 20006 (202) 239-4199

SEAL

REVISIONS

MARK	DATE	DESCRIPTION

CONTRACTORS

A/E CON. NO.	
A/E TASK NO.	
CONS. CONTR.	
CONS. WORK	
PRIME A/E	LSY ARCHITECTS
SUB A/E	JPA / TIMMONS / SGH
CONSTR. CON.	

BUILDING

FACILITY CODE	
BUILDING NO.	BUILDING 31B
NAME	NIH
STREET	9000 ROCKVILLE PIKE
CITY	BETHESDA
STATE/ZIP	MD / 20892
OTHER BUILDING NO.	

PROJECT

PROJ. NO.	24024
PROJ. OFFICER	MOHAMMED BISWAS
PROJ. MGR.	G.LEE
SUBMISSION	IFC SUBMISSION
SUB. DATE	08/26/2025
WRK REQ. NO.	C116635

N

PROJECT TITLE: BUILDING 31B LANDSCAPE WATER INTRUSION

DRAWING TITLE: EROSION & SEDIMENT CONTROL PLAN - PHASE I

NIH
National Institutes of Health
OFFICE OF RESEARCH FACILITIES
DIVISION OF FACILITIES PLANNING

DESIGNED BY	OR
DRAWN BY	SA
CHECKED BY	OR
DATE	08/26/2025
FILE NAME	

DRAWING

DRAWING NO. C-300

EROSION AND SEDIMENT CONTROL LEGEND

SYMBOL	DESCRIPTION	MDE #
SCE	CONSTRUCTION ENTRANCE WITH WASH RACK	B-1, B-2
LOD	LIMITS OF DISTURBANCE	
	STANDARD INLET PROTECTION (TYPE A)	E-9-1
TP	TREE PROTECTION	
SSF	SUPER SILT FENCE	E-3
	DRAINAGE DIVIDE	
SAF	SAFETY FENCE	

EROSION AND SEDIMENT CONTROL NOTES:

1. NO EXCAVATION IN THE AREAS OF EXISTING UTILITIES IS PERMITTED UNLESS THEIR LOCATION HAS BEEN DETERMINED. CALL "MISS UTILITY" AT 1-800-257-7777, 48 HOURS PRIOR TO WORK.
2. CONTRACTOR IS RESPONSIBLE FOR DISPOSING OF EXCESS SOIL OR MATERIALS AT AN APPROVED LOCATION IN ACCORDANCE WITH LOCAL, STATE, AND FEDERAL REQUIREMENTS.
3. SEE SEQUENCE OF CONSTRUCTION ON C-302.
4. ANY EXCESS SOIL THAT WILL NOT BE REUSED ON THE SITE SHALL BE HAULED OFF.
5. LIMIT SLAB LOADS DURING EXCAVATION AND CONSTRUCTION (OVERBURDEN + VEHICULAR LOADS) TO NO MORE THAN 600 PSF. SUBMIT CONTRACTOR MEANS AND METHODS FOR SOIL REMOVAL FOR ENGINEERING REVIEW PRIOR TO PROCEEDING WITH THE WORK.
6. IMMEDIATELY REMOVE STONE AND/OR SEDIMENT SPILLED, DROPPED, OR TRACKED ONTO ADJACENT ROADWAY BY VACUUMING, SCRAPING, AND/OR SWEEPING. WASHING ROADWAY TO REMOVE MUD TRACKED ONTO PAVEMENT IS NOT ACCEPTABLE UNLESS WASH WATER IS DIRECTED TO AN APPROVED SEDIMENT CONTROL PRACTICE.
7. CONTRACTOR SHALL COORDINATE LOCATION OF CONSTRUCTION ENTRANCE RIPRAP TO AVOID DAMAGE TO THE EXISTING WALLS AND OTHER NEARBY OBJECTS.

PROFESSIONAL CERTIFICATION
I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND,
NAME: P.E. OSVALDO RAMOS
LICENSE: No. 57602
EXPIRATION DATE: 05-04-2027

STATE OF MARYLAND OSVALDO A. RAMOS 57602 PROFESSIONAL ENGINEER

MDE NO. 25-SF-0127
DATE: 08/26/2025

DEPARTMENT OF HEALTH & HUMAN SERVICES, USA

LSY ARCHITECTS & LABORATORY PLANNERS
James Posey Associates Engineering Your Vision
TIMMONS GROUP
SGH

Architect and Engineer Name and LOGO

ARCHITECT: LOUVIERE, STRATTON & YOKEL, LLC
8484 GEORGIA AVE, SUITE 650
SILVER SPRING, MD 20910
(301) 588-1500

MEP ENGINEER: JAMES POSEY ASSOCIATES INC
11155 RED RUN BLVD
OWINGS MILLS, MD 21117
(410) 265-6100

CIVIL ENGINEER: TIMMONS GROUP
20110 ASHBROOK PL, SUITE 100
ASHBURN, VA 20147
(703) 554-6700

STRUCTURAL ENGINEER: SIMPSON GUMPERTZ & HEGER
1625 EYE STREET NW SUITE 900
WASHINGTON, DC 20006
(202) 239-4199

SEAL

REVISIONS

MARK	DATE	DESCRIPTION

CONTRACTORS

A/E CON. NO.	
A/E TASK NO.	
CONS. CONTR.	
CONS. WORK	
PRIME A/E	LSY ARCHITECTS
SUB A/E	JPA / TIMMONS / SGH
CONSTR. CON.	

BUILDING

FACILITY CODE	
BUILDING NO.	BUILDING 31B
NAME	NIH
STREET	9000 ROCKVILLE PIKE
CITY	BETHESDA
STATE/ZIP	MD / 20892
OTHER BUILDING NO.	

PROJECT

PROJ. NO.	24024
PROJ. OFFICER	MOHAMMED BISWAS
PROJ. MGR.	G.LEE
SUBMISSION	IFC SUBMISSION
SUB. DATE	08/26/2025
WRK REQ. NO.	C116635

N

PROJECT TITLE: BUILDING 31B LANDSCAPE WATER INTRUSION

DRAWING TITLE: EROSION & SEDIMENT CONTROL PLAN - PHASE II

NIH National Institutes of Health
OFFICE OF RESEARCH FACILITIES
DIVISION OF FACILITIES PLANNING

DESIGNED BY	OR
DRAWN BY	SA
CHECKED BY	OR
DATE	08/26/2025
FILE NAME	

DRAWING NO. C-301

STANDARD MDE EROSION AND SEDIMENT CONTROL GENERAL NOTES

MDE REQUIRES THAT THESE NOTES, IN THEIR ENTIRETY, BE INCLUDED ON THE EROSION AND SEDIMENT CONTROL PLAN. IT IS RECOGNIZED THAT NOT EVERY NOTE MAY APPLY TO ALL PROJECTS. THE REQUIREMENT OF ANY INDIVIDUAL NOTE NOT APPLICABLE TO THE SUBJECT PROJECT IS NOT BINDING UPON THE APPLICANT OR THE APPLICANT'S CONTRACTOR.

EROSION AND SEDIMENT CONTROL GENERAL NOTES

1. THE CONTRACTOR SHALL NOTIFY MDE AT (410) 537-3510 SEVEN (7) DAYS BEFORE COMMENCING ANY LAND DISTURBING ACTIVITY AND, UNLESS WAIVED BY MDE, SHALL BE REQUIRED TO HOLD A PRECONSTRUCTION MEETING BETWEEN PROJECT REPRESENTATIVES AND A REPRESENTATIVE OF MDE.

2. THE CONTRACTOR SHALL NOTIFY MDE IN WRITING AND BY TELEPHONE AT THE FOLLOWING POINTS:
   A.THE REQUIRED PRE-CONSTRUCTION MEETING.
   B. FOLLOWING INSTALLATION OF SEDIMENT CONTROL MEASURES.
   C. DURING THE INSTALLATION OF SEDIMENT BASINS (TO BE CONVERTED INTO PERMANENT STORMWATER MANAGEMENT STRUCTURES) AT THE REQUIRED INSPECTION POINTS (SEE INSPECTION CHECKLIST ON PLAN). NOTIFICATION PRIOR TO COMMENCING CONSTRUCTION OF EACH STEP IS MANDATORY.
   D. PRIOR TO REMOVAL OR MODIFICATION OF ANY SEDIMENT CONTROL STRUCTURE(S).
   E. PRIOR TO REMOVAL OF ALL SEDIMENT CONTROL DEVICES.
   F. PRIOR TO FINAL ACCEPTANCE.

3. THE PLAN APPROVAL LETTER, APPROVED EROSION AND SEDIMENT CONTROL PLANS, DAILY LOG BOOKS, AND TEST REPORTS SHALL BE AVAILABLE AT THE SITE FOR INSPECTION BY DULY AUTHORIZED OFFICIALS OF MDE AND THE AGENCY RESPONSIBLE FOR THE PROJECT.

4. THE CONTRACTOR SHALL CONSTRUCT ALL EROSION AND SEDIMENT CONTROL MEASURES PER THE APPROVED PLAN AND CONSTRUCTION SEQUENCE AND SHALL HAVE THEM INSPECTED AND APPROVED BY THE MDE INSPECTOR PRIOR TO BEGINNING ANY OTHER LAND DISTURBANCES. MINOR SEDIMENT CONTROL DEVICE LOCATION ADJUSTMENTS MAY BE MADE IN THE FIELD WITH THE APPROVAL OF THE MDE INSPECTOR. THE CONTRACTOR SHALL ENSURE THAT ALL RUNOFF FROM DISTURBED AREAS IS DIRECTED TO THE SEDIMENT CONTROL DEVICES AND SHALL NOT REMOVE ANY EROSION OR SEDIMENT CONTROL MEASURE WITHOUT PRIOR PERMISSION FROM MDE INSPECTOR. THE CONTRACTOR SHALL OBTAIN PRIOR AGENCY AND MDE APPROVAL FOR MODIFICATIONS TO THE EROSION AND SEDIMENT CONTROL PLAN AND/OR SEQUENCE OF CONSTRUCTION.

5. THE MDE INSPECTOR HAS THE OPTION OF REQUIRING ADDITIONAL SAFETY OR SEDIMENT CONTROL MEASURES, IF DEEMED NECESSARY.

6. THE CONTRACTOR SHALL PROTECT ALL POINTS OF CONSTRUCTION INGRESS AND EGRESS TO PREVENT THE DEPOSITION OF MATERIALS ONTO PUBLIC ROADS. ALL MATERIALS DEPOSITED ONTO PUBLIC ROADS SHALL BE REMOVED IMMEDIATELY.

7. THE CONTRACTOR SHALL INSPECT DAILY AND MAINTAIN CONTINUOUSLY IN AN EFFECTIVE OPERATING CONDITION ALL EROSION AND SEDIMENT CONTROL MEASURES UNTIL SUCH TIME AS THEY ARE REMOVED WITH PRIOR PERMISSION FROM THE MDE INSPECTOR.

8. EROSION AND SEDIMENT CONTROL FOR UTILITY CONSTRUCTION SHALL BE PROVIDED IN ACCORDANCE WITH APPROVED PLANS. UTILITY CONSTRUCTION SHALL ONLY BE FOR AREAS WITHIN THE DELINEATED LIMIT OF DISTURBANCE. CALL "MISS UTILITY" AT 1-800-257-7777 48 HOURS PRIOR TO THE START OF WORK. WHEN SAME DAY STABILIZATION IS APPROVED:
   A. EXCAVATED TRENCH MATERIAL SHALL BE PLACED ON THE HIGH SIDE OF THE TRENCH.
   B. TRENCHES FOR UTILITY INSTALLATION SHALL BE BACKFILLED, COMPACTED, AND STABILIZED AT THE END OF EACH WORKING DAY. NO MORE TRENCH SHALL BE OPENED THAN CAN BE COMPLETED THE SAME DAY.

9. ALL WATER REMOVED FROM EXCAVATED AREAS SHALL BE PASSED THROUGH AN MDE APPROVED DEWATERING PRACTICE OR PUMPED TO A SEDIMENT TRAP OR BASIN PRIOR TO DISCHARGE TO A FUNCTIONAL STORM DRAIN SYSTEM OR TO STABLE GROUND SURFACE.

10. CONCRETE WASHOUT STRUCTURES SHALL BE USED WHEN CONCRETE TRUCKS, DRUMS, PUMPS, CHUTES, OR OTHER EQUIPMENT IS RINSED OR CLEANED ON-SITE.

11. CONSTRUCTION ACTIVITIES PRODUCING DUST SHALL IMPLEMENT CONTROL MEASURES TO AVOID THE SUSPENSION OF DUST PARTICLES AND/OR PREVENT DUST FROM BLOWING OFF-SITE OR TO AREAS WITHOUT TREATMENT.

12. FOLLOWING INITIAL SOIL DISTURBANCE OR RE-DISTURBANCE, PERMANENT OR TEMPORARY STABILIZATION SHALL BE COMPLETED WITHIN:
   A. THREE (3) CALENDAR DAYS AS TO THE SURFACE OF ALL PERIMETER CONTROLS, DIKES, SWALES, DITCHES, PERIMETER SLOPES, AND ALL SLOPES STEEPER THAN 3 HORIZONTAL TO 1 VERTICAL (3:1); AND
   B. SEVEN (7) CALENDAR DAYS AS TO ALL OTHER DISTURBED OR GRADED AREAS ON THE PROJECT SITE NOT UNDER ACTIVE GRADING.

13. VEGETATIVE STABILIZATION SHALL BE PERFORMED IN ACCORDANCE WITH THE 2011 MARYLAND STANDARDS AND SPECIFICATIONS FOR SOIL EROSION AND SEDIMENT CONTROL. REFER TO APPROPRIATE SPECIFICATIONS FOR TEMPORARY SEEDING, PERMANENT SEEDING, MULCHING, SODDING, AND GROUND COVERS.

14. WHEN SEEDING, ALL DISTURBED AREAS WITH SLOPES FLATTER THAN 2:1 SHALL BE STABILIZED WITH 4 INCHES OF TOPSOIL, SEED, AND MULCH. ALL DISTURBED AREAS WITH SLOPES 2:1 OR STEEPER SHALL BE STABILIZED WITH MATTING OVER 2 INCHES OF TOPSOIL AND SEED.

15. ALL SEDIMENT BASINS, TRAP EMBANKMENTS AND SLOPES, PERIMETER DIKES, SWALES AND ALL DISTURBED SLOPES STEEPER OR EQUAL TO 3:1 SHALL BE STABILIZED WITH SEED AND ANCHORED STRAW MULCH, SOD, OR OTHER APPROVED STABILIZATION MEASURES, AS SOON AS POSSIBLE BUT NO LATER THAN THREE (3) CALENDAR DAYS AFTER ESTABLISHMENT. ALL AREAS DISTURBED OUTSIDE OF THE PERIMETER SEDIMENT CONTROL SYSTEM SHALL BE MINIMIZED. MAINTENANCE SHALL BE PERFORMED AS NECESSARY TO ENSURE CONTINUED STABILIZATION.

16. PERMANENT SWALES OR OTHER POINTS OF CONCENTRATED WATER FLOW SHALL BE STABILIZED WITH SEED AND AN APPROVED EROSION CONTROL MATTING, SOD, RIP-RAP, OR OTHER APPROVED STABILIZATION MEASURES.

17. FOR STOCKPILE SLOPES STEEPER THAN 3 HORIZONTAL TO 1 VERTICAL (3:1), THE CONTRACTOR SHALL APPLY SEED AND ANCHORED STRAW MULCH, SOD, OR OTHER APPROVED STABILIZATION MEASURES TO THE FACE OF THE STOCKPILE WITHIN THREE (3) CALENDAR DAYS OF ACTIVITY HAVING CEASED ON THE RESPECTIVE FACE. FOR SLOPES 3:1 OR FLATTER, THE CONTRACTOR SHALL APPLY STABILIZATION MEASURES TO THE FACE OF THE STOCKPILE WITHIN SEVEN (7) CALENDAR DAYS OF ACTIVITY HAVING CEASED ON THE RESPECTIVE FACE. MAINTENANCE SHALL BE PERFORMED AS NECESSARY TO ENSURE CONTINUED STABILIZATION.

18. FOR FINISHED GRADING, THE CONTRACTOR SHALL PROVIDE ADEQUATE GRADIENTS TO PREVENT WATER FROM PONDING FOR MORE THAN TWENTY-FOUR (24) HOURS AFTER THE END OF A RAINFALL EVENT. DRAINAGE COURSES AND SWALE FLOW AREAS MAY TAKE AS LONG AS FORTY-EIGHT (48) HOURS AFTER THE END OF A RAINFALL EVENT TO DRAIN. AREAS DESIGNED TO HAVE STANDING WATER SHALL NOT BE REQUIRED TO MEET THIS REQUIREMENT.

19. WHERE DEEMED APPROPRIATE BY THE ENGINEER OR INSPECTOR, SEDIMENT BASINS AND TRAPS MAY NEED TO BE SURROUNDED WITH AN APPROVED SAFETY FENCE. THE FENCE MUST CONFORM TO LOCAL ORDINANCES AND REGULATIONS. THE DEVELOPER OR OWNER SHALL CHECK WITH LOCAL BUILDING OFFICIALS ON APPLICABLE SAFETY REQUIREMENTS. WHERE SAFETY FENCE IS DEEMED APPROPRIATE AND LOCAL ORDINANCES DO NOT SPECIFY FENCING SIZES AND TYPES, THE FOLLOWING SHALL BE USED AS A MINIMUM STANDARD: THE SAFETY FENCE SHALL BE MADE OF WELDED WIRE AND AT LEAST 42 INCHES HIGH, HAVE POSTS SPACED NO FARTHER APART THAN 8 FEET, HAVE MESH OPENINGS NO GREATER THAN 2 INCHES IN WIDTH AND 4 INCHES IN HEIGHT WITH A MINIMUM OF 14 GAUGE WIRE. SAFETY FENCE SHALL BE MAINTAINED AND IN GOOD CONDITION AT ALL TIMES.

20. ALL SEDIMENT TRAP DEPTH DIMENSIONS ARE RELATIVE TO THE OUTLET ELEVATION. ALL TRAPS SHALL HAVE A STABLE OUTFALL. ALL TRAPS AND BASINS SHALL HAVE STABLE INFLOW POINTS.

21. SEDIMENT SHALL BE REMOVED AND THE TRAP OR BASIN RESTORED TO ITS ORIGINAL DIMENSIONS WHEN THE SEDIMENT HAS ACCUMULATED TO ONE QUARTER OF THE TOTAL DEPTH OF THE TRAP OR BASIN. TOTAL DEPTH SHALL BE MEASURED FROM THE TRAP OR BASIN BOTTOM TO THE CREST OF THE OUTLET.

22. SEDIMENT REMOVED FROM TRAPS (AND BASINS) SHALL BE PLACED AND STABILIZED IN APPROVED AREAS, BUT NOT WITHIN A FLOODPLAIN, WETLAND OR TREE-SAVE AREA. WHEN PUMPING SEDIMENT LADEN WATER, THE DISCHARGE SHALL BE DIRECTED TO AN MDE APPROVED SEDIMENT TRAPPING DEVICE PRIOR TO RELEASE FROM THE SITE. A SUMP PIT MAY BE USED IF SEDIMENT TRAPS THEMSELVES ARE BEING PUMPED OUT.

23. PRIOR TO REMOVAL OF SEDIMENT CONTROL MEASURES, THE CONTRACTOR SHALL STABILIZE AND HAVE ESTABLISHED PERMANENT STABILIZATION FOR ALL CONTRIBUTORY DISTURBED AREAS USING SOD OR AN APPROVED PERMANENT SEED MIXTURE WITH REQUIRED SOIL AMENDMENTS AND AN APPROVED ANCHORED MULCH. WOOD FIBER MULCH MAY ONLY BE USED IN SEEDING SEASON WHERE THE SLOPE DOES NOT EXCEED 10% AND GRADING HAS BEEN DONE TO PROMOTE SHEET FLOW DRAINAGE. AREAS BROUGHT TO FINISHED GRADE DURING THE SEEDING SEASON SHALL BE PERMANENTLY STABILIZED AS SOON AS POSSIBLE, BUT NOT LATER THAN THREE (3) CALENDAR DAYS AFTER ESTABLISHMENT FOR SLOPES STEEPER THAN 3 HORIZONTAL TO 1 VERTICAL (3:1) AND SEVEN (7) CALENDAR DAYS FOR FLATTER SLOPES. WHEN PROPERTY IS BROUGHT TO FINISHED GRADE DURING THE MONTHS OF NOVEMBER THROUGH FEBRUARY, AND PERMANENT STABILIZATION IS FOUND TO BE IMPRACTICAL, TEMPORARY SEED AND ANCHORED STRAW MULCH SHALL BE APPLIED TO DISTURBED AREAS. THE FINAL PERMANENT STABILIZATION OF SUCH PROPERTY SHALL BE APPLIED BY MARCH 15 OR EARLIER IF GROUND AND WEATHER CONDITIONS ALLOW.

24. TEMPORARY SEDIMENT CONTROL DEVICES SHALL BE REMOVED WITH PERMISSION OF THE MDE INSPECTOR WITHIN THIRTY (30) CALENDAR DAYS FOLLOWING ESTABLISHMENT OF PERMANENT STABILIZATION IN ALL CONTRIBUTORY DRAINAGE AREAS. UPON REMOVAL OF SEDIMENT CONTROL DEVICES, THE AREA DISTURBED BY REMOVAL SHALL BE STABILIZED WITH TOPSOIL, SEED, AND MULCH, OR AS SPECIFIED, WITHIN 24 HOURS OF SAID REMOVAL. STORMWATER MANAGEMENT STRUCTURES USED TEMPORARILY FOR SEDIMENT CONTROL SHALL BE CONVERTED TO THE PERMANENT CONFIGURATION WITHIN THIS TIME PERIOD AS WELL.

25. OFF-SITE SPOIL OR BORROW AREAS ON STATE OR FEDERAL PROPERTY SHALL HAVE PRIOR APPROVAL BY MDE AND OTHER APPLICABLE STATE, FEDERAL, AND LOCAL AGENCIES; OTHERWISE APPROVAL SHALL BE GRANTED BY THE LOCAL AUTHORITIES. ALL WASTE AND BORROW AREAS OFF-SITE SHALL BE PROTECTED BY SEDIMENT CONTROL MEASURES AND STABILIZED.

26. SITE INFORMATION:
A. AREA DISTURBED 0.12 ACRES
B. TOTAL CUT TBD CUBIC YARDS
C. TOTAL FILL TBD CUBIC YARDS
D. OFF-SITE WASTE / BORROW AREA LOCATION TBD. SITE MUST HAVE ACTIVE ESC PERMIT

SEQUENCE OF CONSTRUCTION:

PHASE I

1. REFER TO MDE EROSION AND SEDIMENT CONTROL GENERAL NOTE 1 FOR NECESSARY ACTIONS BEFORE CONSTRUCTION COMMENCES.
2. INSTALL PHASE I EROSION AND SEDIMENT CONTROL MEASURES INCLUDING INSTALLATION OF STANDARD INLET PROTECTION FOR THE EXISTING INLETS.
3. WITHIN THE PHASE I LIMITS OF CONSTRUCTION, CONTRACTOR TO COMMENCE WITH ROUGH GRADING AND DEMOLITION ACTIVITIES INCLUDING DEMOLITION OF THE DESIGNATED EXISTING STORM SEWER PIPE AND STRUCTURES.
4. FOR AREAS BROUGHT TO FINISHED GRADE, STABILIZE WITH TEMPORARY SEEDING, MULCH, EROSION BLANKETS OR OTHER SUITABLE MATERIALS. STABILIZE ALL DISTURBED AREAS PER MARYLAND DEPARTMENT OF ENVIRONMENT STANDARDS.
5. COMPLETE INSTALLATION OF UTILITIES NOT ALREADY INSTALLED. ENSURE ALL UTILITY WORK AREA IS STABILIZED AT THE END OF THE CONSTRUCTION WORK DAY AS INDICATED BY SAME DAY STABILIZATION ON THE PLANS.
6. BEGIN FINAL GRADING OF THE PHASE I LIMITS OF CONSTRUCTION.
7. INSTALL PROPOSED SITE FEATURES WITHIN THE PHASE I LIMITS OF CONSTRUCTION.
8. STABILIZE ANY PROBLEM AREAS ON SITE.
9. WITHIN THE PHASE I LIMITS OF CONSTRUCTION, PLACE TOPSOIL IN LANDSCAPE AREAS AND INSTALL LANDSCAPING. SEED AND MULCH ALL DENUDED AREAS.

PHASE II

10. INSTALL REMAINING PHASE II EROSION AND SEDIMENT CONTROL MEASURES.
11. WITHIN THE PHASE II LIMITS OF CONSTRUCTION, CONTRACTOR TO COMMENCE WITH ROUGH GRADING AND INSTALLATION OF THE STORM SEWER PIPE AND STRUCTURES FROM DOWNSTREAM TO UPSTREAM IN ACCORDANCE WITH MDE ESC GENERAL NOTE 8. INSTALLATION OF INLET PROTECTION SHALL BE PERFORMED ALONG WITH THE INSTALLATION OF THE STORM DRAINAGE SYSTEM.
12. FOR AREAS BROUGHT TO FINISHED GRADE, STABILIZE WITH TEMPORARY SEEDING, MULCH, EROSION BLANKETS OR OTHER SUITABLE MATERIALS. STABILIZE ALL DISTURBED AREAS PER MARYLAND DEPARTMENT OF ENVIRONMENT STANDARDS.
13. BEGIN FINAL GRADING OF THE PHASE II LIMITS OF CONSTRUCTION.
14. INSTALL PROPOSED SITE FEATURES WITHIN THE PHASE II LIMITS OF CONSTRUCTION.
15. STABILIZE ANY PROBLEM AREAS ON SITE.
16. PLACE TOPSOIL ON LANDSCAPE AREAS AND INSTALL LANDSCAPING. SEED AND MULCH ALL DENUDED AREAS.
17. THE CONTRACTOR MUST OBTAIN APPROVAL FROM THE MDE INSPECTOR PRIOR TO REMOVAL OF THE EROSION AND SEDIMENT CONTROL MEASURES. CONTRACTOR TO REMOVE ALL EROSION AND SEDIMENT CONTROL MEASURES ONCE MDE HAS GIVEN THEIR APPROVAL. CONTRACTOR SHALL PROVIDE IMMEDIATE STABILIZATION OF AREAS DISTURBED BY EROSION AND SEDIMENT CONTROL MEASURE REMOVAL
18. THE CONTRACTOR IS RESPONSIBLE FOR THE REMOVAL OF CONSTRUCTION MATERIAL FROM THE SITE PRIOR TO COMPLETION.

STABILIZATION NOTES:

1. SIDEWALKS AREAS SHOULD BE STABILIZED WITH BASE STONE OR PAVEMENT.
2. A PATH AROUND THE BUILDING WILL BE STABILIZED AND MAINTAINED WITH 4" STONE OVER NON-WOVEN GEOTEXTILE FILTER FABRIC OR OTHER SUITABLE MATERIAL.
3. SOIL STABILIZATION MATTING SHALL BE USED IN ALL NON-PAVED AREAS. TEMPORARY SEEDING, PERMANENT SEEDING/HYDROSEEDING, SOD, OR WOOD CHIPS SHOULD BE UTILIZED IN ADDITION TO THE SOIL STABILIZATION MATTING.
4. MINIMIZE THE LENGTH OF TIME FOR SOIL EXPOSURE.
5. ALL EROSION AND SEDIMENT CONTROLS TO BE INSPECTED AND REPAIRED AT THE END OF EACH DAY AND AFTER EACH RAIN EVENT.
6. THE AREA SHOULD BE STABILIZED WITHIN 3 - 7 DAYS AND SHALL COMPLY WITH THE MARYLAND DEPARTMENT OF THE ENVIRONMENT SPECIFICATIONS FOR STABILIZATION.

B-4 STANDARDS AND SPECIFICATIONS

FOR

VEGETATIVE STABILIZATION

Definition

Using vegetation as cover to protect exposed soil from erosion.

Purpose

To promote the establishment of vegetation on exposed soil.

Conditions Where Practice Applies

On all disturbed areas not stabilized by other methods. This specification is divided into sections on incremental stabilization; soil preparation, soil amendments and topsoiling; seeding and mulching; temporary stabilization; and permanent stabilization.

Effects on Water Quality and Quantity

Stabilization practices are used to promote the establishment of vegetation on exposed soil. When soil is stabilized with vegetation, the soil is less likely to erode and more likely to allow infiltration of rainfall, thereby reducing sediment loads and runoff to downstream areas.

Planting vegetation in disturbed areas will have an effect on the water budget, especially on volumes and rates of runoff, infiltration, evaporation, transpiration, percolation, and groundwater recharge. Over time, vegetation will increase organic matter content and improve the water holding capacity of the soil and subsequent plant growth.

Vegetation will help reduce the movement of sediment, nutrients, and other chemicals carried by runoff to receiving waters. Plants will also help protect groundwater supplies by assimilating those substances present within the root zone.

Sediment control practices must remain in place during grading, seedbed preparation, seeding, mulching, and vegetative establishment.

Adequate Vegetative Establishment

Inspect seeded areas for vegetative establishment and make necessary repairs, replacements, and reseedings within the planting season.

1. Adequate vegetative stabilization requires 95 percent groundcover.
2. If an area has less than 40 percent groundcover, restabilize following the original recommendations for lime, fertilizer, seedbed preparation, and seeding.
3. If an area has between 40 and 94 percent groundcover, over-seed and fertilize using half of the rates originally specified.
4. Maintenance fertilizer rates for permanent seeding are shown in Table B.6.

B.9

B-4-1 STANDARDS AND SPECIFICATIONS

FOR

INCREMENTAL STABILIZATION

Definition

Establishment of vegetative cover on cut and fill slopes.

Purpose

To provide timely vegetative cover on cut and fill slopes as work progresses.

Conditions Where Practice Applies

Any cut or fill slope greater than 15 feet in height. This practice also applies to stockpiles.

Criteria

A. Incremental Stabilization - Cut Slopes
   1. Excavate and stabilize cut slopes in increments not to exceed 15 feet in height. Prepare seedbed and apply seed and mulch on all cut slopes as the work progresses.
   2. Construction sequence example (Refer to Figure B.1):
      a. Construct and stabilize all temporary swales or dikes that will be used to convey runoff around the excavation.
      b. Perform Phase 1 excavation, prepare seedbed, and stabilize.
      c. Perform Phase 2 excavation, prepare seedbed, and stabilize. Overseed Phase 1 areas as necessary.
      d. Perform final phase excavation, prepare seedbed, and stabilize. Overseed previously seeded areas as necessary.

Note: Once excavation has begun the operation should be continuous from grubbing through the completion of grading and placement of topsoil (if required) and permanent seed and mulch. Any interruptions in the operation or completing the operation out of the seeding season will necessitate the application of temporary stabilization.

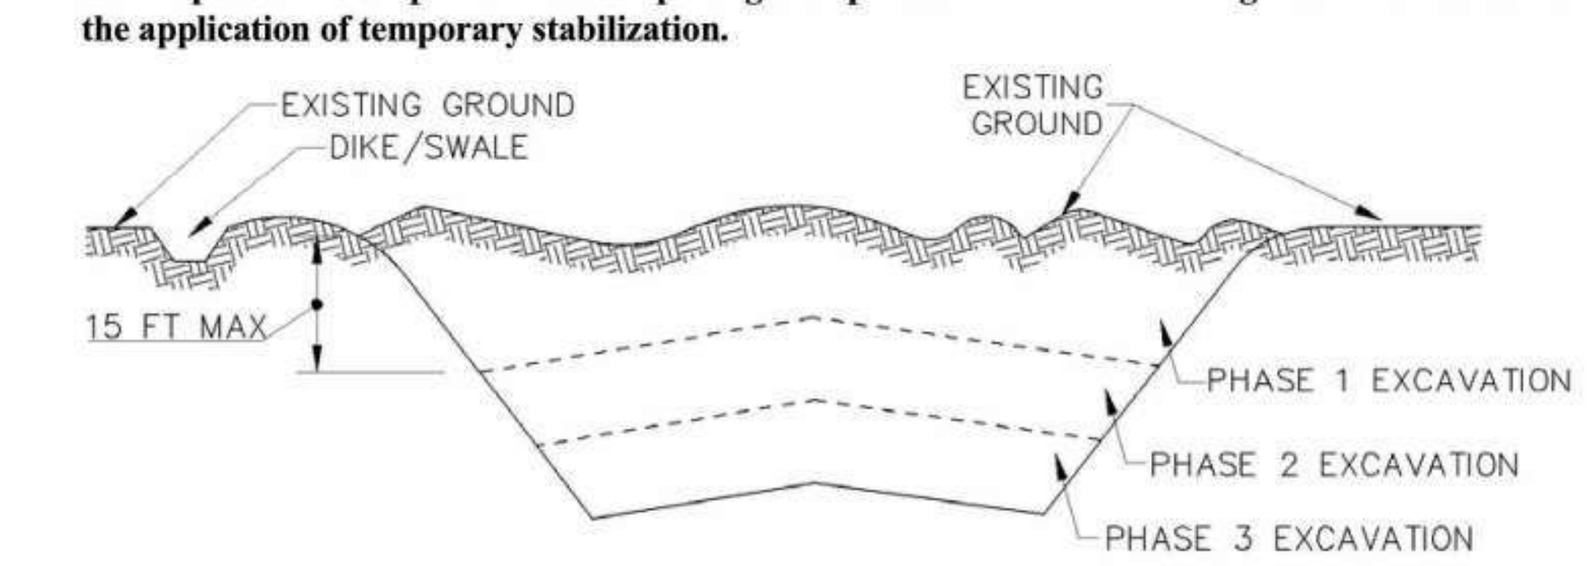

Figure B.1: Incremental Stabilization – Cut

B.10

B. Incremental Stabilization - Fill Slopes
   1. Construct and stabilize fill slopes in increments not to exceed 15 feet in height. Prepare seedbed and apply seed and mulch on all slopes as the work progresses.
   2. Stabilize slopes immediately when the vertical height of a lift reaches 15 feet, or when the grading operation ceases as prescribed in the plans.
   3. At the end of each day, install temporary water conveyance practice(s), as necessary, to intercept surface runoff and convey it down the slope in a non-erosive manner.
   4. Construction sequence example (Refer to Figure B.2):
      a. Construct and stabilize all temporary swales or dikes that will be used to divert runoff around the fill. Construct silt fence on low side of fill unless other methods shown on the plans address this area.
      b. At the end of each day, install temporary water conveyance practice(s), as necessary, to intercept surface runoff and convey it down the slope in a non-erosive manner.
      c. Place Phase 1 fill, prepare seedbed, and stabilize.
      d. Place Phase 2 fill, prepare seedbed, and stabilize.
      e. Place final phase fill, prepare seedbed, and stabilize. Overseed previously seeded areas as necessary.

Note: Once the placement of fill has begun the operation should be continuous from grubbing through the completion of grading and placement of topsoil (if required) and permanent seed and mulch. Any interruptions in the operation or completing the operation out of the seeding season will necessitate the application of temporary stabilization.

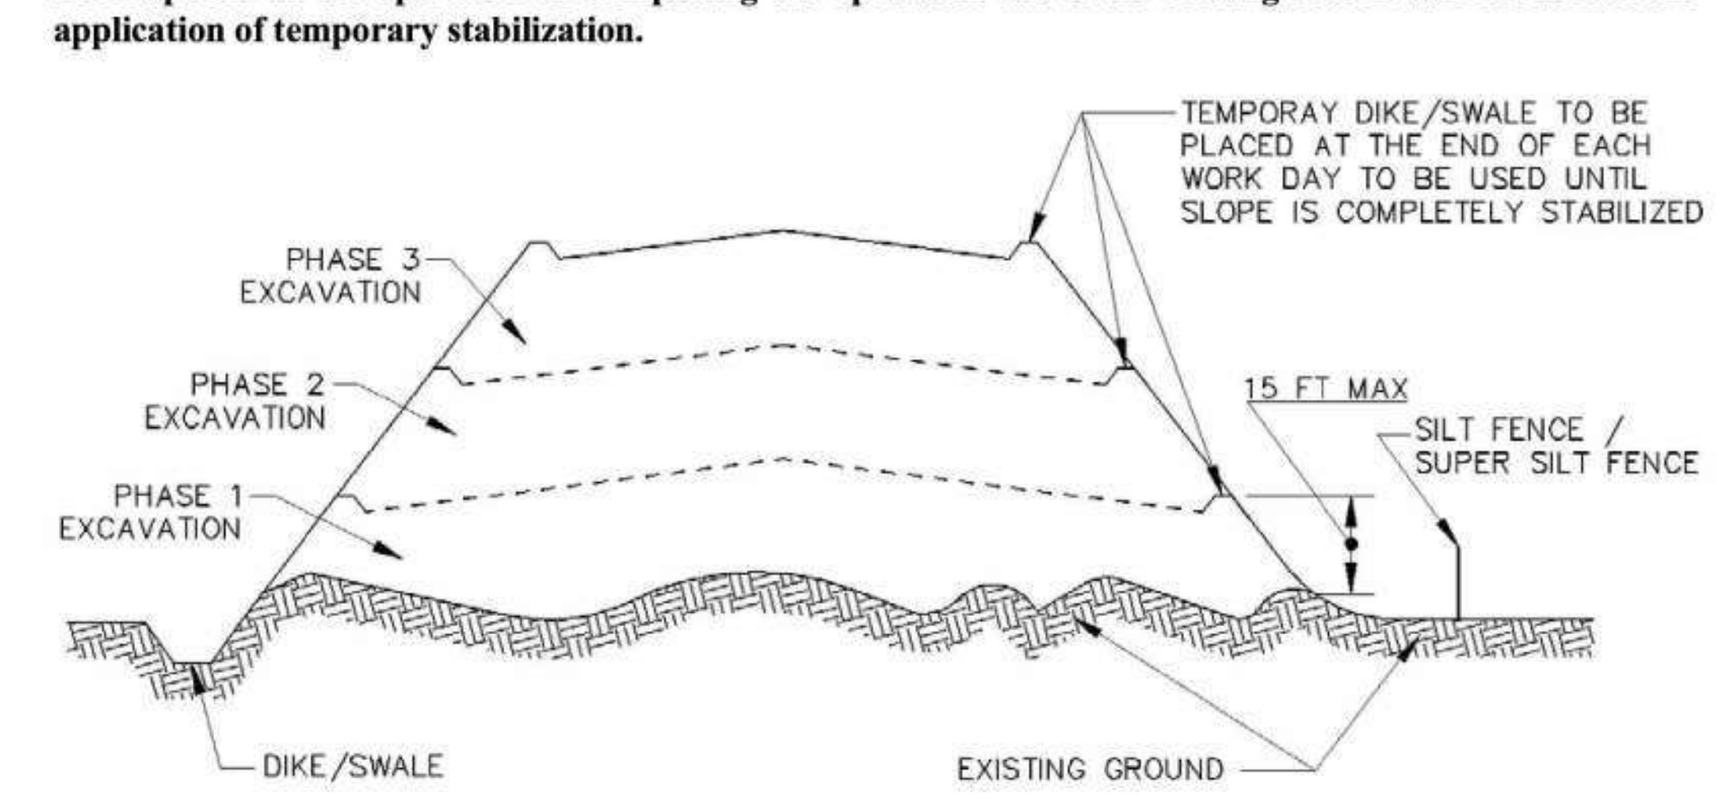

Figure B.2: Incremental Stabilization – Fill

B.11

B-4-2 STANDARDS AND SPECIFICATIONS

FOR

SOIL PREPARATION, TOPSOILING, AND SOIL AMENDMENTS

Definition

The process of preparing the soils to sustain adequate vegetative stabilization.

Purpose

To provide a suitable soil medium for vegetative growth.

Conditions Where Practice Applies

Where vegetative stabilization is to be established.

Criteria

A. Soil Preparation
   1. Temporary Stabilization
      a. Seedbed preparation consists of loosening soil to a depth of 3 to 5 inches by means of suitable agricultural or construction equipment, such as disc harrows or chisel plows or rippers mounted on construction equipment. After the soil is loosened, it must not be rolled or dragged smooth but left in the roughened condition. Slopes 3:1 or flatter are to be tracked with ridges running parallel to the contour of the slope.
      b. Apply fertilizer and lime as prescribed on the plans.
      c. Incorporate lime and fertilizer into the top 3 to 5 inches of soil by disking or other suitable means.
   2. Permanent Stabilization
      a. A soil test is required for any earth disturbance of 5 acres or more. The minimum soil conditions required for permanent vegetative establishment are:
         i. Soil pH between 6.0 and 7.0.
         ii. Soluble salts less than 500 parts per million (ppm).
         iii. Soil contains less than 40 percent clay but enough fine grained material (greater than 30 percent silt plus clay) to provide the capacity to hold a moderate amount of moisture. An exception: if lovegrass will be planted, then a sandy soil (less than 30 percent silt plus clay) would be acceptable.
         iv. Soil contains 1.5 percent minimum organic matter by weight.
         v. Soil contains sufficient pore space to permit adequate root penetration.
      b. Application of amendments or topsoil is required if on-site soils do not meet the above conditions.
      c. Graded areas must be maintained in a true and even grade as specified on the approved plan, then scarified or otherwise loosened to a depth of 3 to 5 inches.

B.12

NOTE TO CONTRACTOR: EROSION AND SEDIMENT CONTROLS SHALL BE STRICTLY ENFORCED

PROFESSIONAL CERTIFICATION
I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND,
NAME: P.E. OSVALDO RAMOS
LICENSE: No. 57602
EXPIRATION DATE: 05-04-2027

STATE OF MARYLAND · OSVALDO A. RAMOS · 57602 · PROFESSIONAL ENGINEER

MDE NO. 25-SF-0127 **DATE: 08/26/2025**

DEPARTMENT OF HEALTH & HUMAN SERVICES, USA

LSY ARCHITECTS & LABORATORY PLANNERS

James Posey Associates — Engineering Your Vision

TIMMONS GROUP

SGH

Architect and Engineer Name and LOGO

SEAL

ARCHITECT:	LOUVIERE, STRATTON & YOKEL, LLC 8484 GEORGIA AVE, SUITE 650 SILVER SPRING, MD 20910 (301) 588-1500
MEP ENGINEER:	JAMES POSEY ASSOCIATES INC 11155 RED RUN BLVD OWINGS MILLS, MD 21117 (410) 265-6100
CIVIL ENGINEER:	TIMMONS GROUP 20110 ASHBROOK PL, SUITE 100 ASHBURN, VA 20147 (703) 554-6700
STRUCTURAL ENGINEER:	SIMPSON GUMPERTZ & HEGER 1625 EYE STREET NW SUITE 900 WASHINGTON, DC 20006 (202) 239-4199

REVISIONS

MARK	DATE	DESCRIPTION

CONTRACTORS

A/E CON. NO.	
A/E TASK NO.	
CONS. CONTR.	
CONS. WORK	
PRIME A/E	LSY ARCHITECTS
SUB A/E	JPA / TIMMONS / SGH
CONSTR. CON.	

BUILDING

FACILITY CODE	
BUILDING NO.	BUILDING 31B
NAME	NIH
STREET	9000 ROCKVILLE PIKE
CITY	BETHESDA
STATE/ZIP	MD / 20892
OTHER BUILDING NO.	

PROJECT

PROJ. NO.	24024
PROJ. OFFICER	MOHAMMED BISWAS
PROJ. MGR.	G.LEE
SUBMISSION	IFC SUBMISSION
SUB. DATE	08/26/2025
WRK REQ. NO.	C116635

N

PROJECT TITLE: BUILDING 31B LANDSCAPE WATER INTRUSION

DRAWING TITLE: EROSION & SEDIMENT CONTROL NOTES & DETAILS

NIH National Institutes of Health
OFFICE OF RESEARCH FACILITIES
DIVISION OF FACILITIES PLANNING

DESIGNED BY	OR
DRAWN BY	SA
CHECKED BY	OR
DATE	08/26/2025
FILE NAME	

DRAWING

DRAWING NO. C-302

d. Apply soil amendments as specified on the approved plan or as indicated by the results of a soil test.

e. Mix soil amendments into the top 3 to 5 inches of soil by disking or other suitable means. Rake lawn areas to smooth the surface, remove large objects like stones and branches, and ready the area for seed application. Loosen surface soil by dragging with a heavy chain or other equipment to roughen the surface where site conditions will not permit normal seedbed preparation. Track slopes 3:1 or flatter with tracked equipment leaving the soil in an irregular condition with ridges running parallel to the contour of the slope. Leave the top 1 to 3 inches of soil loose and friable. Seedbed loosening may be unnecessary on newly disturbed areas.

B. Topsoiling

1. Topsoil is placed over prepared subsoil prior to establishment of permanent vegetation. The purpose is to provide a suitable soil medium for vegetative growth. Soils of concern have low moisture content, low nutrient levels, low pH, materials toxic to plants, and/or unacceptable soil gradation.
2. Topsoil salvaged from an existing site may be used provided it meets the standards as set forth in these specifications. Typically, the depth of topsoil to be salvaged for a given soil type can be found in the representative soil profile section in the Soil Survey published by USDA-NRCS.
3. Topsoiling is limited to areas having 2:1 or flatter slopes where:
   a. The texture of the exposed subsoil/parent material is not adequate to produce vegetative growth.
   b. The soil material is so shallow that the rooting zone is not deep enough to support plants or furnish continuing supplies of moisture and plant nutrients.
   c. The original soil to be vegetated contains material toxic to plant growth.
   d. The soil is so acidic that treatment with limestone is not feasible.
4. Areas having slopes steeper than 2:1 require special consideration and design.
5. Topsoil Specifications: Soil to be used as topsoil must meet the following criteria:
   a. Topsoil must be a loam, sandy loam, clay loam, silt loam, sandy clay loam, or loamy sand. Other soils may be used if recommended by an agronomist or soil scientist and approved by the appropriate approval authority. Topsoil must not be a mixture of contrasting textured subsoils and must contain less than 5 percent by volume of cinders, stones, slag, coarse fragments, gravel, sticks, roots, trash, or other materials larger than 1½ inches in diameter.
   b. Topsoil must be free of noxious plants or plant parts such as Bermuda grass, quack grass, Johnson grass, nut sedge, poison ivy, thistle, or others as specified.
   c. Topsoil substitutes or amendments, as recommended by a qualified agronomist or soil scientist and approved by the appropriate approval authority, may be used in lieu of natural topsoil.
6. Topsoil Application
   a. Erosion and sediment control practices must be maintained when applying topsoil.
   b. Uniformly distribute topsoil in a 5 to 8 inch layer and lightly compact to a minimum thickness of 4 inches. Spreading is to be performed in such a manner that sodding or seeding can proceed with a minimum of additional soil preparation and tillage. Any irregularities in the surface resulting from topsoiling or other operations must be corrected in order to prevent the formation of depressions or water pockets.
   c. Topsoil must not be placed if the topsoil or subsoil is in a frozen or muddy condition, when the subsoil is excessively wet or in a condition that may otherwise be detrimental to proper grading

and seedbed preparation.

C. Soil Amendments (Fertilizer and Lime Specifications)

1. Soil tests must be performed to determine the exact ratios and application rates for both lime and fertilizer on sites having disturbed areas of 5 acres or more. Soil analysis may be performed by a recognized private or commercial laboratory. Soil samples taken for engineering purposes may also be used for chemical analyses.
2. Fertilizers must be uniform in composition, free flowing and suitable for accurate application by appropriate equipment. Manure may be substituted for fertilizer with prior approval from the appropriate approval authority. Fertilizers must all be delivered to the site fully labeled according to the applicable laws and must bear the name, trade name or trademark and warranty of the producer.
3. Lime materials must be ground limestone (hydrated or burnt lime may be substituted except when hydroseeding) which contains at least 50 percent total oxides (calcium oxide plus magnesium oxide). Limestone must be ground to such fineness that at least 50 percent will pass through a #100 mesh sieve and 98 to 100 percent will pass through a #20 mesh sieve.
4. Lime and fertilizer are to be evenly distributed and incorporated into the top 3 to 5 inches of soil by disking or other suitable means.
5. Where the subsoil is either highly acidic or composed of heavy clays, spread ground limestone at the rate of 4 to 8 tons/acre (200-400 pounds per 1,000 square feet) prior to the placement of topsoil.

B-4-3 STANDARDS AND SPECIFICATIONS

FOR

SEEDING AND MULCHING

Definition

The application of seed and mulch to establish vegetative cover.

Purpose

To protect disturbed soils from erosion during and at the end of construction.

Conditions Where Practice Applies

To the surface of all perimeter controls, slopes, and any disturbed area not under active grading.

Criteria

A. Seeding

1. Specifications
   a. All seed must meet the requirements of the Maryland State Seed Law. All seed must be subject to re-testing by a recognized seed laboratory. All seed used must have been tested within the 6 months immediately preceding the date of sowing such material on any project. Refer to Table B.4 regarding the quality of seed. Seed tags must be available upon request to the inspector to verify type of seed and seeding rate.
   b. Mulch alone may be applied between the fall and spring seeding dates only if the ground is frozen. The appropriate seeding mixture must be applied when the ground thaws.
   c. Inoculants: The inoculant for treating legume seed in the seed mixtures must be a pure culture of nitrogen fixing bacteria prepared specifically for the species. Inoculants must not be used later than the date indicated on the container. Add fresh inoculants as directed on the package. Use four times the recommended rate when hydroseeding. Note: It is very important to keep inoculant as cool as possible until used. Temperatures above 75 to 80 degrees Fahrenheit can weaken bacteria and make the inoculant less effective.
   d. Sod or seed must not be placed on soil which has been treated with soil sterilants or chemicals used for weed control until sufficient time has elapsed (14 days min.) to permit dissipation of phyto-toxic materials.
2. Application
   a. Dry Seeding: This includes use of conventional drop or broadcast spreaders.
      i. Incorporate seed into the subsoil at the rates prescribed on Temporary Seeding Table B.1, Permanent Seeding Table B.3, or site-specific seeding summaries.
      ii. Apply seed in two directions, perpendicular to each other. Apply half the seeding rate in each direction. Roll the seeded area with a weighted roller to provide good seed to soil contact.

   b. Drill or Cultipacker Seeding: Mechanized seeders that apply and cover seed with soil.
      i. Cultipacking seeders are required to bury the seed in such a fashion as to provide at least 1/4 inch of soil covering. Seedbed must be firm after planting.
      ii. Apply seed in two directions, perpendicular to each other. Apply half the seeding rate in each direction.
   c. Hydroseeding: Apply seed uniformly with hydroseeder (slurry includes seed and fertilizer).
      i. If fertilizer is being applied at the time of seeding, the application rates should not exceed the following: nitrogen, 100 pounds per acre total of soluble nitrogen; P_2O_5 (phosphorous), 200 pounds per acre; K_2O (potassium), 200 pounds per acre.
      ii. Lime: Use only ground agricultural limestone (up to 3 tons per acre may be applied by hydroseeding). Normally, not more than 2 tons are applied by hydroseeding at any one time. Do not use burnt or hydrated lime when hydroseeding.
      iii. Mix seed and fertilizer on site and seed immediately and without interruption.
      iv. When hydroseeding do not incorporate seed into the soil.

B. Mulching

1. Mulch Materials (in order of preference)
   a. Straw consisting of thoroughly threshed wheat, rye, oat, or barley and reasonably bright in color. Straw is to be free of noxious weed seeds as specified in the Maryland Seed Law and not musty, moldy, caked, decayed, or excessively dusty. **Note: Use only sterile straw mulch in areas where one species of grass is desired.**
   b. Wood Cellulose Fiber Mulch (WCFM) consisting of specially prepared wood cellulose processed into a uniform fibrous physical state.
      i. WCFM is to be dyed green or contain a green dye in the package that will provide an appropriate color to facilitate visual inspection of the uniformly spread slurry.
      ii. WCFM, including dye, must contain no germination or growth inhibiting factors.
      iii. WCFM materials are to be manufactured and processed in such a manner that the wood cellulose fiber mulch will remain in uniform suspension in water under agitation and will blend with seed, fertilizer and other additives to form a homogeneous slurry. The mulch material must form a blotter-like ground cover, on application, having moisture absorption and percolation properties and must cover and hold grass seed in contact with the soil without inhibiting the growth of the grass seedlings.
      iv. WCFM material must not contain elements or compounds at concentration levels that will be phyto-toxic.
      v. WCFM must conform to the following physical requirements: fiber length of approximately 10 millimeters, diameter approximately 1 millimeter, pH range of 4.0 to 8.5, ash content of 1.6 percent maximum and water holding capacity of 90 percent minimum.

2. Application
   a. Apply mulch to all seeded areas immediately after seeding.
   b. When straw mulch is used, spread it over all seeded areas at the rate of 2 tons per acre to a uniform loose depth of 1 to 2 inches. Apply mulch to achieve a uniform distribution and depth so that the soil surface is not exposed. When using a mulch anchoring tool, increase the application rate to 2.5 tons per acre.
   c. Wood cellulose fiber used as mulch must be applied at a net dry weight of 1500 pounds per acre. Mix the wood cellulose fiber with water to attain a mixture with a maximum of 50 pounds of wood cellulose fiber per 100 gallons of water.
3. Anchoring
   a. Perform mulch anchoring immediately following application of mulch to minimize loss by wind or water. This may be done by one of the following methods (listed by preference), depending upon the size of the area and erosion hazard:
      i. A mulch anchoring tool is a tractor drawn implement designed to punch and anchor mulch into the soil surface a minimum of 2 inches. This practice is most effective on large areas, but is limited to flatter slopes where equipment can operate safely. If used on sloping land, this practice should follow the contour.
      ii. Wood cellulose fiber may be used for anchoring straw. Apply the fiber binder at a net dry weight of 750 pounds per acre. Mix the wood cellulose fiber with water at a maximum of 50 pounds of wood cellulose fiber per 100 gallons of water.
      iii. Synthetic binders such as Acrylic DLR (Agro-Tack), DCA-70, Petroset, Terra Tax II, Terra Tack AR or other approved equal may be used. Follow application rates as specified by the manufacturer. Application of liquid binders needs to be heavier at the edges where wind catches mulch, such as in valleys and on crests of banks. **Use of asphalt binders is strictly prohibited.**
      iv. Lightweight plastic netting may be stapled over the mulch according to manufacturer recommendations. Netting is usually available in rolls 4 to 15 feet wide and 300 to 3,000 feet long.

B-4-4 STANDARDS AND SPECIFICATIONS

FOR

TEMPORARY STABILIZATION

Definition

To stabilize disturbed soils with vegetation for up to 6 months.

Purpose

To use fast growing vegetation that provides cover on disturbed soils.

Conditions Where Practice Applies

Exposed soils where ground cover is needed for a period of 6 months or less. For longer duration of time, permanent stabilization practices are required.

Criteria

1. Select one or more of the species or seed mixtures listed in Table B.1 for the appropriate Plant Hardiness Zone (from Figure B.3), and enter them in the Temporary Seeding Summary below along with application rates, seeding dates and seeding depths. If this Summary is not put on the plan and completed, then Table B.1 plus fertilizer and lime rates must be put on the plan.
2. For sites having soil tests performed, use and show the recommended rates by the testing agency. Soil tests are not required for Temporary Seeding.
3. When stabilization is required outside of a seeding season, apply seed and mulch or straw mulch alone as prescribed in Section B-4-3.A.1.b and maintain until the next seeding season.

Temporary Seeding Summary

Hardiness Zone (from Figure B.3): 7A **Seed Mixture** (from Table B.1): COOL/WARM SEASON					**Fertilizer Rate (10-20-20)**	**Lime Rate**
No.	**Species**	**Application Rate (lb/ac)**	**Seeding Dates**	**Seeding Depths**		
	ANNUAL RYGRASS	40	MAR 1-MAY 15 AUG 1-SEP 30	0.5 IN	436 lb/ac (10 lb/1000 sf)	2 tons/ac (90 lb/1000 sf)
	FOXTAIL MILLET	30	JUN 1-JUL 31	0.5 IN		

Table B.1: Temporary Seeding for Site Stabilization

Plant Species	**Seeding Rate 1/**		**Seeding Depth 2/ (inches)**	**Recommended Seeding Dates by Plant Hardiness Zone 3/**		
	lb/ac	**lb/1000 ft²**		**5b and 6a**	**6b**	**7a and 7b**
Cool-Season Grasses						
Annual Ryegrass (*Lolium perenne ssp. multiflorum*)	40	1.0	0.5	Mar 15 to May 31; Aug 1 to Sep 30	Mar 1 to May 15; Aug 1 to Oct 15	Feb 15 to Apr 30; Aug 15 to Nov 30
Barley (*Hordeum vulgare*)	96	2.2	1.0	Mar 15 to May 31; Aug 1 to Sep 30	Mar 1 to May 15; Aug 1 to Oct 15	Feb 15 to Apr 30; Aug 15 to Nov 30
Oats (*Avena sativa*)	72	1.7	1.0	Mar 15 to May 31; Aug 1 to Sep 30	Mar 1 to May 15; Aug 1 to Oct 15	Feb 15 to Apr 30; Aug 15 to Nov 30
Wheat (*Triticum aestivum*)	120	2.8	1.0	Mar 15 to May 31; Aug 1 to Sep 30	Mar 1 to May 15; Aug 1 to Oct 15	Feb 15 to Apr 30; Aug 15 to Nov 30
Cereal Rye (*Secale cereale*)	112	2.8	1.0	Mar 15 to May 31; Aug 1 to Oct 31	Mar 1 to May 15; Aug 1 to Nov 15	Feb 15 to Apr 30; Aug 15 to Dec 15
Warm-Season Grasses						
Foxtail Millet (*Setaria italica*)	30	0.7	0.5	Jun 1 to Jul 31	May 16 to Jul 31	May 1 to Aug 14
Pearl Millet (*Pennisetum glaucum*)	20	0.5	0.5	Jun 1 to Jul 31	May 16 to Jul 31	May 1 to Aug 14

NOTES:

1/ Seeding rates for the warm-season grasses are in pounds of Pure Live Seed (PLS). Actual planting rates shall be adjusted to reflect percent seed germination and purity, as tested. Adjustments are usually not needed for the cool-season grasses.

Seeding rates listed above are for temporary seedings, when planted alone. When planted as a nurse crop with permanent seed mixes, use 1/3 of the seeding rate listed above for barley, oats, and wheat. For smaller-seeded grasses (annual ryegrass, pearl millet, foxtail millet), do not exceed more than 5% (by weight) of the overall permanent seeding mix. Cereal rye generally should not be used as a nurse crop, unless planting will occur in very late fall beyond the seeding dates for other temporary seedings. Cereal rye has allelopathic properties that inhibit the germination and growth of other plants. If it must be used as a nurse crop, seed at 1/3 of the rate listed above.

Oats are the recommended nurse crop for warm-season grasses.

2/ For sandy soils, plant seeds at twice the depth listed above.
3/ The planting dates listed are averages for each Zone and may require adjustment to reflect local conditions, especially near the boundaries of the zone.

NOTE TO CONTRACTOR: EROSION AND SEDIMENT CONTROLS SHALL BE STRICTLY ENFORCED

PROFESSIONAL CERTIFICATION
I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND,
NAME: P.E. OSVALDO RAMOS
LICENSE: No. 57602
EXPIRATION DATE: 05-04-2027

STATE OF MARYLAND
OSVALDO A. RAMOS
57602
PROFESSIONAL ENGINEER

MDE NO. 25-SF-0127
DATE: 08/26/2025

DEPARTMENT OF HEALTH & HUMAN SERVICES, USA

LSY
ARCHITECTS & LABORATORY PLANNERS

James Posey Associates
Engineering Your Vision

TIMMONS GROUP

SGH

Architect and Engineer Name and LOGO

SEAL

ARCHITECT: LOUVIERE, STRATTON & YOKEL, LLC
8484 GEORGIA AVE, SUITE 650
SILVER SPRING, MD 20910
(301) 588-1500

MEP ENGINEER: JAMES POSEY ASSOCIATES INC
11155 RED RUN BLVD
OWINGS MILLS, MD 21117
(410) 265-6100

CIVIL ENGINEER: TIMMONS GROUP
20110 ASHBROOK PL, SUITE 100
ASHBURN, VA 20147
(703) 554-6700

STRUCTURAL ENGINEER: SIMPSON GUMPERTZ & HEGER
1625 EYE STREET NW SUITE 900
WASHINGTON, DC 20006
(202) 239-4199

REVISIONS

MARK	DATE	DESCRIPTION

CONTRACTORS

A/E CON. NO.
A/E TASK NO.
CONS. CONTR.
CONS. WORK
PRIME A/E: LSY ARCHITECTS
SUB A/E: JPA / TIMMONS / SGH
CONSTR. CON.

BUILDING

FACILITY CODE
BUILDING NO.: BUILDING 31B
NAME: NIH
STREET: 9000 ROCKVILLE PIKE
CITY: BETHESDA
STATE/ZIP: MD / 20892
OTHER BUILDING NO.

PROJECT

PROJ. NO.: 24024
PROJ. OFFICER: MOHAMMED BISWAS
PROJ. MGR.: G.LEE
SUBMISSION: IFC SUBMISSION
SUB. DATE: 08/26/2025
WRK REQ. NO.: C116635

N

PROJECT TITLE: BUILDING 31B LANDSCAPE WATER INTRUSION

DRAWING TITLE: EROSION & SEDIMENT CONTROL NOTES & DETAILS

NIH
National Institutes of Health
OFFICE OF RESEARCH FACILITIES
DIVISION OF FACILITIES PLANNING

DESIGNED BY: OR
DRAWN BY: SA
CHECKED BY: OR
DATE: 08/26/2025
FILE NAME

DRAWING

DRAWING NO. C-303

10 OF 19

B-4-5 STANDARDS AND SPECIFICATIONS

FOR

PERMANENT STABILIZATION

Definition

To stabilize disturbed soils with permanent vegetation.

Purpose

To use long-lived perennial grasses and legumes to establish permanent ground cover on disturbed soils.

Conditions Where Practice Applies

Exposed soils where ground cover is needed for 6 months or more.

Criteria

A. Seed Mixtures

1. General Use
   a. Select one or more of the species or mixtures listed in Table B.3 for the appropriate Plant Hardiness Zone (from Figure B.3) and based on the site condition or purpose found on Table B.2. Enter selected mixture(s), application rates, and seeding dates in the Permanent Seeding Summary. The Summary is to be placed on the plan.
   b. Additional planting specifications for exceptional sites such as shorelines, stream banks, or dunes or for special purposes such as wildlife or aesthetic treatment may be found in USDA-NRCS Technical Field Office Guide, Section 342 - Critical Area Planting.
   c. For sites having disturbed area over 5 acres, use and show the rates recommended by the soil testing agency.
   d. For areas receiving low maintenance, apply urea form fertilizer (46-0-0) at 3 ½ pounds per 1000 square feet (150 pounds per acre) at the time of seeding in addition to the soil amendments shown in the Permanent Seeding Summary .
2. Turfgrass Mixtures
   a. Areas where turfgrass may be desired include lawns, parks, playgrounds, and commercial sites which will receive a medium to high level of maintenance.
   b. Select one or more of the species or mixtures listed below based on the site conditions or purpose. Enter selected mixture(s), application rates, and seeding dates in the Permanent Seeding Summary. The summary is to be placed on the plan.
      i. Kentucky Bluegrass: Full Sun Mixture: For use in areas that receive intensive management. Irrigation required in the areas of central Maryland and Eastern Shore. Recommended Certified Kentucky Bluegrass Cultivars Seeding Rate: 1.5 to 2.0 pounds per 1000 square feet. Choose a minimum of three Kentucky bluegrass cultivars with each ranging from 10 to 35 percent of the total mixture by weight.
      ii. Kentucky Bluegrass/Perennial Rye: Full Sun Mixture: For use in full sun areas where

rapid establishment is necessary and when turf will receive medium to intensive management. Certified Perennial Ryegrass Cultivars/Certified Kentucky Bluegrass Seeding Rate: 2 pounds mixture per 1000 square feet. Choose a minimum of three Kentucky bluegrass cultivars with each ranging from 10 to 35 percent of the total mixture by weight.

iii. Tall Fescue/Kentucky Bluegrass: Full Sun Mixture: For use in drought prone areas and/or for areas receiving low to medium management in full sun to medium shade. Recommended mixture includes; Certified Tall Fescue Cultivars 95 to 100 percent, Certified Kentucky Bluegrass Cultivars 0 to 5 percent. Seeding Rate: 5 to 8 pounds per 1000 square feet. One or more cultivars may be blended.

iv. Kentucky Bluegrass/Fine Fescue: Shade Mixture: For use in areas with shade in Bluegrass lawns. For establishment in high quality, intensively managed turf area. Mixture includes; Certified Kentucky Bluegrass Cultivars 30 to 40 percent and Certified Fine Fescue and 60 to 70 percent. Seeding Rate: 1½ to 3 pounds per 1000 square feet.

Notes:
Select turfgrass varieties from those listed in the most current University of Maryland Publication, Agronomy Memo #77, "Turfgrass Cultivar Recommendations for Maryland"

Choose certified material. Certified material is the best guarantee of cultivar purity. The certification program of the Maryland Department of Agriculture, Turf and Seed Section, provides a reliable means of consumer protection and assures a pure genetic line

c. Ideal Times of Seeding for Turf Grass Mixtures

Western MD: March 15 to June 1, August 1 to October 1 (Hardiness Zones: 5b, 6a)

Central MD: March 1 to May 15, August 15 to October 15 (Hardiness Zone: 6b)

Southern MD, Eastern Shore: March 1 to May 15, August 15 to October 15 (Hardiness Zones: 7a, 7b)

d. Till areas to receive seed by disking or other approved methods to a depth of 2 to 4 inches, level and rake the areas to prepare a proper seedbed. Remove stones and debris over 1½ inches in diameter. The resulting seedbed must be in such condition that future mowing of grasses will pose no difficulty.

e. If soil moisture is deficient, supply new seedings with adequate water for plant growth (½ to 1 inch every 3 to 4 days depending on soil texture) until they are firmly established. This is especially true when seedings are made late in the planting season, in abnormally dry or hot seasons, or on adverse sites.

Permanent Seeding Summary

Hardiness Zone (from Figure B.3): 7A Seed Mixture (from Table B.3): 11					Fertilizer Rate (10-20-20)			Lime Rate
No.	Species	Application Rate (lb/ac)	Seeding Dates	Seeding Depths	N	P_2O_5	K_20	
	CREEPING RED FESCUE	30	FEB 15-APR 30	¼- ½ in	45 pounds per acre (1.0 lb/ 1000 sf)	90 lb/ac (2 lb/ 1000 sf)	90 lb/ac (2 lb/ 1000 sf)	2 tons/ac (90 lb/ 1000 sf)
	CHEWINGS FESCUE	30	AUG 15-OCT 31	¼- ½ in				
	KENTUCKY BLUEGRASS	20	NOV 1-NOV 30	¼- ½ in				

B. Sod: To provide quick cover on disturbed areas (2:1 grade or flatter).

1. General Specifications
   a. Class of turfgrass sod must be Maryland State Certified. Sod labels must be made available to the job foreman and inspector.
   b. Sod must be machine cut at a uniform soil thickness of ¾ inch, plus or minus ¼ inch, at the time of cutting. Measurement for thickness must exclude top growth and thatch. Broken pads and torn or uneven ends will not be acceptable.
   c. Standard size sections of sod must be strong enough to support their own weight and retain their size and shape when suspended vertically with a firm grasp on the upper 10 percent of the section.
   d. Sod must not be harvested or transplanted when moisture content (excessively dry or wet) may adversely affect its survival.
   e. Sod must be harvested, delivered, and installed within a period of 36 hours. Sod not transplanted within this period must be approved by an agronomist or soil scientist prior to its installation.
2. Sod Installation
   a. During periods of excessively high temperature or in areas having dry subsoil, lightly irrigate the subsoil immediately prior to laying the sod.
   b. Lay the first row of sod in a straight line with subsequent rows placed parallel to it and tightly wedged against each other. Stagger lateral joints to promote more uniform growth and strength. Ensure that sod is not stretched or overlapped and that all joints are butted tight in order to prevent voids which would cause air drying of the roots.
   c. Wherever possible, lay sod with the long edges parallel to the contour and with staggering joints. Roll and tamp, peg or otherwise secure the sod to prevent slippage on slopes. Ensure solid contact exists between sod roots and the underlying soil surface.
   d. Water the sod immediately following rolling and tamping until the underside of the new sod pad and soil surface below the sod are thoroughly wet. Complete the operations of laying, tamping and irrigating for any piece of sod within eight hours.

3. Sod Maintenance
   a. In the absence of adequate rainfall, water daily during the first week or as often and sufficiently as necessary to maintain moist soil to a depth of 4 inches. Water sod during the heat of the day to prevent wilting.
   b. After the first week, sod watering is required as necessary to maintain adequate moisture content.
   c. Do not mow until the sod is firmly rooted. No more than ⅓ of the grass leaf must be removed by the initial cutting or subsequent cuttings. Maintain a grass height of at least 3 inches unless otherwise specified.

B-4-8 STANDARDS AND SPECIFICATIONS

FOR

STOCKPILE AREA

Definition

A mound or pile of soil protected by appropriately designed erosion and sediment control measures.

Purpose

To provide a designated location for the temporary storage of soil that controls the potential for erosion, sedimentation, and changes to drainage patterns.

Conditions Where Practice Applies

Stockpile areas are utilized when it is necessary to salvage and store soil for later use.

Criteria

1. The stockpile location and all related sediment control practices must be clearly indicated on the erosion and sediment control plan.
2. The footprint of the stockpile must be sized to accommodate the anticipated volume of material and based on a side slope ratio no steeper than 2:1. Benching must be provided in accordance with Section B-3 Land Grading.
3. Runoff from the stockpile area must drain to a suitable sediment control practice.
4. Access the stockpile area from the upgrade side.
5. Clear water runoff into the stockpile area must be minimized by use of a diversion device such as an earth dike, temporary swale or diversion fence. Provisions must be made for discharging concentrated flow in a non-erosive manner.
6. Where runoff concentrates along the toe of the stockpile fill, an appropriate erosion/sediment control practice must be used to intercept the discharge.
7. Stockpiles must be stabilized in accordance with the 3/7 day stabilization requirement as well as Standard B-4-1 Incremental Stabilization and Standard B-4-4 Temporary Stabilization.
8. If the stockpile is located on an impervious surface, a liner should be provided below the stockpile to facilitate cleanup. Stockpiles containing contaminated material must be covered with impermeable sheeting.

Maintenance

The stockpile area must continuously meet the requirements for Adequate Vegetative Establishment in accordance with Section B-4 Vegetative Stabilization. Side slopes must be maintained at no steeper than a 2:1 ratio. The stockpile area must be kept free of erosion. If the vertical height of a stockpile exceeds 20 feet for 2:1 slopes, 30 feet for 3:1 slopes, or 40 feet for 4:1 slopes, benching must be provided in accordance with Section B-3 Land Grading.

D. Design Certification

DESIGN CERTIFICATION

I hereby certify that this plan has been designed in accordance with the 2011 Maryland Standards and Specifications for Soil Erosion and Sediment Control, the 2000 Maryland Stormwater Design Manual, Volumes I & II including supplements, the Environment Article Sections 4-101 through 116 and Sections 4-201 and 215, and the Code of Maryland Regulations (COMAR) 26.17.01 and COMAR 26.17.02 for erosion and sediment control and stormwater management, respectively.

05/07/2025
Date

Designer's Signature

Md. Registration No. 0057602
P.E. R.L.S., RLA, or R.A. (circle one)

Osvaldo Ramos
Printed Name

NOTE TO CONTRACTOR: EROSION AND SEDIMENT CONTROLS SHALL BE STRICTLY ENFORCED

PROFESSIONAL CERTIFICATION
I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND,
NAME: P.E. OSVALDO RAMOS
LICENSE: No. 57602
EXPIRATION DATE: 05-04-2027

STATE OF MARYLAND · OSVALDO A. RAMOS · 57602 · PROFESSIONAL ENGINEER

MDE NO. 25-SF-0127 DATE: 08/26/2025

DEPARTMENT OF HEALTH & HUMAN SERVICES, USA

LSY ARCHITECTS & LABORATORY PLANNERS

James Posey Associates Engineering Your Vision

TIMMONS GROUP

SGH

Architect and Engineer Name and LOGO

SEAL

ARCHITECT: LOUVIERE, STRATTON & YOKEL, LLC, 8484 GEORGIA AVE, SUITE 650, SILVER SPRING, MD 20910, (301) 588-1500

MEP ENGINEER: JAMES POSEY ASSOCIATES INC, 11155 RED RUN BLVD, OWINGS MILLS, MD 21117, (410) 265-6100

CIVIL ENGINEER: TIMMONS GROUP, 20110 ASHBROOK PL, SUITE 100, ASHBURN, VA 20147, (703) 554-6700

STRUCTURAL ENGINEER: SIMPSON GUMPERTZ & HEGER, 1625 EYE STREET NW SUITE 900, WASHINGTON, DC 20006, (202) 239-4199

REVISIONS

MARK	DATE	DESCRIPTION

CONTRACTORS

A/E CON. NO.	
A/E TASK NO.	
CONS. CONTR.	
CONS. WORK	
PRIME A/E	LSY ARCHITECTS
SUB A/E	JPA / TIMMONS / SGH
CONSTR. CON.	

BUILDING

FACILITY CODE	
BUILDING NO.	BUILDING 31B
NAME	NIH
STREET	9000 ROCKVILLE PIKE
CITY	BETHESDA
STATE/ZIP	MD / 20892
OTHER BUILDING NO.	

PROJECT

PROJ. NO.	24024
PROJ. OFFICER	MOHAMMED BISWAS
PROJ. MGR.	G.LEE
SUBMISSION	IFC SUBMISSION
SUB. DATE	08/26/2025
WRK REQ. NO.	C116635

N

PROJECT TITLE: BUILDING 31B LANDSCAPE WATER INTRUSION

DRAWING TITLE: EROSION & SEDIMENT CONTROL NOTES & DETAILS

NIH National Institutes of Health
OFFICE OF RESEARCH FACILITIES
DIVISION OF FACILITIES PLANNING

DESIGNED BY	OR
DRAWN BY	SA
CHECKED BY	OR
DATE	08/26/2025
FILE NAME	

DRAWING NO. C-304

Tree Protection Fence Detail

Not to scale

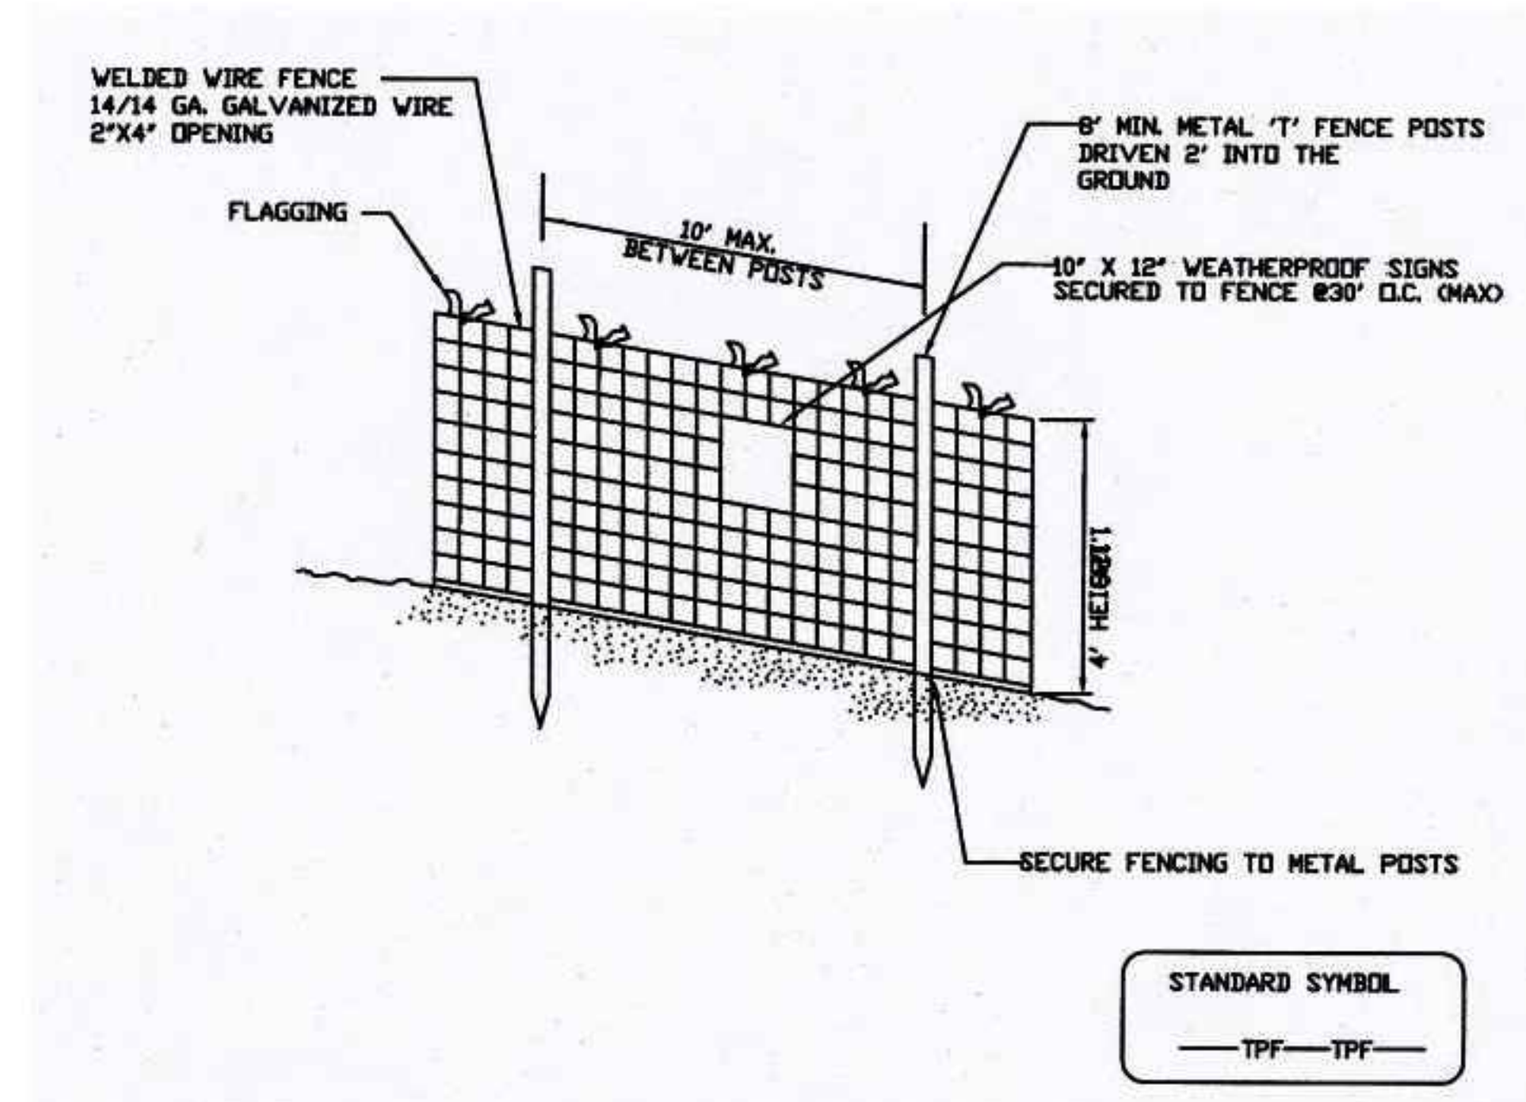

NOTES

1. Practice may be combined with sediment control fencing.
2. Location and limits of fencing should be coordinated in field with arborist.
3. Boundaries of protection area should be staked prior to installing protective device.
4. Root damage should be avoided.
5. Protection signage is required.
6. Fencing shall be maintained throughout construction.

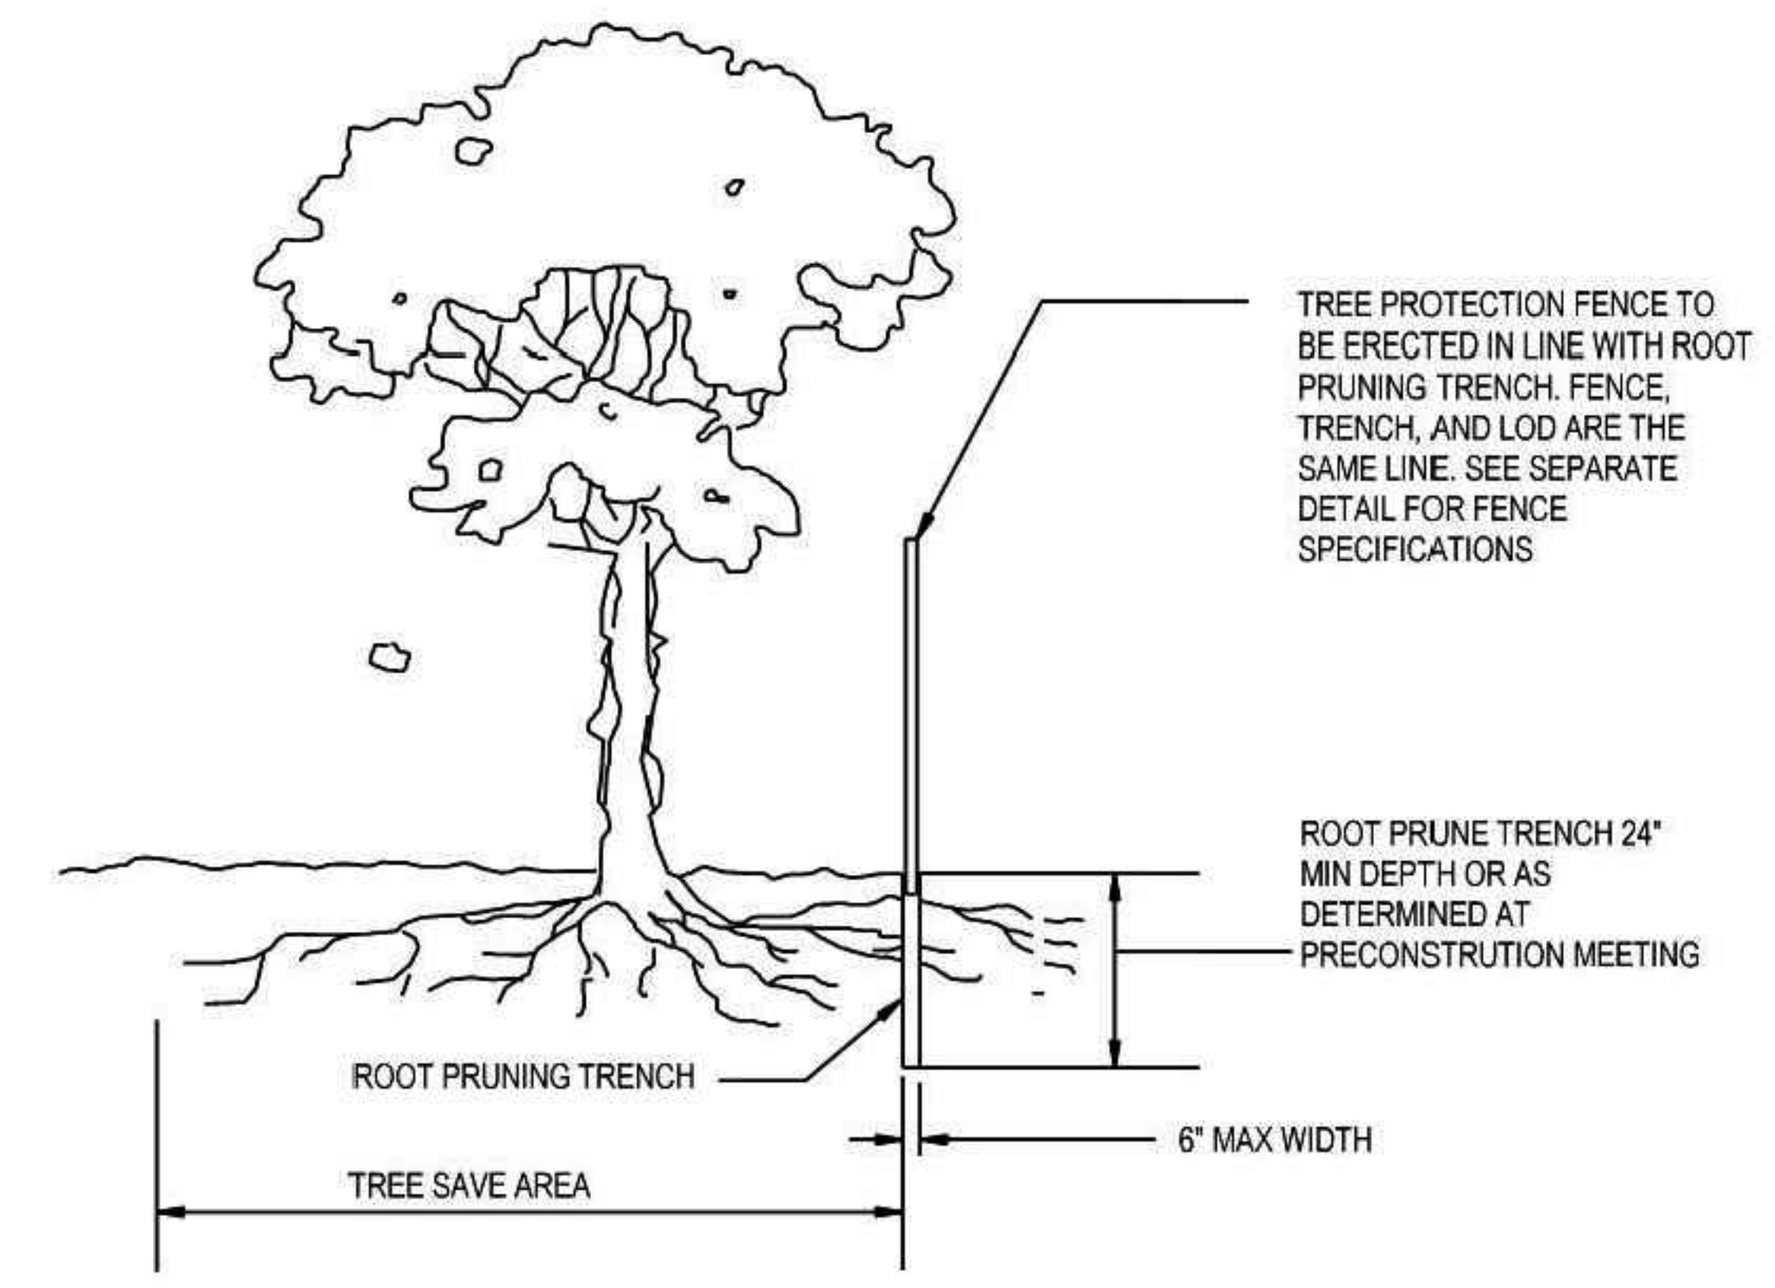

NOTES:

1. RETENTION AREAS WILL BE SET AS PART OF THE REVIEW PROCESS AND PRECONSTRUCTION MEETING.
2. BOUNDARIES OF RETENTION AREAS MUST BE STAKED AT THE PRECONSTRUCTION MEETING AND FLAGGED PRIOR TO TRENCHING.
3. EXACT LOCATION OF TRENCH SHALL BE DETERMINED IN THE FIELD IN COORDINATION WITH THE FOREST CONSERVATION (FC) INSPECTOR .
4. TRENCH SHOULD BE IMMEDIATELY BACKFILLED WITH EXCAVATED SOIL OR OTHER ORGANIC SOIL AS SPECIFIED PER PLAN OR BY THE FC INSPECTOR.
5. ROOTS SHALL BE CLEANLY CUT USING VIBRATORY KNIFE OR OTHER ACCEPTABLE EQUIPMENT.
6. ALL PRUNING MUST BE EXECUTED WITH LOD SHOWN ON PLANS OR AS AUTHORIZED IN WRITING BY THE FC INSPECTOR.

ROOT PRUNING DETAIL

NTS

DETAIL B-1 STABILIZED CONSTRUCTION ENTRANCE

STANDARD SYMBOL

SCE

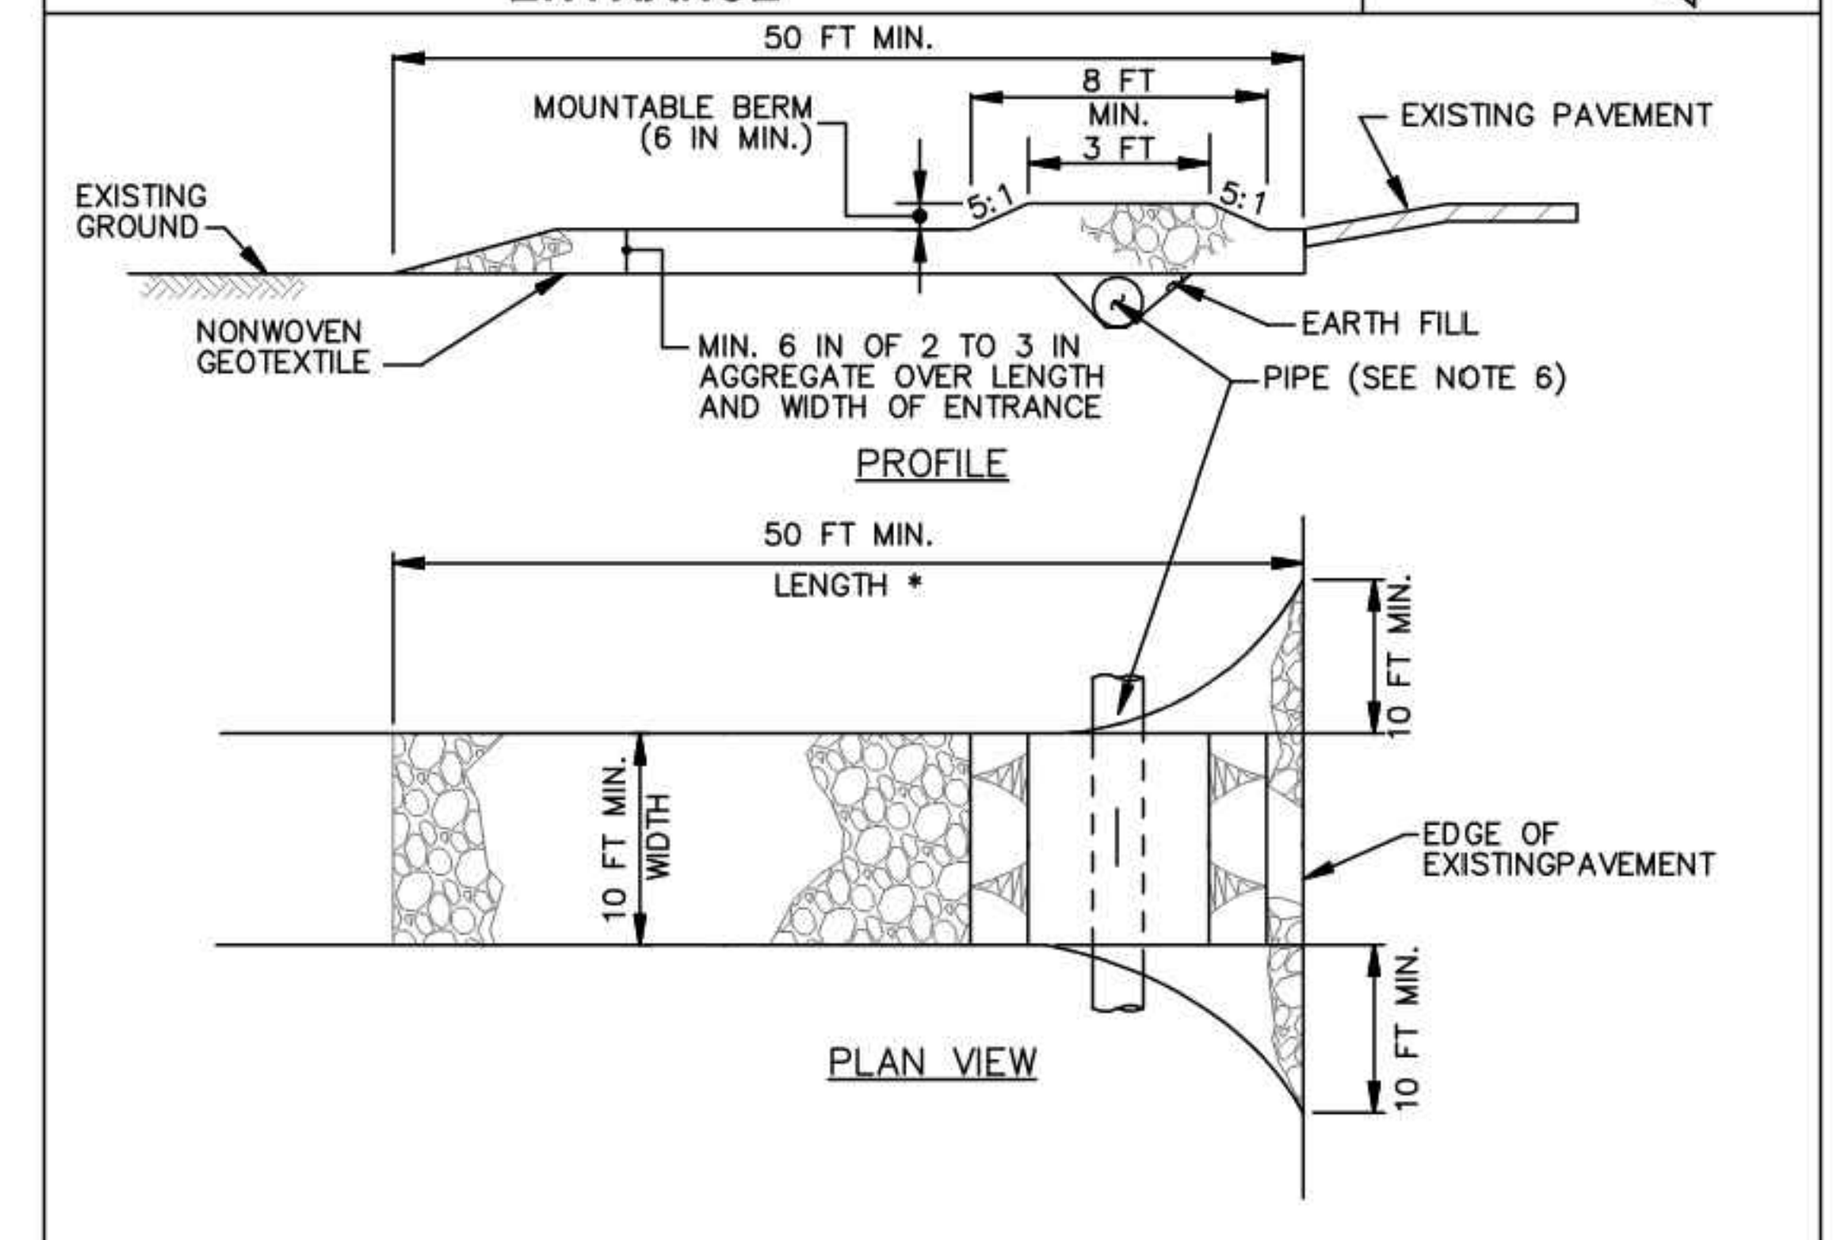

CONSTRUCTION SPECIFICATIONS

1. PLACE STABILIZED CONSTRUCTION ENTRANCE IN ACCORDANCE WITH THE APPROVED PLAN. VEHICLES MUST TRAVEL OVER THE ENTIRE LENGTH OF THE SCE. USE MINIMUM LENGTH OF 50 FEET (*30 FEET FOR SINGLE RESIDENCE LOT). USE MINIMUM WIDTH OF 10 FEET. FLARE SCE 10 FEET MINIMUM AT THE EXISTING ROAD TO PROVIDE A TURNING RADIUS.
2. PIPE ALL SURFACE WATER FLOWING TO OR DIVERTED TOWARD THE SCE UNDER THE ENTRANCE, MAINTAINING POSITIVE DRAINAGE. PROTECT PIPE INSTALLED THROUGH THE SCE WITH A MOUNTABLE BERM WITH 5:1 SLOPES AND A MINIMUM OF 12 INCHES OF STONE OVER THE PIPE. PROVIDE PIPE AS SPECIFIED ON APPROVED PLAN. WHEN THE SCE IS LOCATED AT A HIGH SPOT AND HAS NO DRAINAGE TO CONVEY, A PIPE IS NOT NECESSARY. A MOUNTABLE BERM IS REQUIRED WHEN SCE IS NOT LOCATED AT A HIGH SPOT.
3. PREPARE SUBGRADE AND PLACE NONWOVEN GEOTEXTILE, AS SPECIFIED IN SECTION H–1 MATERIALS.
4. PLACE CRUSHED AGGREGATE (2 TO 3 INCHES IN SIZE) OR EQUIVALENT RECYCLED CONCRETE (WITHOUT REBAR) AT LEAST 6 INCHES DEEP OVER THE LENGTH AND WIDTH OF THE SCE.
5. MAINTAIN ENTRANCE IN A CONDITION THAT MINIMIZES TRACKING OF SEDIMENT. ADD STONE OR MAKE OTHER REPAIRS AS CONDITIONS DEMAND TO MAINTAIN CLEAN SURFACE, MOUNTABLE BERM, AND SPECIFIED DIMENSIONS. IMMEDIATELY REMOVE STONE AND/OR SEDIMENT SPILLED, DROPPED, OR TRACKED ONTO ADJACENT ROADWAY BY VACUUMING, SCRAPING, AND/OR SWEEPING. WASHING ROADWAY TO REMOVE MUD TRACKED ONTO PAVEMENT IS NOT ACCEPTABLE UNLESS WASH WATER IS DIRECTED TO AN APPROVED SEDIMENT CONTROL PRACTICE.

MARYLAND STANDARDS AND SPECIFICATIONS FOR SOIL EROSION AND SEDIMENT CONTROL

U.S. DEPARTMENT OF AGRICULTURE NATURAL RESOURCES CONSERVATION SERVICE	2011	MARYLAND DEPARTMENT OF ENVIRONMENT WATER MANAGEMENT ADMINISTRATION

DETAIL E-3 SUPER SILT FENCE

STANDARD SYMBOL

SSF

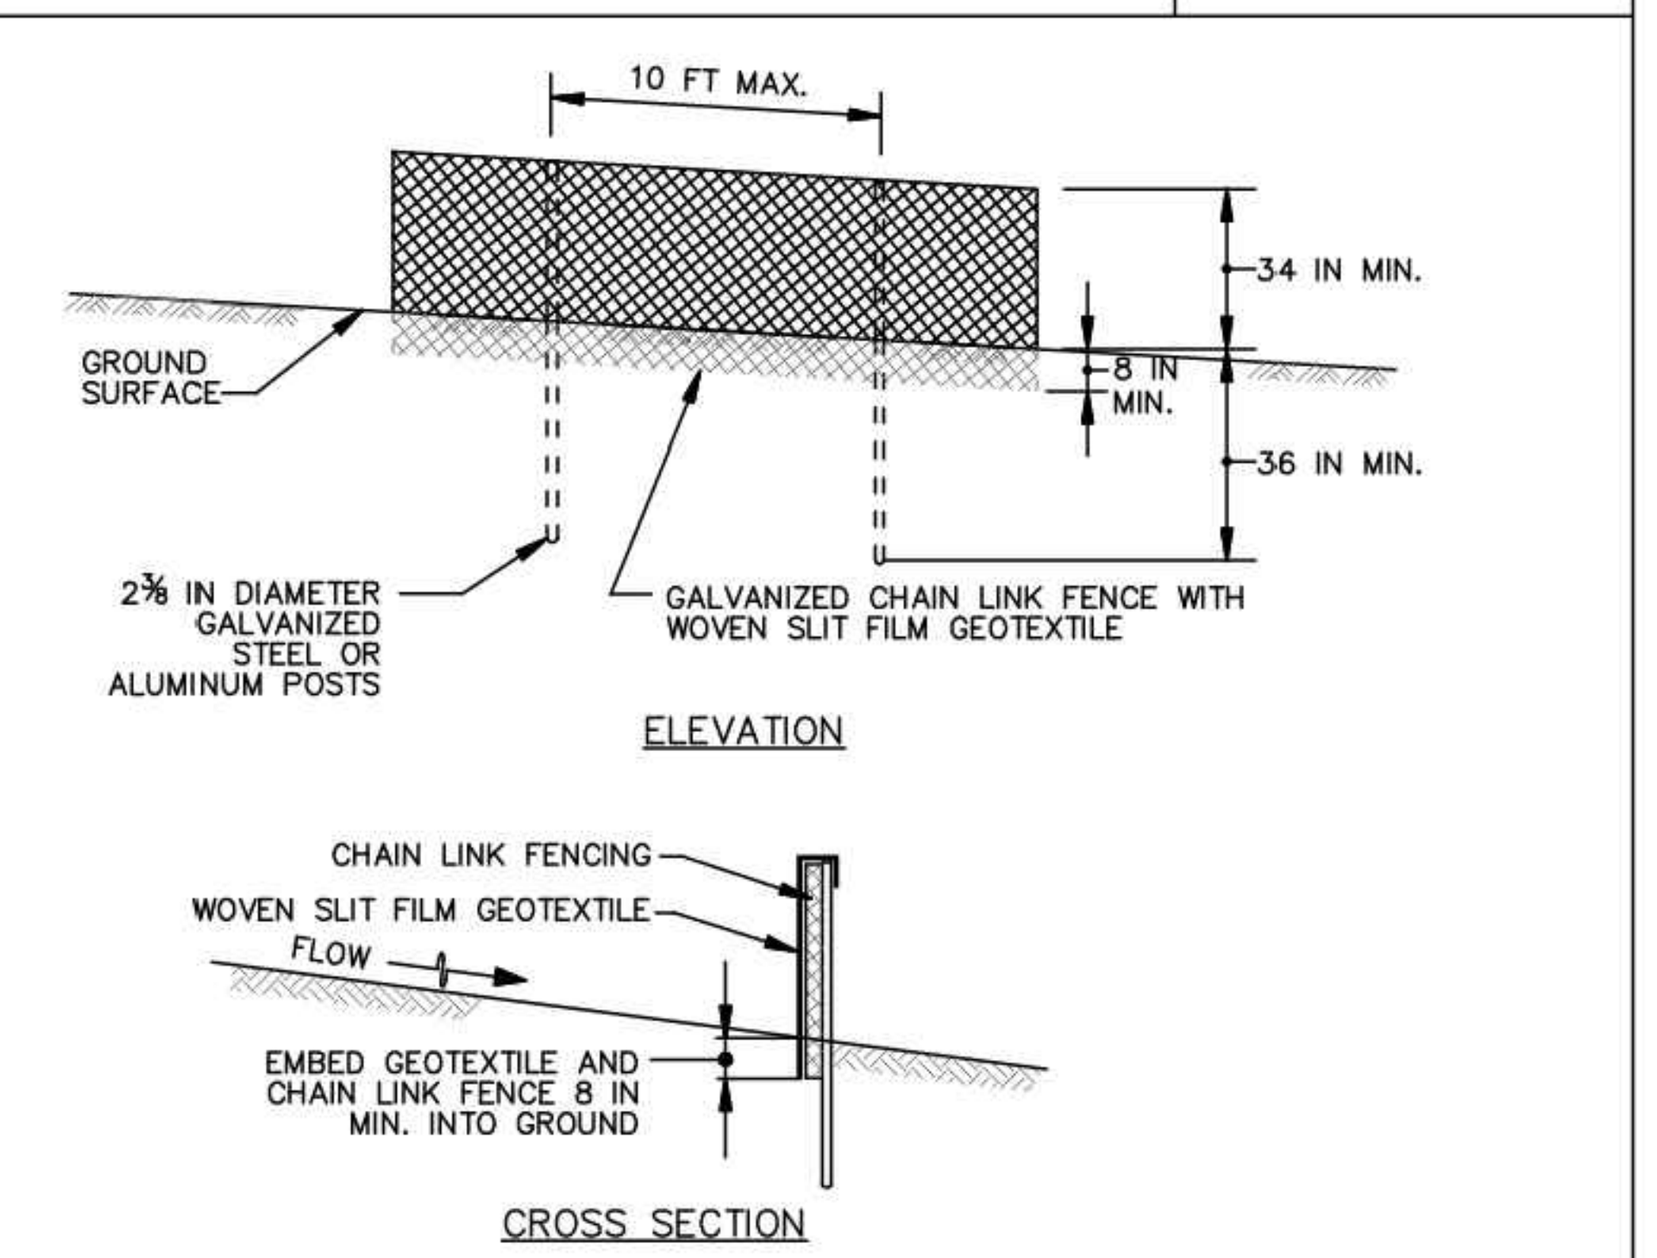

CONSTRUCTION SPECIFICATIONS

1. INSTALL 2⅜ INCH DIAMETER GALVANIZED STEEL POSTS OF 0.095 INCH WALL THICKNESS AND SIX FOOT LENGTH SPACED NO FURTHER THAN 10 FEET APART. DRIVE THE POSTS A MINIMUM OF 36 INCHES INTO THE GROUND.
2. FASTEN 9 GAUGE OR HEAVIER GALVANIZED CHAIN LINK FENCE (2⅜ INCH MAXIMUM OPENING) 42 INCHES IN HEIGHT SECURELY TO THE FENCE POSTS WITH WIRE TIES OR HUG RINGS.
3. FASTEN WOVEN SLIT FILM GEOTEXTILE AS SPECIFIED IN SECTION H–1 MATERIALS, SECURELY TO THE UPSLOPE SIDE OF CHAIN LINK FENCE WITH TIES SPACED EVERY 24 INCHES AT THE TOP AND MID SECTION. EMBED GEOTEXTILE AND CHAIN LINK FENCE A MINIMUM OF 8 INCHES INTO THE GROUND.
4. WHERE ENDS OF THE GEOTEXTILE COME TOGETHER, THE ENDS SHALL BE OVERLAPPED BY 6 INCHES, FOLDED, AND STAPLED TO PREVENT SEDIMENT BY PASS.
5. EXTEND BOTH ENDS OF THE SUPER SILT FENCE A MINIMUM OF FIVE HORIZONTAL FEET UPSLOPE AT 45 DEGREES TO THE MAIN FENCE ALIGNMENT TO PREVENT RUNOFF FROM GOING AROUND THE ENDS OF THE SUPER SILT FENCE.
6. PROVIDE MANUFACTURER CERTIFICATION TO THE INSPECTION/ENFORCEMENT AUTHORITY SHOWING THAT GEOTEXTILE USED MEETS THE REQUIREMENTS IN SECTION H–1 MATERIALS.
7. REMOVE ACCUMULATED SEDIMENT AND DEBRIS WHEN BULGES DEVELOP IN FENCE OR WHEN SEDIMENT REACHES 25% OF FENCE HEIGHT. REPLACE GEOTEXTILE IF TORN. IF UNDERMINING OCCURS, REINSTALL CHAIN LINK FENCING AND GEOTEXTILE.

MARYLAND STANDARDS AND SPECIFICATIONS FOR SOIL EROSION AND SEDIMENT CONTROL

U.S. DEPARTMENT OF AGRICULTURE NATURAL RESOURCES CONSERVATION SERVICE	2011	MARYLAND DEPARTMENT OF ENVIRONMENT WATER MANAGEMENT ADMINISTRATION

E-9 STANDARDS AND SPECIFICATIONS

FOR

STORM DRAIN INLET PROTECTION

Definition

A filter consisting of stone and/or nonwoven geotextile constructed around a storm drain inlet.

Purpose

To filter sediment-laden runoff before it enters the storm drain system.

Conditions Where Practices Applies

When sediment-laden flow is directed to an inlet and it is not possible to temporarily divert the storm drain outfall into a sediment trapping practice, or when watertight blocking of inlets is not advisable.

There are multiple types of inlet protection, each intended for use with a particular type of inlet.

Design Criteria

1. Determine drainage area for all inlet locations. Use Table E.7 for drainage area constraints.
2. Provisions (e.g., asphalt berm, earth dike, etc.) should be made to prevent flow bypass for inlets on slopes. Otherwise, bypassed flow must be addressed by a down slope sediment control practice. If the maximum drainage area to an inlet is exceeded (see Table E-7), the inlet needs to be protected or blocked and additional controls installed.

Table E.7: Inlet Protection Drainage Area Limits

Type of Inlet Protection	Maximum Drainage Area
Standard Inlet Protection	A - ¼ acre B - 1 acre
At –Grade Inlet Protection	1 acre
Curb Inlet Protection (CIP)	¼ acre
Median Inlet Protection	1 acre
Median Sump Inlet	1 acre/side
Combination Inlet Protection	¼ acre
Gabion Inlet Protection	1½ acres

Maintenance

Storm drain inlet protection requires frequent maintenance. To maintain function and avoid premature clogging, accumulated sediment needs to be removed after each rain event. If the inlet protection does not completely drain within 24 hours after a storm event, it is clogged. When this occurs, remove accumulated sediment and clean, or replace the geotextile and stone.

E.23

DETAIL E-9-1 STANDARD INLET PROTECTION

STANDARD SYMBOL

SIP

TYPE A MAXIMUM DRAINAGE AREA = ¼ ACRE
TYPE B MAXIMUM DRAINAGE AREA = 1 ACRE

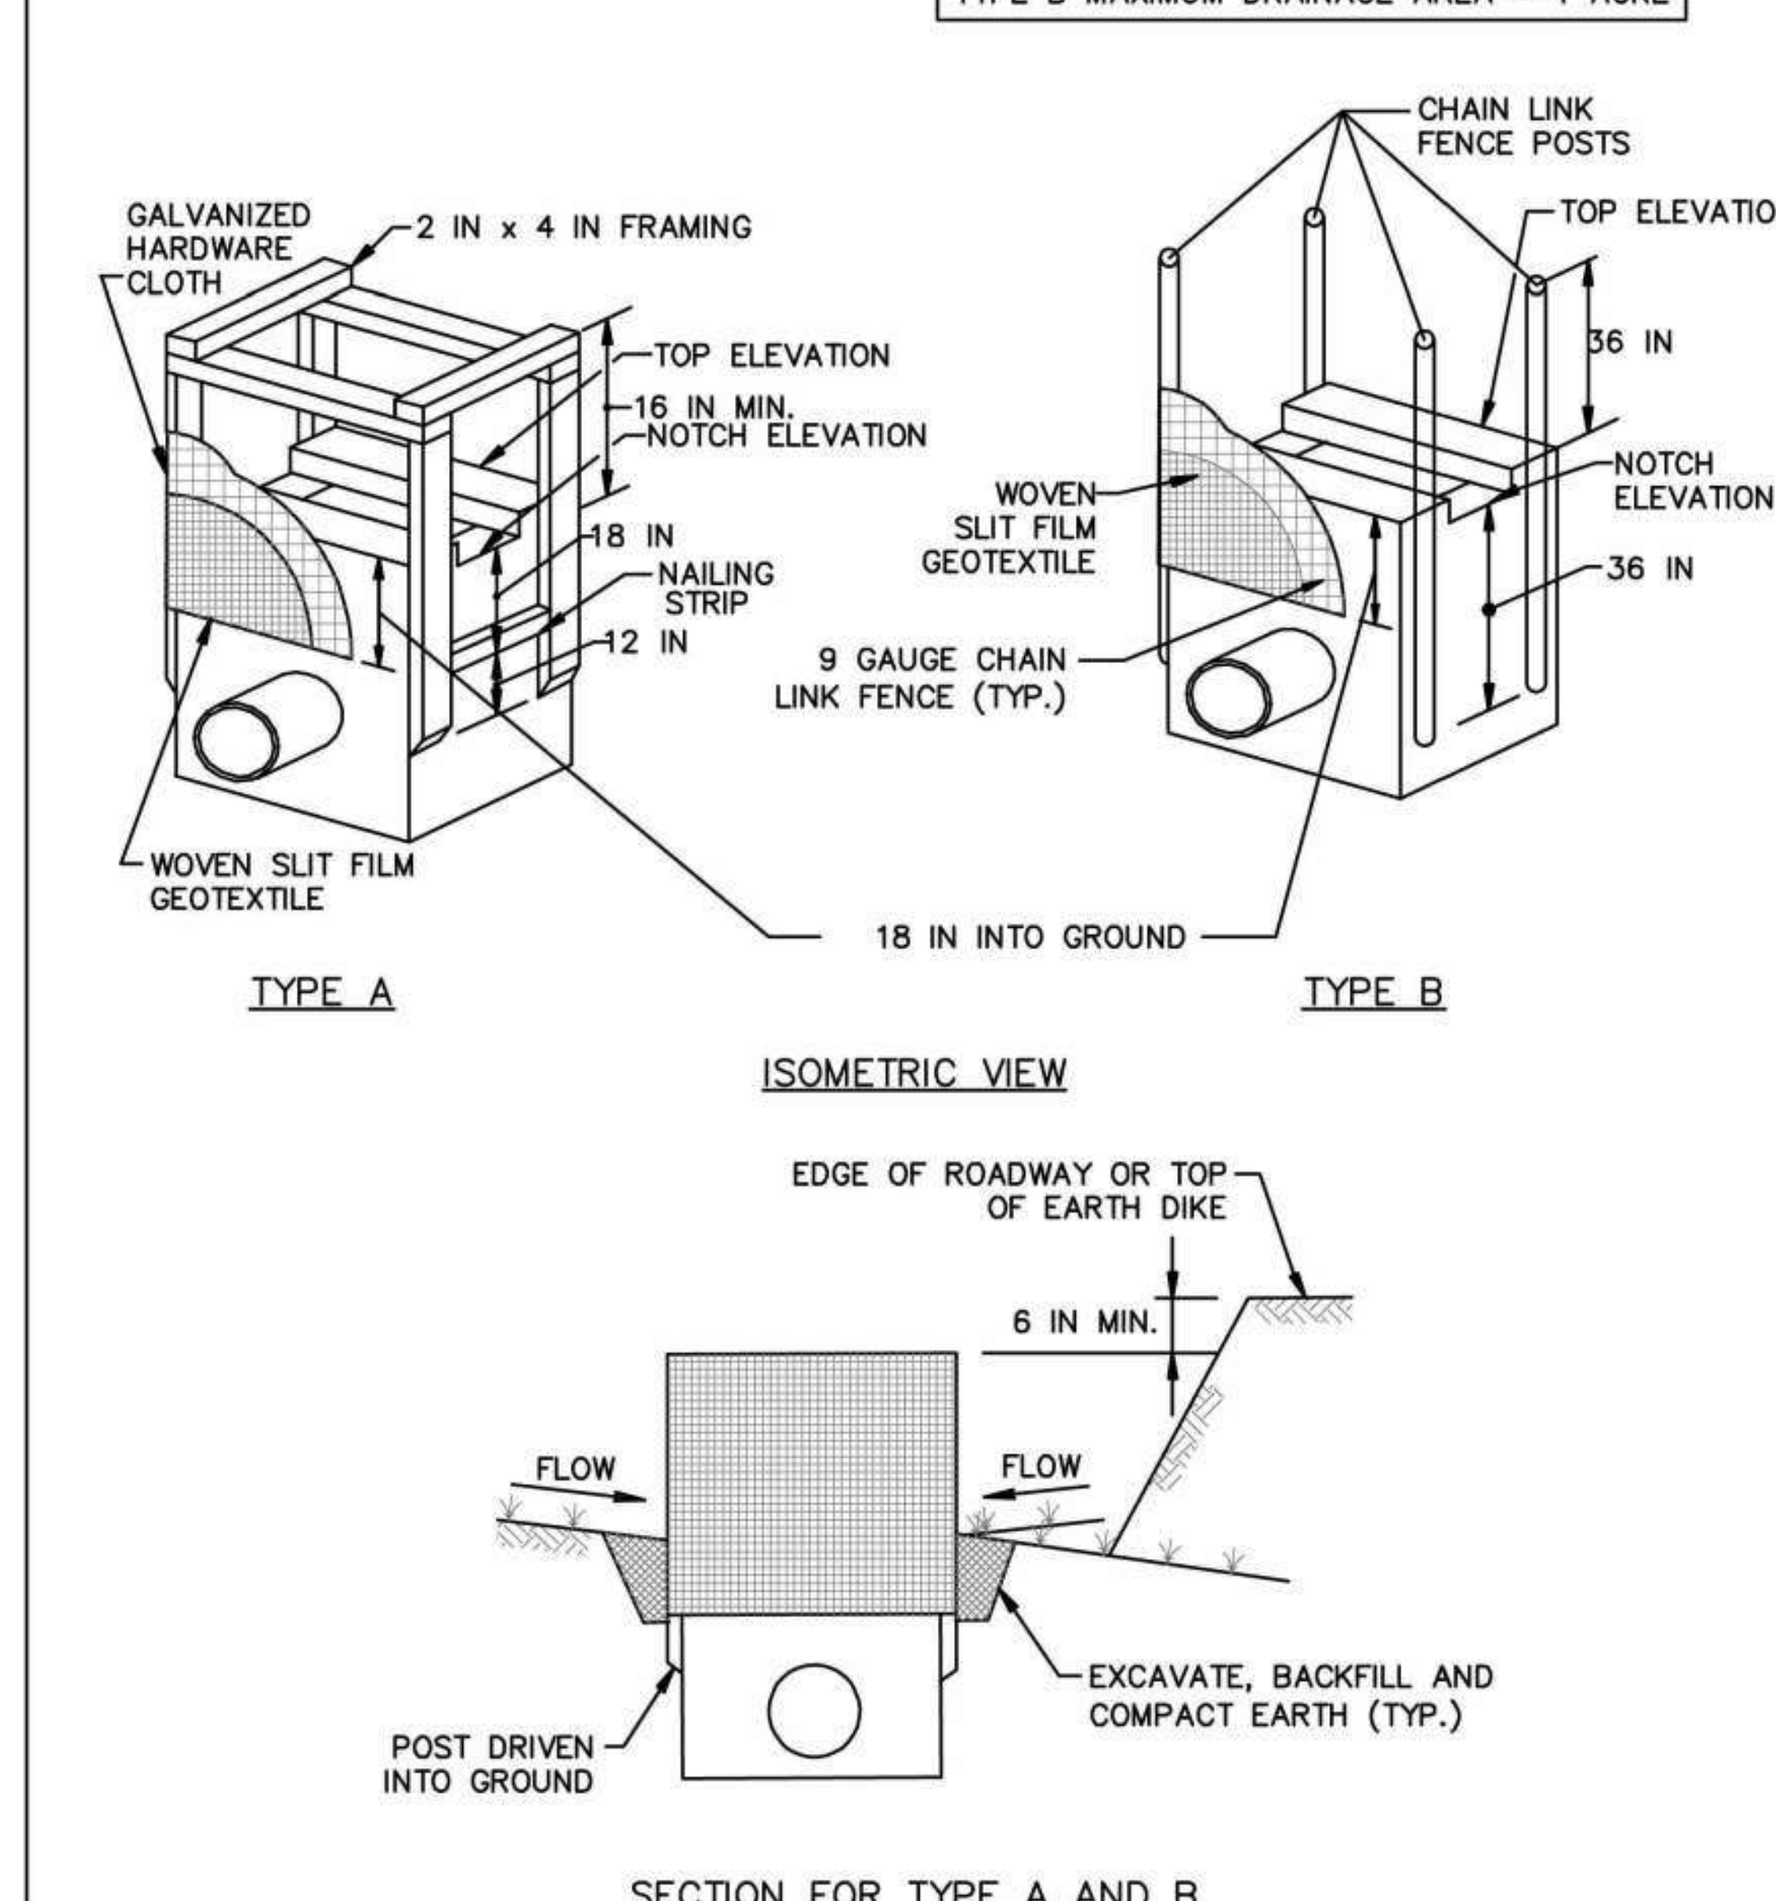

1 OF 2

MARYLAND STANDARDS AND SPECIFICATIONS FOR SOIL EROSION AND SEDIMENT CONTROL

U.S. DEPARTMENT OF AGRICULTURE NATURAL RESOURCES CONSERVATION SERVICE	2011	MARYLAND DEPARTMENT OF ENVIRONMENT WATER MANAGEMENT ADMINISTRATION

E.24

NOTE TO CONTRACTOR: EROSION AND SEDIMENT CONTROLS SHALL BE STRICTLY ENFORCED

PROFESSIONAL CERTIFICATION
I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND,
NAME: P.E. OSVALDO RAMOS
LICENSE: No. 57602
EXPIRATION DATE: 05-04-2027

STATE OF MARYLAND · OSVALDO A. RAMOS · 57602 · PROFESSIONAL ENGINEER

MDE NO. 25-SF-0127

DATE: 08/26/2025

DEPARTMENT OF HEALTH & HUMAN SERVICES, USA

LSY ARCHITECTS & LABORATORY PLANNERS

James Posey Associates — Engineering Your Vision

TIMMONS GROUP

SGH

Architect and Engineer Name and LOGO

ARCHITECT: LOUVIERE, STRATTON & YOKEL, LLC, 8484 GEORGIA AVE, SUITE 650, SILVER SPRING, MD 20910, (301) 588-1500
MEP ENGINEER: JAMES POSEY ASSOCIATES INC, 11155 RED RUN BLVD, OWINGS MILLS, MD 21117, (410) 265-6100
CIVIL ENGINEER: TIMMONS GROUP, 20110 ASHBROOK PL, SUITE 100, ASHBURN, VA 20147, (703) 554-6700
STRUCTURAL ENGINEER: SIMPSON GUMPERTZ & HEGER, 1625 EYE STREET NW SUITE 900, WASHINGTON, DC 20006, (202) 239-4199

SEAL

REVISIONS

MARK	DATE	DESCRIPTION

CONTRACTORS

A/E CON. NO.	
A/E TASK NO.	
CONS. CONTR.	
CONS. WORK	
PRIME A/E	LSY ARCHITECTS
SUB A/E	JPA / TIMMONS / SGH
CONSTR. CON.	

BUILDING

FACILITY CODE	
BUILDING NO.	BUILDING 31B
NAME	NIH
STREET	9000 ROCKVILLE PIKE
CITY	BETHESDA
STATE/ZIP	MD / 20892
OTHER BUILDING NO.	

PROJECT

PROJ. NO.	24024
PROJ. OFFICER	MOHAMMED BISWAS
PROJ. MGR.	G.LEE
SUBMISSION	IFC SUBMISSION
SUB. DATE	08/26/2025
WRK REQ. NO.	C116635

N

PROJECT TITLE: BUILDING 31B LANDSCAPE WATER INTRUSION

DRAWING TITLE: EROSION & SEDIMENT CONTROL NOTES & DETAILS

NIH National Institutes of Health
OFFICE OF RESEARCH FACILITIES
DIVISION OF FACILITIES PLANNING

DESIGNED BY	OR
DRAWN BY	SA
CHECKED BY	OR
DATE	08/26/2025
FILE NAME	

DRAWING NO. C-305

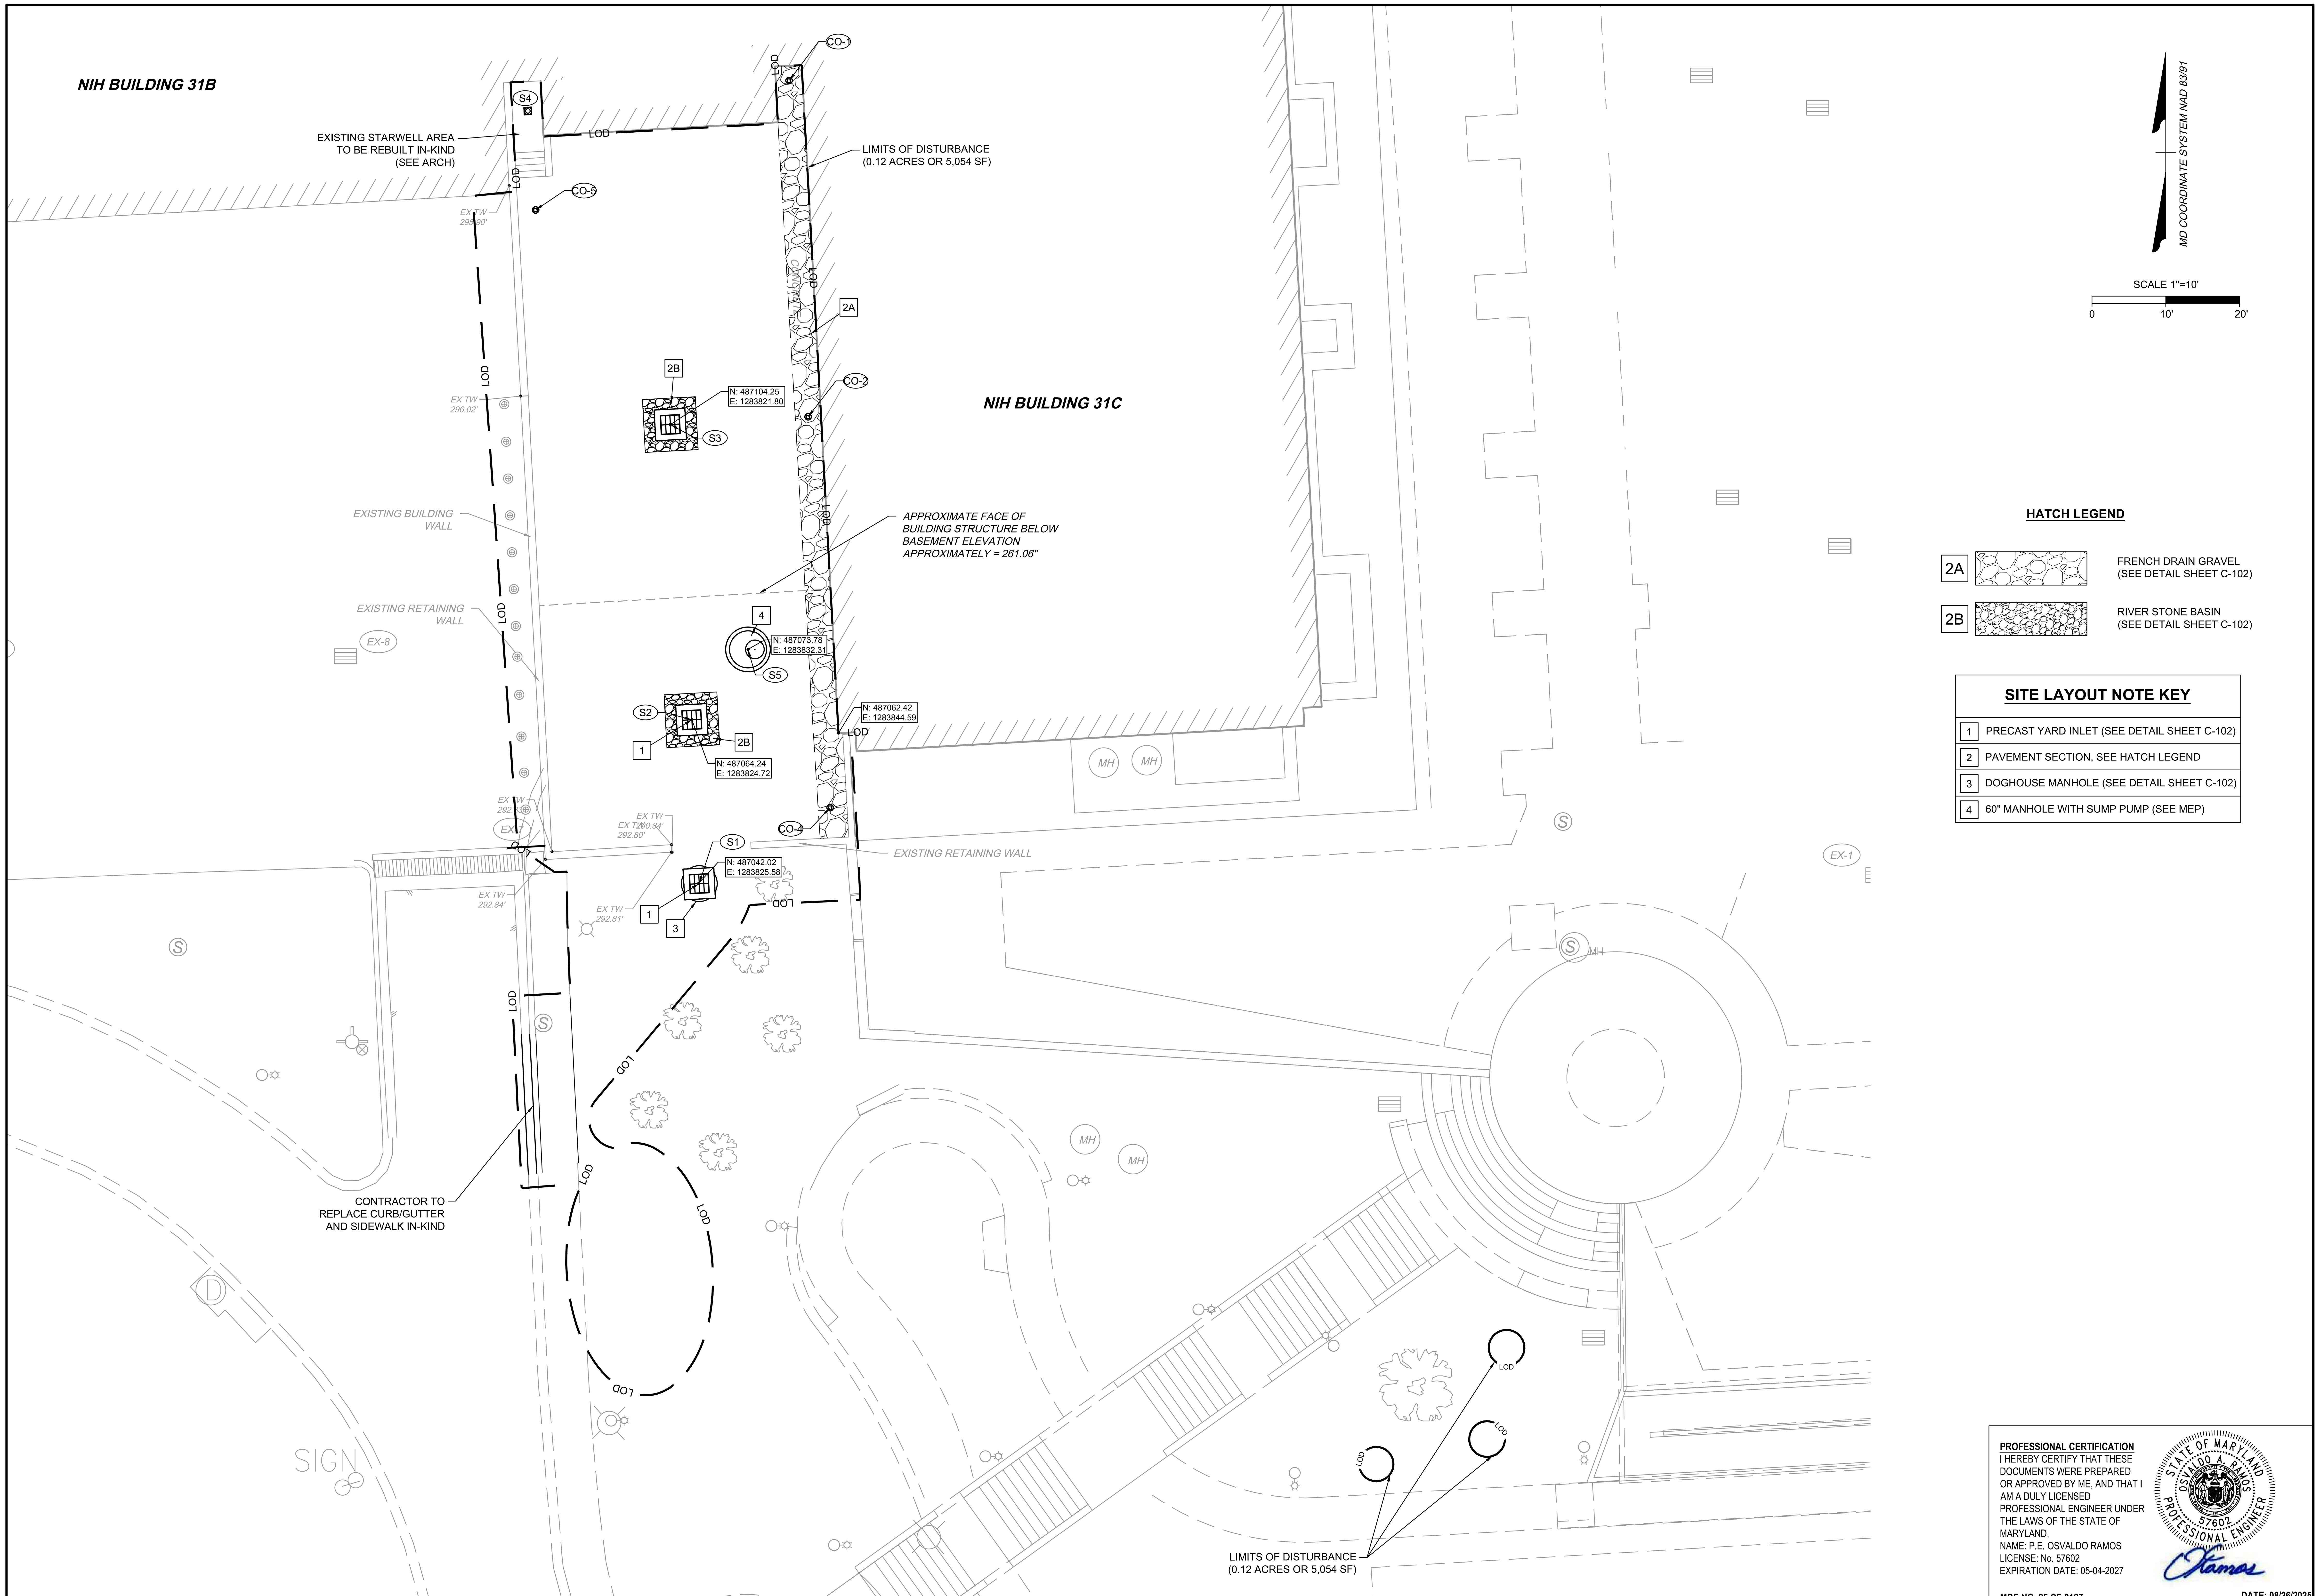

HATCH LEGEND

2A	FRENCH DRAIN GRAVEL (SEE DETAIL SHEET C-102)
2B	RIVER STONE BASIN (SEE DETAIL SHEET C-102)

SITE LAYOUT NOTE KEY

1	PRECAST YARD INLET (SEE DETAIL SHEET C-102)
2	PAVEMENT SECTION, SEE HATCH LEGEND
3	DOGHOUSE MANHOLE (SEE DETAIL SHEET C-102)
4	60" MANHOLE WITH SUMP PUMP (SEE MEP)

PROFESSIONAL CERTIFICATION
I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND,
NAME: P.E. OSVALDO RAMOS
LICENSE: No. 57602
EXPIRATION DATE: 05-04-2027

MDE NO. 25-SF-0127
DATE: 08/26/2025

PROPERTY OF THE UNITED STATES GOVERNMENT
FOR OFFICIAL USE ONLY
Do not remove this notice
Properly destroy documents when no longer needed

DEPARTMENT OF HEALTH & HUMAN SERVICES, USA

LSY ARCHITECTS & LABORATORY PLANNERS
James Posey Associates — Engineering Your Vision
TIMMONS GROUP
SGH

Architect and Engineer Name and LOGO

ARCHITECT: LOUVIERE, STRATTON & YOKEL, LLC, 8484 GEORGIA AVE, SUITE 650, SILVER SPRING, MD 20910, (301) 588-1500
MEP ENGINEER: JAMES POSEY ASSOCIATES INC, 11155 RED RUN BLVD, OWINGS MILLS, MD 21117, (410) 265-6100
CIVIL ENGINEER: TIMMONS GROUP, 20110 ASHBROOK PL, SUITE 100, ASHBURN, VA 20147, (703) 554-6700
STRUCTURAL ENGINEER: SIMPSON GUMPERTZ & HEGER, 1625 EYE STREET NW SUITE 900, WASHINGTON, DC 20006, (202) 239-4199

SEAL

REVISIONS

MARK	DATE	DESCRIPTION

CONTRACTORS

A/E CON. NO.	
A/E TASK NO.	
CONS. CONTR.	
CONS. WORK	
PRIME A/E	LSY ARCHITECTS
SUB A/E	JPA / TIMMONS / SGH
CONSTR. CON.	

BUILDING

FACILITY CODE	
BUILDING NO.	BUILDING 31B
NAME	NIH
STREET	9000 ROCKVILLE PIKE
CITY	BETHESDA
STATE/ZIP	MD / 20892
OTHER BUILDING NO.	

PROJECT

PROJ. NO.	24024
PROJ. OFFICER	MOHAMMED BISWAS
PROJ. MGR.	G.LEE
SUBMISSION	IFC SUBMISSION
SUB. DATE	08/26/2025
WRK REQ. NO.	C116635

N

PROJECT TITLE: BUILDING 31B LANDSCAPE WATER INTRUSION

DRAWING TITLE: GEOMETRY & SITE PLAN

National Institutes of Health
OFFICE OF RESEARCH FACILITIES
DIVISION OF FACILITIES PLANNING

DESIGNED BY	OR
DRAWN BY	SA
CHECKED BY	OR
DATE	08/26/2025
FILE NAME	

DRAWING NO. C-400

13 OF 19

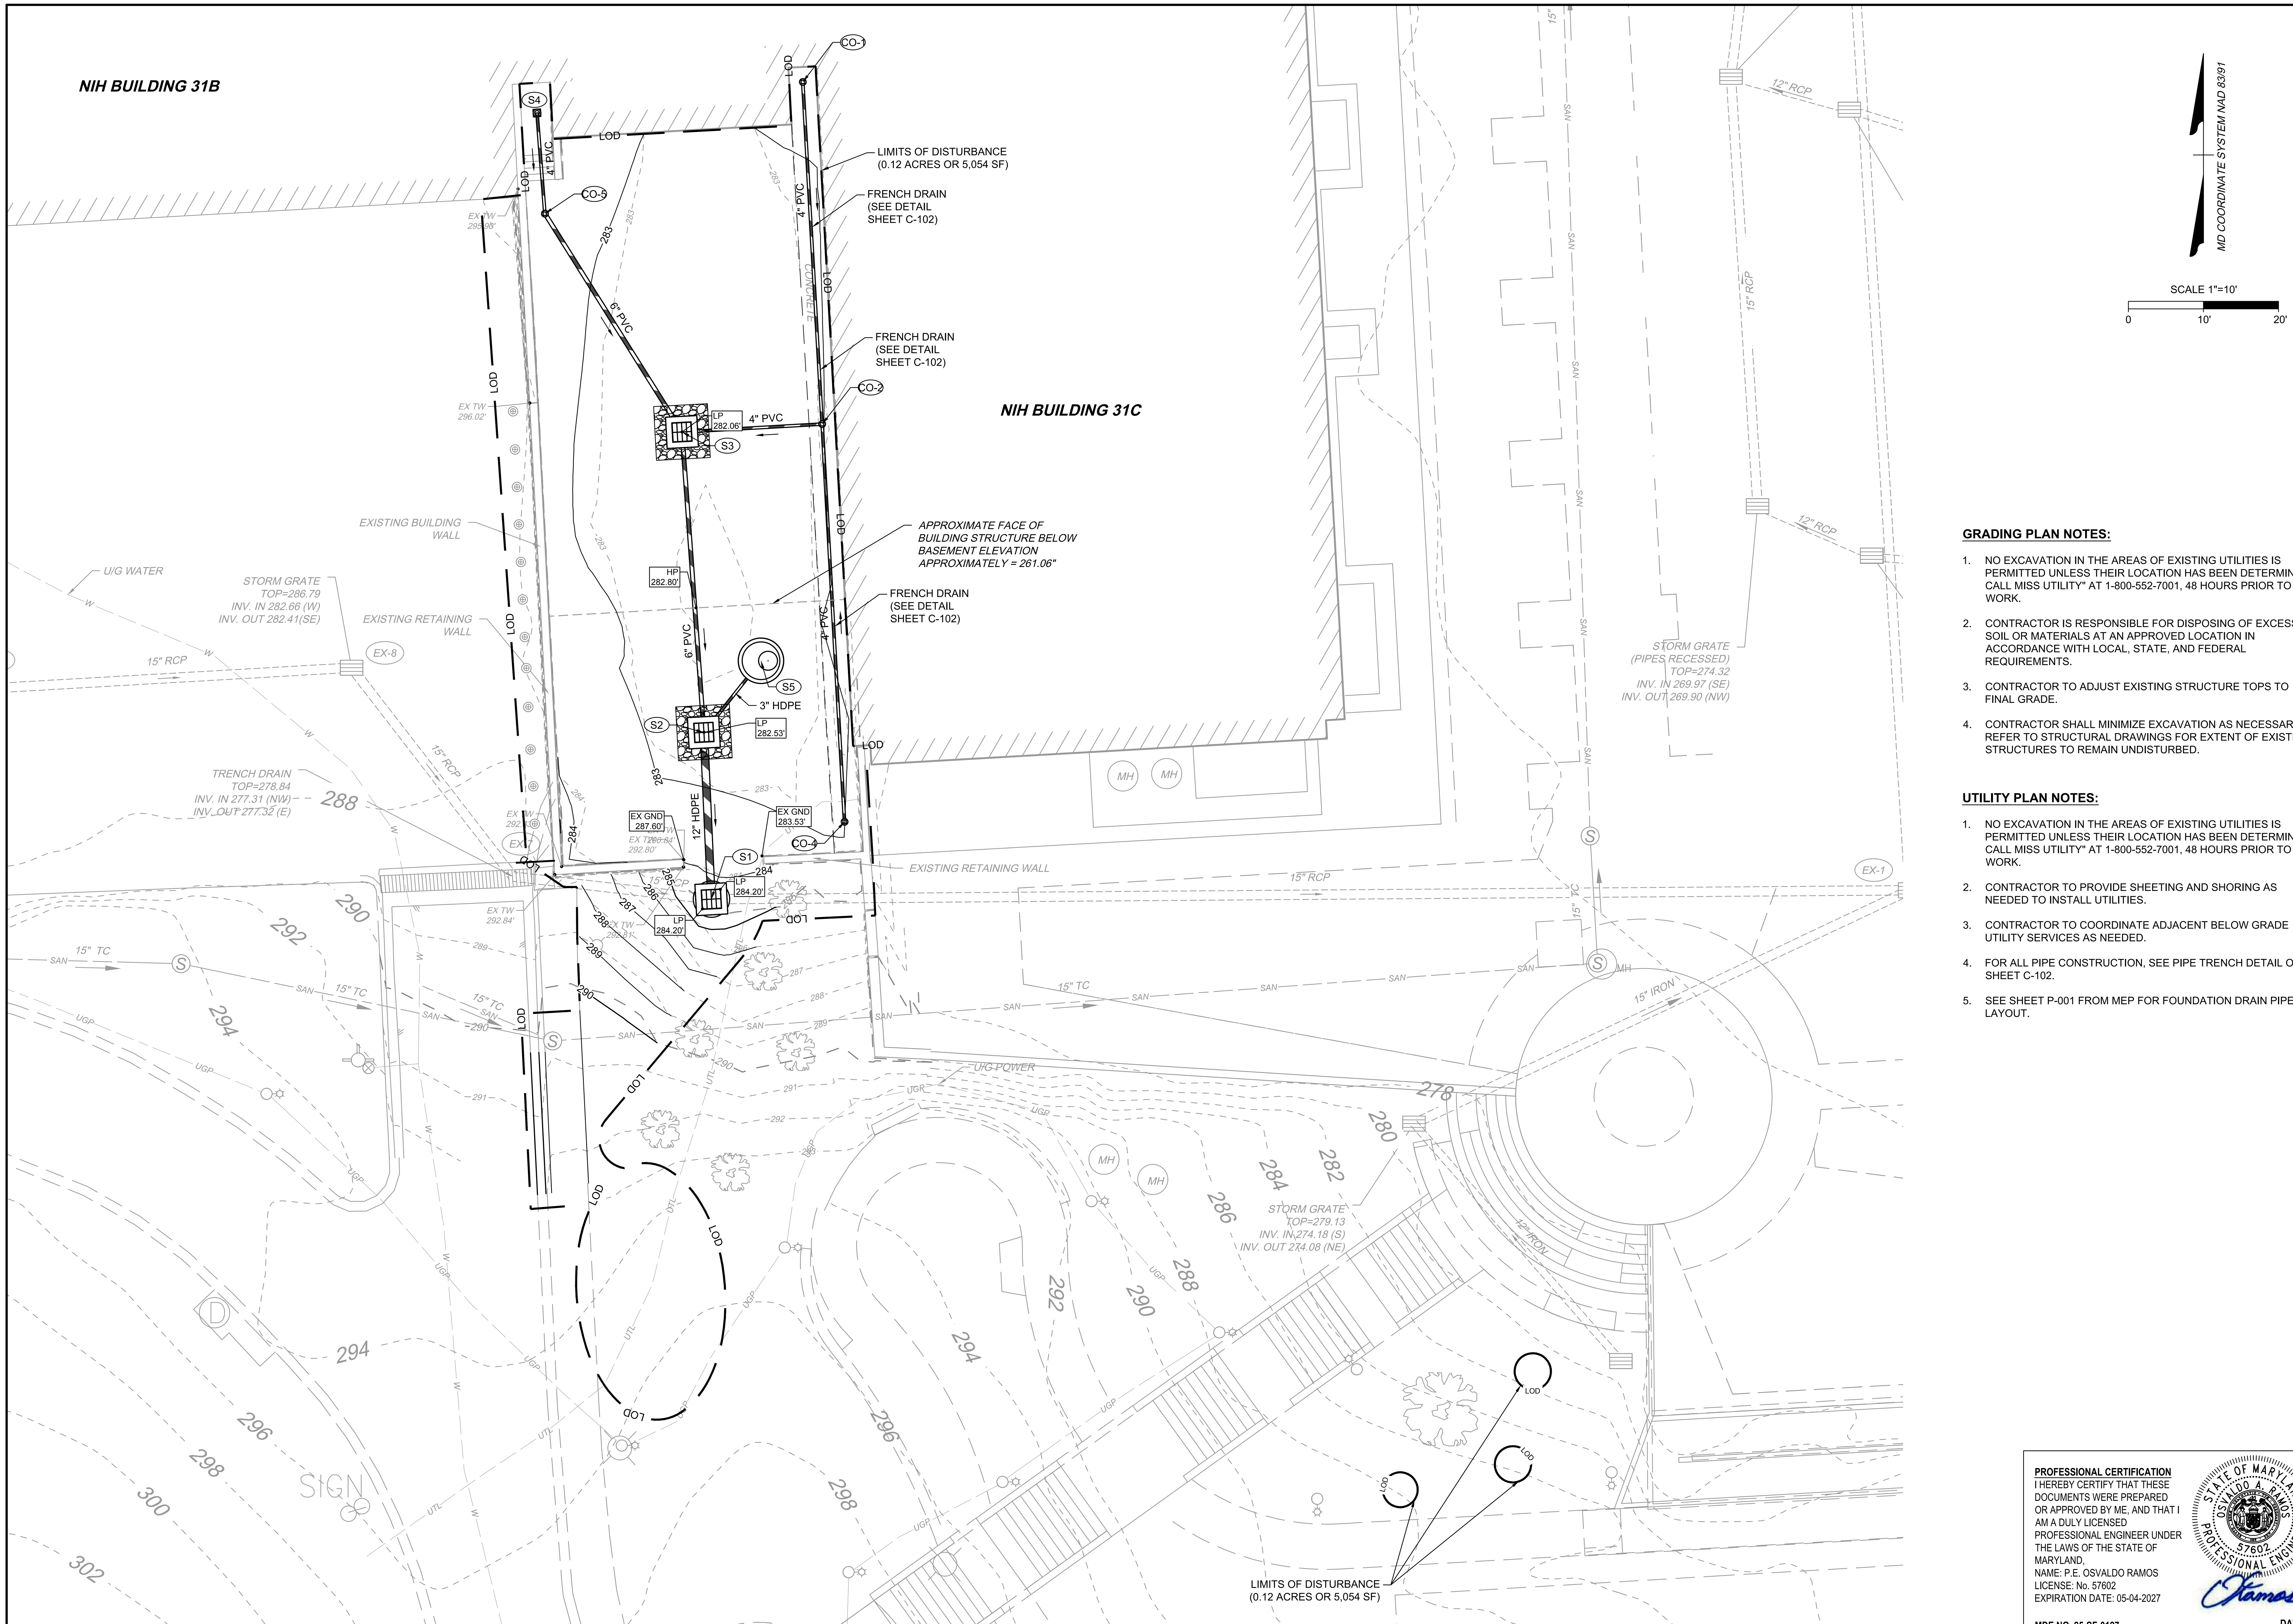

GRADING PLAN NOTES:

1. NO EXCAVATION IN THE AREAS OF EXISTING UTILITIES IS PERMITTED UNLESS THEIR LOCATION HAS BEEN DETERMINED. CALL MISS UTILITY" AT 1-800-552-7001, 48 HOURS PRIOR TO WORK.
2. CONTRACTOR IS RESPONSIBLE FOR DISPOSING OF EXCESS SOIL OR MATERIALS AT AN APPROVED LOCATION IN ACCORDANCE WITH LOCAL, STATE, AND FEDERAL REQUIREMENTS.
3. CONTRACTOR TO ADJUST EXISTING STRUCTURE TOPS TO FINAL GRADE.
4. CONTRACTOR SHALL MINIMIZE EXCAVATION AS NECESSARY. REFER TO STRUCTURAL DRAWINGS FOR EXTENT OF EXISTING STRUCTURES TO REMAIN UNDISTURBED.

UTILITY PLAN NOTES:

1. NO EXCAVATION IN THE AREAS OF EXISTING UTILITIES IS PERMITTED UNLESS THEIR LOCATION HAS BEEN DETERMINED. CALL MISS UTILITY" AT 1-800-552-7001, 48 HOURS PRIOR TO WORK.
2. CONTRACTOR TO PROVIDE SHEETING AND SHORING AS NEEDED TO INSTALL UTILITIES.
3. CONTRACTOR TO COORDINATE ADJACENT BELOW GRADE UTILITY SERVICES AS NEEDED.
4. FOR ALL PIPE CONSTRUCTION, SEE PIPE TRENCH DETAIL ON SHEET C-102.
5. SEE SHEET P-001 FROM MEP FOR FOUNDATION DRAIN PIPE LAYOUT.

PROFESSIONAL CERTIFICATION
I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND,
NAME: P.E. OSVALDO RAMOS
LICENSE: No. 57602
EXPIRATION DATE: 05-04-2027

STATE OF MARYLAND
OSVALDO A. RAMOS
57602
PROFESSIONAL ENGINEER

MDE NO. 25-SF-0127

DATE: 08/26/2025

DEPARTMENT OF HEALTH & HUMAN SERVICES, USA

LSY
ARCHITECTS & LABORATORY PLANNERS

James Posey Associates
Engineering Your Vision

TIMMONS GROUP

SGH

Architect and Engineer Name and LOGO

ARCHITECT:	LOUVIERE, STRATTON & YOKEL, LLC 8484 GEORGIA AVE, SUITE 650 SILVER SPRING, MD 20910 (301) 588-1500
MEP ENGINEER:	JAMES POSEY ASSOCIATES INC 11155 RED RUN BLVD OWINGS MILLS, MD 21117 (410) 265-6100
CIVIL ENGINEER:	TIMMONS GROUP 20110 ASHBROOK PL, SUITE 100 ASHBURN, VA 20147 (703) 554-6700
STRUCTURAL ENGINEER:	SIMPSON GUMPERTZ & HEGER 1625 EYE STREET NW SUITE 900 WASHINGTON, DC 20006 (202) 239-4199

SEAL

REVISIONS

MARK	DATE	DESCRIPTION

CONTRACTORS

A/E CON. NO.	
A/E TASK NO.	
CONS. CONTR.	
CONS. WORK	
PRIME A/E	LSY ARCHITECTS
SUB A/E	JPA / TIMMONS / SGH
CONSTR. CON.	

BUILDING

FACILITY CODE	
BUILDING NO.	BUILDING 31B
NAME	NIH
STREET	9000 ROCKVILLE PIKE
CITY	BETHESDA
STATE/ZIP	MD / 20892
OTHER BUILDING NO.	

PROJECT

PROJ. NO.	24024
PROJ. OFFICER	MOHAMMED BISWAS
PROJ. MGR.	G.LEE
SUBMISSION	IFC SUBMISSION
SUB. DATE	08/26/2025
WRK REQ. NO.	C116635

N

PROJECT TITLE: BUILDING 31B LANDSCAPE WATER INTRUSION

DRAWING TITLE: GRADING & UTILITY PLAN

NIH
National Institutes of Health
OFFICE OF RESEARCH FACILITIES
DIVISION OF FACILITIES PLANNING

DESIGNED BY	OR
DRAWN BY	SA
CHECKED BY	OR
DATE	08/26/2025
FILE NAME	

DRAWING

DRAWING NO. C-500

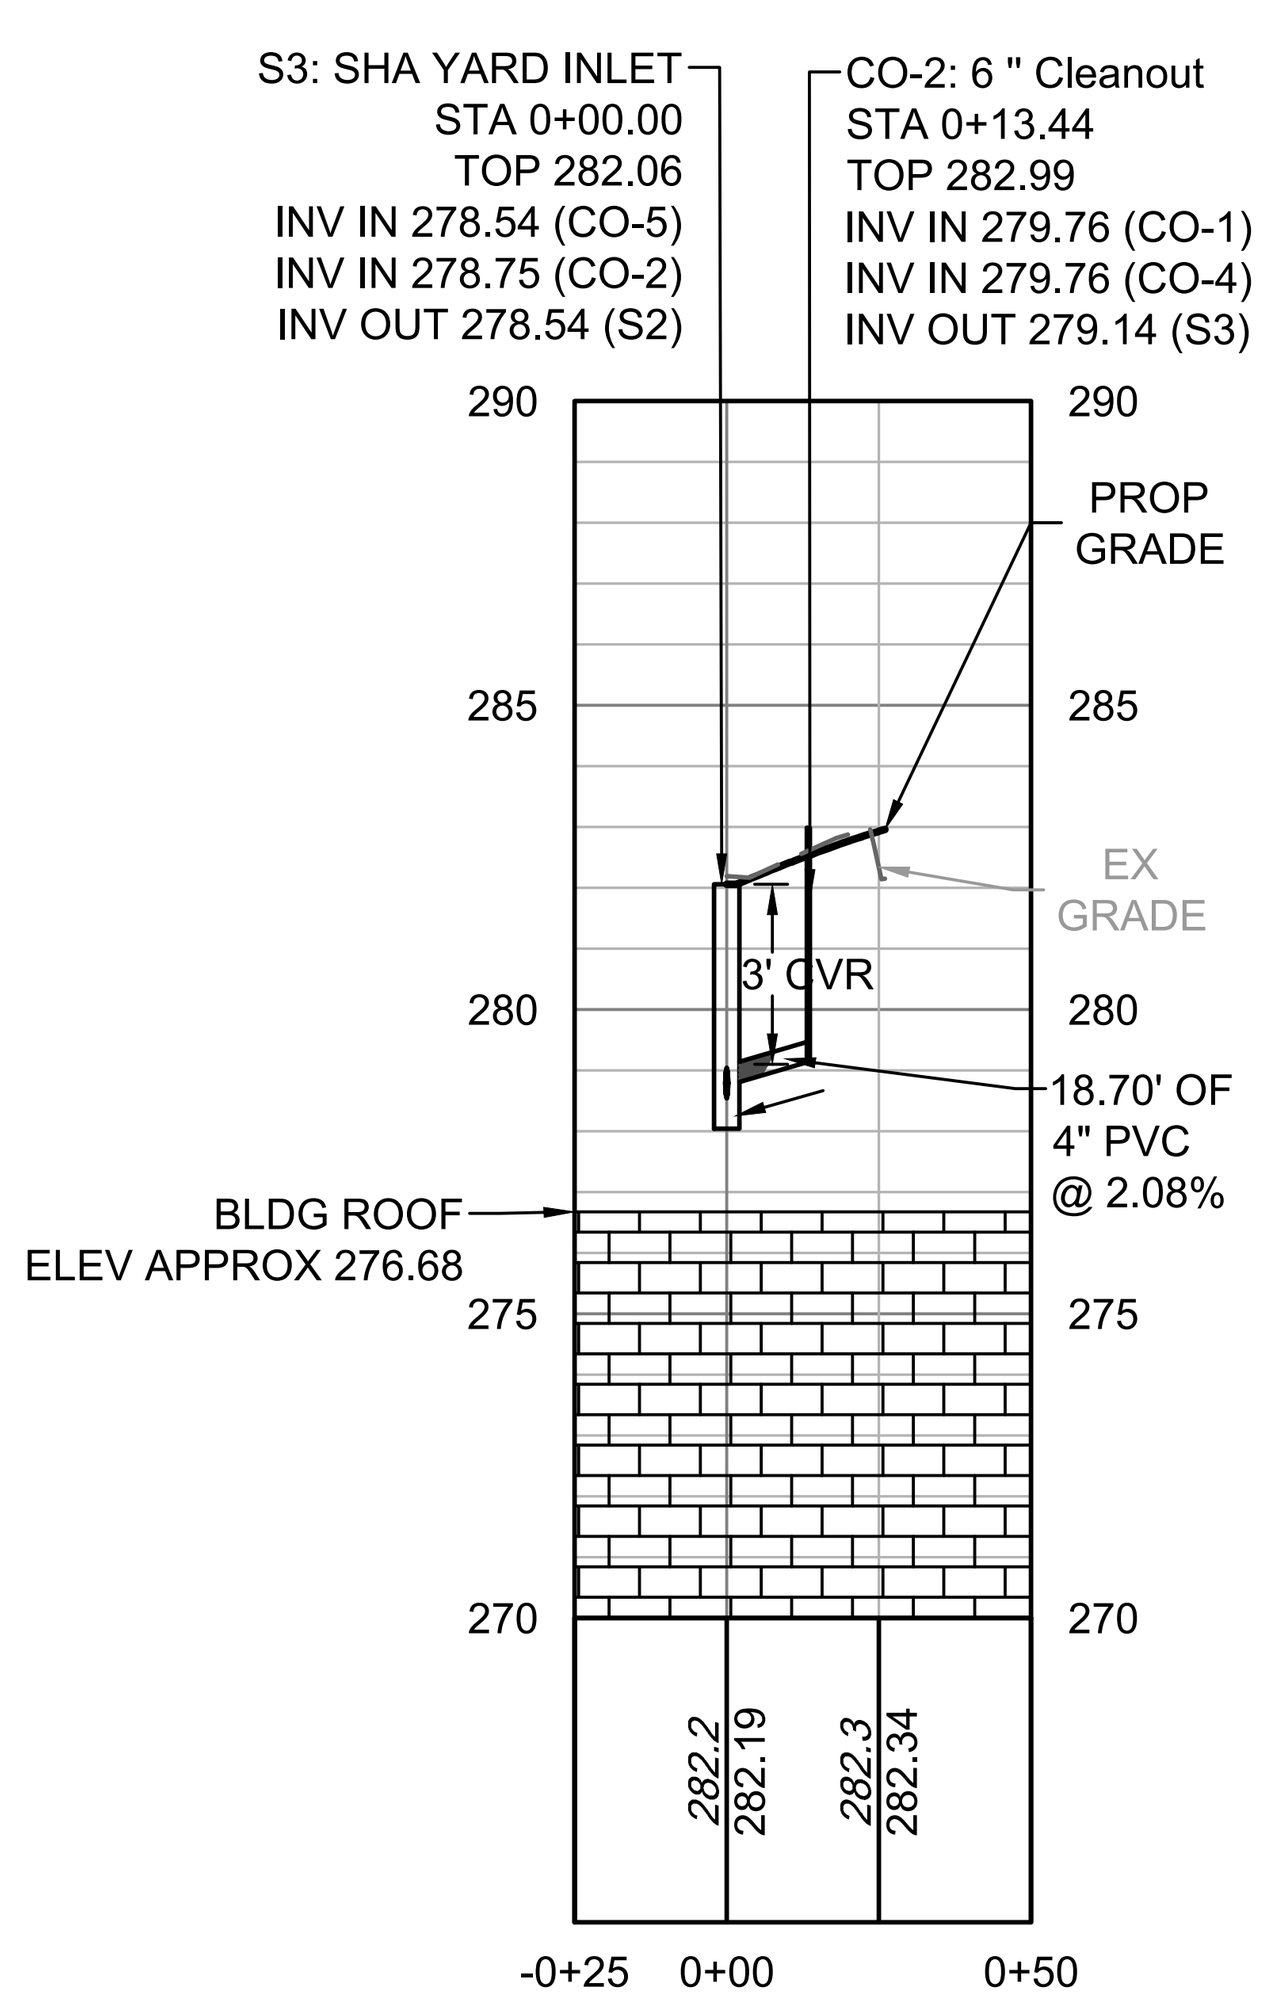

STORM PROFILE
(STR S3 TO CO-2)
HORZ: 1" = 50'
VERT: 1" = 5'

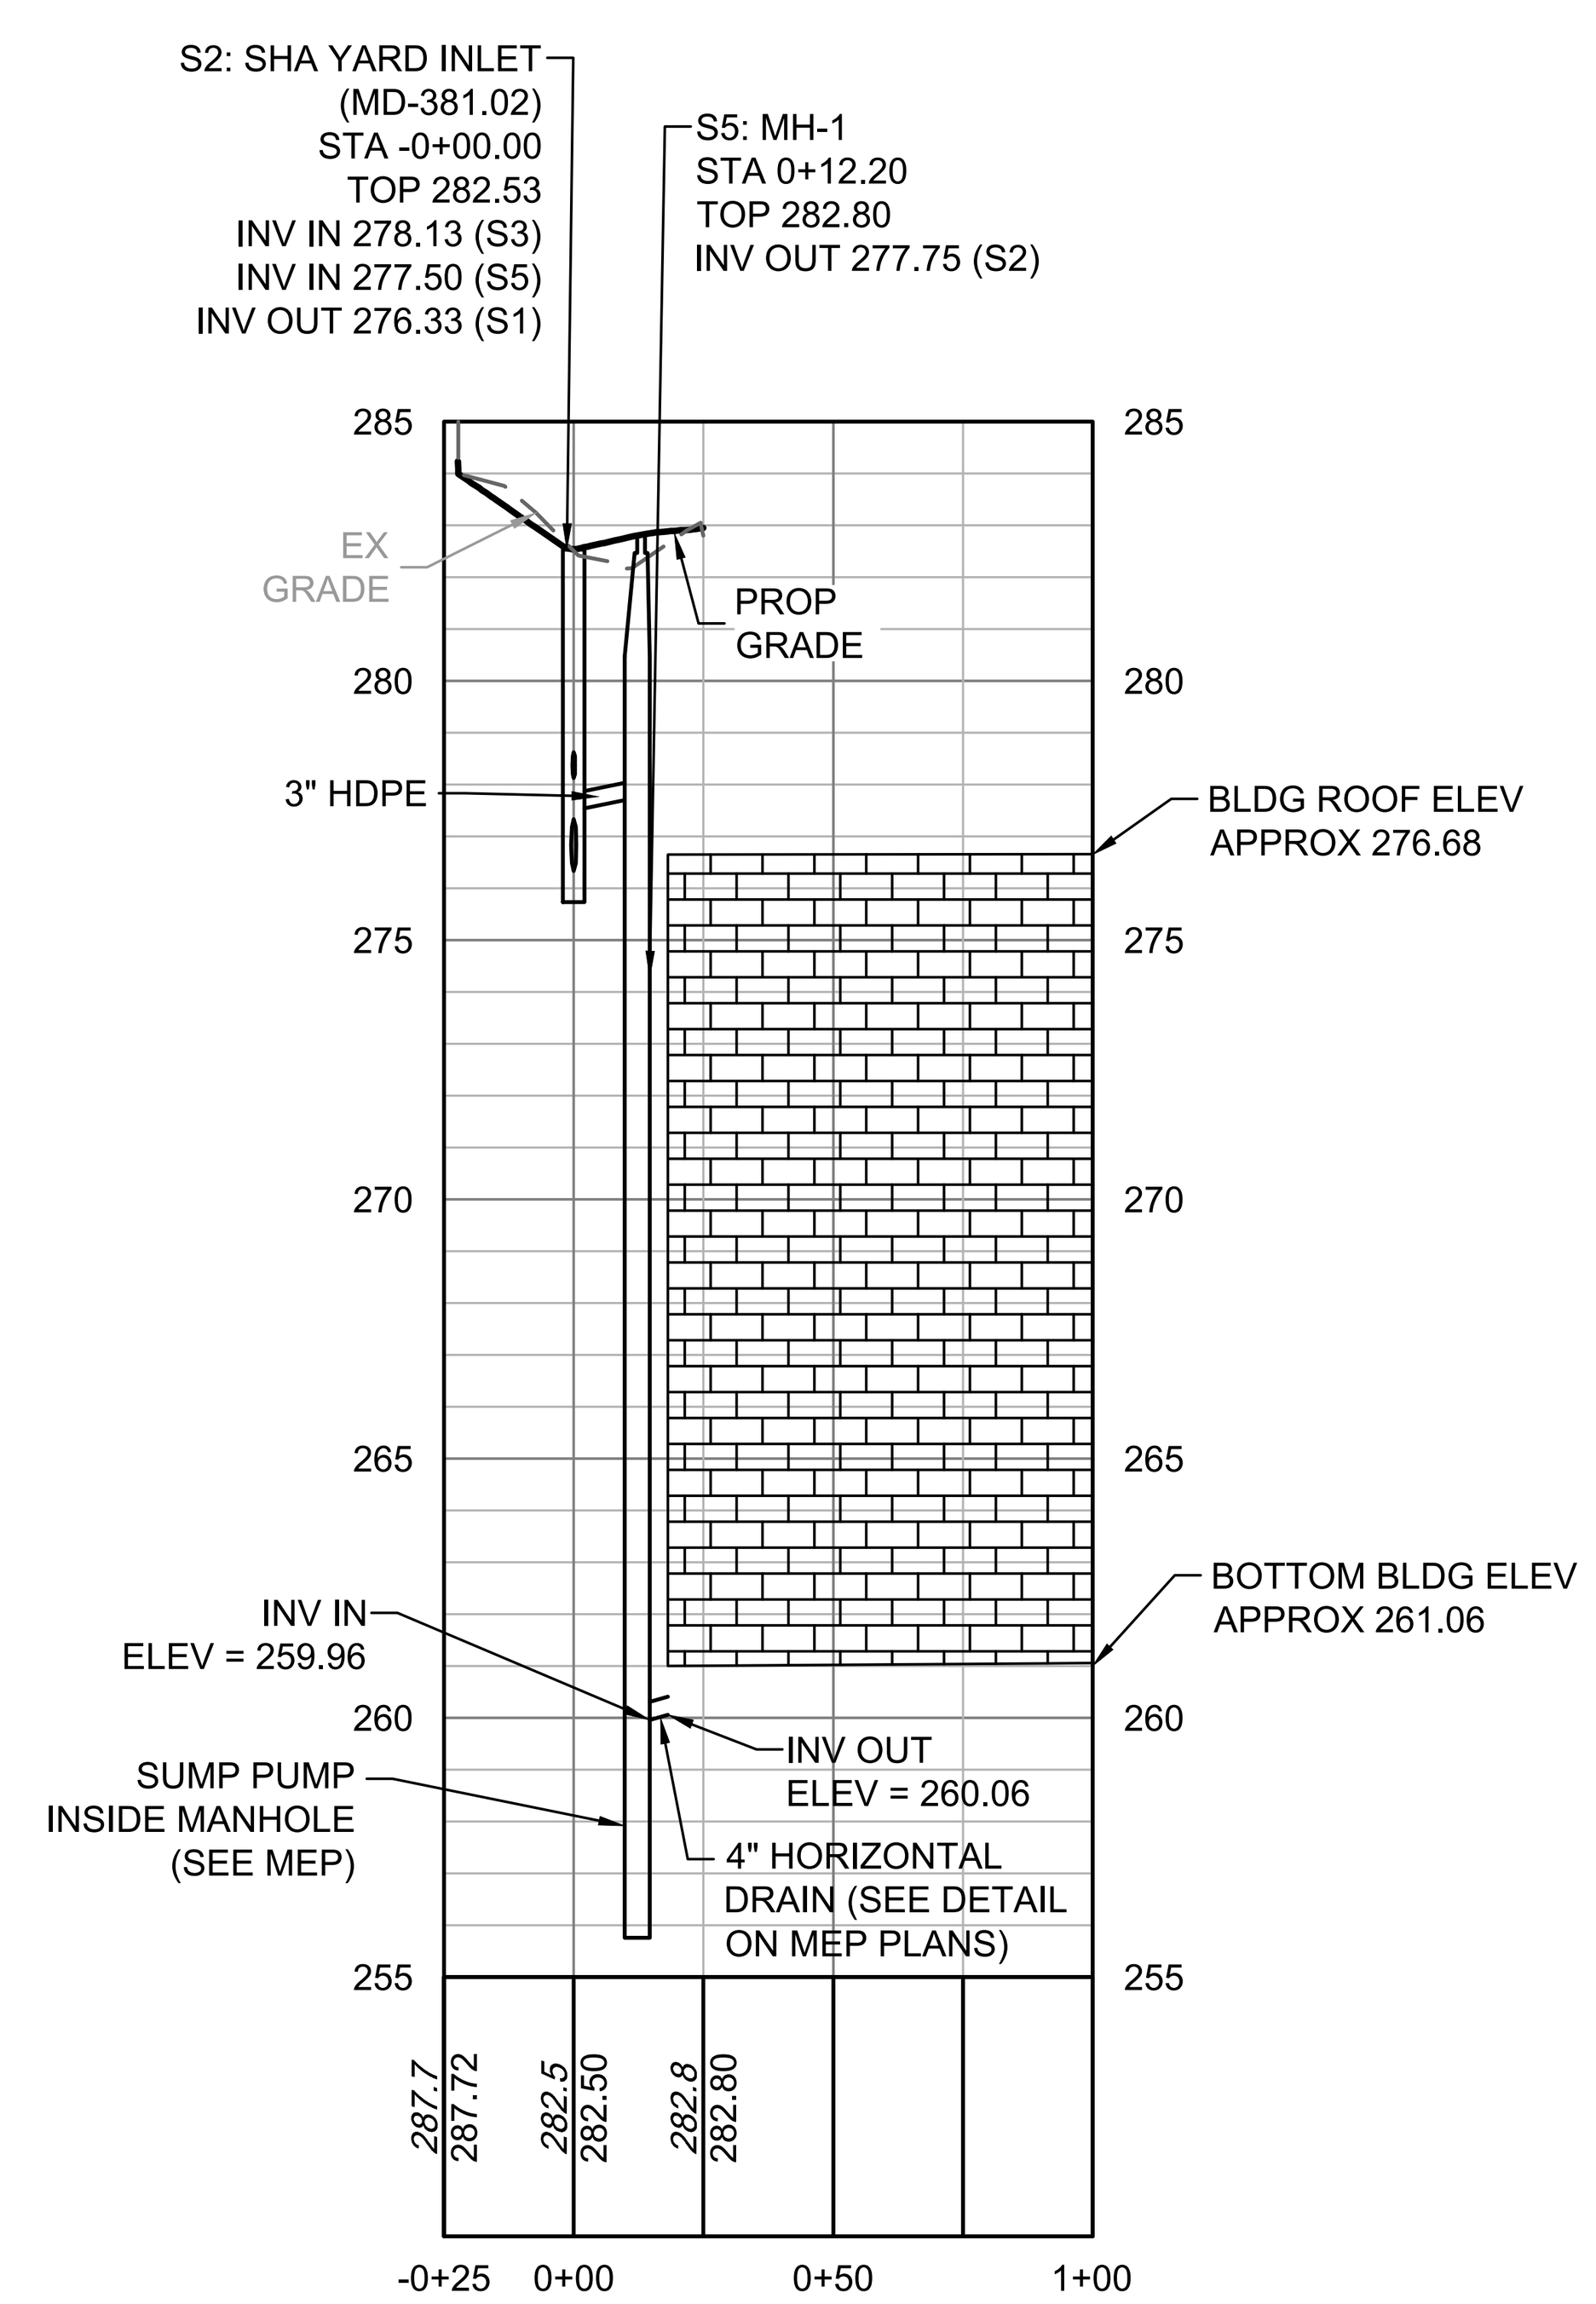

SUMP PUMP PROFILE
(STR S2 TO S5)
HORZ: 1" = 50'
VERT: 1" = 5'

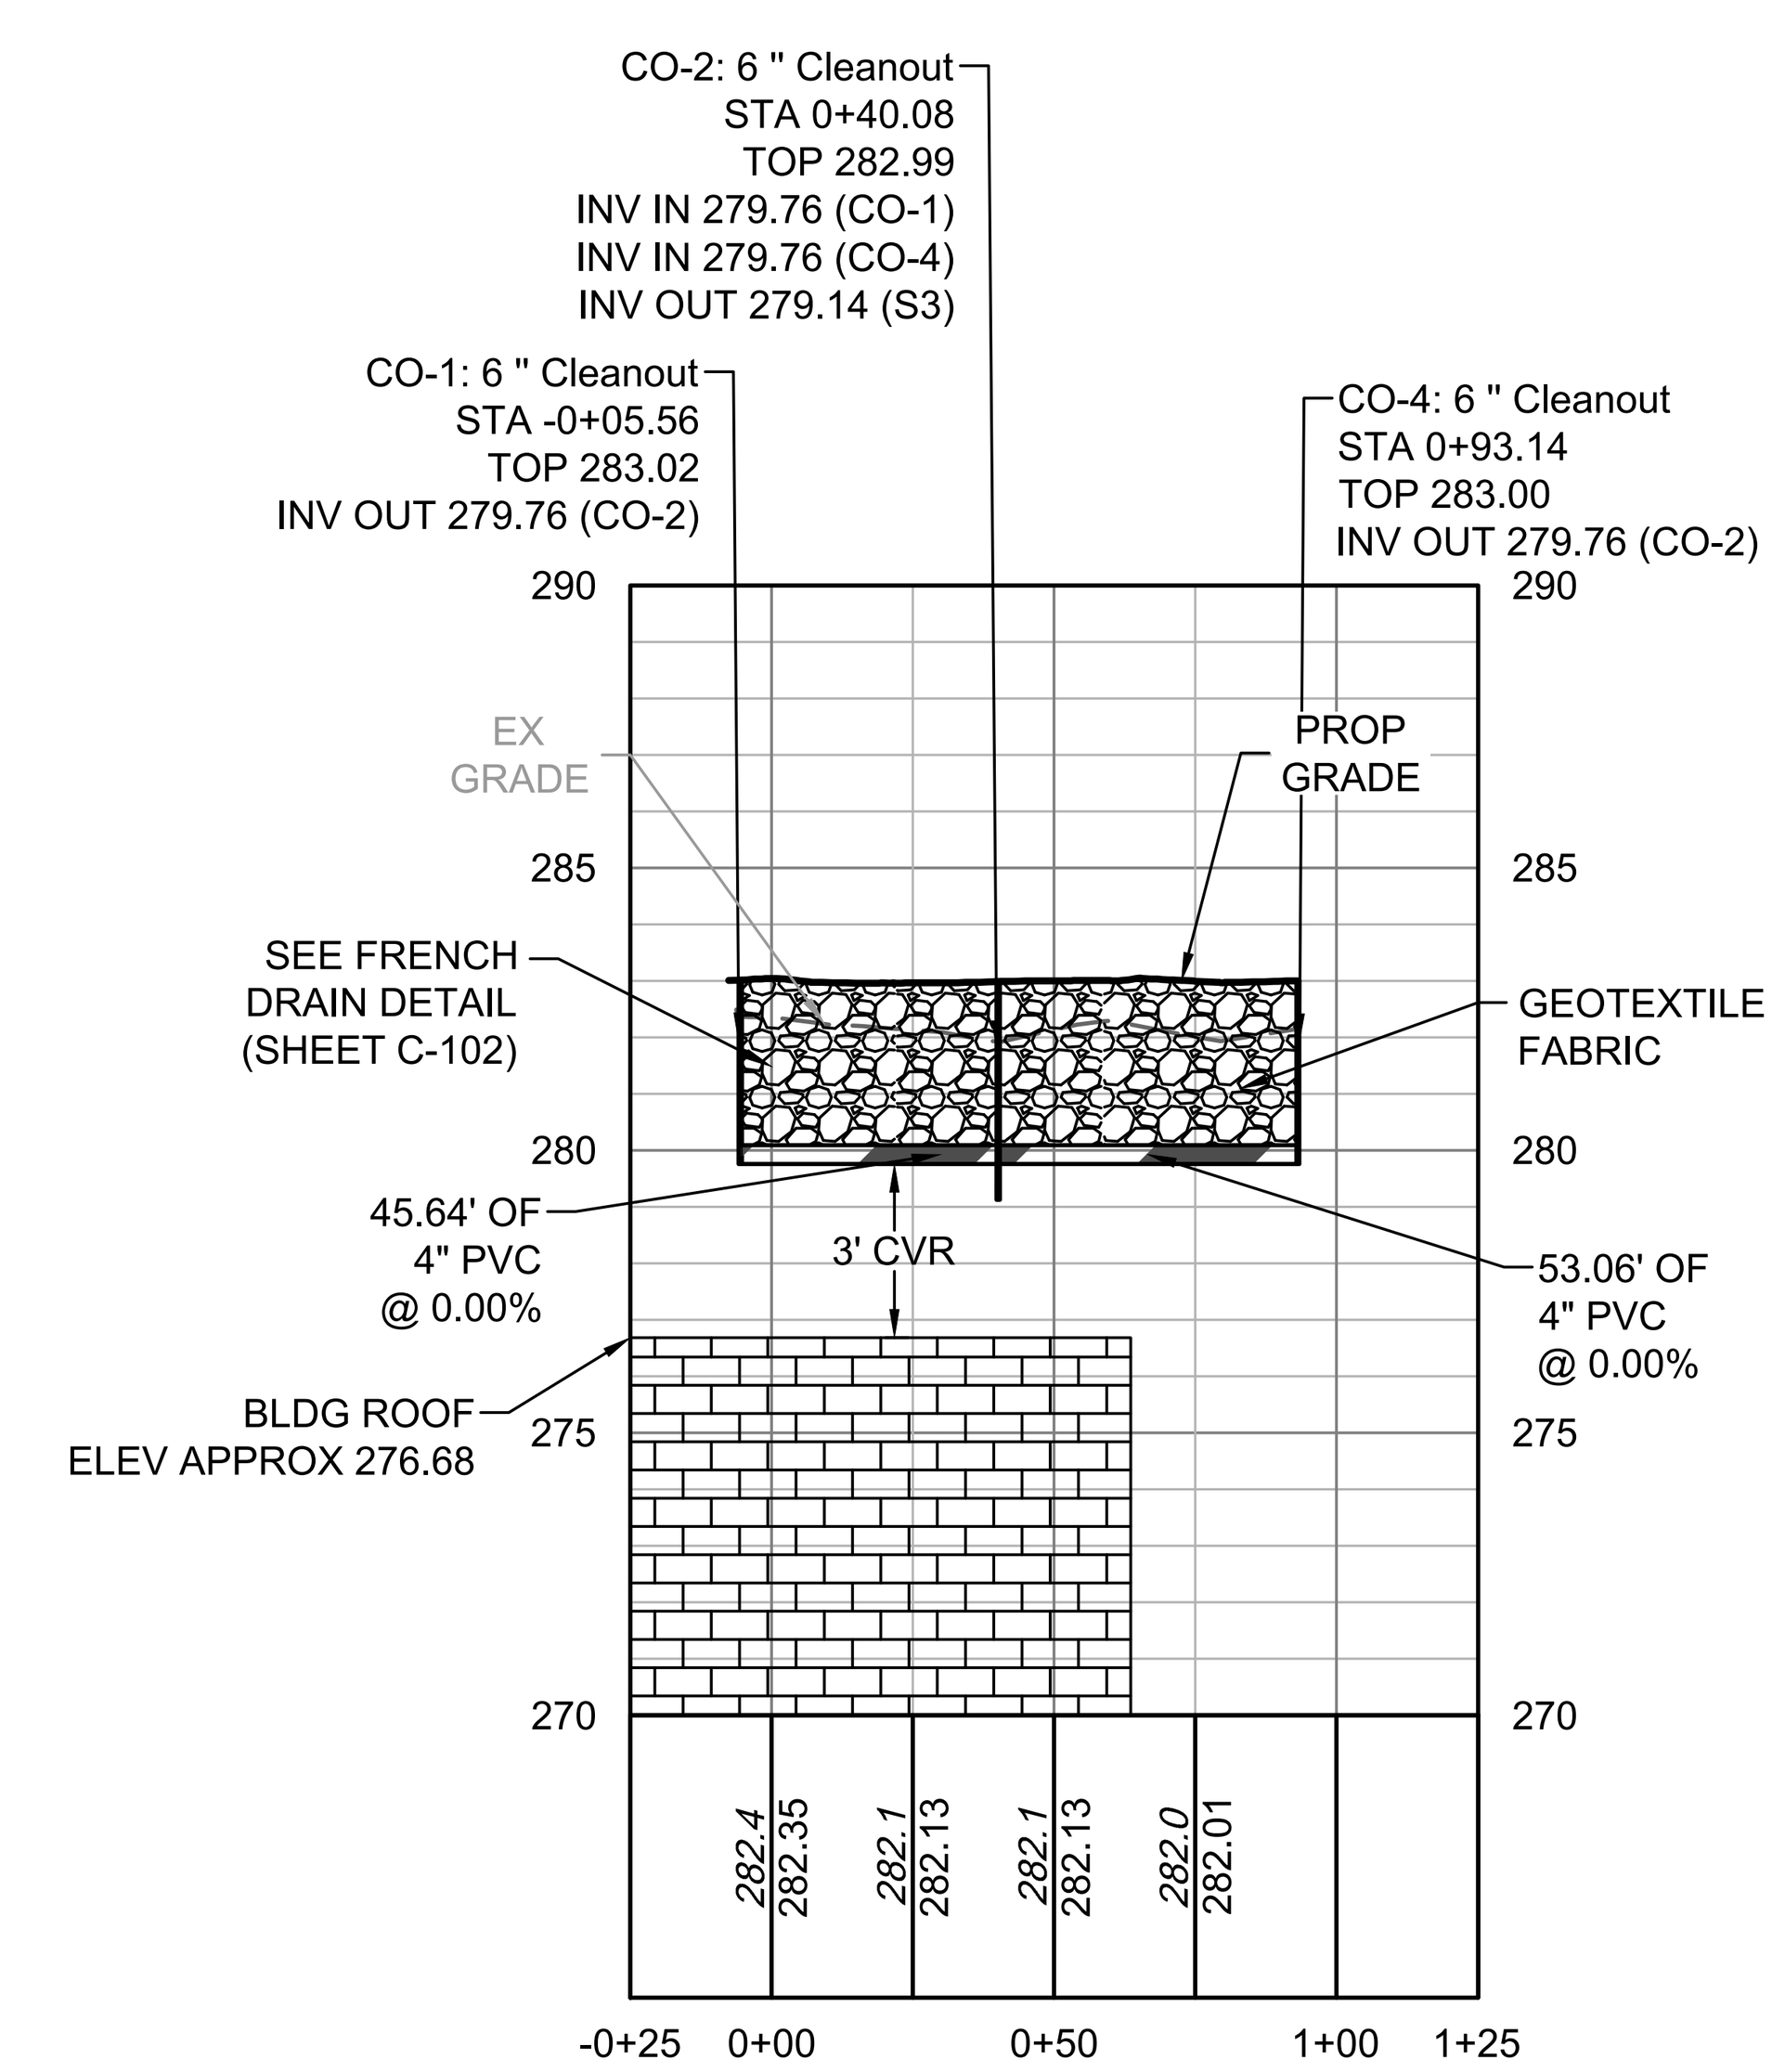

FRENCH DRAIN PROFILE
(STR CO-1 TO CO-4)
HORZ: 1" = 50'
VERT: 1" = 5'

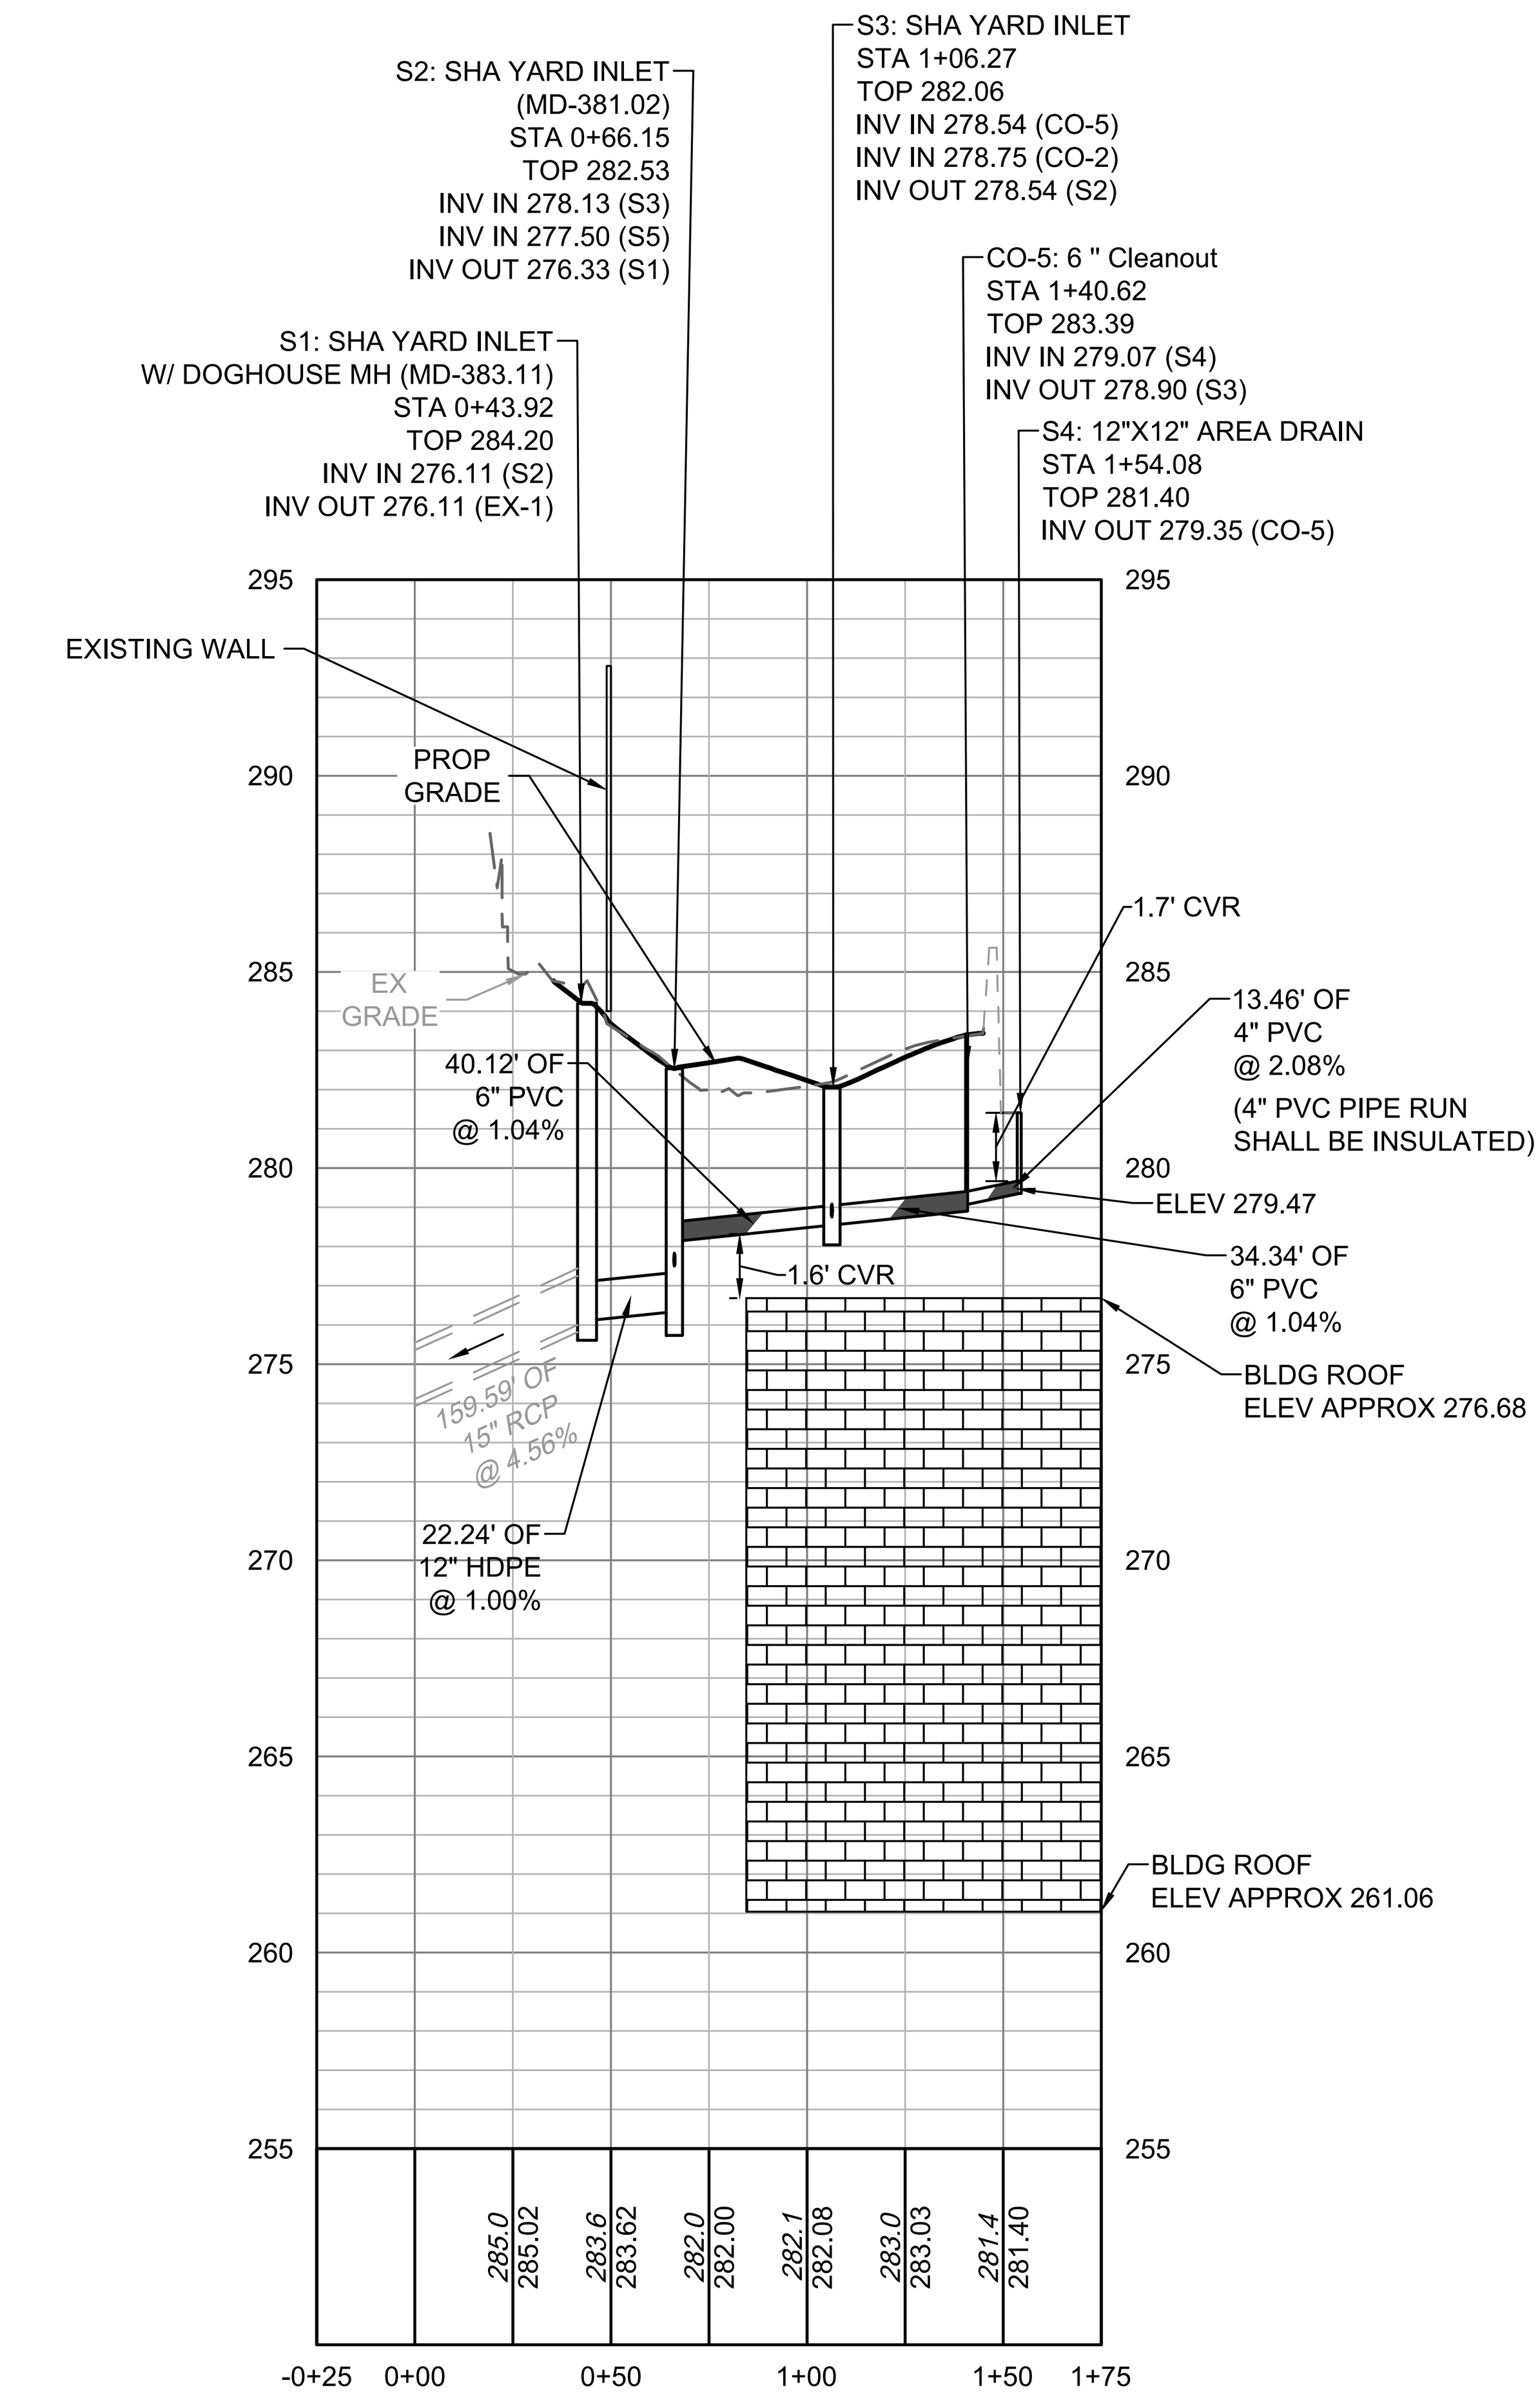

STORM PROFILE
(STR S1 TO S4)
HORZ: 1" = 50'
VERT: 1" = 5'



PROFILE SCALE

PROFESSIONAL CERTIFICATION
I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND,
NAME: P.E. OSVALDO RAMOS
LICENSE: No. 57602
EXPIRATION DATE: 05-04-2027

STATE OF MARYLAND
OSVALDO A. RAMOS
57602
PROFESSIONAL ENGINEER

MDE NO. 25-SF-0127
DATE: 08/26/2025

DEPARTMENT OF HEALTH & HUMAN SERVICES, USA

LSY
ARCHITECTS & LABORATORY PLANNERS

James Posey Associates
Engineering Your Vision

TIMMONS GROUP

SGH

Architect and Engineer Name and LOGO

SEAL

ARCHITECT:	LOUVIERE, STRATTON & YOKEL, LLC 8484 GEORGIA AVE, SUITE 650 SILVER SPRING, MD 20910 (301) 588-1500
MEP ENGINEER:	JAMES POSEY ASSOCIATES INC 11155 RED RUN BLVD OWINGS MILLS, MD 21117 (410) 265-6100
CIVIL ENGINEER:	TIMMONS GROUP 20110 ASHBROOK PL, SUITE 100 ASHBURN, VA 20147 (703) 554-6700
STRUCTURAL ENGINEER:	SIMPSON GUMPERTZ & HEGER 1625 EYE STREET NW SUITE 900 WASHINGTON, DC 20006 (202) 239-4199

REVISIONS

MARK	DATE	DESCRIPTION

CONTRACTORS

A/E CON. NO.	
A/E TASK NO.	
CONS. CONTR.	
CONS. WORK	
PRIME A/E	LSY ARCHITECTS
SUB A/E	JPA / TIMMONS / SGH
CONSTR. CON.	

BUILDING

FACILITY CODE	
BUILDING NO.	BUILDING 31B
NAME	NIH
STREET	9000 ROCKVILLE PIKE
CITY	BETHESDA
STATE/ZIP	MD / 20892
OTHER BUILDING NO.	

PROJECT

PROJ. NO.	24024
PROJ. OFFICER	MOHAMMED BISWAS
PROJ. MGR.	G.LEE
SUBMISSION	IFC SUBMISSION
SUB. DATE	08/26/2025
WRK REQ. NO.	C116635

N

PROJECT TITLE: BUILDING 31B LANDSCAPE WATER INTRUSION

DRAWING TITLE: STORM PROFILES

NIH
National Institutes of Health
OFFICE OF RESEARCH FACILITIES
DIVISION OF FACILITIES PLANNING

DESIGNED BY	OR
DRAWN BY	SA
CHECKED BY	OR
DATE	08/26/2025
FILE NAME	

DRAWING

DRAWING NO. C-600

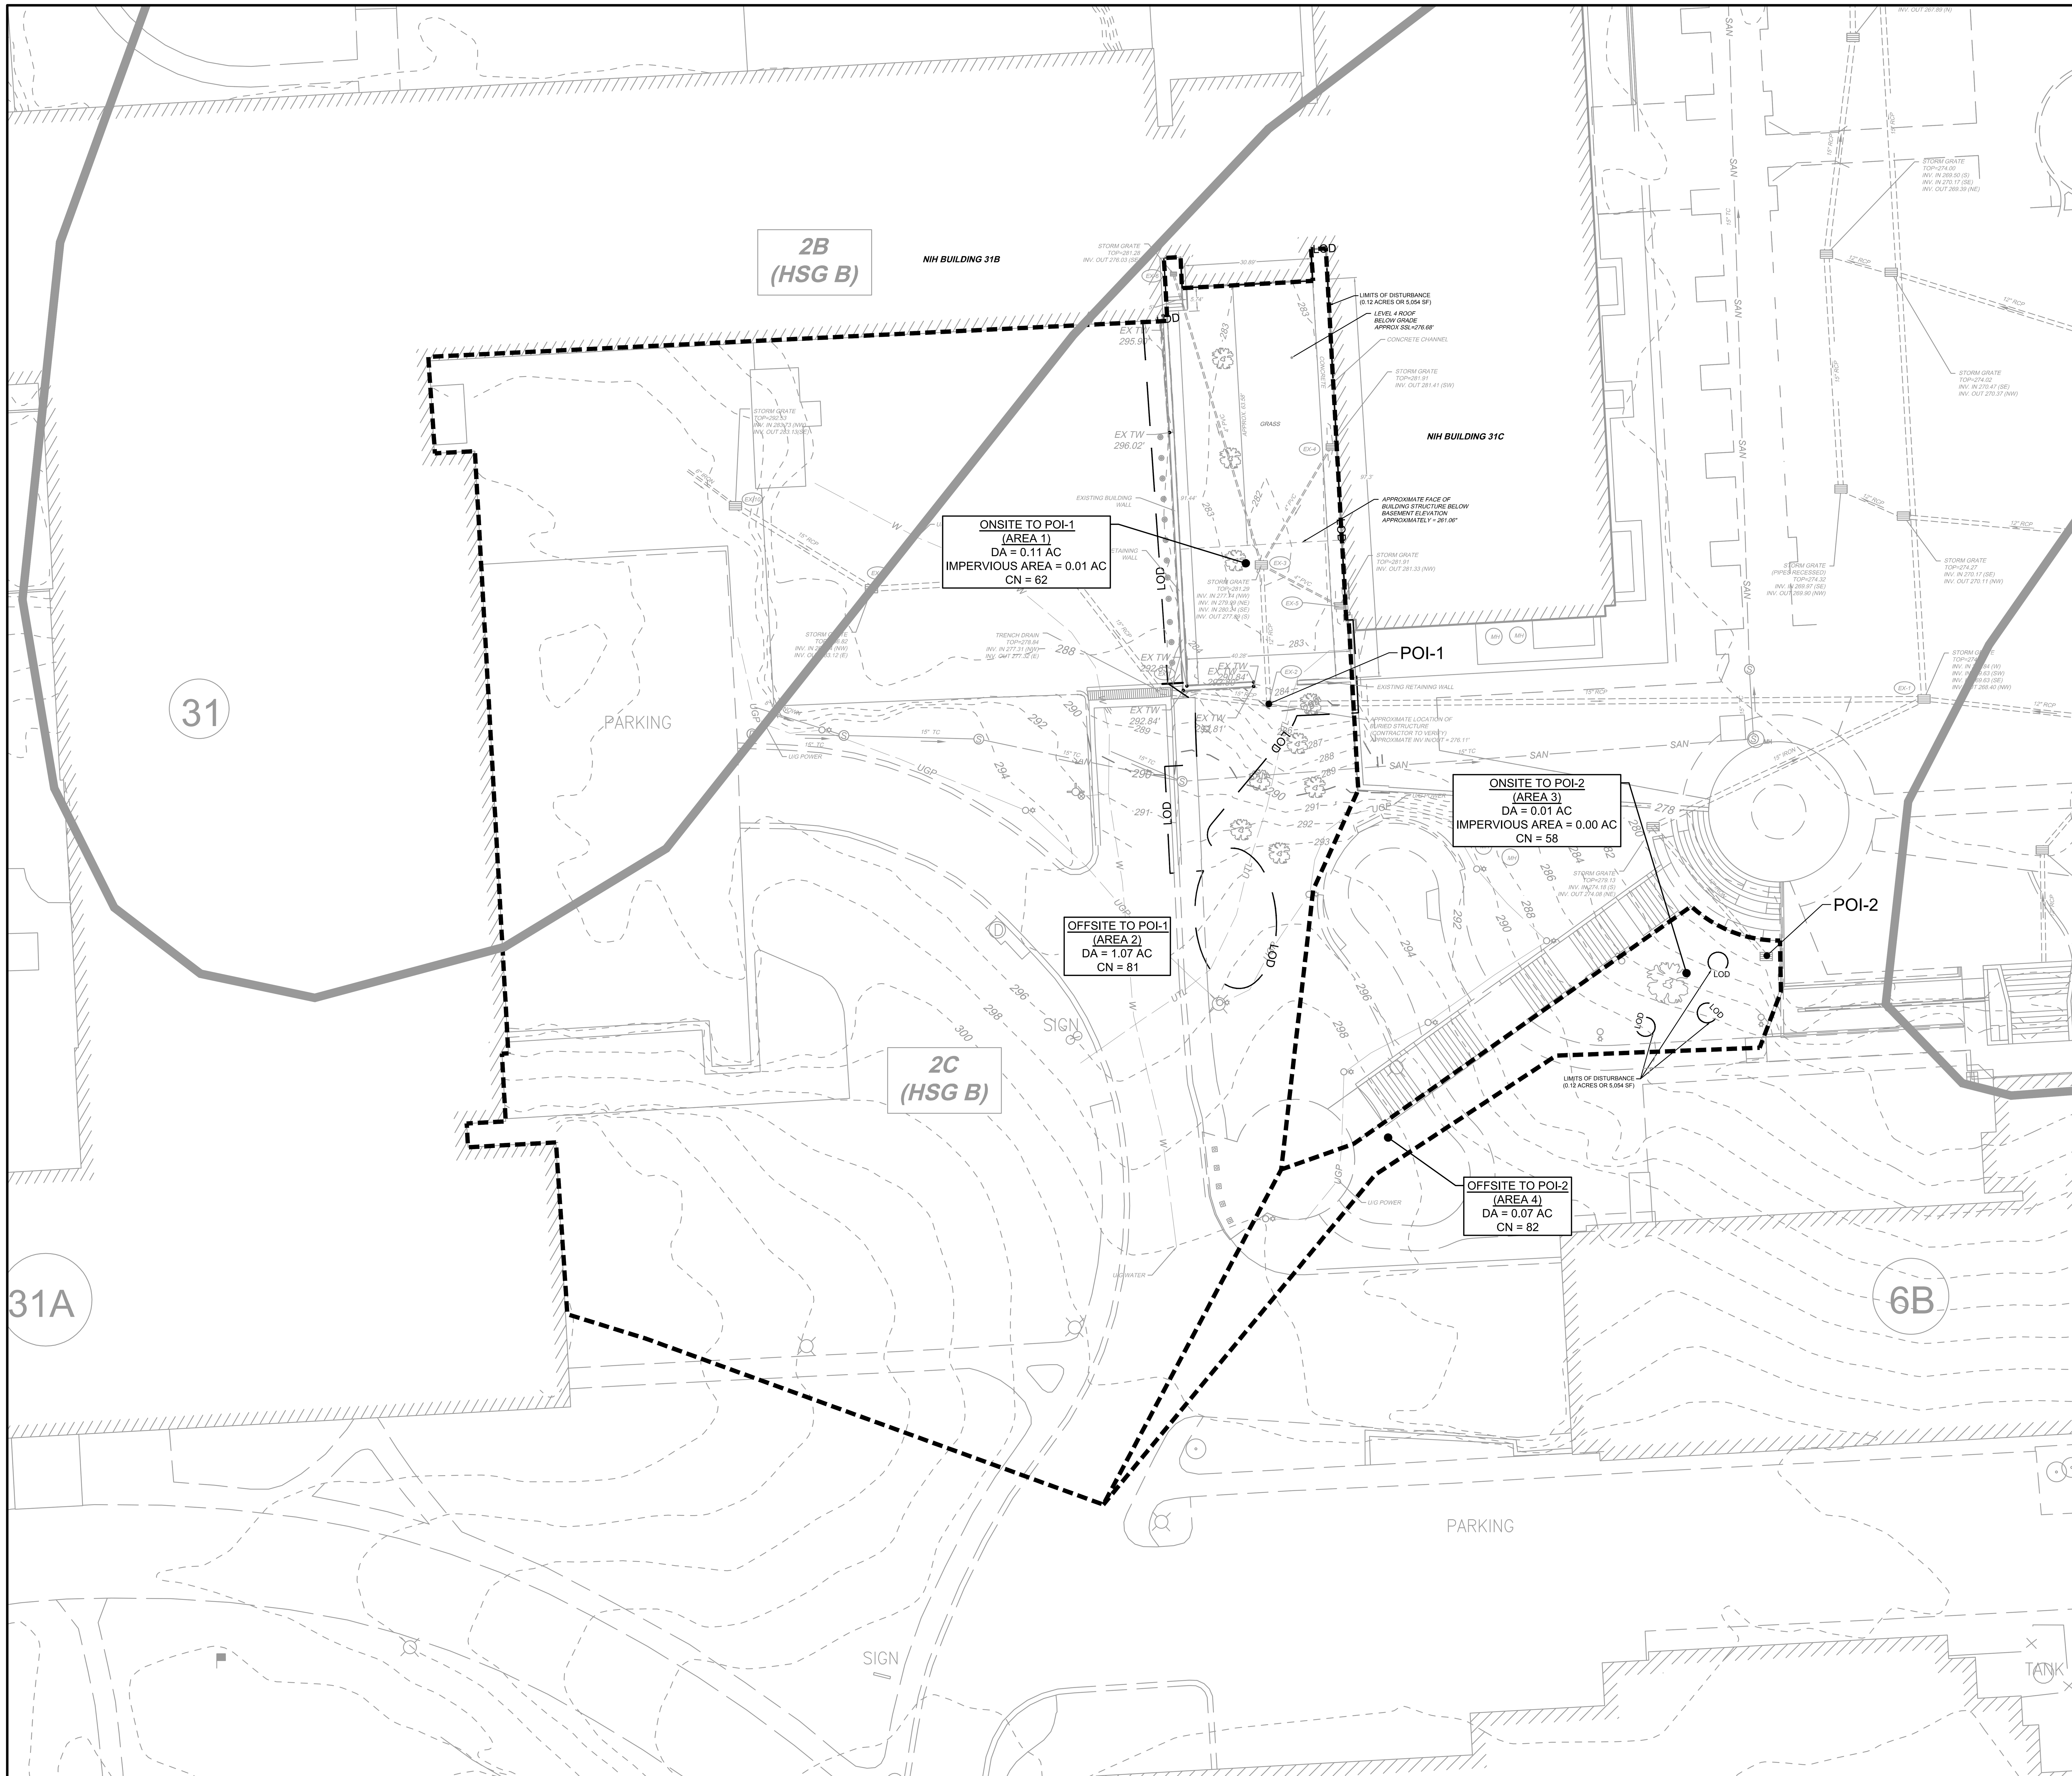

MD COORDINATE SYSTEM NAD 83/91

SCALE 1"=20'

0 20' 40'

PRE-DEV POI ANALYSIS LEGEND

(black fill)	POI #1 IMPERVIOUS AREA (0.01 AC)
● 1	POINT OF INVESTIGATION

NOTE:

1) NO PRE-DEVELOPMENT IMPERVIOUS AREAS ARE CAPTURED BY POI-2.

FOR MDE INFORMATION ONLY.
NOT FOR CONSTRUCTION.

PROFESSIONAL CERTIFICATION
I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND,
NAME: P.E. OSVALDO RAMOS
LICENSE: No. 57602
EXPIRATION DATE: 05-04-2027

STATE OF MARYLAND
OSVALDO A. RAMOS
57602
PROFESSIONAL ENGINEER

MDE NO. 25-SF-0127 **DATE: 08/26/2025**

PROPERTY OF THE UNITED STATES GOVERNMENT
FOR OFFICIAL USE ONLY
Do not remove this notice
Properly destroy documents when no longer needed

DEPARTMENT OF HEALTH & HUMAN SERVICES, USA

LSY
ARCHITECTS & LABORATORY PLANNERS

James Posey Associates
Engineering Your Vision

TIMMONS GROUP

SGH

Architect and Engineer Name and LOGO

ARCHITECT: LOUVIERE, STRATTON & YOKEL, LLC
8484 GEORGIA AVE, SUITE 650
SILVER SPRING, MD 20910
(301) 588-1500

MEP ENGINEER: JAMES POSEY ASSOCIATES INC
11155 RED RUN BLVD
OWINGS MILLS, MD 21117
(410) 265-6100

CIVIL ENGINEER: TIMMONS GROUP
20110 ASHBROOK PL, SUITE 100
ASHBURN, VA 20147
(703) 554-6700

STRUCTURAL ENGINEER: SIMPSON GUMPERTZ & HEGER
1625 EYE STREET NW SUITE 900
WASHINGTON, DC 20006
(202) 239-4199

SEAL

REVISIONS

MARK	DATE	DESCRIPTION

CONTRACTORS

A/E CON. NO.	
A/E TASK NO.	
CONS. CONTR.	
CONS. WORK	
PRIME A/E	LSY ARCHITECTS
SUB A/E	JPA / TIMMONS / SGH
CONSTR. CON.	

BUILDING

FACILITY CODE	
BUILDING NO.	BUILDING 31B
NAME	NIH
STREET	9000 ROCKVILLE PIKE
CITY	BETHESDA
STATE/ZIP	MD / 20892
OTHER BUILDING NO.	

PROJECT

PROJ. NO.	24024
PROJ. OFFICER	MOHAMMED BISWAS
PROJ. MGR.	G.LEE
SUBMISSION	IFC SUBMISSION
SUB. DATE	08/26/2025
WRK REQ. NO.	C116635

N

PROJECT TITLE: BUILDING 31B LANDSCAPE WATER INTRUSION

DRAWING TITLE: SWM PRE-DEVELOPMENT DIVIDES

NIH
National Institutes of Health
OFFICE OF RESEARCH FACILITIES
DIVISION OF FACILITIES PLANNING

DESIGNED BY	OR
DRAWN BY	SA
CHECKED BY	OR
DATE	08/26/2025
FILE NAME	

DRAWING

DRAWING NO. C-700

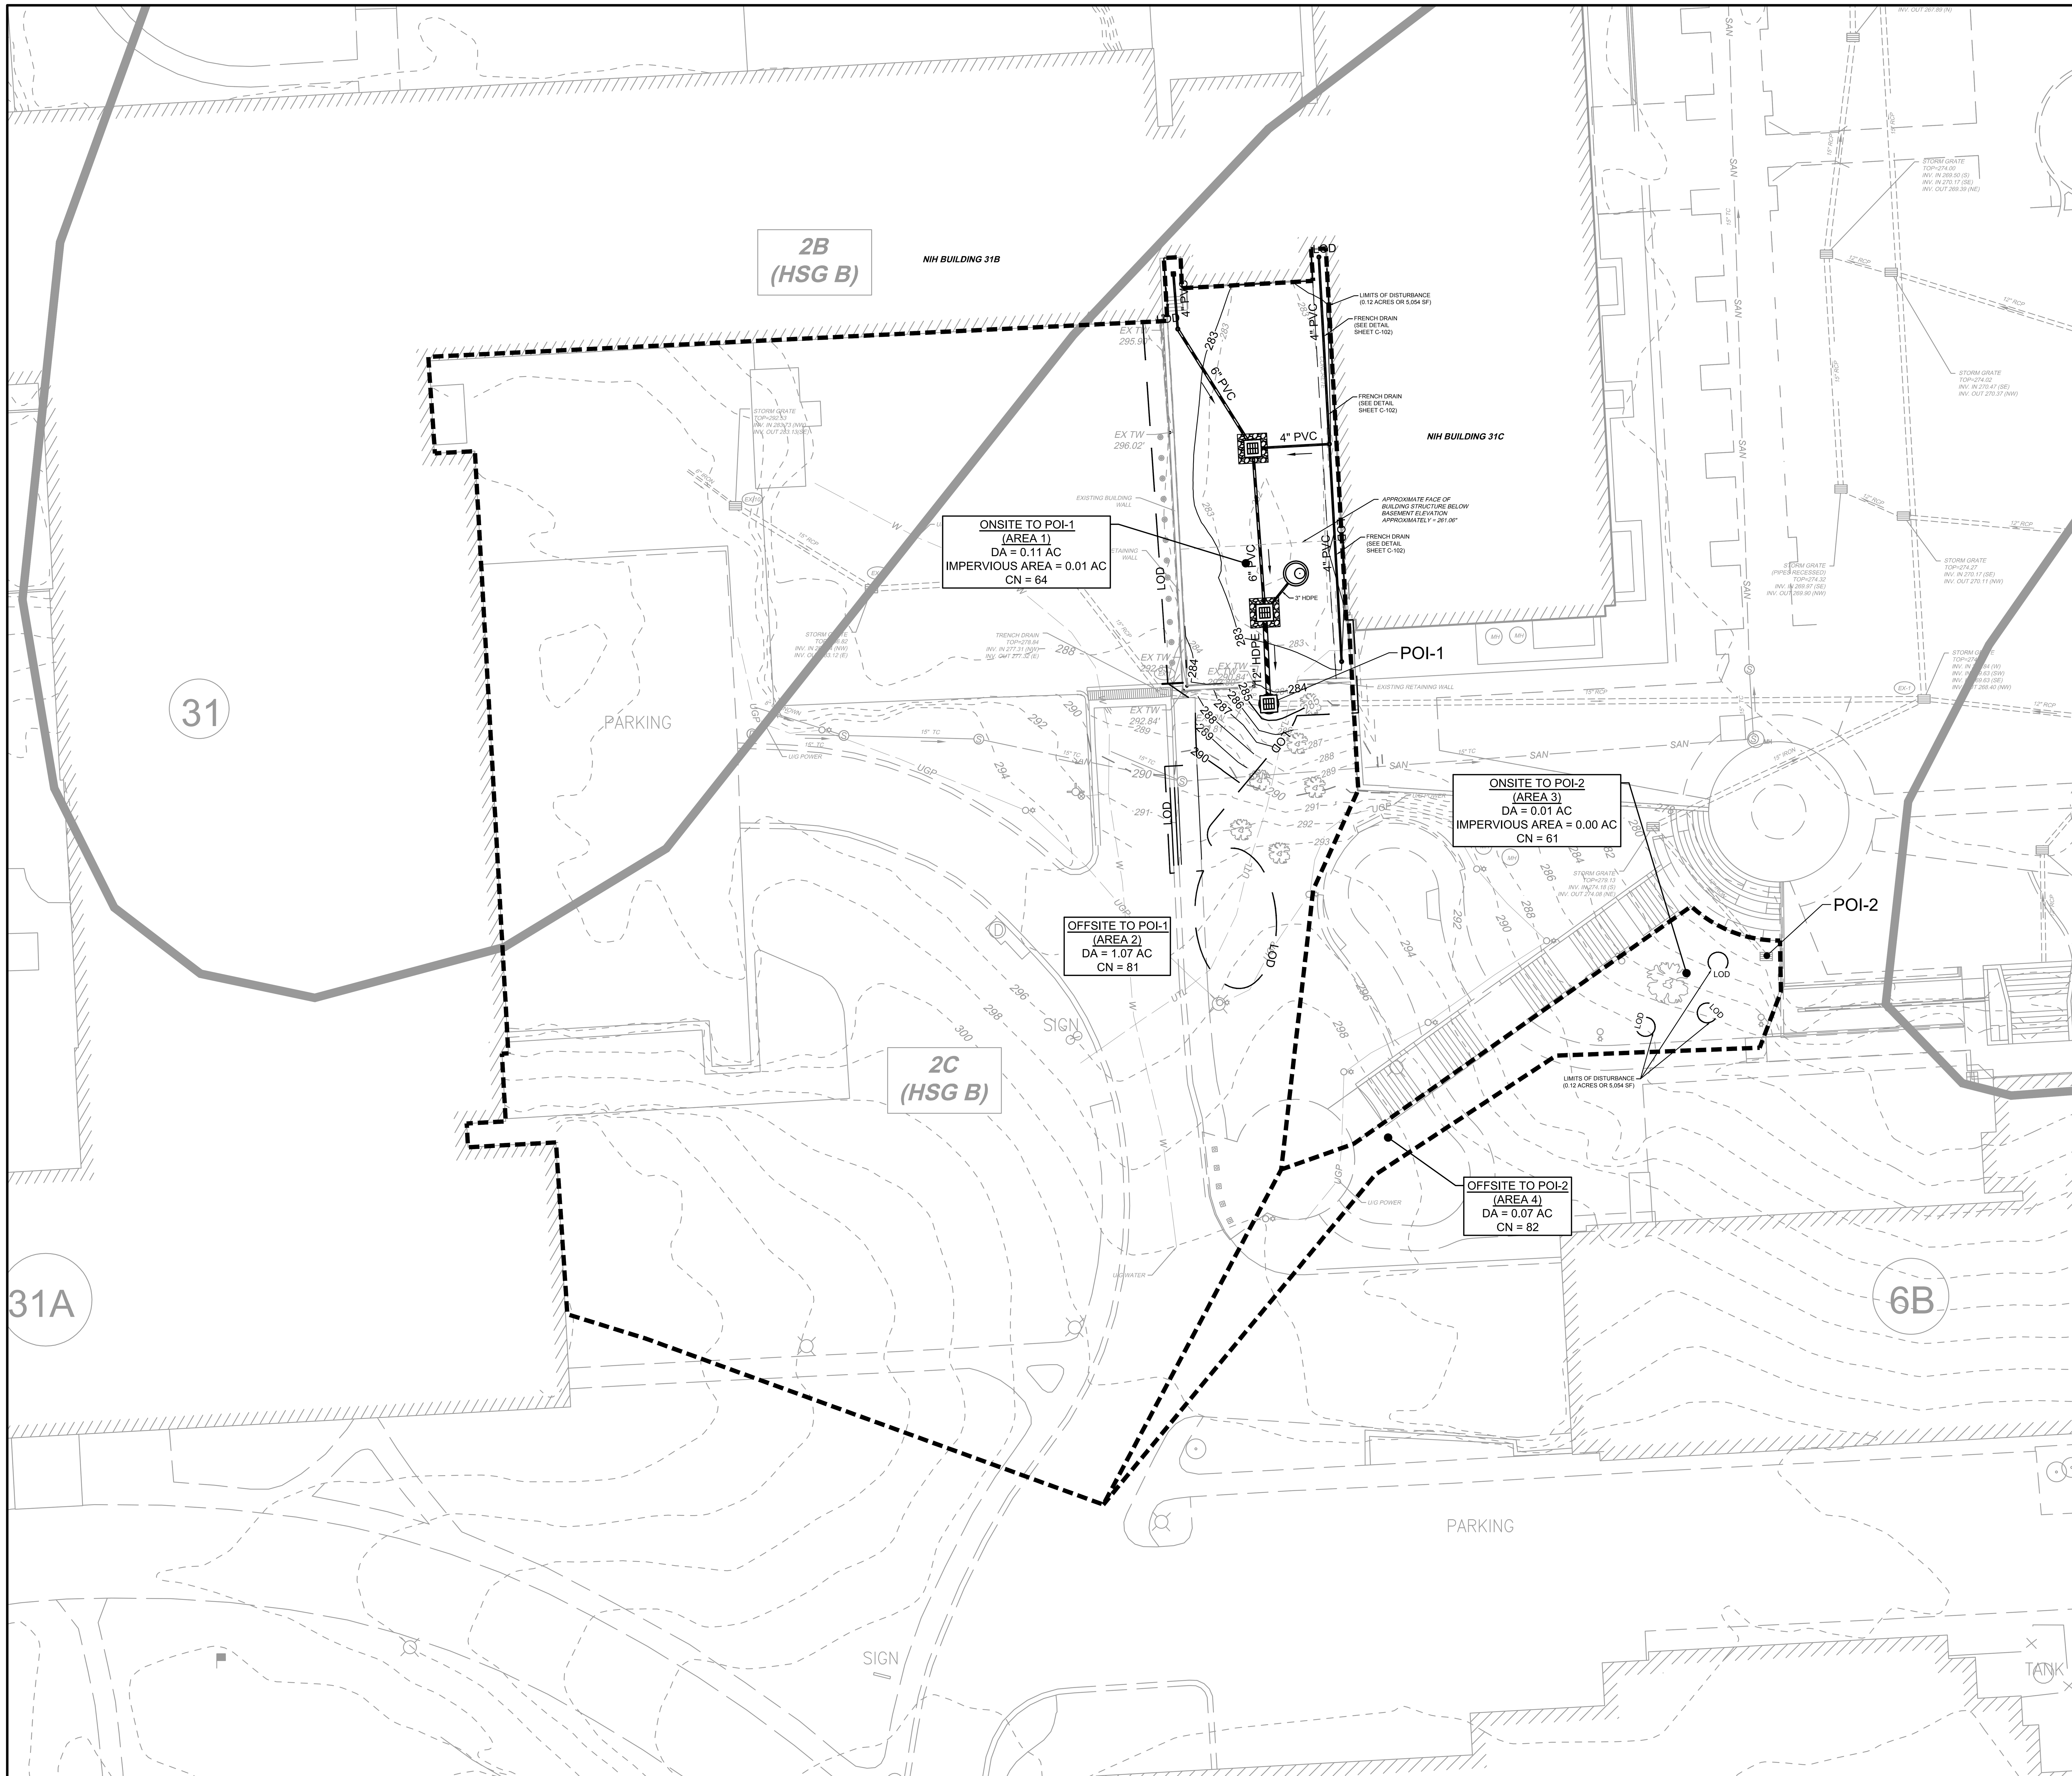

MD COORDINATE SYSTEM NAD 83/91

SCALE 1"=20'

0 20' 40'

POST-DEV POI ANALYSIS LEGEND

■	POI #1 IMPERVIOUS AREA (0.01 AC)
● 1	POINT OF INVESTIGATION

NOTE:

1) NO POST-DEVELOPMENT IMPERVIOUS AREAS ARE CAPTURED BY POI-2.

FOR MDE INFORMATION ONLY.
NOT FOR CONSTRUCTION.

PROFESSIONAL CERTIFICATION
I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED PROFESSIONAL ENGINEER UNDER THE LAWS OF THE STATE OF MARYLAND,
NAME: P.E. OSVALDO RAMOS
LICENSE: No. 57602
EXPIRATION DATE: 05-04-2027

STATE OF MARYLAND
OSVALDO A. RAMOS
57602
PROFESSIONAL ENGINEER

MDE NO. 25-SF-0127

DATE: 08/26/2025

DEPARTMENT OF HEALTH & HUMAN SERVICES, USA

LSY
ARCHITECTS & LABORATORY PLANNERS

James Posey Associates
Engineering Your Vision

TIMMONS GROUP

SGH

Architect and Engineer Name and LOGO

ARCHITECT:	LOUVIERE, STRATTON & YOKEL, LLC 8484 GEORGIA AVE, SUITE 650 SILVER SPRING, MD 20910 (301) 588-1500
MEP ENGINEER:	JAMES POSEY ASSOCIATES INC 11155 RED RUN BLVD OWINGS MILLS, MD 21117 (410) 265-6100
CIVIL ENGINEER:	TIMMONS GROUP 20110 ASHBROOK PL, SUITE 100 ASHBURN, VA 20147 (703) 554-6700
STRUCTURAL ENGINEER:	SIMPSON GUMPERTZ & HEGER 1625 EYE STREET NW SUITE 900 WASHINGTON, DC 20006 (202) 239-4199

SEAL

REVISIONS

MARK	DATE	DESCRIPTION

CONTRACTORS

A/E CON. NO.	
A/E TASK NO.	
CONS. CONTR.	
CONS. WORK	
PRIME A/E	LSY ARCHITECTS
SUB A/E	JPA / TIMMONS / SGH
CONSTR. CON.	

BUILDING

FACILITY CODE	
BUILDING NO.	BUILDING 31B
NAME	NIH
STREET	9000 ROCKVILLE PIKE
CITY	BETHESDA
STATE/ZIP	MD / 20892
OTHER BUILDING NO.	

PROJECT

PROJ. NO.	24024
PROJ. OFFICER	MOHAMMED BISWAS
PROJ. MGR.	G.LEE
SUBMISSION	IFC SUBMISSION
SUB. DATE	08/26/2025
WRK REQ. NO.	C116635

N

PROJECT TITLE: BUILDING 31B LANDSCAPE WATER INTRUSION

DRAWING TITLE: SWM POST-DEVELOPMENT DIVIDES

NIH
National Institutes of Health
OFFICE OF RESEARCH FACILITIES
DIVISION OF FACILITIES PLANNING

DESIGNED BY	OR
DRAWN BY	SA
CHECKED BY	OR
DATE	08/26/2025
FILE NAME	

DRAWING

DRAWING NO. C-701

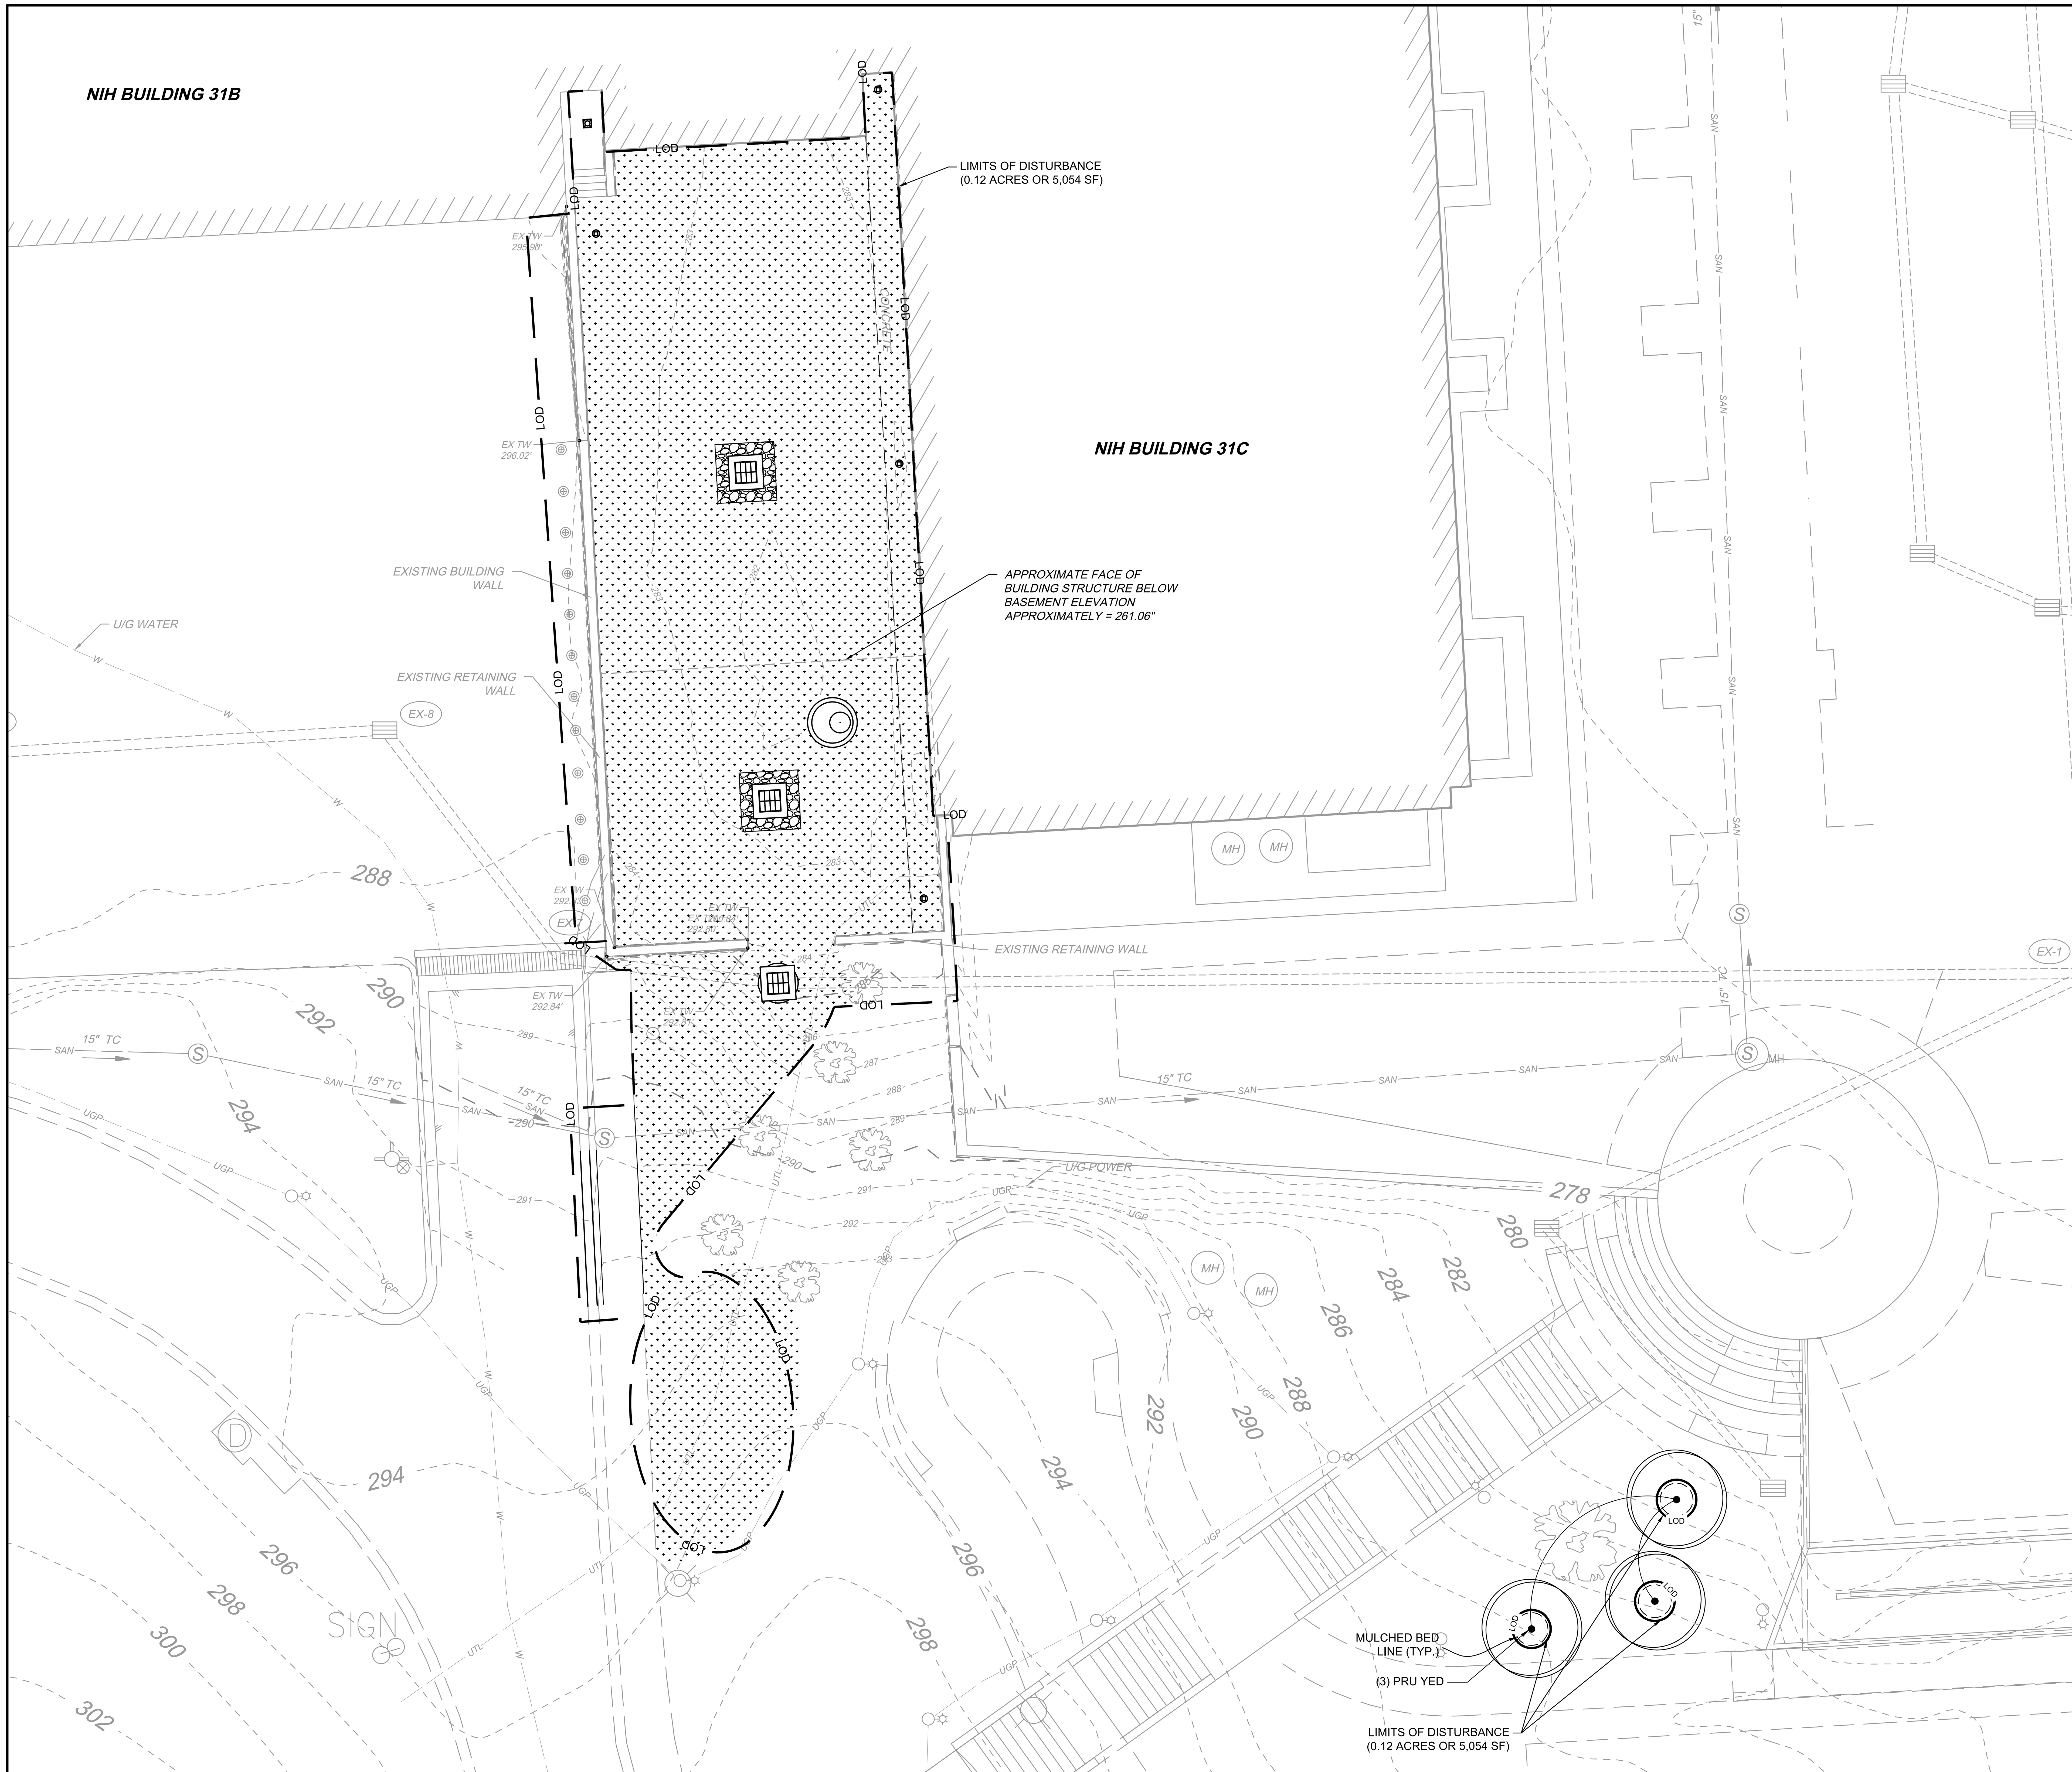

MD COORDINATE SYSTEM NAD 83/91

SCALE 1"=10'

0 10' 20'

TREE REPLACEMENT AND SOIL REPLACEMENT PLAN NOTES:

1. TREE REPLACEMENT SHALL ADHERE TO SECTIONS 3.5.3 AND 3.5.4 OF THE NIH DESIGN REQUIREMENTS MANUAL.
2. CONTRACTOR IS RESPONSIBLE FOR DISPOSING OF EXCESS SOIL OR MATERIALS AT AN APPROVED LOCATION IN ACCORDANCE WITH LOCAL, STATE, AND FEDERAL REQUIREMENTS.
3. CONTRACTOR SHALL COORDINATE WITH THE NIH LANDSCAPE ARCHITECT AS THEY SHALL ASSIST WITH THE FINAL LAYOUT OF THE TREES BY FLAGGING THE LOCATIONS.
4. CONTRACTOR TO USE EXISTING TOP SOIL TO RE-SPREAD WITHIN THE PROJECT AREA. LOCATION OF STOCK PILES SHALL BE COORDINATED WITH NIH DURING PRE-CONSTRUCTION STAGE.
5. SEED/SOD DENUDED ONCE FINAL GRADE IS REACHED.

HATCH LEGEND

AREA TO SEED/SOD

PROFESSIONAL CERTIFICATION
I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED LANDSCAPE ARCHITECT UNDER THE LAWS OF THE STATE OF MARYLAND,
NAME: BRYAN McKNIGHT
LICENSE: No. 4291
EXPIRATION DATE: 01-24-2027

STATE OF MARYLAND BRYAN McKNIGHT 4291 LANDSCAPE ARCHITECT

MDE NO. 25-SF-0127

DATE: 08/26/2025

DEPARTMENT OF HEALTH & HUMAN SERVICES, USA

LSY ARCHITECTS & LABORATORY PLANNERS

James Posey Associates Engineering Your Vision

TIMMONS GROUP

SGH

Architect and Engineer Name and LOGO

ARCHITECT: LOUVIERE, STRATTON & YOKEL, LLC
8484 GEORGIA AVE, SUITE 650
SILVER SPRING, MD 20910
(301) 588-1500

MEP ENGINEER: JAMES POSEY ASSOCIATES INC
11155 RED RUN BLVD
OWINGS MILLS, MD 21117
(410) 265-6100

CIVIL ENGINEER: TIMMONS GROUP
20110 ASHBROOK PL, SUITE 100
ASHBURN, VA 20147
(703) 554-6700

STRUCTURAL ENGINEER: SIMPSON GUMPERTZ & HEGER
1625 EYE STREET NW SUITE 900
WASHINGTON, DC 20006
(202) 239-4199

SEAL

REVISIONS

MARK	DATE	DESCRIPTION

CONTRACTORS

A/E CON. NO.	
A/E TASK NO.	
CONS. CONTR.	
CONS. WORK	
PRIME A/E	LSY ARCHITECTS
SUB A/E	JPA / TIMMONS / SGH
CONSTR. CON.	

BUILDING

FACILITY CODE	
BUILDING NO.	BUILDING 31B
NAME	NIH
STREET	9000 ROCKVILLE PIKE
CITY	BETHESDA
STATE/ZIP	MD / 20892
OTHER BUILDING NO.	

PROJECT

PROJ. NO.	24024
PROJ. OFFICER	MOHAMMED BISWAS
PROJ. MGR.	G.LEE
SUBMISSION	IFC SUBMISSION
SUB. DATE	08/26/2025
WRK REQ. NO.	C116635

N

PROJECT TITLE: BUILDING 31B LANDSCAPE WATER INTRUSION

DRAWING TITLE: TREE REPLACEMENT PLAN

NIH National Institutes of Health
OFFICE OF RESEARCH FACILITIES
DIVISION OF FACILITIES PLANNING

DESIGNED BY	OR
DRAWN BY	SA
CHECKED BY	OR
DATE	08/26/2025
FILE NAME	

DRAWING NO. C-800

TREE REPLACEMENT CALCULATION:

Existing Tree Removed		Existing Tree Removed Within New Building Footprint**		Existing Dead Tree Removed***	
Existing Tree DBH*	Replacement Trees	Existing Tree DBH*	Replacement Trees	Existing Tree DBH*	Replacement Trees
1 to 20	1	1 to 20	1	1 to 20	1
20-40	4	20-40	1	20-40	1
40+	8	40+	1	40+	1

TREE REPLACEMENT CALCULATIONS

CODE	REQUIREMENT	TREES REMOVED			REPLACEMENT CALCULATION	TREES REQUIRED	TREES PROVIDED
		1" - 20" CAL.	20" - 40" CAL.	40"+ CAL.			
SEC. 3.5.4 CAMPUS TREES	TREES REMOVED ARE TO BE REPLACED IN KIND PER THE TREE REPLACEMENT MATRIX	3	0	0	3 TREES x 1 = 3	3	3

PLANT SCHEDULE - REPLACEMENT TREES

CODE	QTY	BOTANICAL NAME	COMMON NAME	MIN. INSTALLED SIZE
LARGE DECIDUOUS TREES				
PRU YED	3	PRUNUS x YEDOENSIS	YOSHINO CHERRY	2" CAL.

GENERAL NOTES:

1. PLANTS SHALL CONFORM TO CURRENT "AMERICAN STANDARDS FOR NURSERY STOCK" BY THE AMERICAN NURSERY & LANDSCAPE ASSOCIATION (ANLA), PARTICULARLY WITH REGARDS TO SITE, GROWTH, AND SIZE OF BALL AND DENSITY OF BRANCH STRUCTURE. CONTRACTOR TO INSURE ALL PLANT MATERIAL CONFORM TO NATIONAL AND LOCAL BUILDING CODES AND ORDINANCES.
2. ALL PLANTS (B&B OR CONTAINER) SHALL BE PROPERLY IDENTIFIED BY WEATHERPROOF LABELS SECURELY ATTACHED HERETO BEFORE DELIVERY TO PROJECT SITE. LABELS SHALL IDENTIFY PLANTS BY NAME, SPECIES AND SIZE. LABELS SHALL NOT BE REMOVED UNTIL THE FINAL INSPECTION BY THE OWNER'S REPRESENTATIVE.
3. ANY MATERIAL AND/OR WORK MAY BE REJECTED BY THE OWNER'S REPRESENTATIVE IF IT DOES NOT MEET THE REQUIREMENTS OF THE SPECIFICATIONS. THE CONTRACTOR SHALL REMOVE ALL REJECTED MATERIALS FROM THE SITE.
4. THE CONTRACTOR SHALL FURNISH ALL PLANTS IN QUANTITIES AND SIZES TO COMPLETE THE WORK AS SPECIFIED IN PLANT SCHEDULE. THE LANDSCAPE CONTRACTOR SHALL BE RESPONSIBLE TO VERIFY ALL PLANT QUANTITIES ON THE PLANS PRIOR TO COMMENCEMENT OF WORK. QUANTITIES IN THE PLANT SCHEDULE ARE FOR THE CONTRACTORS CONVENIENCE ONLY AND DO NOT CONSTITUTE THE FINAL COUNTY.
5. SUBSTITUTIONS REQUIRE WRITTEN APPROVAL OF THE OWNER'S REPRESENTATIVE AND MAY REQUIRE FURTHER APPROVALS FROM THE RESPONSIBLE JURISDICTION.
6. PLANTS SHALL BE LOCATED AS SHOWN ON THE DRAWINGS AND BY SCALING OR AS DESIGNATED IN THE FIELD BY THE OWNER'S REPRESENTATIVE. ALL LOCATIONS ARE TO BE APPROVED BY THE OWNER'S REPRESENTATIVE BEFORE EXCAVATION.
7. CONTRACTOR SHALL LOCATE AND MARK ALL UNDERGROUND UTILITY LINES AND IRRIGATION SYSTEMS PRIOR TO EXCAVATING PLANT BEDS OR PITS. ALL UTILITY EASEMENT AREAS WHERE NO PLANTING SHALL TAKE PLACE SHALL ALSO BE MARKED ON THE SITE, PRIOR TO LOCATING AND DIGGING THE TREE PITS. IF UTILITY LINES ARE ENCOUNTERED IN EXCAVATION OF TREE PITS, OTHER LOCATIONS FOR THE TREES SHALL BE SELECTED BY THE OWNER'S REPRESENTATIVE. SUCH CHANGES SHALL BE MADE BY THE CONTRACTOR WITHOUT ADDITIONAL COMPENSATION. NO CHANGES OF LOCATION SHALL BE MADE WITHOUT THE APPROVAL OF THE OWNER'S REPRESENTATIVE.
8. ALL EQUIPMENT AND TOOLS SHALL BE PLACED SO AS NOT TO INTERFERE OR HINDER THE PEDESTRIAN AND VEHICULAR TRAFFIC FLOW.
9. DURING PLANTING OPERATIONS, EXCESS AND WASTE MATERIALS SHALL BE PROMPTLY AND FREQUENTLY REMOVED FROM THE SITE.
10. ALL SHRUB PITS ARE TO BE EXCAVATED TO A MINIMUM DEPTH TO ALLOW THE SHRUB ROOT BALL TO BE A MINIMUM OF 4" HIGHER THAN FINISH GRADE. ALL PLANT SHRUB BEDS ARE TO BE EXCAVATED TO THE WIDTH SHOWN ON THE PLANS.
11. ALL TREE PITS ARE TO BE EXCAVATED TO A MINIMUM DEPTH TO ALLOW THE TREE ROOT BALL TO BE A MINIMUM OF 2-3" HIGHER THAN FINISH GRADE. THE TREE ROOT BALL IS TO REST ON UNDISTURBED SOIL, OR A COMPACTED BED MUST BE PREPARED FOR THE TREE ROOT BALL TO REST ON AND WHICH WILL NOT SUBSIDE CAUSING THE TREE TO SINK BELOW FINISH GRADE. ALL TREE PITS ARE TO BE A MINIMUM OF 12" LARGER ON EVERY SIDE OF THE TREES ROOT BALL.
12. THE PLANTER BEDS ARE TO BE ENTIRELY CLEANED OUT TO THE UNDISTURBED SOIL LEVEL. ALL EXISTING SOIL, CONSTRUCTION DEBRIS, ROOTS AND OTHER FOREIGN MATERIAL ARE TO BE REMOVED AND DISCARDED OFFSITE.
14. IF PLANTING IN AREAS THAT HAVE BEEN PREVIOUSLY COMPACTED, THE SOIL SHOULD BE PROPERLY PREPARED (TILLED AND AMENDED AS NEEDED BASED ON SOIL SAMPLES) TO A DEPTH OF 1 FOOT BEFORE INSTALLATION OF LANDSCAPE MATERIAL. SOIL WITHIN INDIVIDUAL PLANTING HOLES SHOULD NOT BE AMENDED.
15. THE CONTRACTOR IS RESPONSIBLE TO ENSURE THAT ALL PLANT PITS ARE WELL DRAINED. THE LANDSCAPE CONTRACTOR WITHOUT COST TO THE OWNER WILL REPLACE ALL PLANT MATERIAL, WHICH IS AFFECTED BY POOR DRAINAGE.
16. ALL LAWN AREAS ARE TO BE TILLED TO A DEPTH OF 6" AND ALL FOREIGN MATERIAL REMOVED WHICH WILL INHIBIT THE HEALTHY GROWTH OF THE GRASS. ALL OLD GRASS AND GRASS ROOTS ARE TO BE REMOVED FROM THE SITE. NEW TOPSOIL OF A MINIMUM 4" IS TO BE PLACED OVER THE AREAS TO BE SODDED. THE GRASS AREAS ARE TO BE FINE GRADED TO ENSURE THAT NO UNDULATIONS OCCUR. THE LAWN TOPSOIL IS TO BE ROLLED AND LIGHTLY IRRIGATED PRIOR TO PLACING OF THE SEED. THE SEED IS NOT TO BE LAID ON FROZEN OR SOAKED SOIL.
17. THE TREES AND SHRUBS ARE TO BE HANDLED WITH THE BEST CARE AND ATTENTION TO ENSURE THAT THE PLANTS ARE NOT BRUISED, BROKEN, TORN, DAMAGED IN ANY WAY WHICH WILL AFFECT THE PLANTS GENERAL APPEARANCE AND WELL BEING.
18. THE TREES AND SHRUBS ARE TO BE PLANTED WITH THE ACCEPTED STANDARDS OF THE AMERICAN ASSOCIATION OF NURSERYMEN. THE PLANTS ARE TO BE PROPERLY WATERED AND BACKFILLED DURING THE PLANTING. ALL CARE MUST BE TAKEN TO ENSURE THAT THE PLANTS ARE UPRIGHT, A PLANT'S BEST SIDE IS EXPOSED TO THE POINT OF THE PLANTS GREATEST VISIBILITY.
19. THE TREES MUST BE STAKED IN ACCORDANCE WITH ACCEPTABLE NURSERY PRACTICE TO ENSURE THAT THEY ARE SECURE IN THE GROUND AND WILL GROW STRAIGHT AND UNIFORM. THE TREES ARE TO BE WRAPPED IF THE CONTRACTOR DEEMS IT NECESSARY TO PROTECT THE TREES FROM SUN SCALD OR INSECT ATTACK.
20. TREES SHALL BE LOCATED A MINIMUM OF 4 FEET FROM WALLS AND WALKS.
21. GROUPS OF SHRUBS SHALL BE PLACED IN A CONTINUOUS MULCH BED WITH SMOOTH CONTINUOUS LINES. ALL MULCHED BED EDGES SHALL BE CURVILINEAR IN SHAPE FOLLOWING THE CONTOUR OF THE PLANT MASS. TREES LOCATED WITHIN 4 FEET OF SHRUB BEDS SHALL SHARE SAME MULCH BED.
22. DIG THE TREE PIT AT LEAST ONE (1) FOOT WIDER THAN THE ROOT BALL AND EQUAL TO THE BALL'S VERTICAL DIMENSION,SO THE TOP OF THE ROOT BALL WILL BE FLUSH WITH THE GROUND LEVEL.
23. ESPECIALLY IN AREAS WHERE CONSTRUCTION ACTIVITY HAS COMPACTED THE SOIL, THE SIDES OF THE PIT SHOULD BE SCARIFIED OR LOOSENED WITH A PICKAX OR SHOVEL.
24. BACKFILL FOR PLANTING AREAS SHOULD BE WITH THE SITE'S EXISTING SOIL HOWEVER, IF SOIL IS HARD, COMPACTED FILL DIRT, THE SOIL IN THE PLANTING AREAS SHOULD BE IMPROVED WITH ORGANIC MATTER AND THE GROUND WORKED SO THAT IT CAN BE MORE EASILY PLANTED. ALL ROOTS MUST BE COMPLETELY COVERED. PLANT MATERIAL SHOULD BE THOROUGHLY WATERED AFTER INSTALLATION.
25. HERBACEOUS EMBANKMENT PLANTINGS SHOULD BE LIMITED TO 10 INCHES IN HEIGHT.
26. PLANTS SHALL NOT BLOCK MAINTENANCE ACCESS TO STRUCTURES WITH TREES OR SHRUBS.
27. ALL PLANTING AREAS SHALL CONTAIN SOILS SUITABLE FOR PLANTING. SOILS SHALL BE FREE OF CONSTRUCTION MATERIALS. EXCESSIVE ROCK AND GRAVEL OR COMPACTION SHALL BE ADDRESSED PRIOR TO INSTALLATION OF LANDSCAPE MATERIAL.

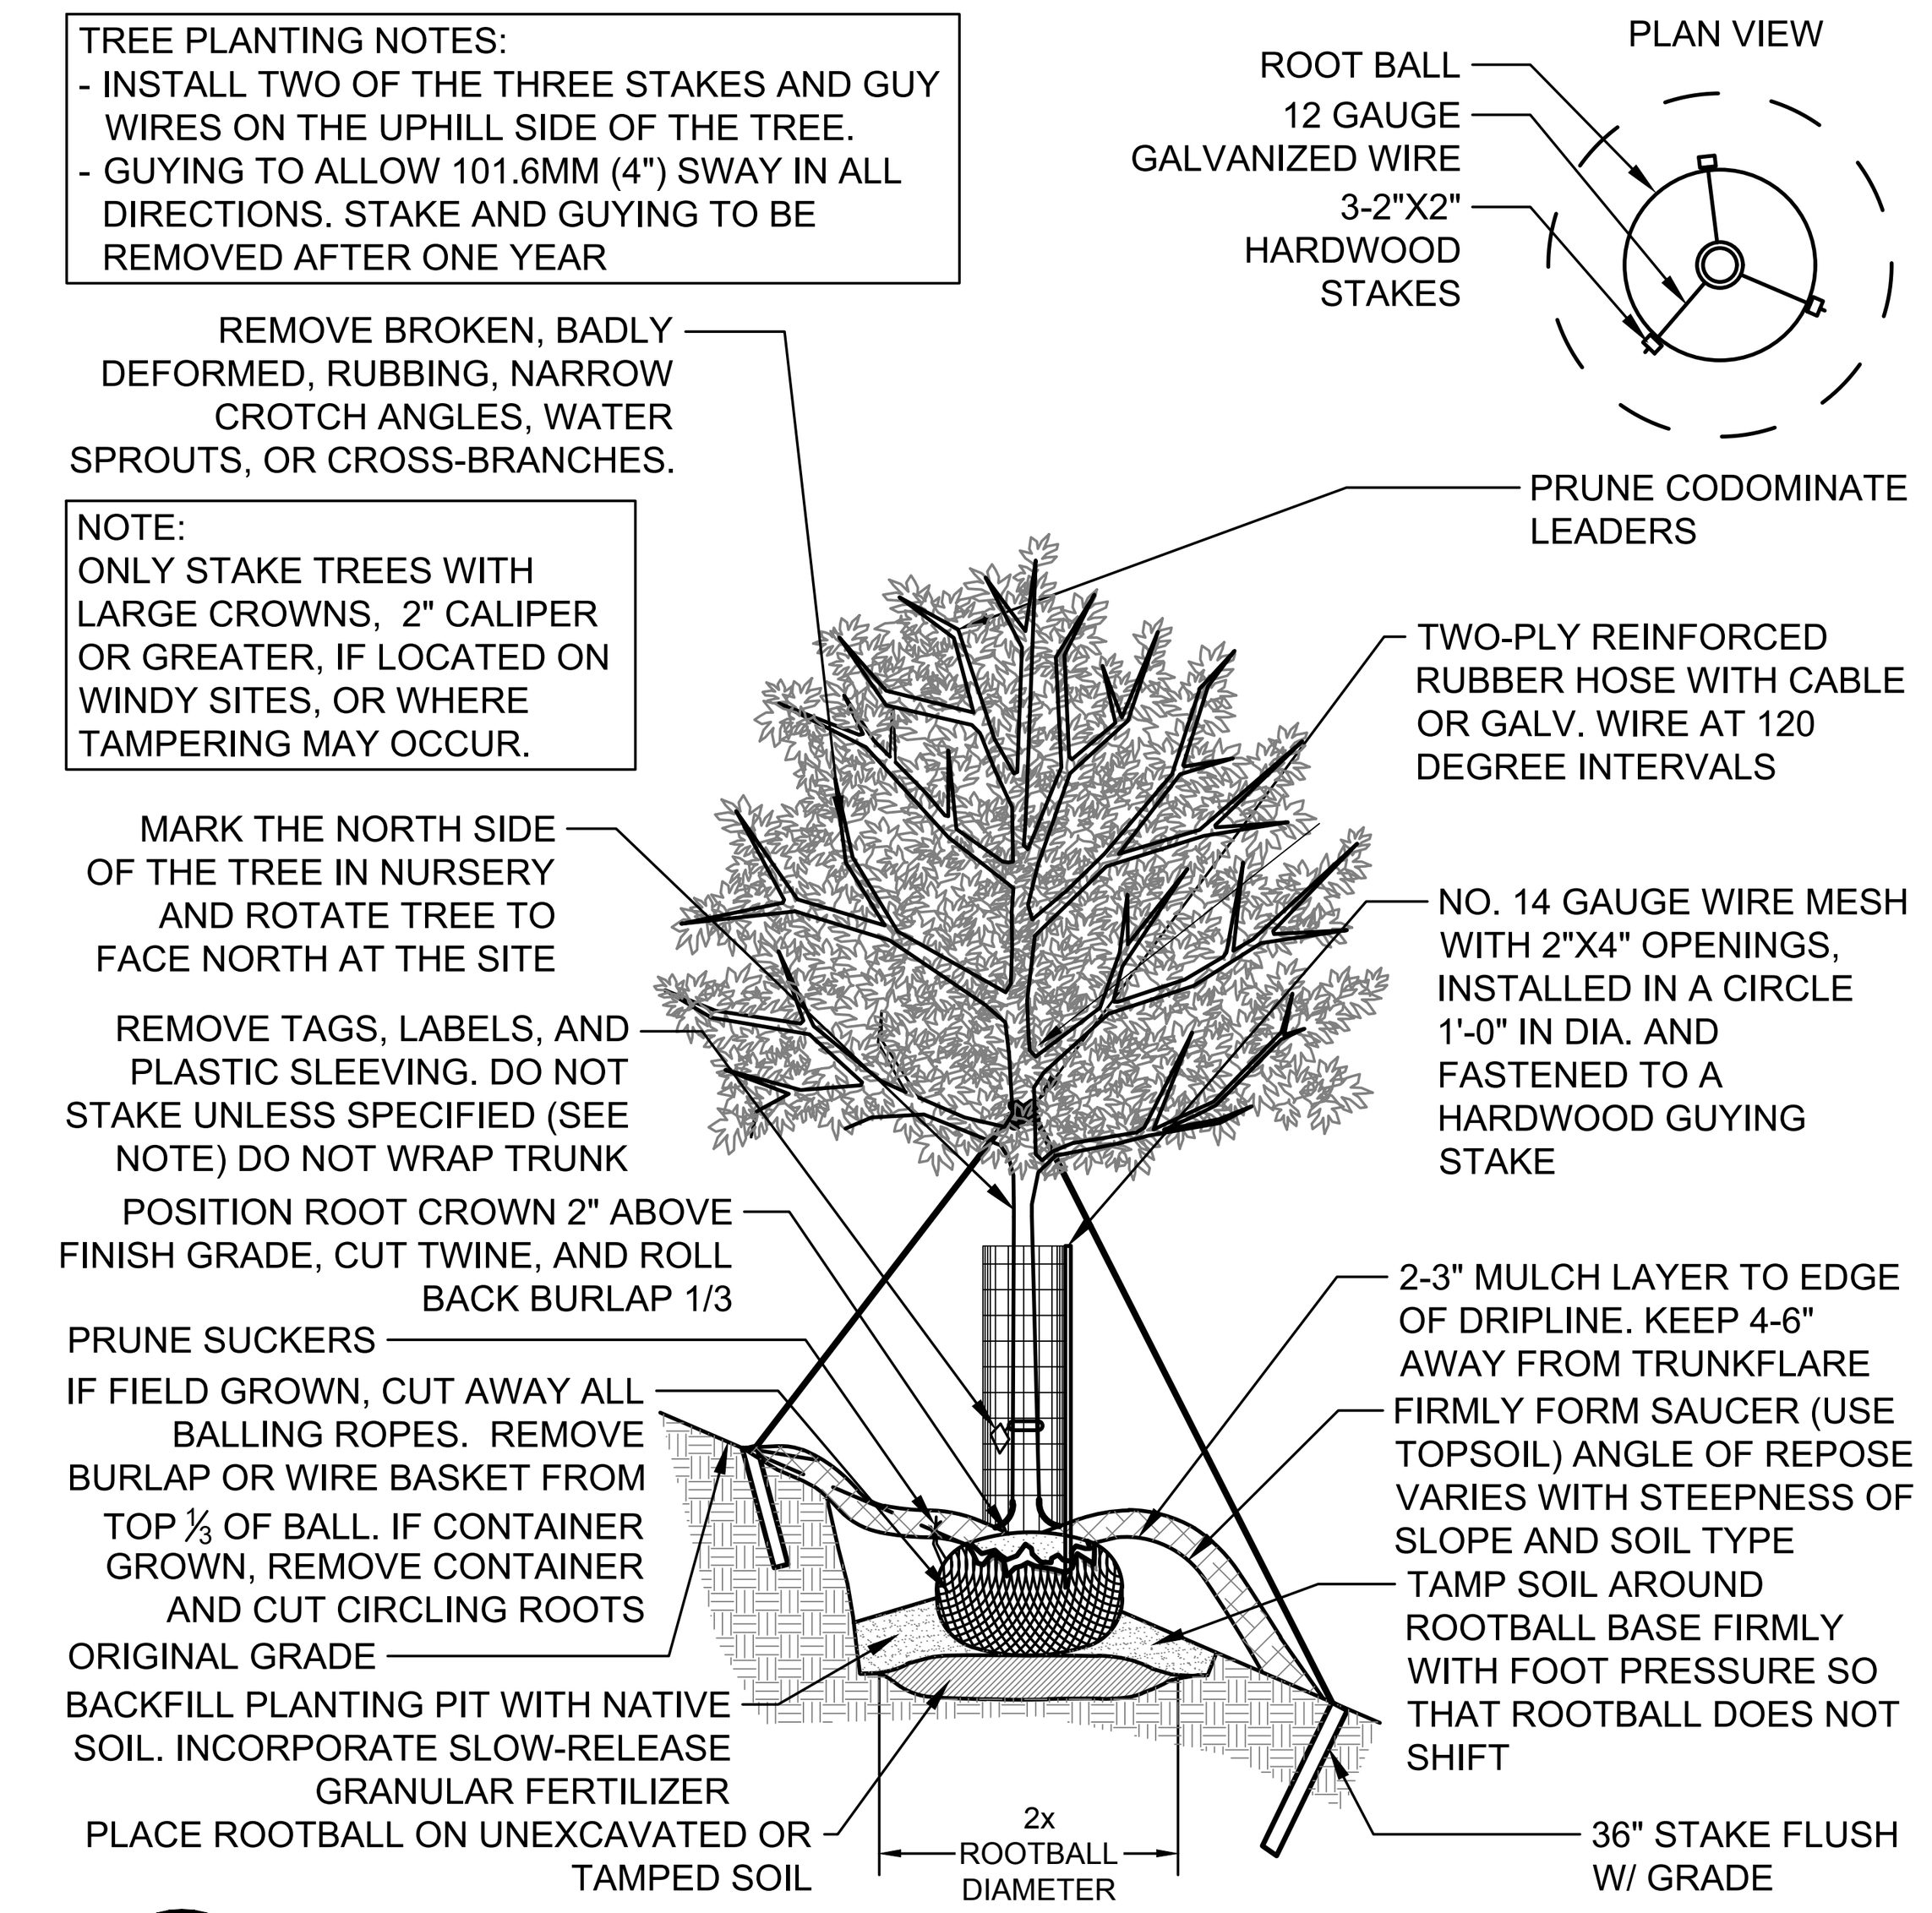

1 TREE PLANTING WITH GUYS ON SLOPE DETAIL

NTS

PROFESSIONAL CERTIFICATION
I HEREBY CERTIFY THAT THESE DOCUMENTS WERE PREPARED OR APPROVED BY ME, AND THAT I AM A DULY LICENSED LANDSCAPE ARCHITECT UNDER THE LAWS OF THE STATE OF MARYLAND,
NAME: BRYAN McKNIGHT
LICENSE: No. 4291
EXPIRATION DATE: 01-24-2027

STATE OF MARYLAND BRYAN McKNIGHT 4291 LANDSCAPE ARCHITECT

MDE NO. 25-SF-0127 DATE: 08/26/2025

PROPERTY OF THE UNITED STATES GOVERNMENT
FOR OFFICIAL USE ONLY
Do not remove this notice
Properly destroy documents when no longer needed

DEPARTMENT OF HEALTH & HUMAN SERVICES, USA

LSY ARCHITECTS & LABORATORY PLANNERS

James Posey Associates Engineering Your Vision

TIMMONS GROUP

SGH

Architect and Engineer Name and LOGO

SEAL

ARCHITECT:	LOUVIERE, STRATTON & YOKEL, LLC 8484 GEORGIA AVE, SUITE 650 SILVER SPRING, MD 20910 (301) 588-1500
MEP ENGINEER:	JAMES POSEY ASSOCIATES INC 11155 RED RUN BLVD OWINGS MILLS, MD 21117 (410) 265-6100
CIVIL ENGINEER:	TIMMONS GROUP 20110 ASHBROOK PL, SUITE 100 ASHBURN, VA 20147 (703) 554-6700
STRUCTURAL ENGINEER:	SIMPSON GUMPERTZ & HEGER 1625 EYE STREET NW SUITE 900 WASHINGTON, DC 20006 (202) 239-4199

REVISIONS

MARK	DATE	DESCRIPTION

CONTRACTORS

A/E CON. NO.	
A/E TASK NO.	
CONS. CONTR.	
CONS. WORK	
PRIME A/E	LSY ARCHITECTS
SUB A/E	JPA / TIMMONS / SGH
CONSTR. CON.	

BUILDING

FACILITY CODE	
BUILDING NO.	BUILDING 31B
NAME	NIH
STREET	9000 ROCKVILLE PIKE
CITY	BETHESDA
STATE/ZIP	MD / 20892
OTHER BUILDING NO.	

PROJECT

PROJ. NO.	24024
PROJ. OFFICER	MOHAMMED BISWAS
PROJ. MGR.	G.LEE
SUBMISSION	IFC SUBMISSION
SUB. DATE	08/26/2025
WRK REQ. NO.	C116635

N

PROJECT TITLE: BUILDING 31B LANDSCAPE WATER INTRUSION

DRAWING TITLE: TREE REPLACEMENT NOTES AND DETAILS

NIH
National Institutes of Health
OFFICE OF RESEARCH FACILITIES
DIVISION OF FACILITIES PLANNING

DESIGNED BY	OR
DRAWN BY	SA
CHECKED BY	OR
DATE	08/26/2025
FILE NAME	

DRAWING

DRAWING NO. C-801

GENERAL DEMOLITION NOTES:
(TYPICAL ALL DEMOLITION SHEETS)

A. REMOVE EXISTING NON-STRUCTURAL ELEMENTS WITHIN THE PROJECT SITE EXCEPT WHERE INDICATED BY NOTE OR SYMBOL AS EXISTING TO REMAIN.

B. EXISTING MATERIALS ARE AS FOLLOWS, UNO:
INTERIOR WALLS: CMU/GWB
FLOOR FINISH: EPOXY
FINISH CEILING: ATC

C. DEMOLITION DRAWING SHOWS GENERAL EXTENT OF REQUIRED WORK. REMOVE FIXTURES, FITTINGS, DEVICES, ETC. REQUIRED TO PREPARE THE PROJECT SITE TO RECEIVE NEW WORK. SEE NEW WORK DRAWINGS FOR ADDITIONAL INFORMATION.

D. PERFORM SELECTIVE DEMOLITION FOR WORK SHOWN ELSEWHERE IN THE CONTRACT DOCUMENTS THAT REQUIRES DEMOLITION NOT SHOWN ON DEMOLITION DRAWINGS.

E. PHASE DEMOLITION AND PROVIDE TEMPORARY FACILITIES AS REQUIRED TO MAINTAIN MEP AND LIFE SAFETY SYSTEMS SERVING OCCUPIED SPACES IN FULL OPERATING CONDITION. COORDINATE PLAN FOR MAINTENANCE OF THESE SYSTEMS WITH PROJECT OFFICER.

F. MAINTAIN BUILDING IN WEATHER TIGHT CONDITION.

G. RESTORE FIRE SEPARATION CONSTRUCTION TO FULL CAPACITY, INCLUDING FIRESTOPPING, AS SOON AS POSSIBLE AFTER DEMOLITION ACTIVITIES THAT COMPROMISE THEIR INTEGRITY.

H. PROVIDE TEMPORARY BRACING REQUIRED TO SUPPORT BUILDING ELEMENTS TO REMAIN AND REQUIRED TO MAINTAIN THE PROJECT SITE IN A SAFE CONDITION.

I. WHERE REMOVAL OF FINISHES IS REQUIRED FROM SURFACES TO REMAIN AS SUBSTRATE FOR NEW FINISHES, USE REMOVAL METHODS WHICH RESULT IN SUBSTRATE SUITABLE FOR NEW FINISHES.

J. ALL CONSTRUCTION DEBRIS (THIS INCLUDES RECYCLABLE AND NON RECYCLABLE) ARE TO BE CYCLED THROUGH NIH'S CONSTRUCTION DEBRIS AND MONTGOMERY'S SCRAP METAL DUMPSTERS LOCATED AT BUILDING LOADING DOCK. CONTACT DEP BILL KETNER 301.496.7990 WILLIAM.KETNER@NIH.GOV

K. DISPOSE ALL NON-RECYCLABLE ITEMS OFF-SITE UNLESS INDICATED TO BE SALVAGED OR REUSED IN NEW WORK.

L. ALL ITEMS INDICATED WITH A DASHED LINE ARE TO BE REMOVED UNO.

M. MAINTAIN CLEAR ACCESS CORRIDORS TO BUILDING EXITS SERVING OCCUPIED AREAS OUTSIDE AREA OF DEMOLITION AT ALL TIMES.

N. X-RAY/GPR ELEVATED SLABS OR OTHER STRUCTURAL CONCRETE ELEMENTS REQUIRING PENETRATION TO DETERMINE LOCATION OF REINFORCING BARS. PERFORM WORK TO AVOID CUTTING REBARS. IF REBARS CANNOT BE AVOIDED, OBTAIN APPROVAL OF STRUCTURAL ENGINEER PRIOR TO CUTTING OR DRILLING. PERFORM X-RAYING/GPR SCAN AFTER NORMAL BUILDING HOURS AND COORDINATE SCHEDULE WITH PROJECT OFFICER.OBTAIN AN PERMIT PRIOR TO PERFORMING X-RAY/GPR.

O. ASBESTOS CONTAINING MATERIAL (ACM) AND OTHER HAZARDOUS MATERIALS SUCH AS MERCURY AND PCBS ARE NOT EXPECTED WITHIN PROJECT SITE. IF MATERIALS SUSPECTED OF CONTAINING ACM OR OTHER HAZARDOUS MATERIALS ARE ENCOUNTERED, STOP WORK AND CONTACT PROJECT OFFICER FOR INSTRUCTIONS.

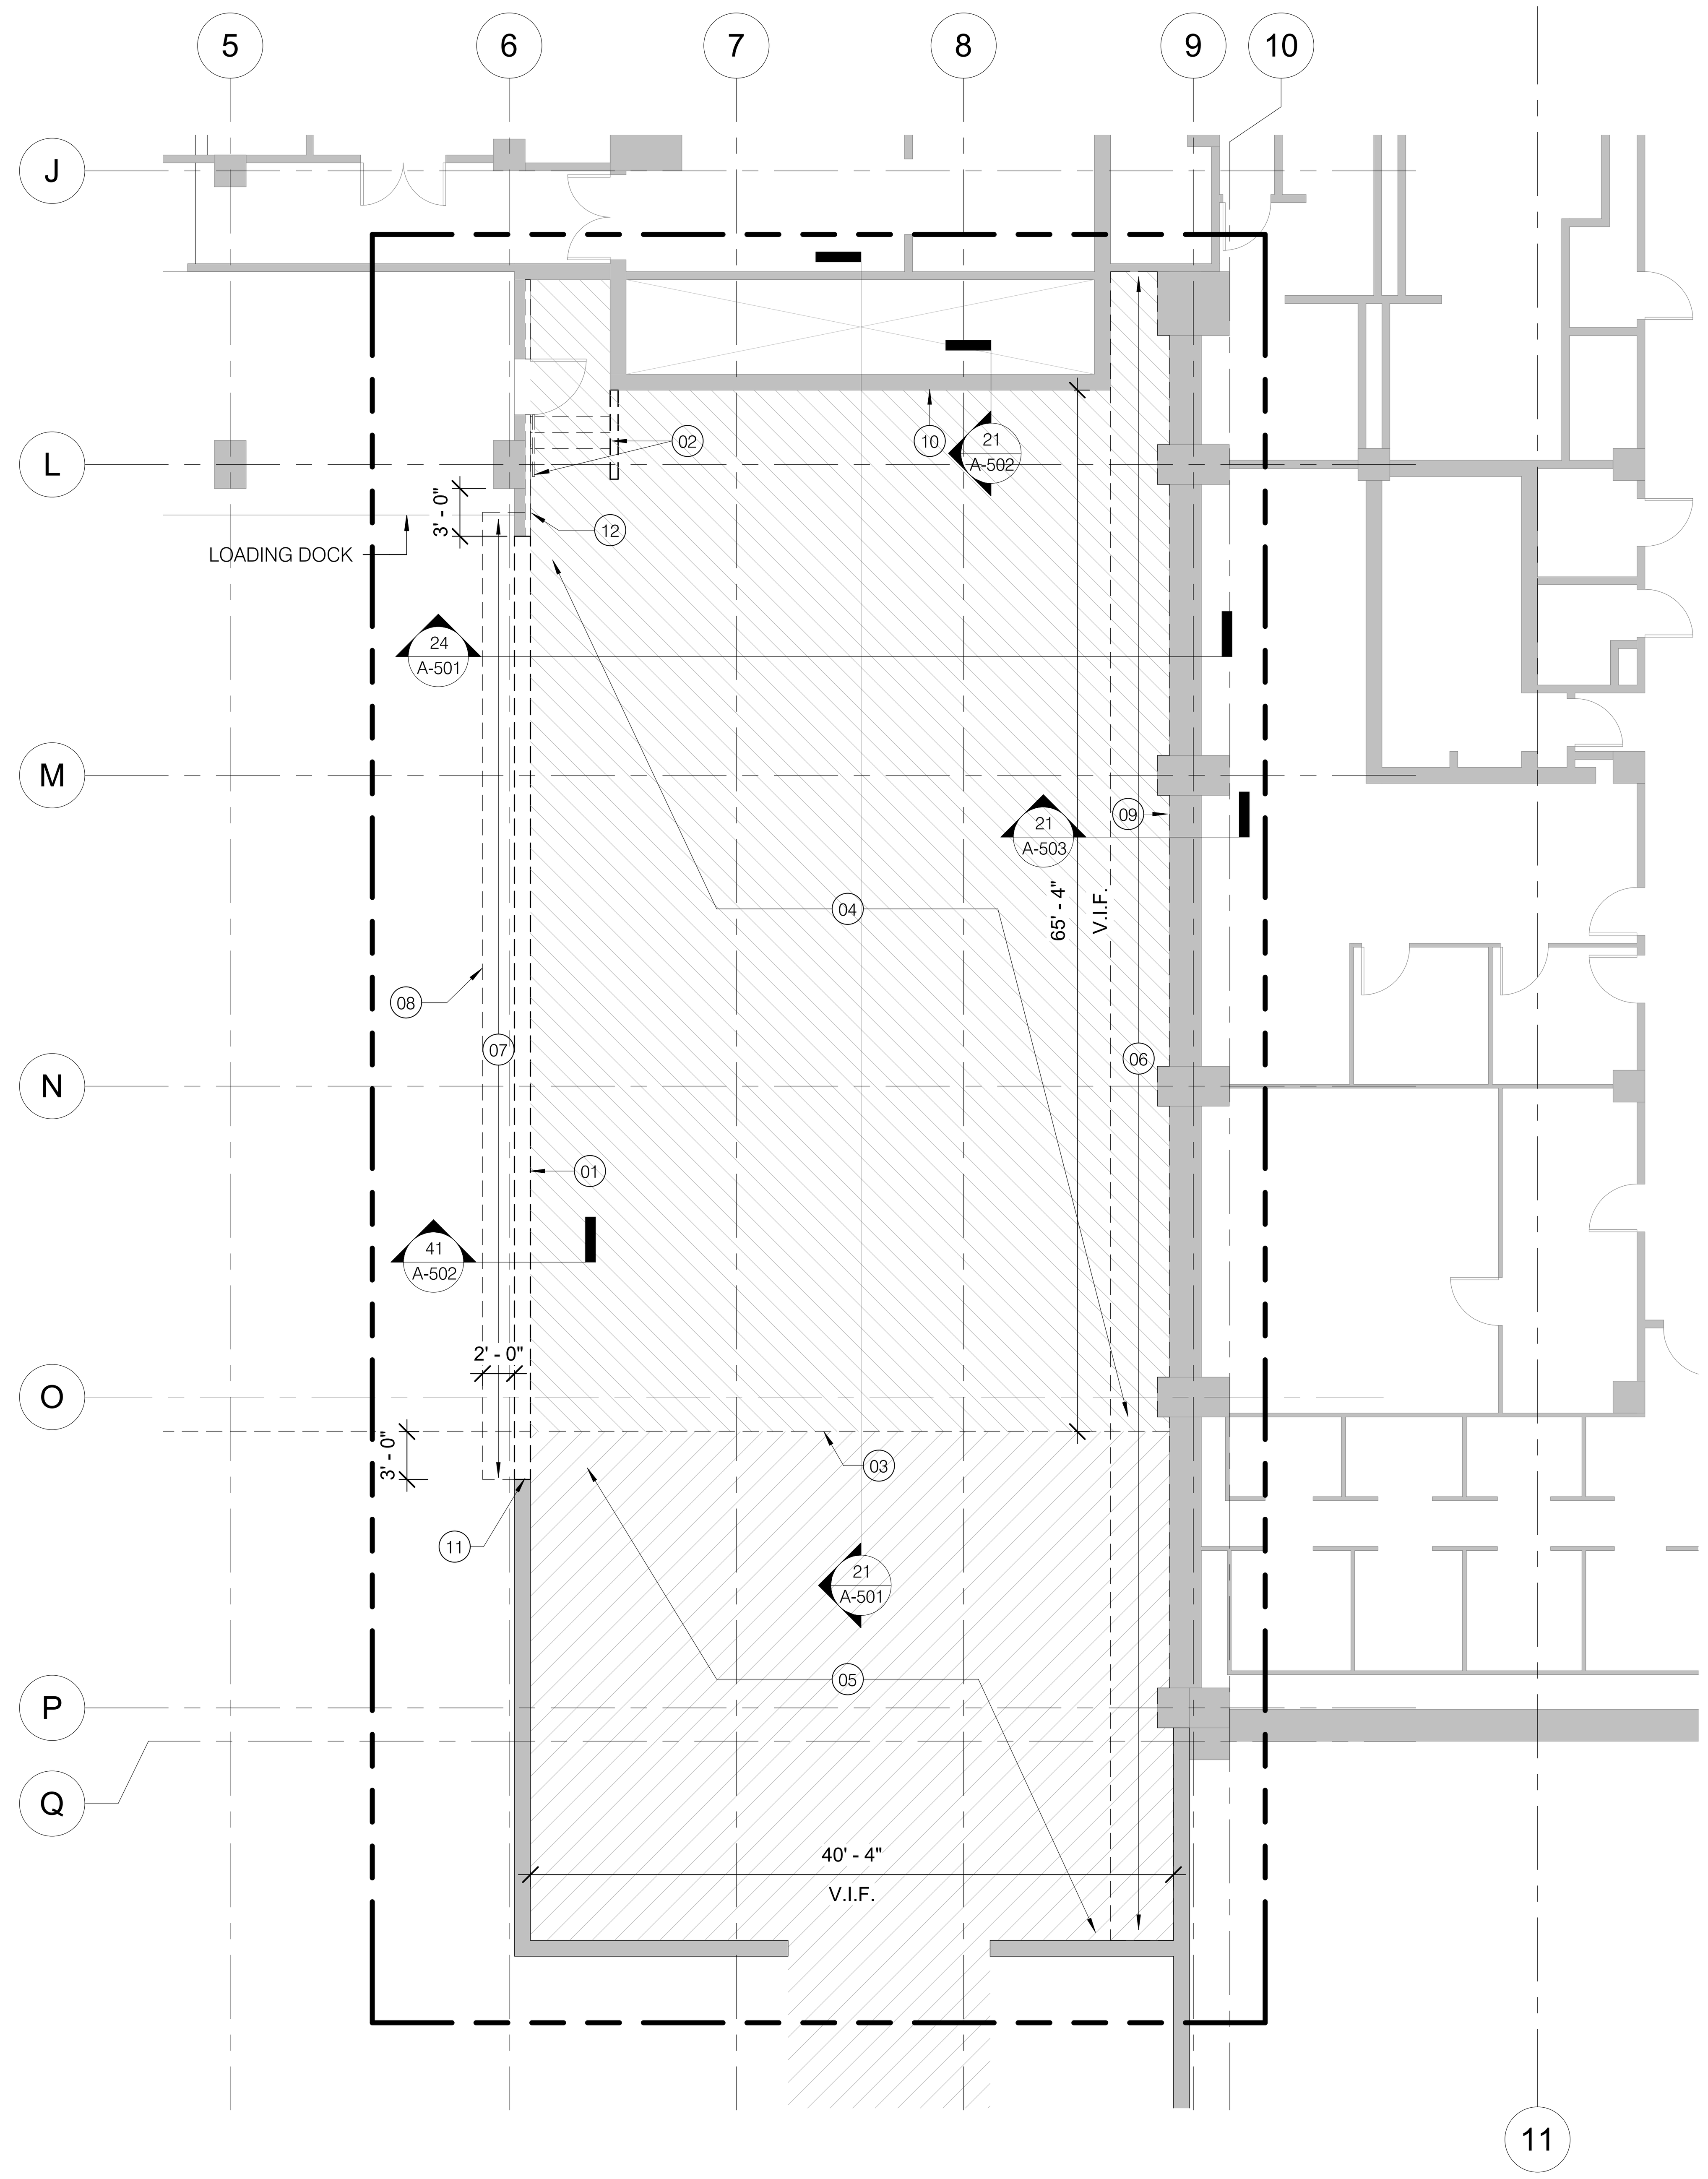

43 A-100 B3 SURFACE DEMO PLAN
1/8" = 1'-0"

1/8" = 1'-0" 5 0 5 10 15 20
SCALE FEET

DEMOLITION LEGEND:

REMOVE WALL

PARTITION, ETR

DOOR, ETR

APPROXIMATE AREA OF EXCAVATION - (APPROX) 6 FEET DEEP

APPROXIMATE AREA OF EXCAVATION AS REQUIRED TO ACCOMMODATE NEW B4 FOUNDATION WALL WATERPROOFING AND FOUNDATION DRAIN - (APPROX) 18 FEET DEEP

LIMIT OF CONSTRUCTION LINE

KEY NOTES: (TYPICAL X)

X DESIGNATE NEW WORK ACTIVITY BY ROOM

01	SCREEN WALL AND BRICK FOUNDATION WALL CLADDING SCOPE - SEE 21/A-501.
02	REMOVE STAIR, SLAB, HANDRAIL, KNEE WALL, AND DRAIN DOWN TO TOPPING SLAB. SIGNAGES WILL BE PROVIDED AT THE B3 LEVEL CORRIDOR TO INDICATE THE ALTERNATIVE EGRESS ROUTE. REFER TO LIFE SAFETY PLAN 41/G-002 FOR THE EGRESS ROUTE.
03	SOUTH EDGE OF B4 ROOF DECK AND WALL BELOW.
04	EXCAVATE SOIL AND REMOVE LANDSCAPE, EXISTING TOPPING SLAB, AND PLAZA WATERPROOFING TO EXPOSE THE STRUCTURAL SLAB. REFER TO CIVIL DRAWINGS.
05	TO THE EXTENT NECESSARY, EXCAVATE SOIL, REMOVE AND DISPOSE OF EXISTING FOUNDATION WALL WATERPROOFING AND FOUNDATION DRAIN, IF PRESENT. PROVIDE TEMPORARY SUPPORT OF EXCAVATION, INCLUDING SUPPORT OF RETAINING WALL AND LOADING DOCK PLAZA SLAB TO REMAIN, AS REQUIRED TO ACCOMMODATE THE WORK. REFER TO CIVIL DRAWINGS. KEEP EXTENT OF DISTURBANCE TO A MINIMUM AND AS NECESSARY.
06	REMOVE EXISTING CONCRETE GUTTER AND DRAINS AND EXCAVATE TO DEPTH OF SLAB, AS IN AREAS WHERE NOTE 04 IS INDENTIFIED..
07	REMOVE LOADING DOCK PLAZA OVERBURDEN AS SHOWN IN THE DRAWINGS TO ACCOMMODATE CONSTRUCTION OF NEW CURB AND INTEGRATION OF EXISTING LOADING DOCK WATERPROOFING WITH FOUNDATION WALL WATERPROOFING.
08	WORK WITH NIH TO COORDINATE LIMITS OF DEMOLITION AND WORK SPACE AS REQUIRED TO MAINTAIN ONE LANE OF LOADING DOCK ACCESS.
09	REMOVE FOUNDATION WALL WATER PROOFING ALONG THE EAST SIDE OF THE WALL.
10	REMOVE FOUNDATION WALL WATER PROOFING AND REMOVE LOWER COURSES OF BRICK, REFER TO DETAIL SHEET.
11	REMOVE PORTIONS OF THE RETAINING WALL, EXTENDING TO 3 FEET BEYOND THE SOUTH EDGE OF THE BUILDING, AS REQUIRED TO ACCOMMODATE THE CURB CONSTRUCTION AND THE TRANSITION FROM PLAZA TO FOUNDATION WALL WATERPROOFING.
12	REMOVE PORTION OF SURFACE BRICK CLADDING, SEE 21/A-501.

KEY PLAN:

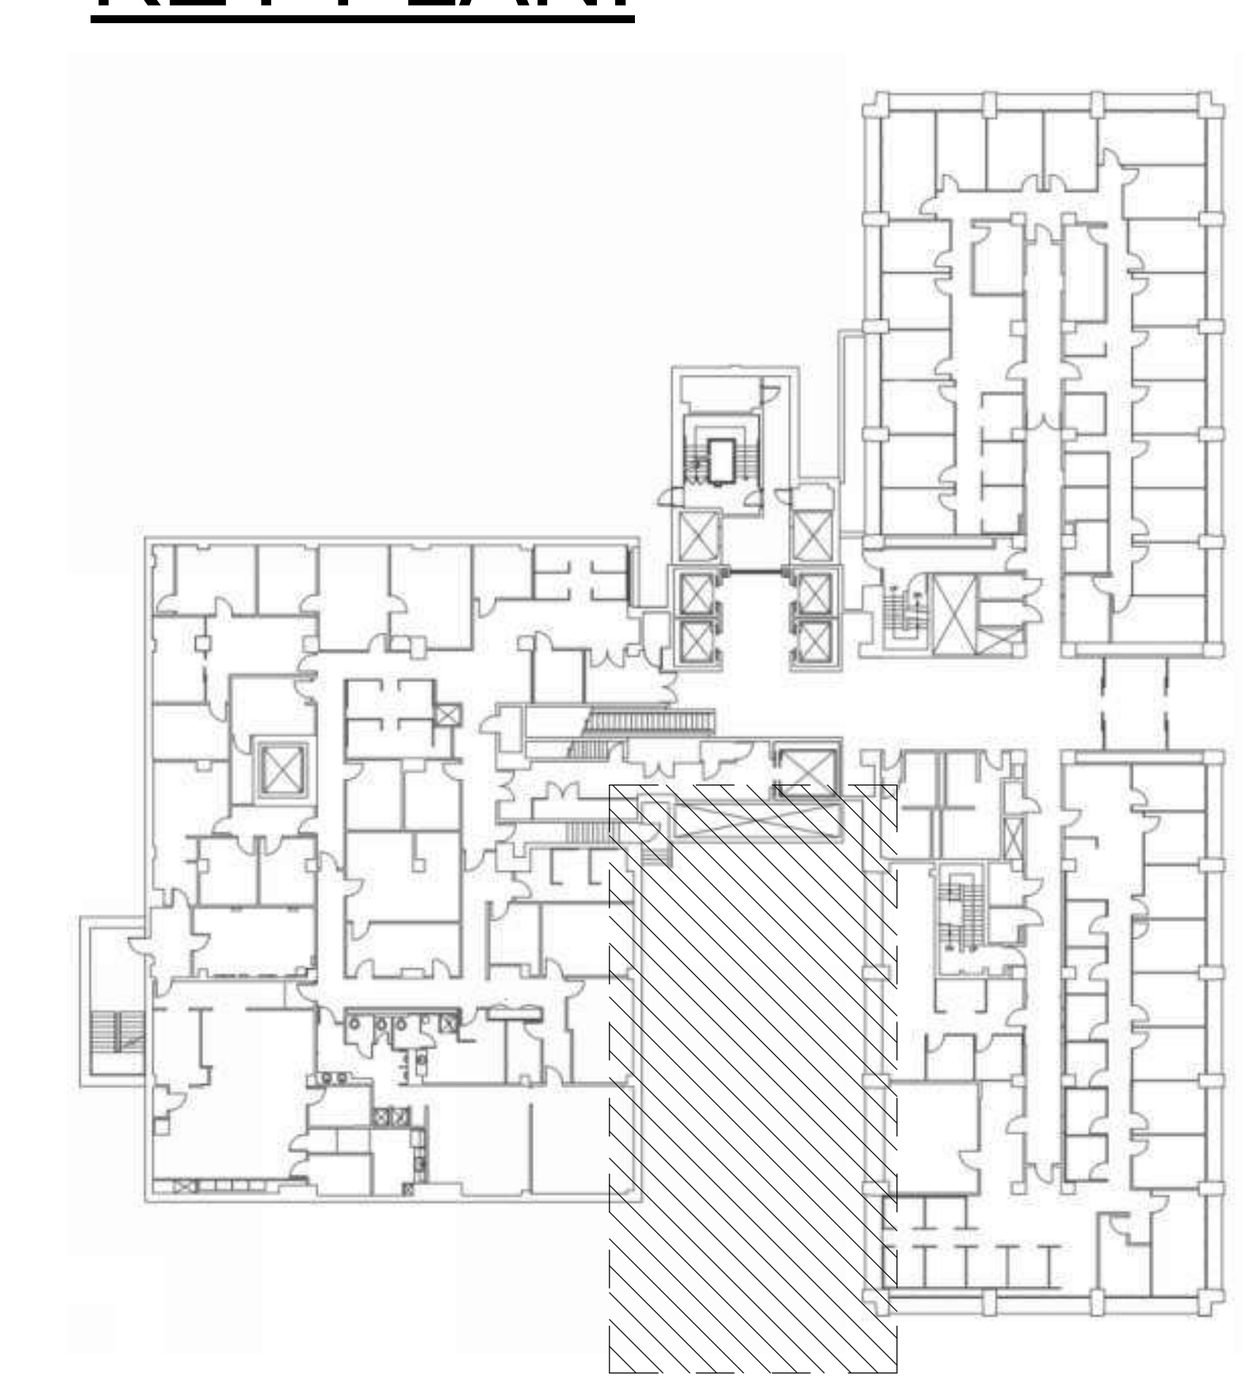

PROPERTY OF THE UNITED STATES GOVERNMENT
FOR OFFICIAL USE ONLY
Do not remove this notice
Properly destroy documents when no longer needed

DEPARTMENT OF HEALTH & HUMAN SERVICES USA

LSY ARCHITECTS & LABORATORY PLANNERS

James Posey Associates Engineering Your Vision

TIMMONS GROUP

SGH

Architect and Engineer Name and LOGO

ARCHITECT: LOUVIERE, STRATTON & YOKEL, LLC
8484 GEORGIA AVE, SUITE 650
SILVER SPRING, MD 20910
(301) 588-1500

MEP ENGINEER: JAMES POSEY ASSOCIATES INC
11155 RED RUN BLVD
OWINGS MILLS, MD 21117
(410) 265-6100

CIVIL ENGINEER: TIMMONS GROUP
2300 N ST NW SUITE 410B
WASHINGTON, DC 20037
(202) 919-2245

STRUCTURAL ENGINEER: SIMPSON GUMPERTZ & HEGER
1625 EYE STREET NW SUITE 900
WASHINGTON, DC 20006
(202) 239-4199

SEAL
ARCHITECT 14829 HEATHER K. JOHNSON STATE OF MARYLAND

REVISIONS

MARK	DATE	DESCRIPTION

CONTRACTORS

A/E CON. NO.	
A/E TASK NO.	
CONS. CONTR.	
CONS. WORK	
PRIME A/E	LSY ARCHITECTS
SUB A/E	JPA / TIMMONS / SGH
CONSTR. CON.	

BUILDING

FACILITY CODE	
BUILDING NO.	BUILDING 31B
NAME	NIH
STREET	9000 ROCKVILLE PIKE
CITY	BETHESDA
STATE/ZIP	MD / 20892
OTHER BUILDING NO.	

PROJECT

PROJ. NO.	24024
PROJ. OFFICER	MOHAMMED BISWAS
PROJ. MGR.	G.LEE
SUBMISSION	IFC SUBMISSION
SUB. DATE	08/26/25
WRK REQ. NO.	C116635

N

PROJECT TITLE: BUILDING 31B NEW ROOFING AND WP OF STRUCTURE BELOW GRADE

DRAWING TITLE: B3 DEMOLITION PLAN

NIH
National Institutes of Health
OFFICE OF RESEARCH FACILITIES
DIVISION OF FACILITIES PLANNING

DESIGNED BY	X.L.
DRAWN BY	G.L.
CHECKED BY	K.C.
DATE	08/26/25
FILE NAME	

DRAWING
A-100

SHEET NUMBER OF

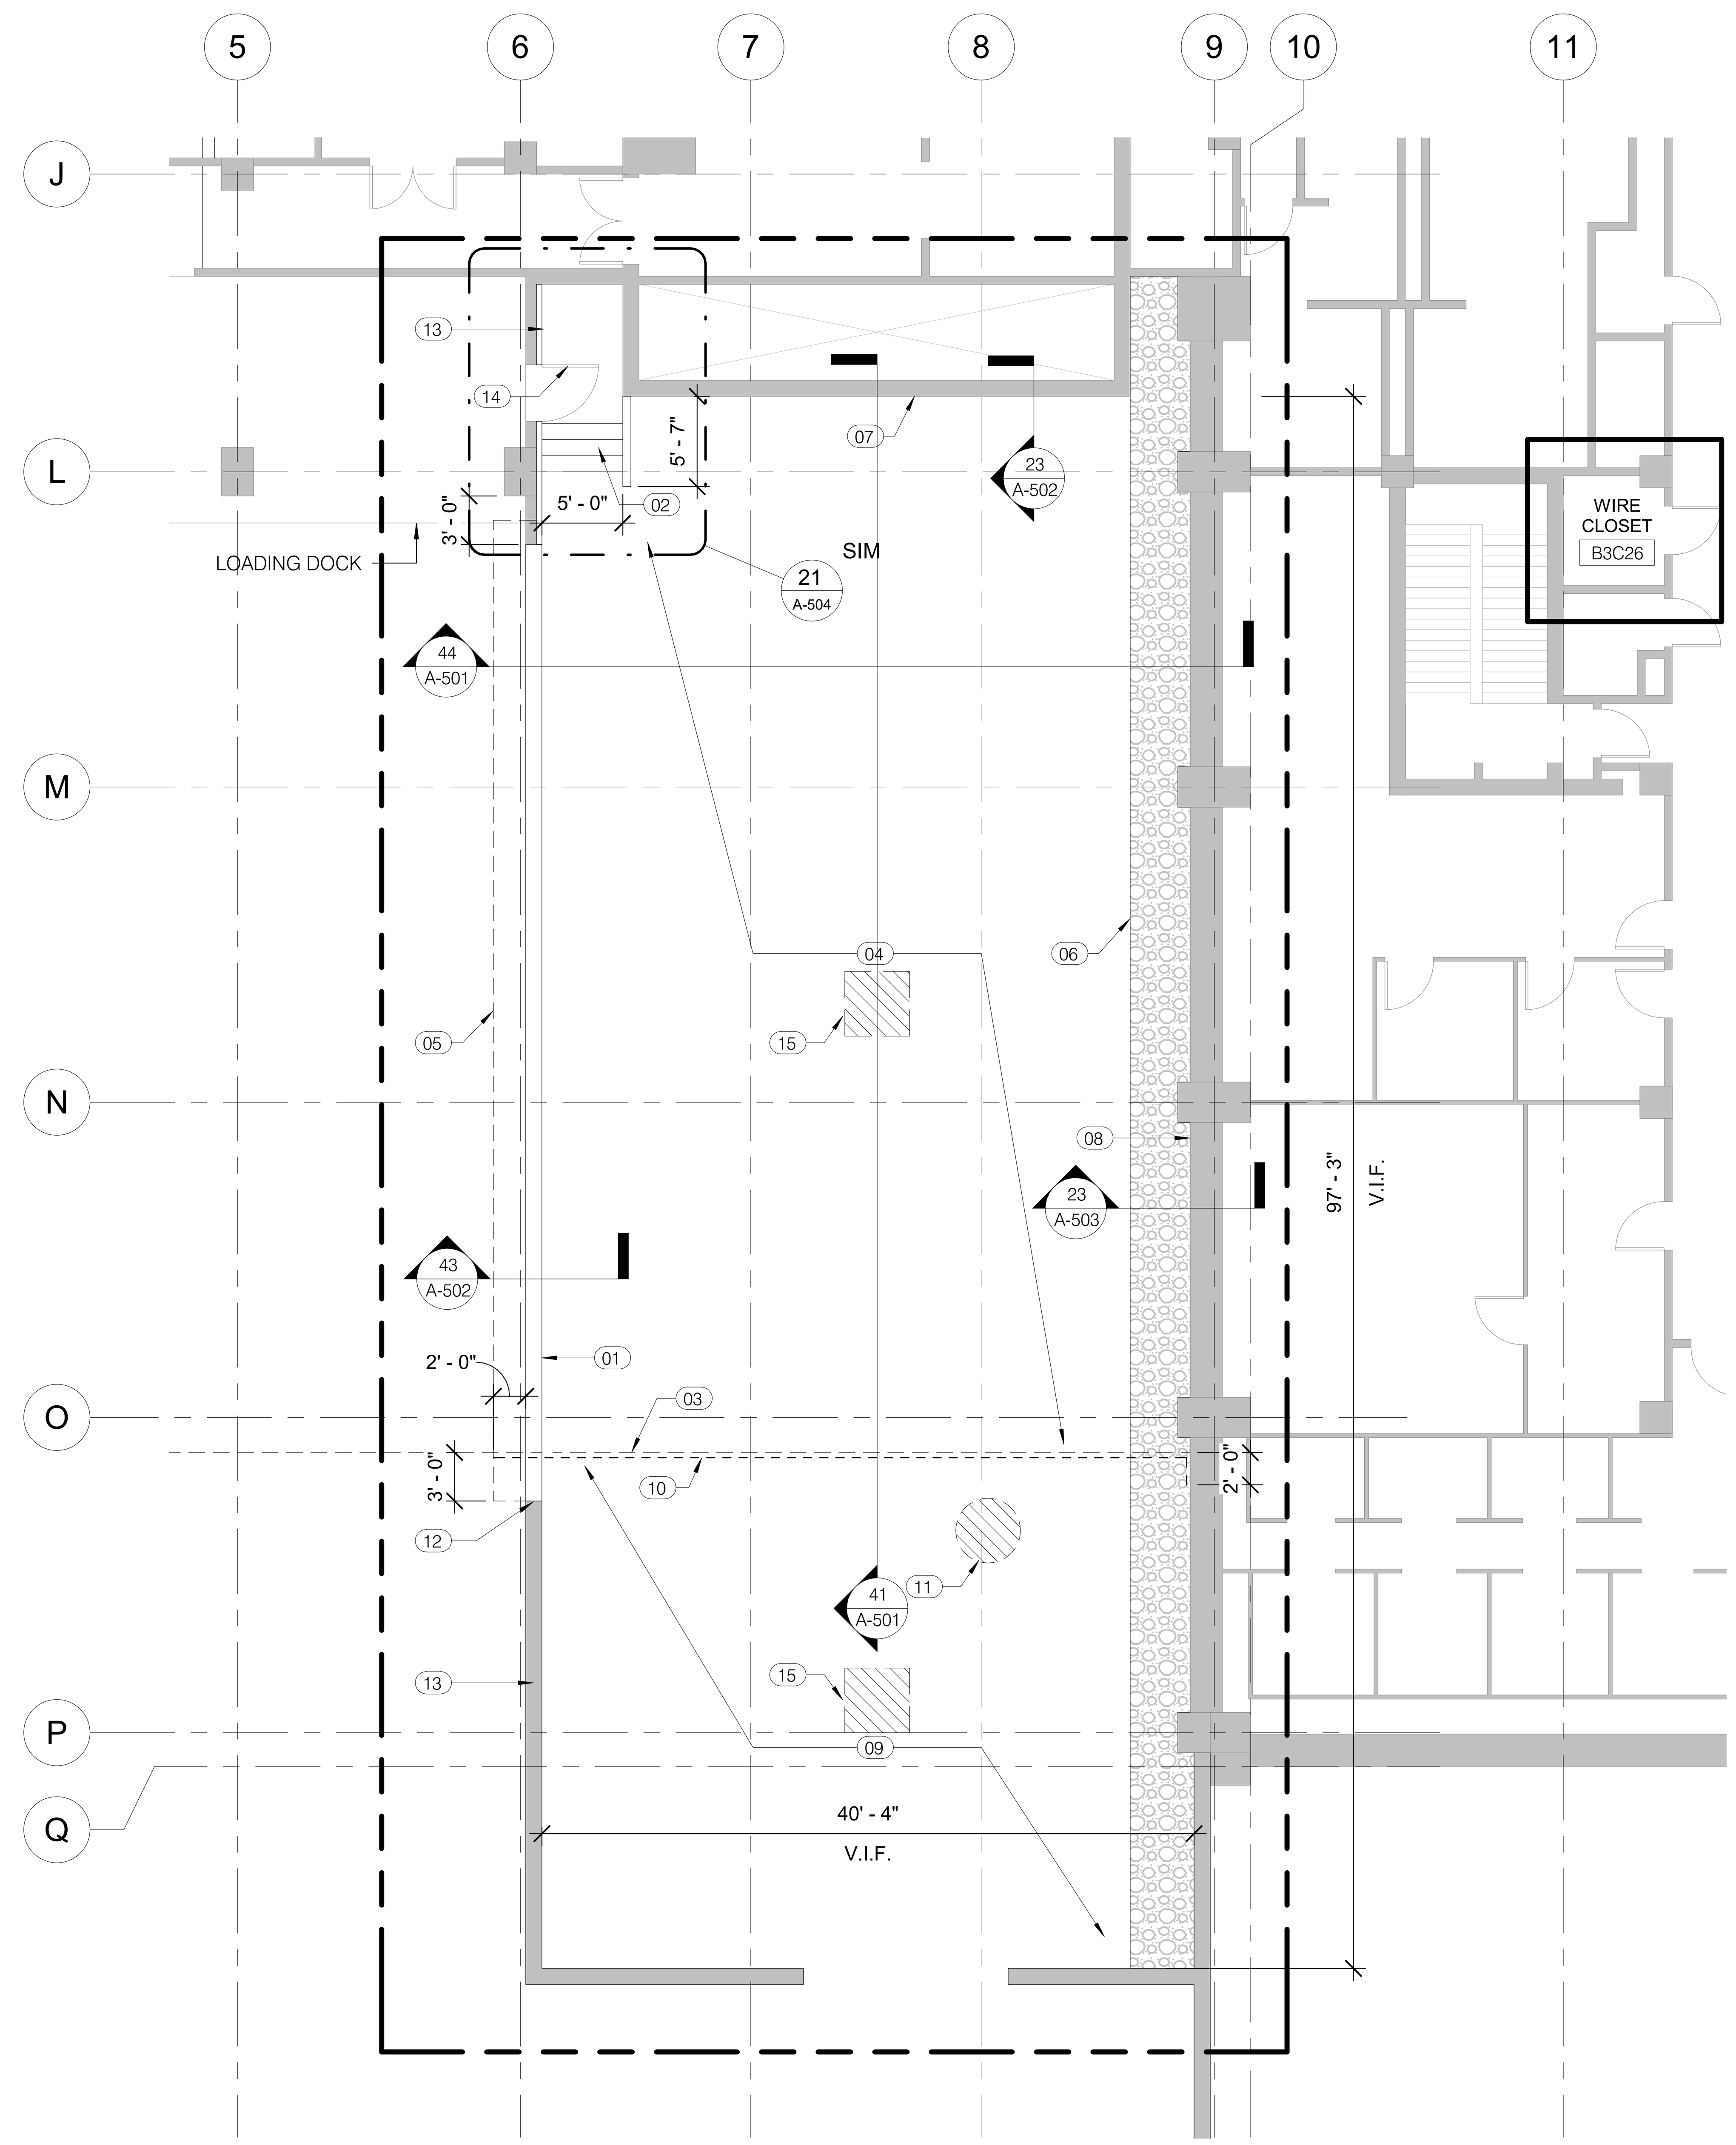

1 A-110 B3 SURFACE NEW WORK PLAN
1/8" = 1'-0"

1/8" = 1'-0" SCALE 5 0 5 10 15 20 FEET

GENERAL NEW WORK NOTES:

A. DIMENSIONS SHOWN ARE TO THE FACE OF GWB/CMU PARTITION UNLESS INDICATED OTHERWISE.

B. ALL FITNESS EQUIPMENT IS GFGI, SHOWN FOR COORDINATION PURPOSES ONLY. RELOCATE THE FITNESS EQUIPMENT AS REQUIRED AND RESTORE IT TO ITS ORIGINAL LOCATION AFTERWARD.

C. FIELD VERIFY ALL ROOM DIMENSIONS PRIOR TO FINAL SHOP DRAWING COMPLETION. IDENTIFY ANY CONFLICTS TO THE PROJECT OFFICER FOR RESOLUTION.

NEW WORK LEGEND:

PARTITION, ETR

ETR DOOR, ETR

LIMIT OF CONSTRUCTION LINE

KEY NOTES: (TYPICAL X)

X DESIGNATE NEW WORK ACTIVITY BY ROOM

01 SCREEN WALL AND BRICK FOUNDATION WALL CLADDING SCOPE, SEE 21/A-501.
02 RECONSTRUCT THE REMOVED EGRESS STAIR AND RE-ESTABLISH THE ORIGINAL EGRESS DOOR AND PATH TO FULL FUNCTIONALITY.
03 SOUTH EDGE OF B4 ROOF DECK AND WALL BELOW.
04 PROVIDE NEW BONDED OVERLAY SLOPED 1/8 IN. PER FT. TO DRAIN AT THE SOUTH EDGE OF THE SLAB, PROVIDE NEW HOT-RUBBERIZED WATERPROOFING MEMBRANE, ROOT BARRIER, AND DRAINAGE BOARD. INTEGRATE WITH FOUNDATION WALL WATERPROOFING AT PERIMETERS. REFER TO DETAILS INDICATED.
05 REPLACE LOADING DOCK PLAZA OVERBURDEN AS SHOWN IN THE DETAILS. REFER TO THE CIVIL DRAWINGS FOR DRAINAGE AND GRADING.
06 PROVIDE A GRAVEL BED WITH PERFORATED DRAIN PIPE WRAPPED IN GRAVEL AND FILTER FABRIC. CONNECT PIPE TO NEW STORM LINES, REFER TO DETAIL 21/A-503 AND CIVIL DRAWINGS.
07 PROVIDE NEW FOUNDATION WALL WATERPROOFING AND REINSTALL BRICK AT CORBEL, SEE 21/A-502.
08 PROVIDE NEW FOUNDATION WALL WATERPROOFING AND NEW METAL COUNTERFLASHING TO PROTECT WATERPROOFING TERMINATION BELOW PRECAST CLADDING, SEE 21-A-503.
09 REFER TO CIVIL DRAWINGS FOR SOIL BACKFILL AND CIVIL RELATED WORK.
10 PROVIDE NEW WATERPROOFING AT THE B4 FOUNDATION WALL. TURN OUT 2 FT. ONTO EAST FOUNDATION WALL AND EXTEND 2 FT. BEYOND WEST FOUNDATION WALL/SCREEN WALL, FULL HEIGHT FROM ROOF TO BOTTOM OF FOOTING. SECURE TERMINATION WITH TERMINATION BAR AND SEALANT.
11 PROVIDE SUMP PUMP INSIDE MANHOLE AS SHOWN ON CIVIL DRAWINGS. INSTALL LADDER PER DETAILS 41/A-505 AND 43/A-505. COORDINATE LADDER AND SUMP PUMP LOCATION WITH PLUMBING DRAWINGS.
12 PROVIDE EXPANSION JOINT BETWEEN WALL/SCREEN AND THE RETANING WALL.
13 PROVIDE CONCRETE COPING OVER TOP OF THE EXISTING BRICK WALL.
14 VERIFY INTEGRITY OF EXISTING EXTERIOR EGRESS DOOR WEATHERPROOFING COMPONENTS: WEATHERSTRIPPING, DOOR SWEEPS, CAULKING, AND SEALANTS. NOTE TO BE REPLACED IF APPLICABLE.
15 PROVIDE STORM WATER INLET, REFER TO CIVIL DRAWINGS.

KEY PLAN:

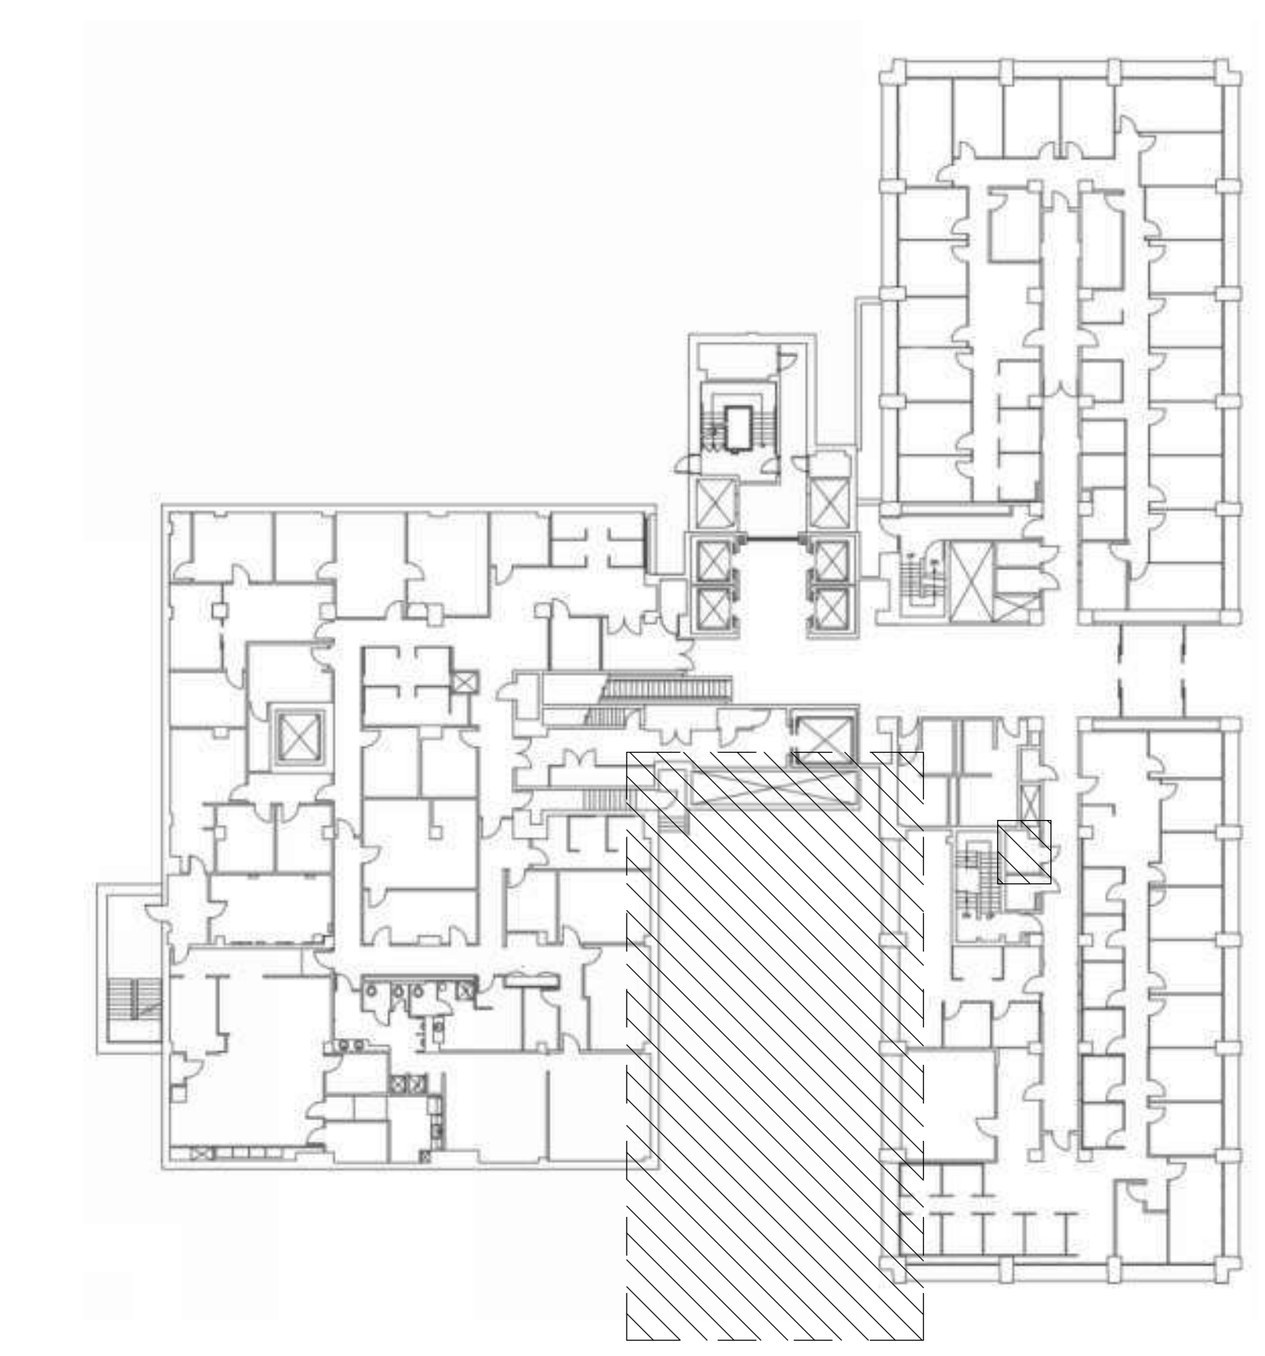

DEPARTMENT OF HEALTH & HUMAN SERVICES USA

LSY ARCHITECTS & LABORATORY PLANNERS

James Posey Associates Engineering Your Vision

TIMMONS GROUP

SGH

Architect and Engineer Name and LOGO

ARCHITECT: LOUVIERE, STRATTON & YOKEL, LLC
8484 GEORGIA AVE, SUITE 650
SILVER SPRING, MD 20910
(301) 588-1500

MEP ENGINEER: JAMES POSEY ASSOCIATES INC
11155 RED RUN BLVD
OWINGS MILLS, MD 21117
(410) 265-6100

CIVIL ENGINEER: TIMMONS GROUP
2300 N ST NW SUITE 410B
WASHINGTON, DC 20037
(202) 919-2245

STRUCTURAL ENGINEER: SIMPSON GUMPERTZ & HEGER
1625 EYE STREET NW SUITE 900
WASHINGTON, DC 20006
(202) 239-4199

SEAL

ARCHITECT 14829 HEATHER K. JOHNSON STATE OF MARYLAND

REVISIONS

MARK	DATE	DESCRIPTION

CONTRACTORS

A/E CON. NO.	
A/E TASK NO.	
CONS. CONTR.	
CONS. WORK	
PRIME A/E	LSY ARCHITECTS
SUB A/E	JPA / TIMMONS / SGH
CONSTR. CON.	

BUILDING

FACILITY CODE	
BUILDING NO.	BUILDING 31B
NAME	NIH
STREET	9000 ROCKVILLE PIKE
CITY	BETHESDA
STATE/ZIP	MD / 20892
OTHER BUILDING NO.	

PROJECT

PROJ. NO.	24024
PROJ. OFFICER	MOHAMMED BISWAS
PROJ. MGR.	G.LEE
SUBMISSION	IFC SUBMISSION
SUB. DATE	08/26/25
WRK REQ. NO.	C116635

N

PROJECT TITLE: BUILDING 31B NEW ROOFING AND WP OF STRUCTURE BELOW GRADE

DRAWING TITLE: B3 NEW WORK PLAN

NIH National Institutes of Health
OFFICE OF RESEARCH FACILITIES
DIVISION OF FACILITIES PLANNING

DESIGNED BY	G.W.
DRAWN BY	X.L.
CHECKED BY	K.C.
DATE	08/26/25
FILE NAME	

DRAWING

A-110

SHEET NUMBER OF

C:\Users\XLu\Documents\24024 NIH Bldg 31B Landscape - Water Intrusion-2022_Xuan_LSY.rvt 8/26/2025 4:10:21 PM

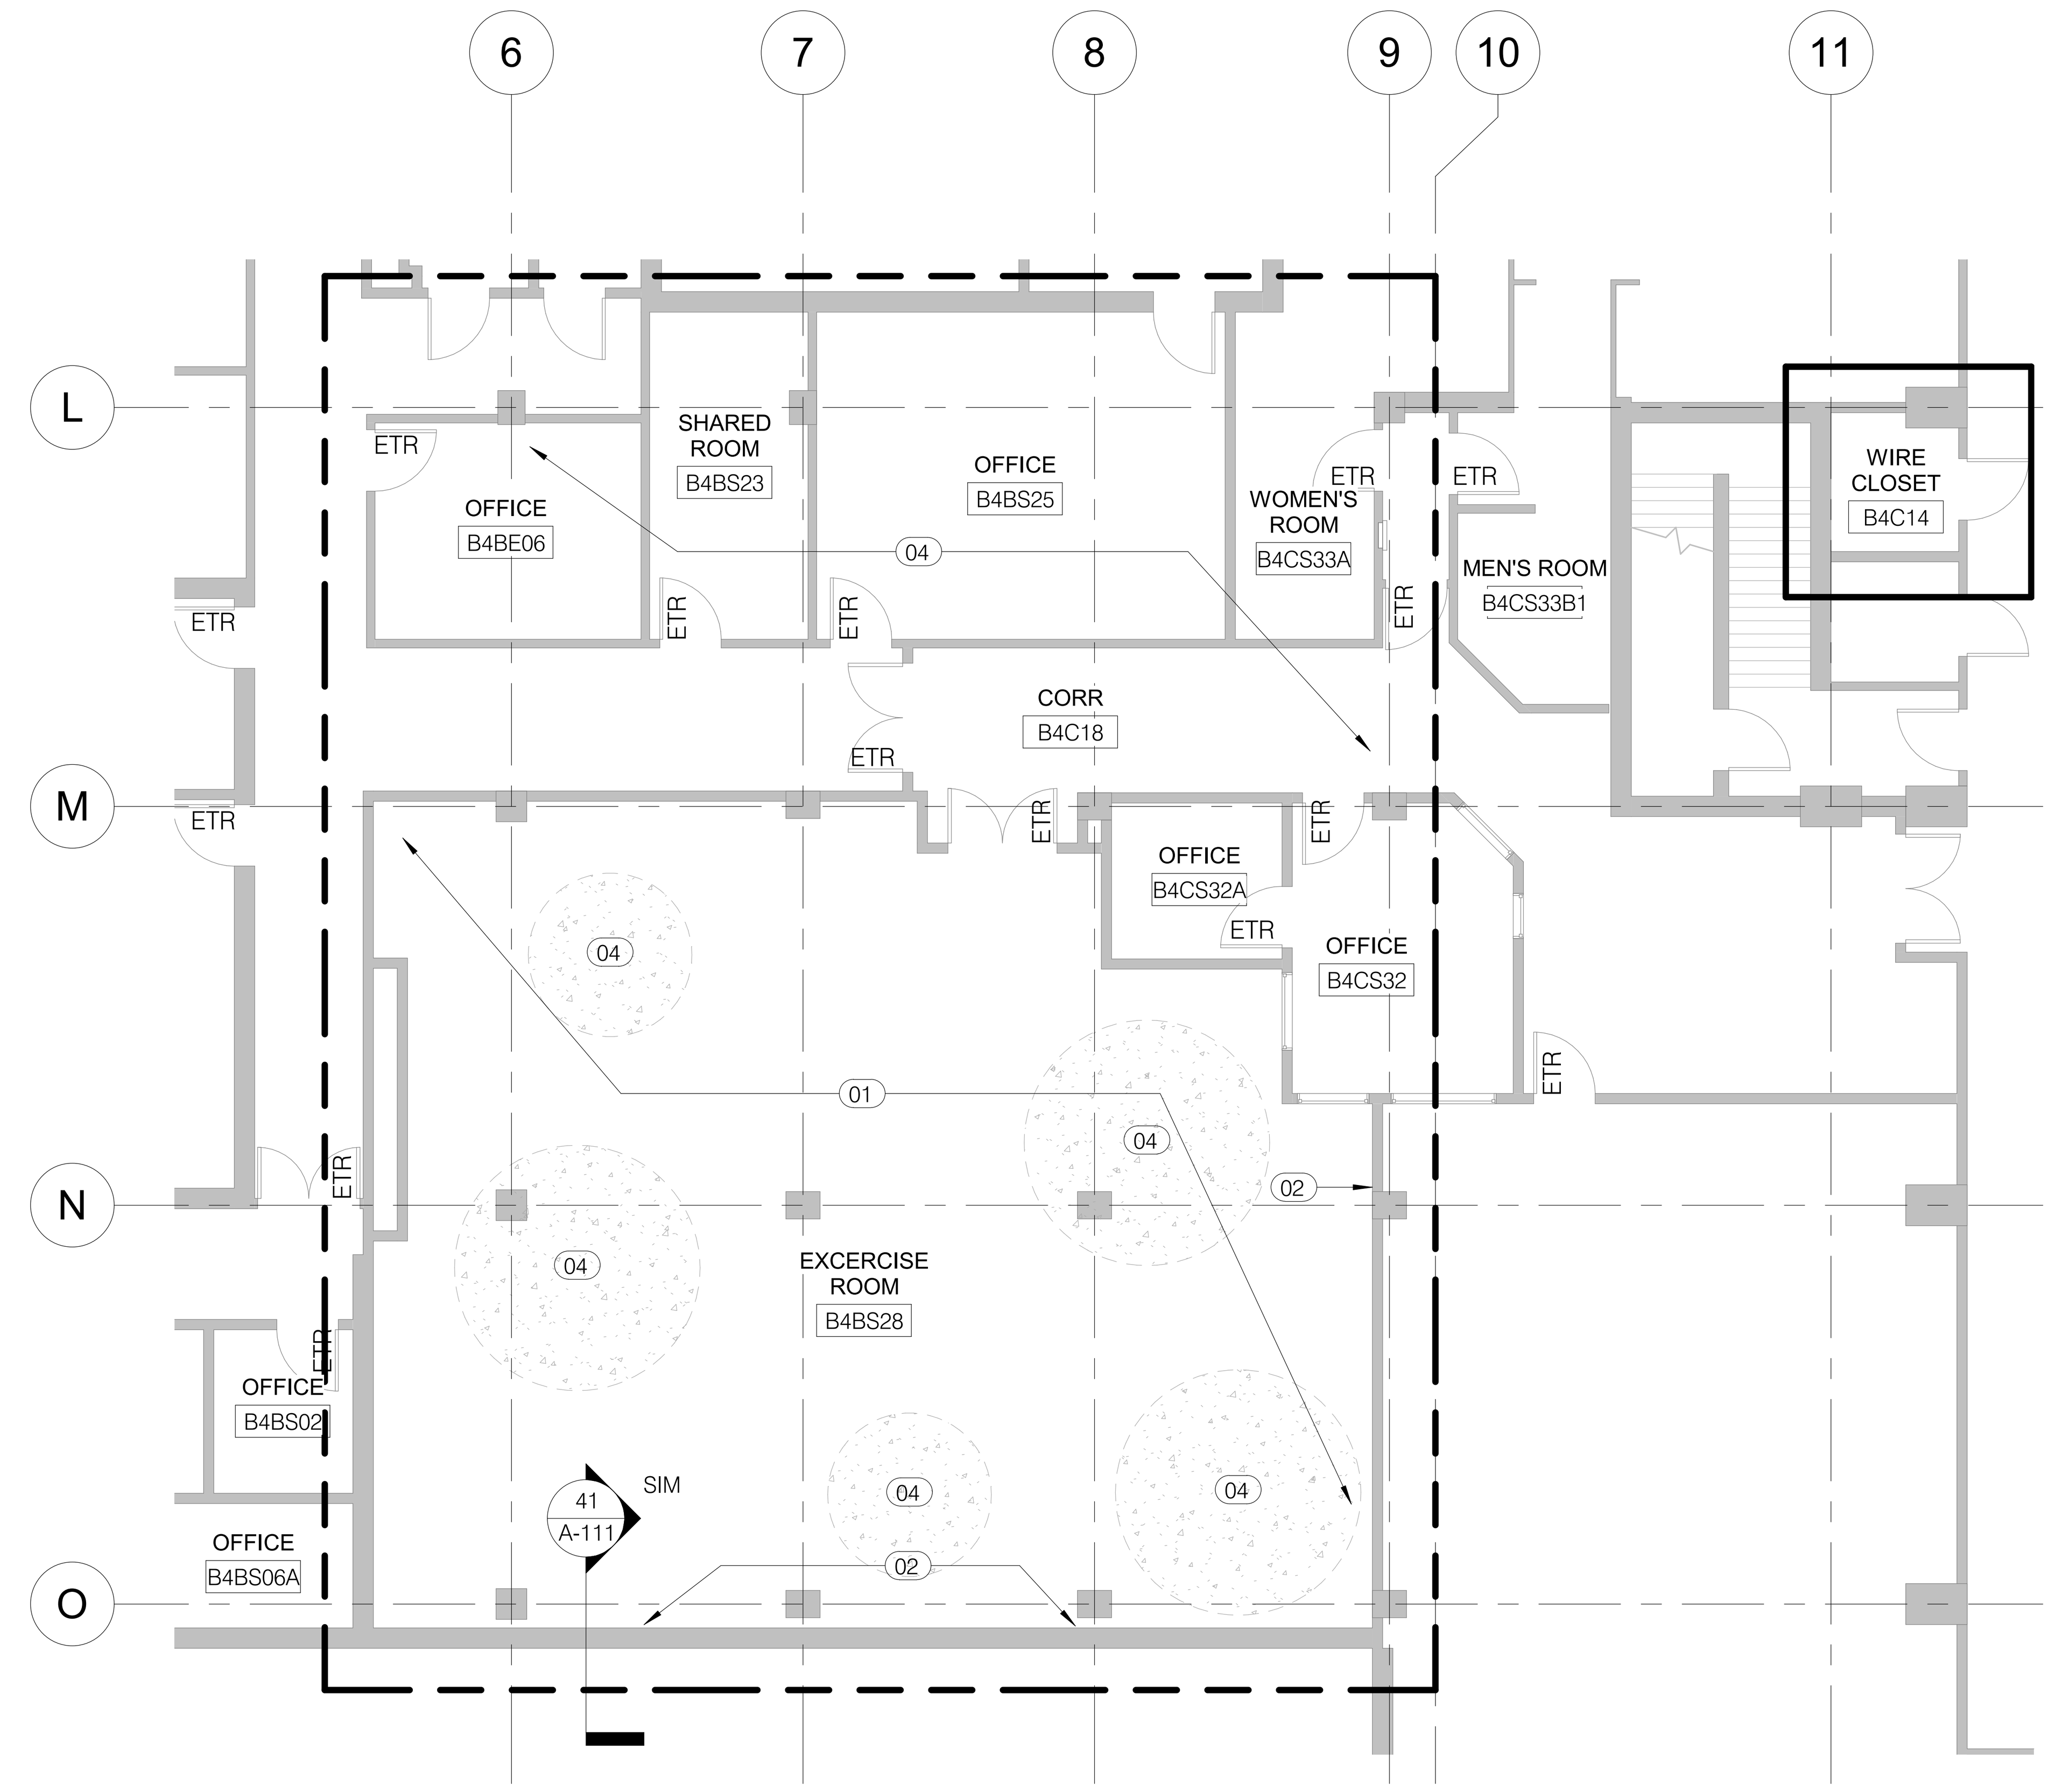

31 A-111 B4 NEW WORK PLAN

1/8" = 1'-0"

1/8" = 1'-0" SCALE 5 0 5 10 15 20 FEET

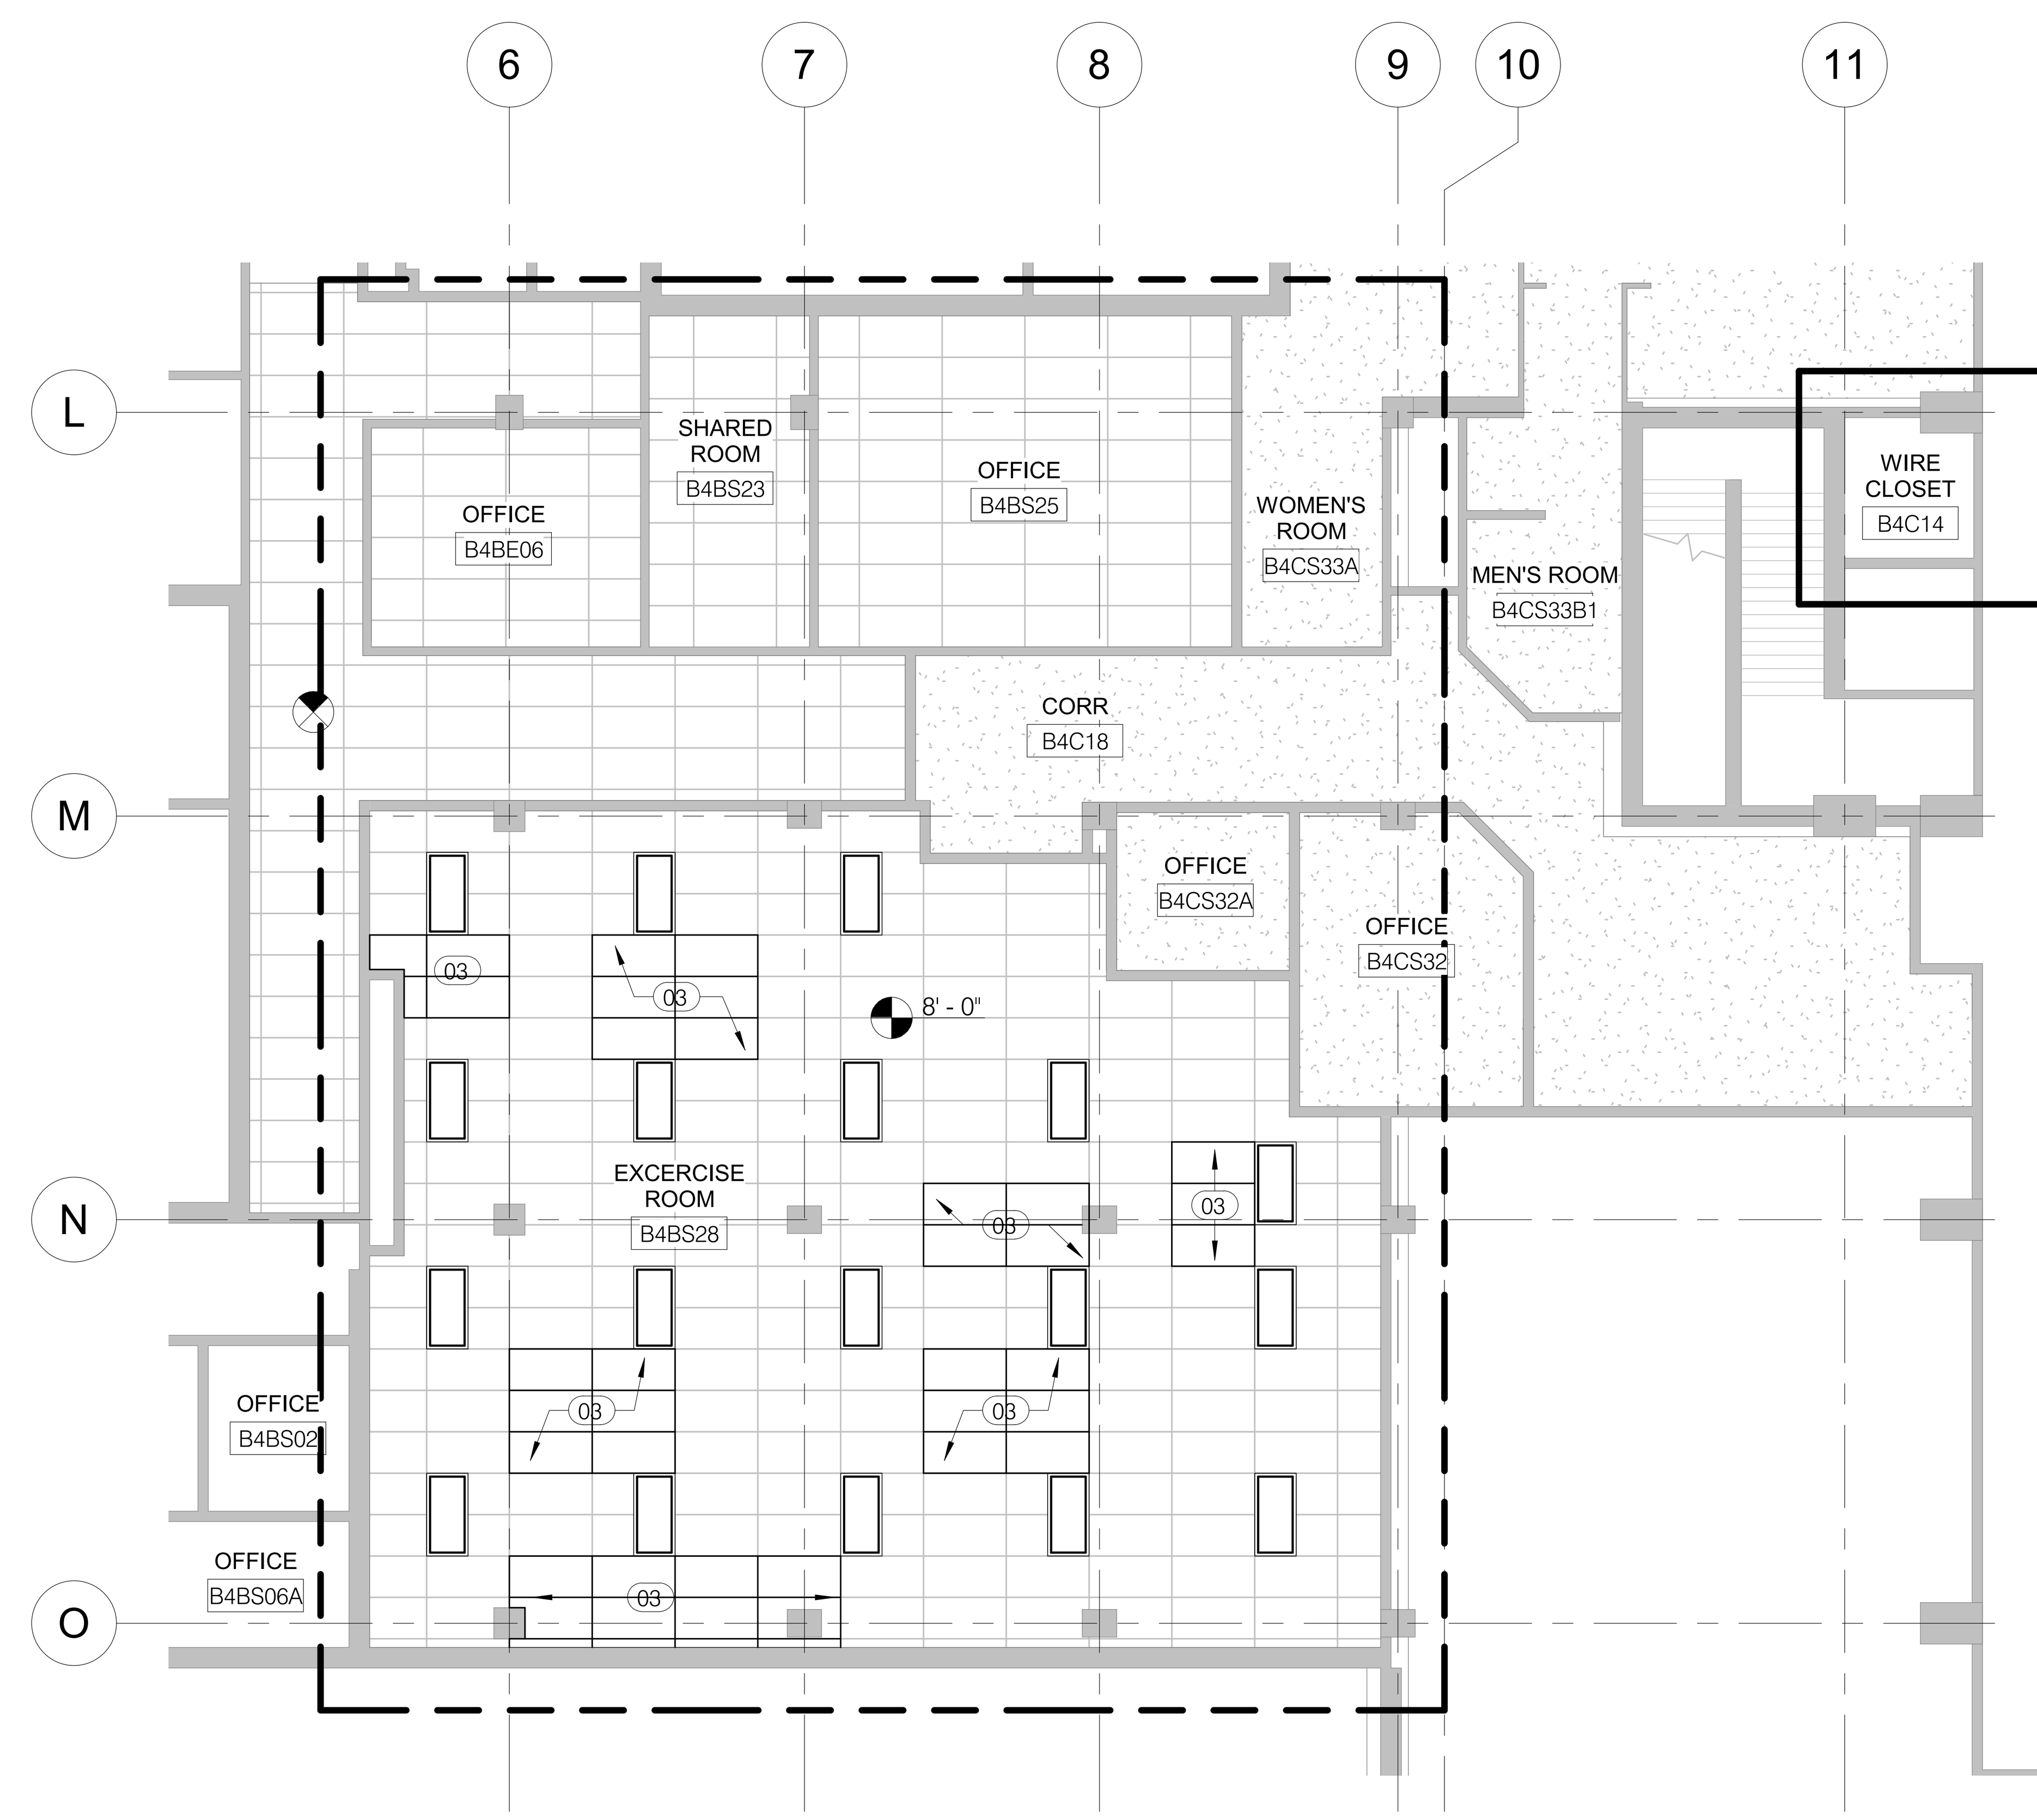

33 A-111 B4 NEW WORK RCP

1/8" = 1'-0"

1/8" = 1'-0" SCALE 5 0 5 10 15 20 FEET

GENERAL NEW WORK NOTES:

A. GC TO IDENTIFY LOCATIONS REQUIRING FULL-DEPTH SLAB REPAIR INVOLVES THE FOLLOWING:

IDENTIFYING ON A FLOOR PLAN LOCATIONS OF CONCRETE DAMAGE ON THE UNDERSIDE OF THE SLAB REQUIRING PARTIAL DEPTH REPAIRS, REMOVING THE OVERBURDEN AND WATERPROOFING TO PERFORM A SIMILAR SURVEY OF THE TOP SIDE OF THE SLAB, THEN OVERLAYING THE UNDERSIDE AND TOP-SIDE PLANS TO IDENTIFY LOCATIONS WHERE PARTIAL-DEPTH REPAIRS MIGHT OVERLAP, NECESSITATING FULL-DEPTH REPAIRS. SEE DETAILS ON A- 505

B. CONTRACTOR TO REPLACE ANY PORTION OF THE CEILING IN KIND THAT MAY NEED TO BE DISTURBED TO REPAIR THE CRACKS IN THE SOUTH EXTERIOR WALL OF THE GYM DUE TO WATER INFILTRATION.

NEW WORK LEGEND:

PARTITION, ETR

DOOR, ETR

LIMIT OF CONSTRUCTION LINE

EXIT SIGN, ETR

2 X 4 LIGHTING FIXTURE

GYP CEILING, ETR

KEY NOTES: (TYPICAL X)

X DESIGNATE NEW WORK ACTIVITY BY ROOM

01 INVESTIGATE ALL LOCATIONS WHERE WATER LEAKAGE HAS OCCURRED. SEAL ALL WATER LEAKAGE LOCATIONS AND JOINTS PRIOR TO APPLYING WATERPROOFING.

02 REPAIR DAMAGED WALL SEE 41/A-111 FOR CONC. INJECTION DETAIL, AND PROVIDE NEW WALL BASE AS NEEDED AND APPLY NEW PAINT TO MATCH THE EXISTING ADJACENT WALL.

03 REMOVE AND REPLACE ACT TILES AND GRID.

04 INVESTIGAT ABOVE CEILING CONCRETE SLAB CONDITON AND PATCH OR REPAIR STRUCTURAL SLAB AS REQUIRED, SEE DETAIL 21/23/25 ON A-505.

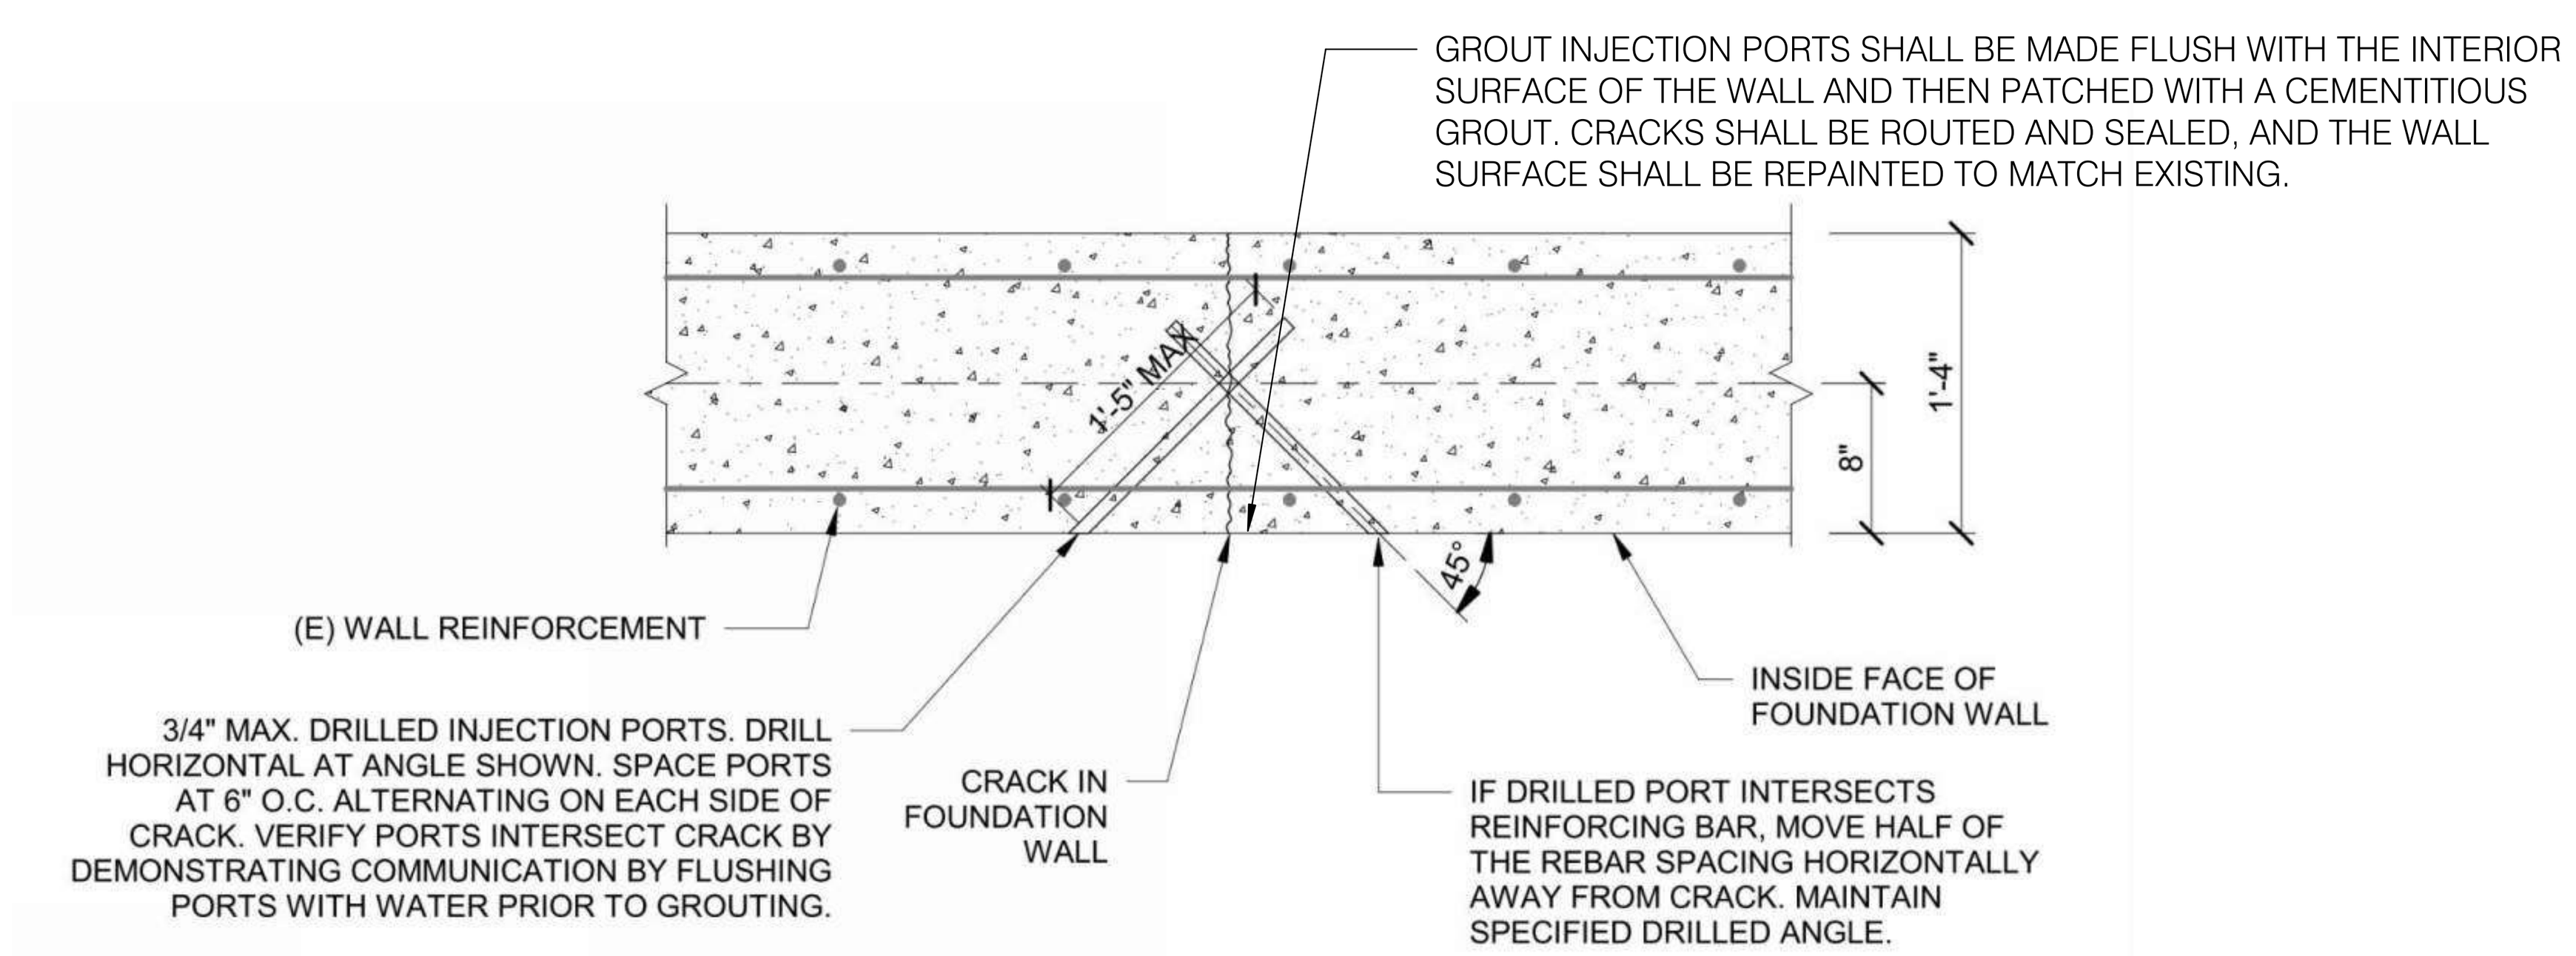

NOTES:

1. CONTRACTOR TO PERFORM GPR SURVEY PRIOR TO GROUT INJECTION AND AVOID EXISTING WALL REINFORCING DURING DRILLING OPERATIONS. USE GPR OR OTHER NON-DESTRUCTIVE TEST TO DETERMINE LOCATION OF REINFORCEMENT OR EMBEDDED CONDUIT WITHIN EXISTING CONCRETE SLAB.

STRUCTURAL NOTES:

SUBMIT SHOP DRAWINGS, SIGNED AND SEALED BY A LICENSED THIRD-PARTY STRUCTURAL ENGINEER, FOR REVIEW AND APPROVAL BY THE NIH AND THE STRUCTURAL ENGINEER OF RECORD. SHOP DRAWINGS SHALL DEMONSTRATE COMPLIANCE WITH STRUCTURAL INTEGRITY REQUIREMENTS PRIOR TO COMMENCEMENT OF INSTALLATION.

41 A-111 CHEMICAL GROUT INJECTION AT FOUNDATION WALL CRACK

1" = 1'-0"

1" = 1'-0" SCALE 1 0 1 2 FEET

KEY PLAN:

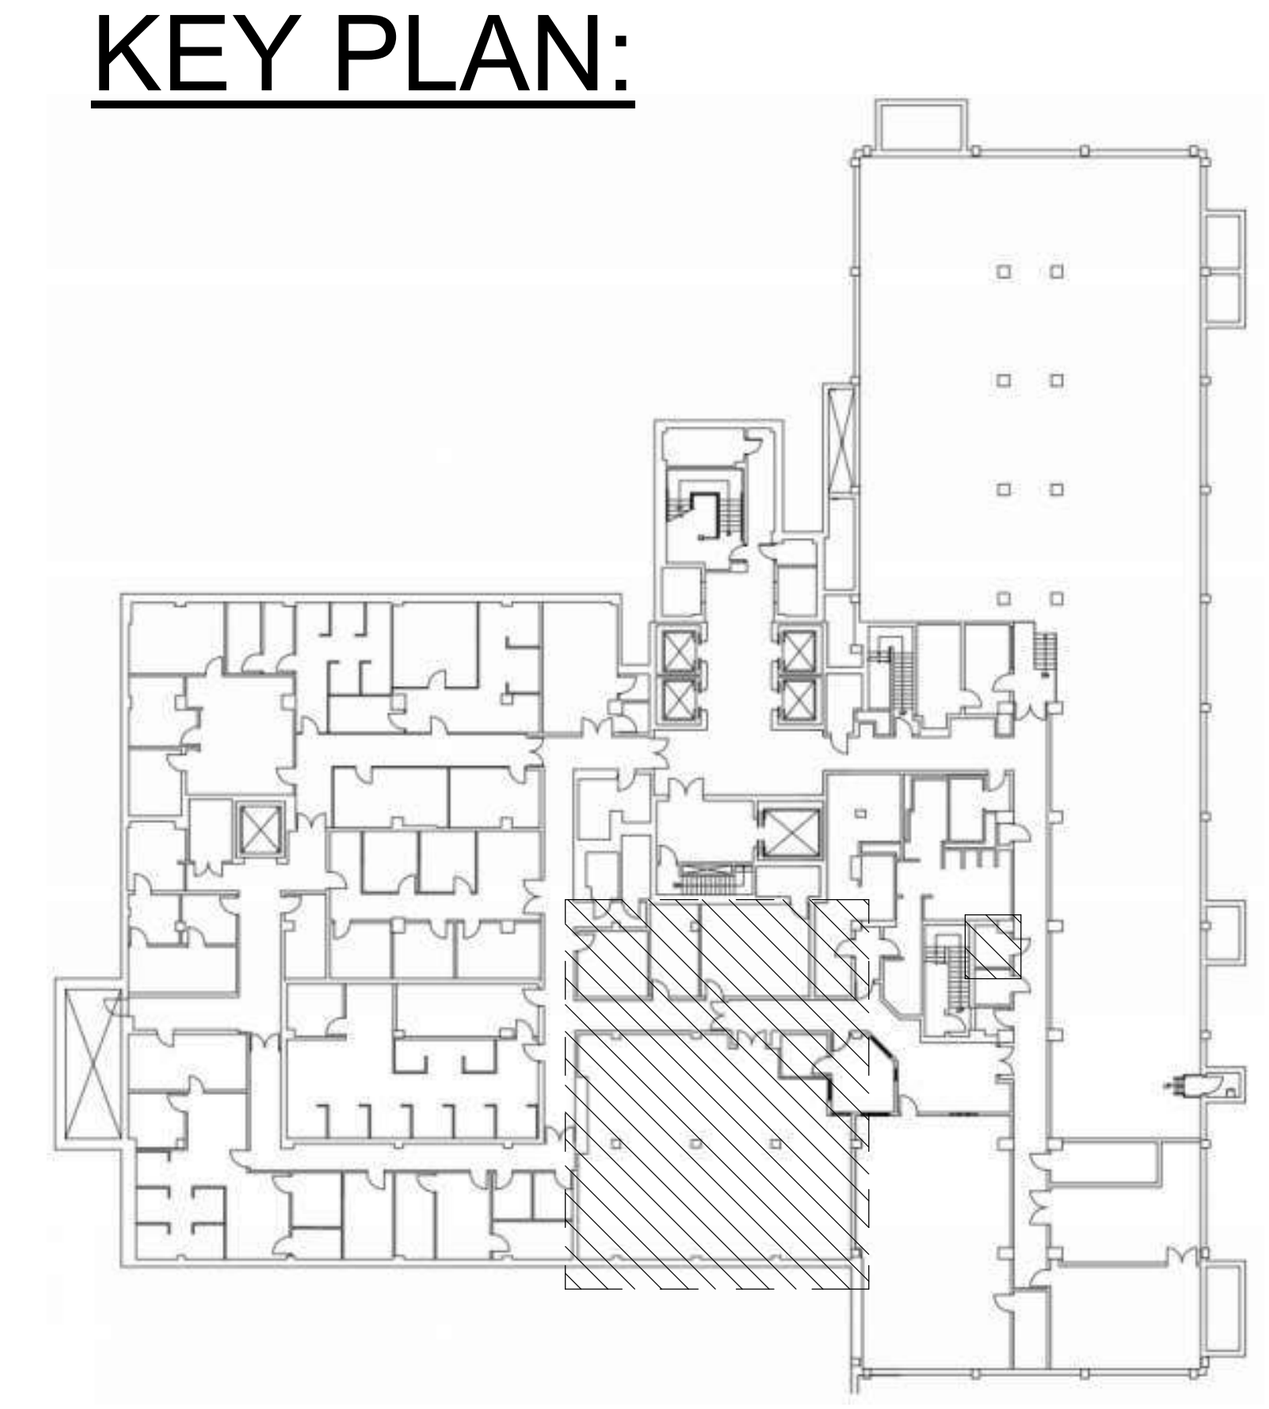

DEPARTMENT OF HEALTH & HUMAN SERVICES USA

LSY ARCHITECTS & LABORATORY PLANNERS

James Posey Associates Engineering Your Vision

TIMMONS GROUP

SGH

Architect and Engineer Name and LOGO

ARCHITECT: LOUVIERE, STRATTON & YOKEL, LLC, 8484 GEORGIA AVE, SUITE 650, SILVER SPRING, MD 20910, (301) 588-1500

MEP ENGINEER: JAMES POSEY ASSOCIATES INC, 11155 RED RUN BLVD, OWINGS MILLS, MD 21117, (410) 265-6100

CIVIL ENGINEER: TIMMONS GROUP, 2300 N ST NW SUITE 410B, WASHINGTON, DC 20037, (202) 919-2245

STRUCTURAL ENGINEER: SIMPSON GUMPERTZ & HEGER, 1625 EYE STREET NW SUITE 900, WASHINGTON, DC 20006, (202) 239-4199

SEAL

ARCHITECT 14829 HEATHER K. JOHNSON STATE OF MARYLAND

REVISIONS		
MARK	DATE	DESCRIPTION

CONTRACTORS	
A/E CON. NO.	
A/E TASK NO.	
CONS. CONTR.	
CONS. WORK	
PRIME A/E	LSY ARCHITECTS
SUB A/E	JPA / TIMMONS / SGH
CONSTR. CON.	

BUILDING	
FACILITY CODE	
BUILDING NO.	BUILDING 31B
NAME	NIH
STREET	9000 ROCKVILLE PIKE
CITY	BETHESDA
STATE/ZIP	MD / 20892
OTHER BUILDING NO.	

PROJECT	
PROJ. NO.	24024
PROJ. OFFICER	MOHAMMED BISWAS
PROJ. MGR.	G.LEE
SUBMISSION	IFC SUBMISSION
SUB. DATE	08/26/25
WRK REQ. NO.	C116635

N

PROJECT TITLE: BUILDING 31B NEW ROOFING AND WP OF STRUCTURE BELOW GRADE

DRAWING TITLE: B4 NEW WORK PLAN

NIH National Institutes of Health
OFFICE OF RESEARCH FACILITIES
DIVISION OF FACILITIES PLANNING

DESIGNED BY	X.L.
DRAWN BY	G.L.
CHECKED BY	K.C.
DATE	08/26/25
FILE NAME	

DRAWING

A-111

SHEET NUMBER OF

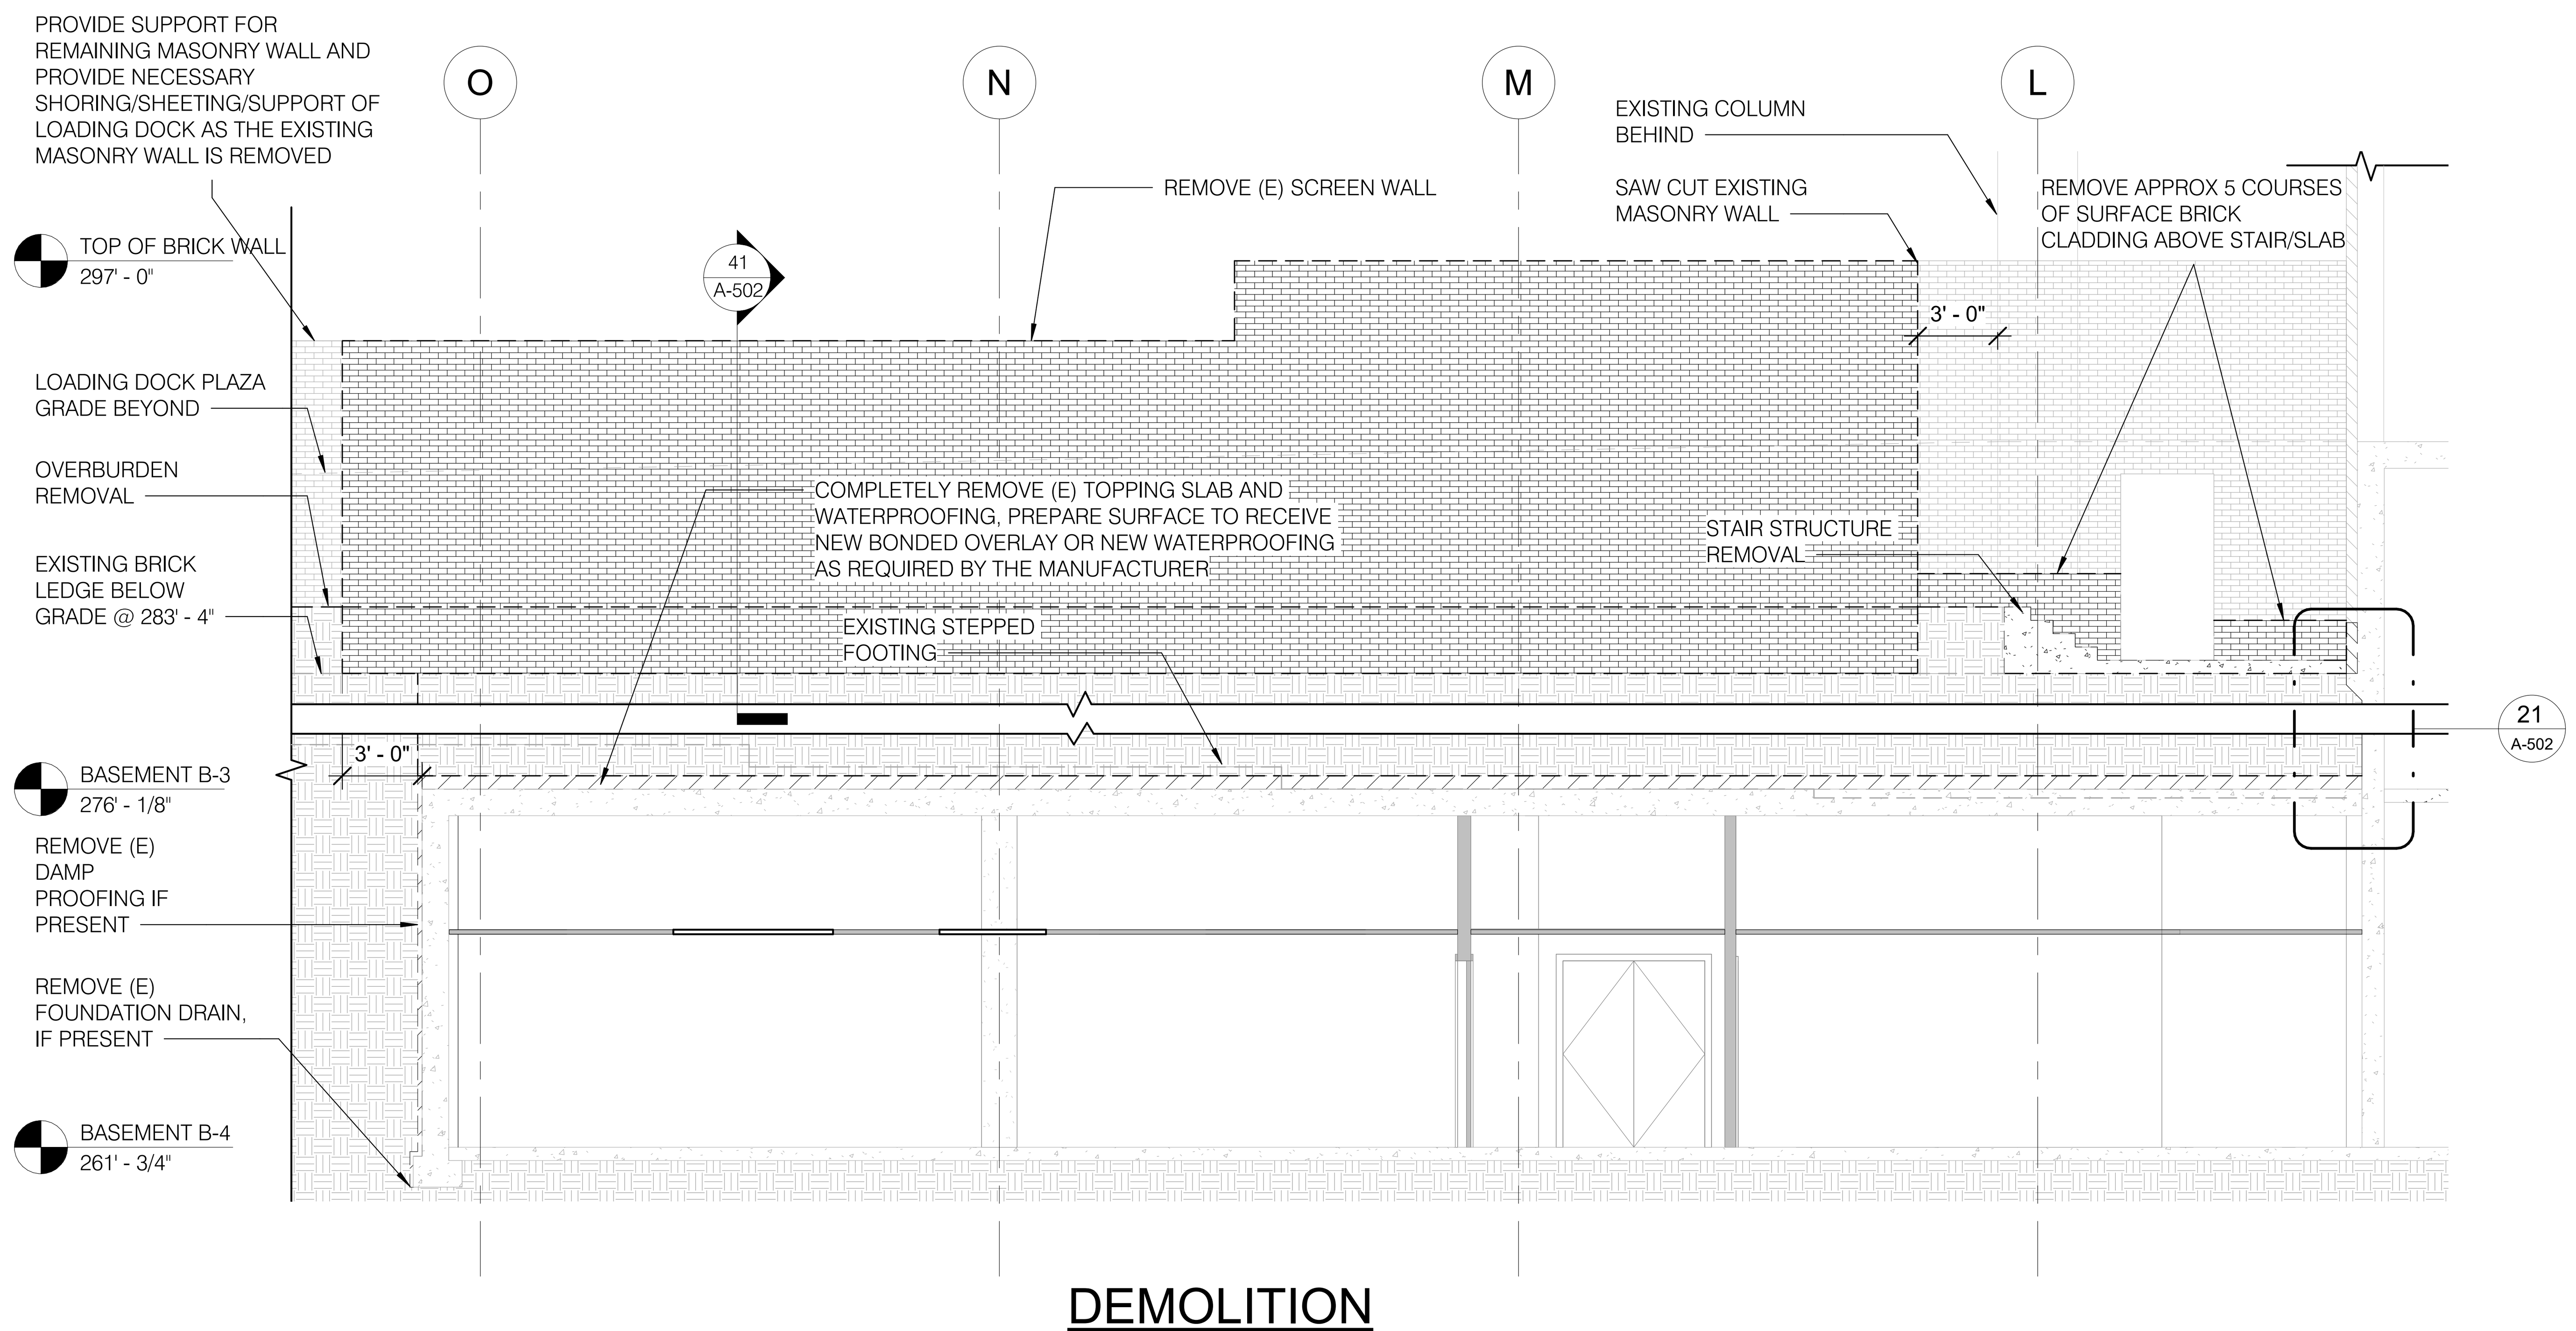

21 A-501 DEMOLITION AND NEW WORK WALL SECTION - A
3/16" = 1'-0"
2 0 2 4 6 8 10 12 14
3/16" = 1'-0" SCALE FEET

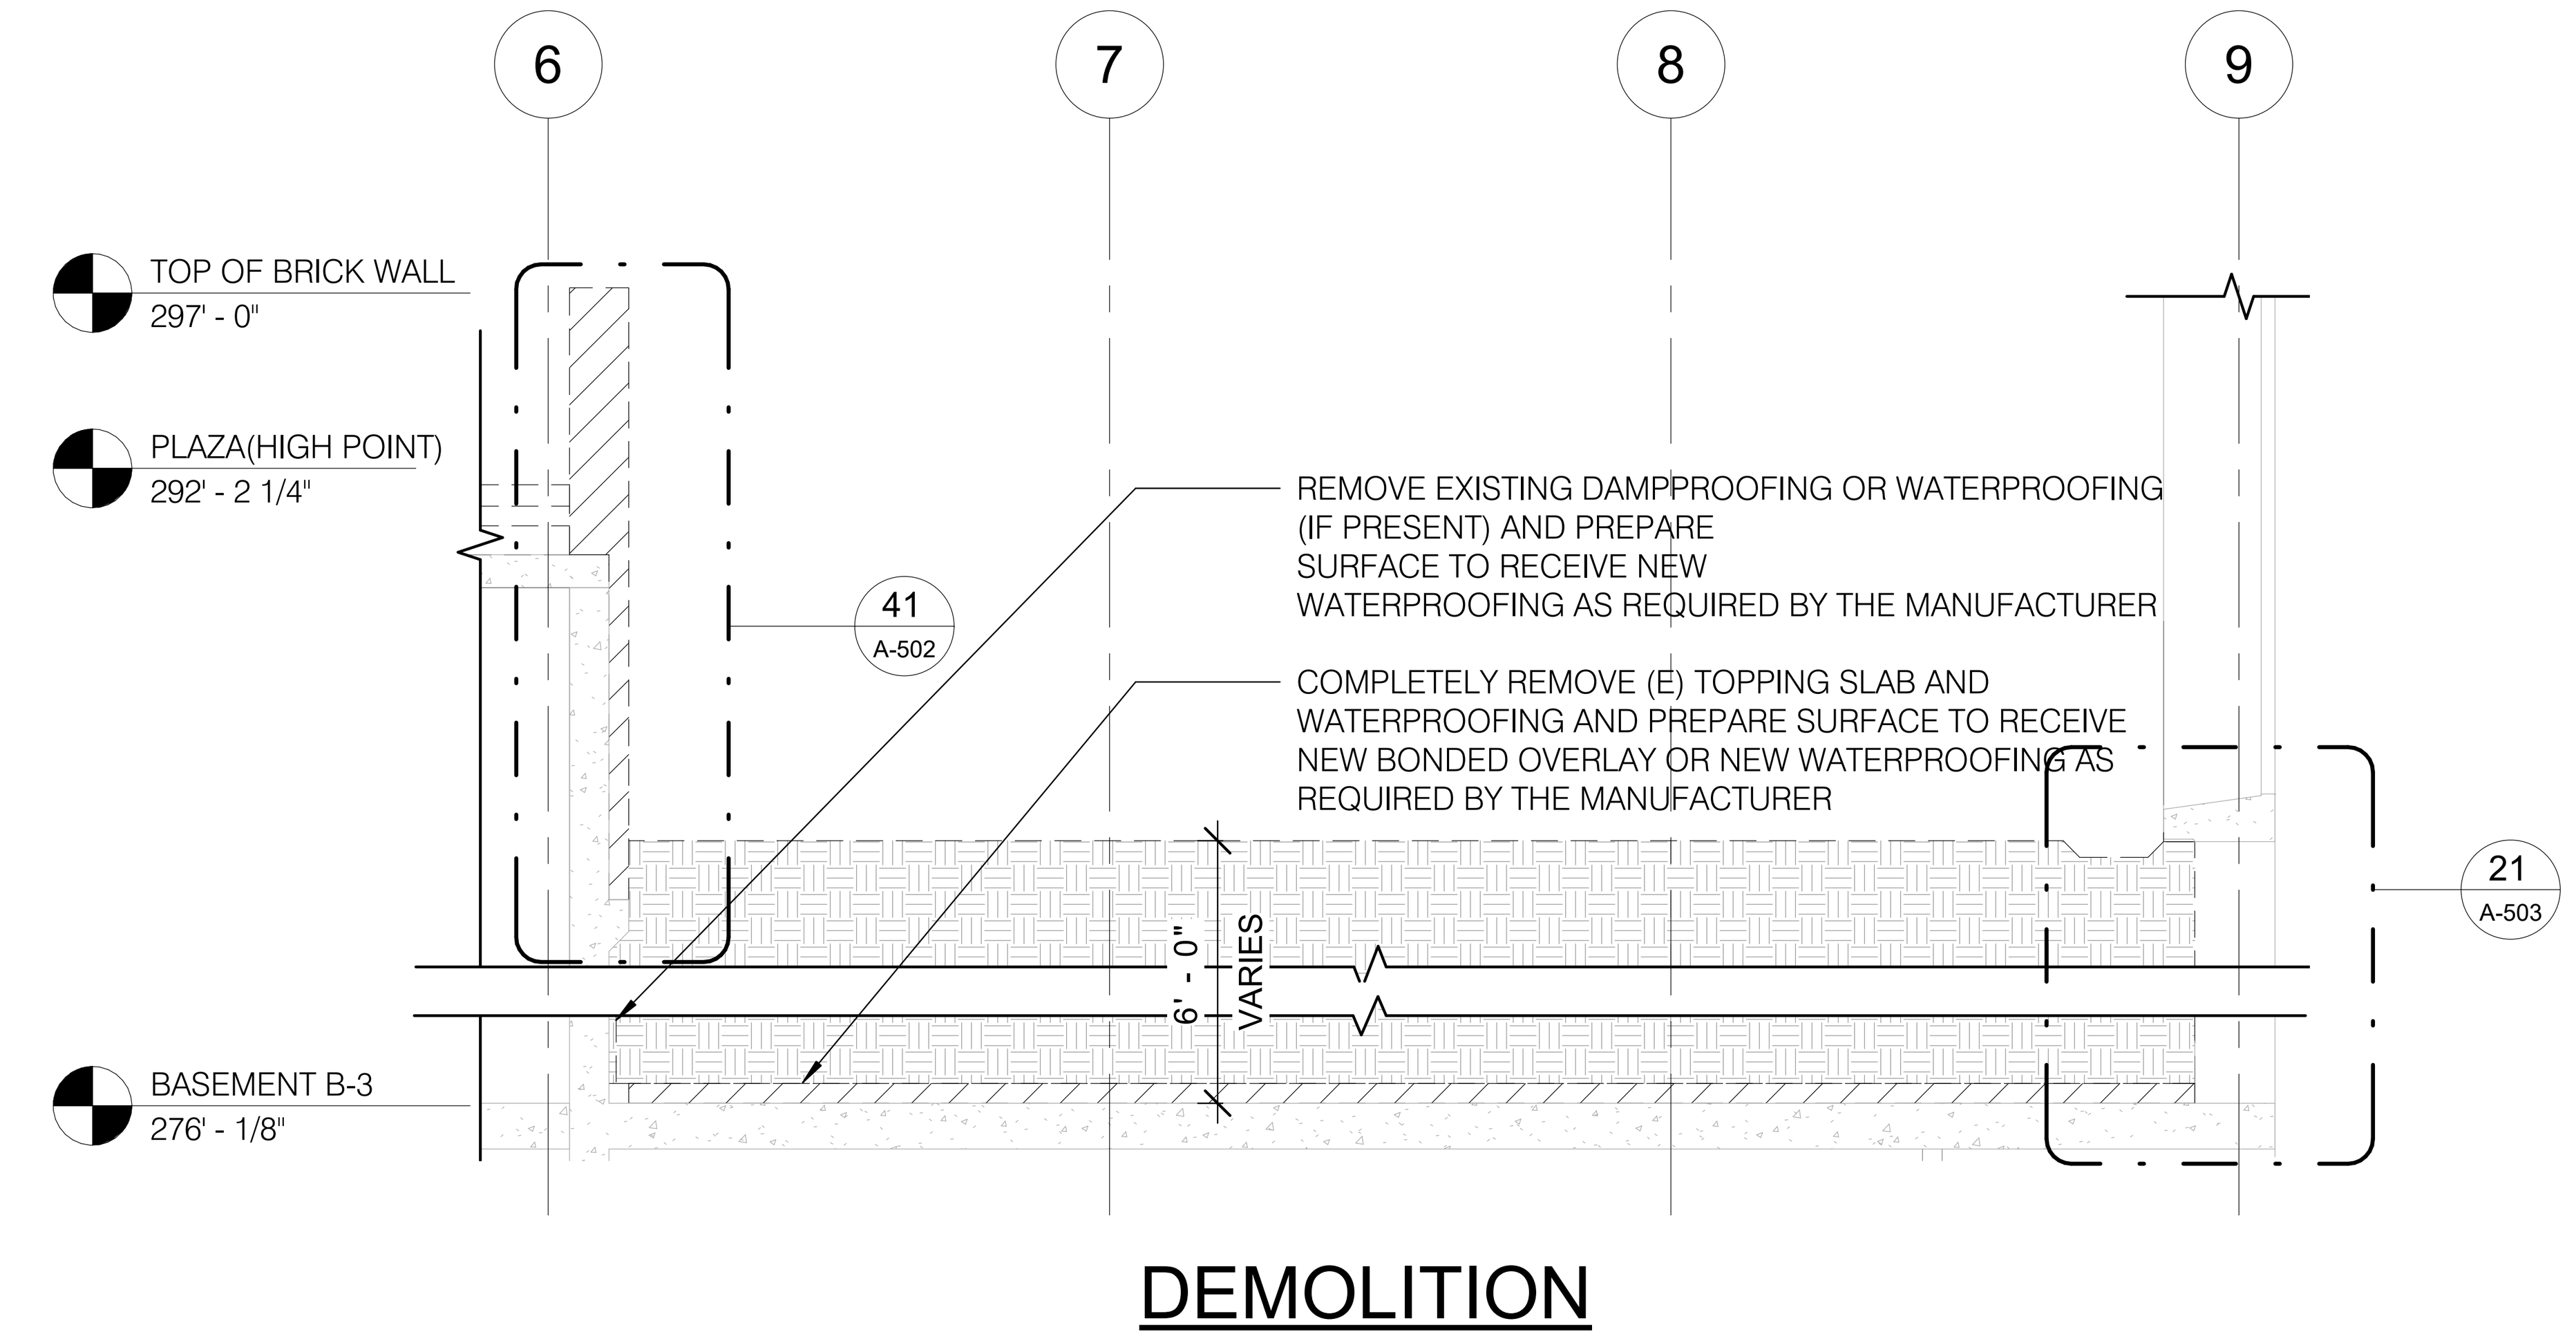

24 A-501 DEMOLITION WALL SECTION - B
3/16" = 1'-0"
2 0 2 4 6 8 10 12 14
3/16" = 1'-0" SCALE FEET

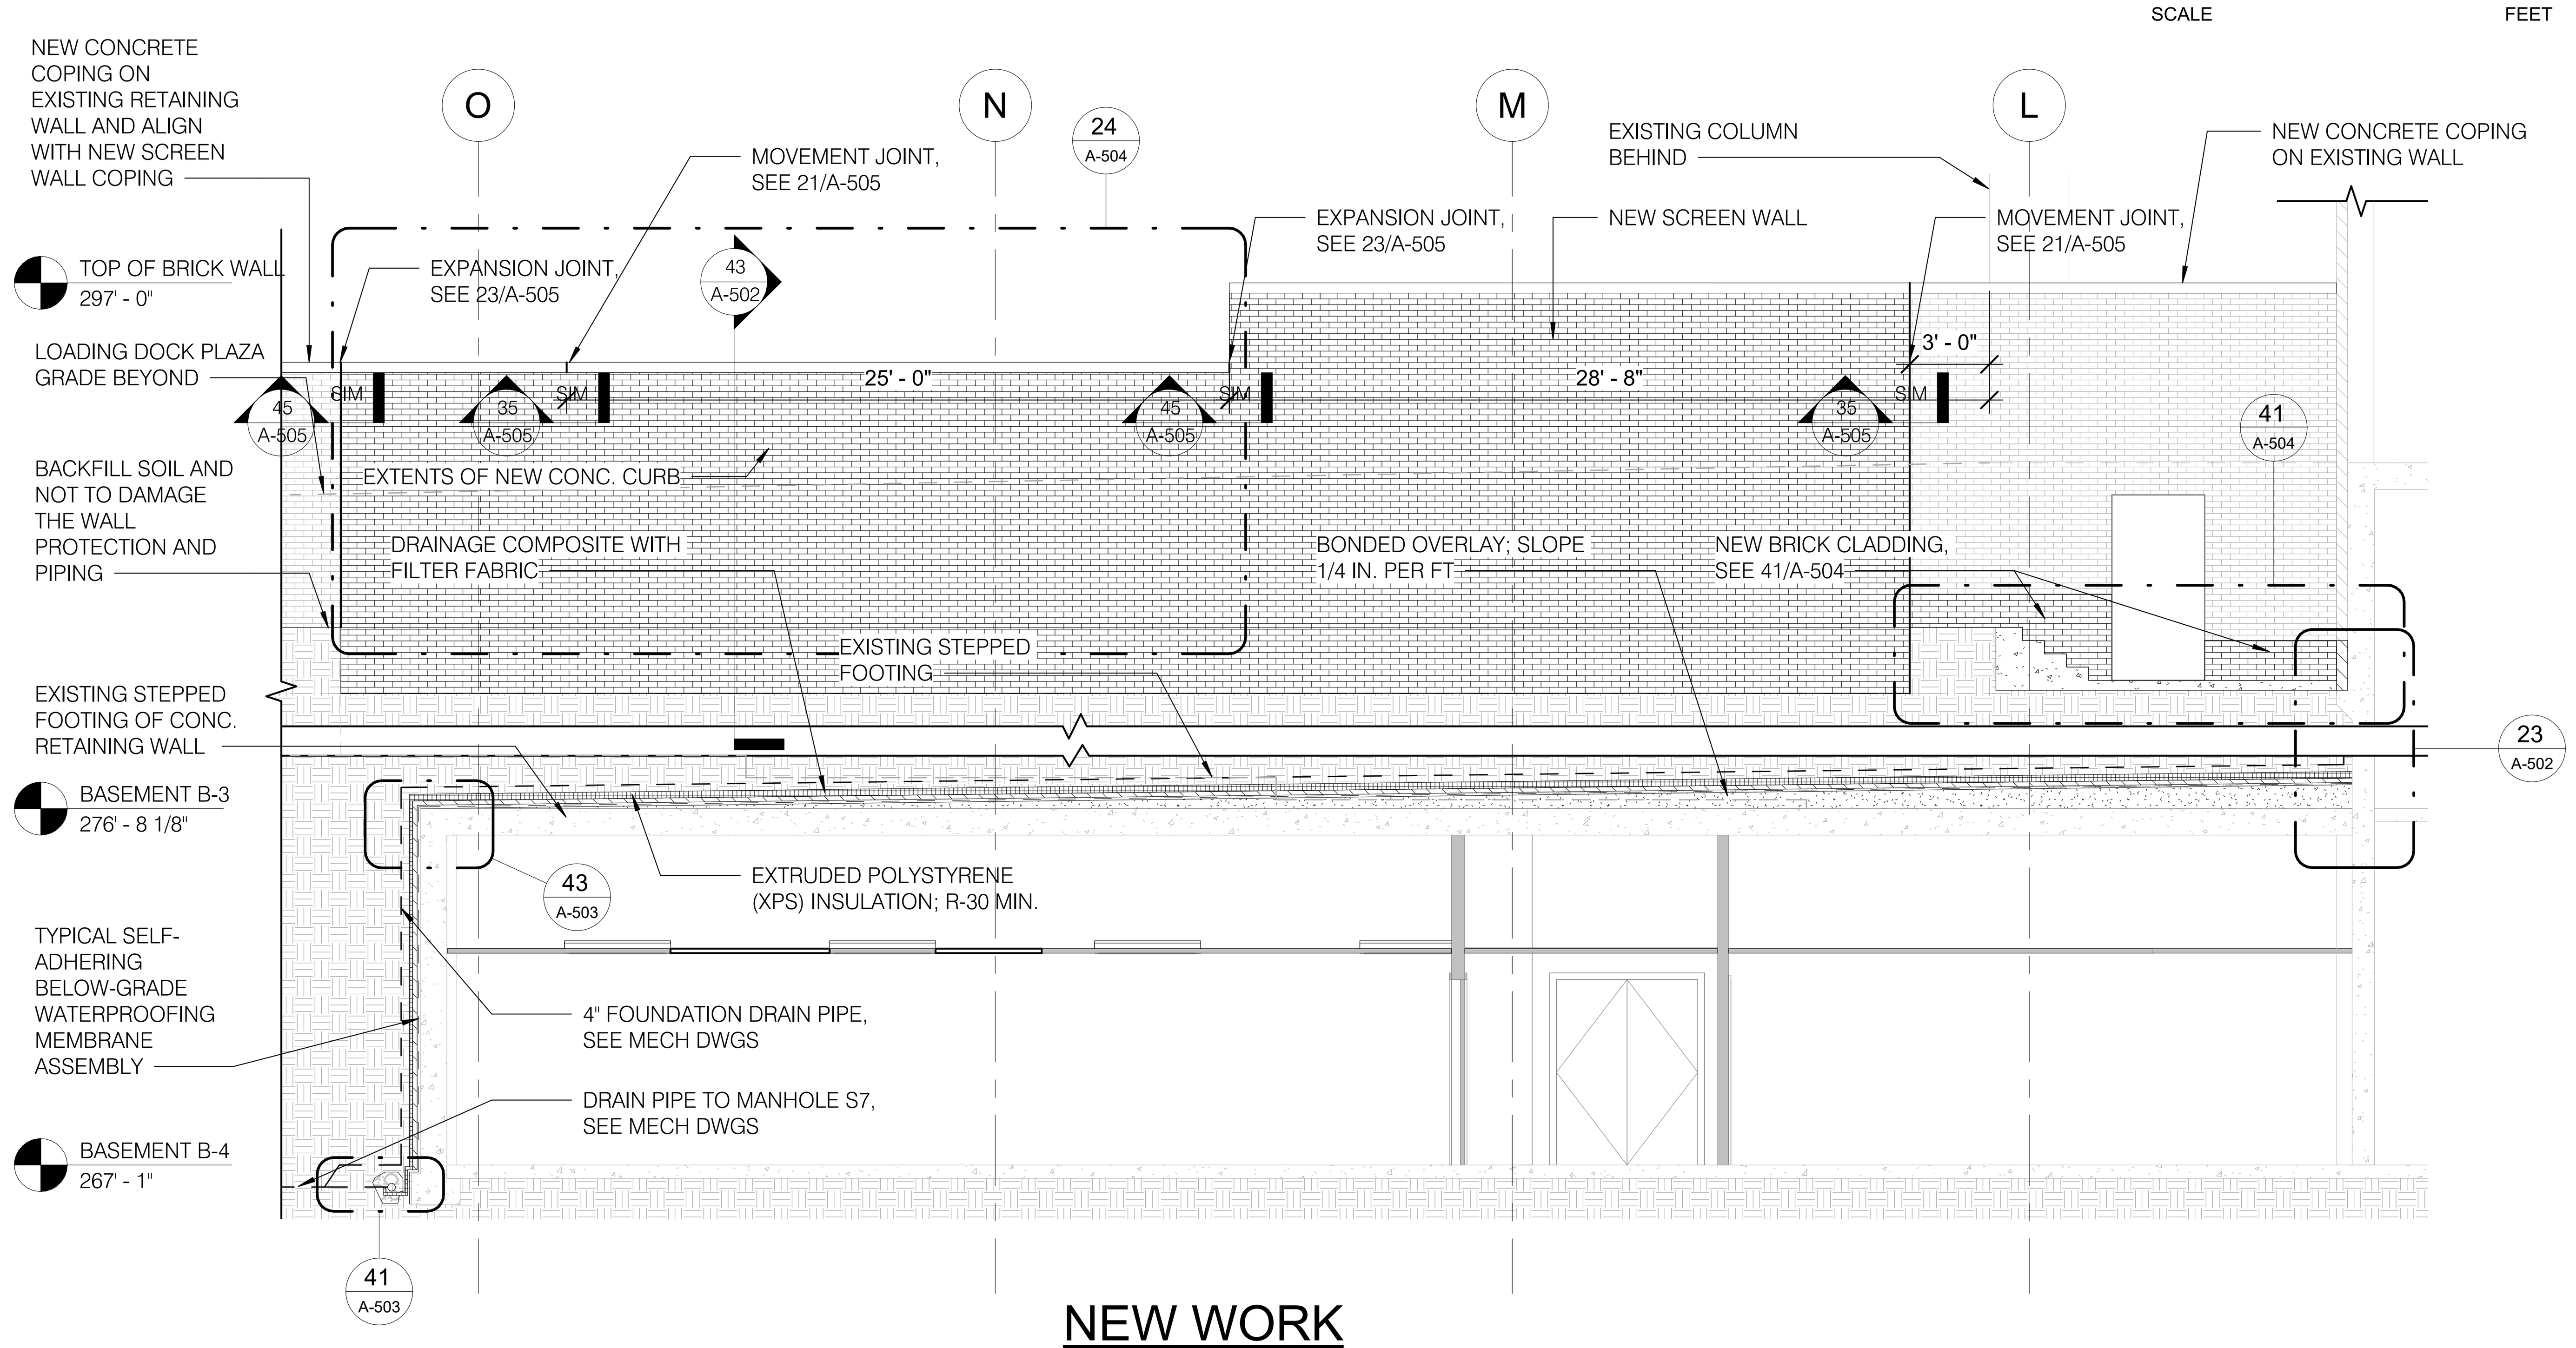

41 A-501 NEW WORK WALL SECTION - A
3/16" = 1'-0"
2 0 2 4 6 8 10 12 14
3/16" = 1'-0" SCALE FEET

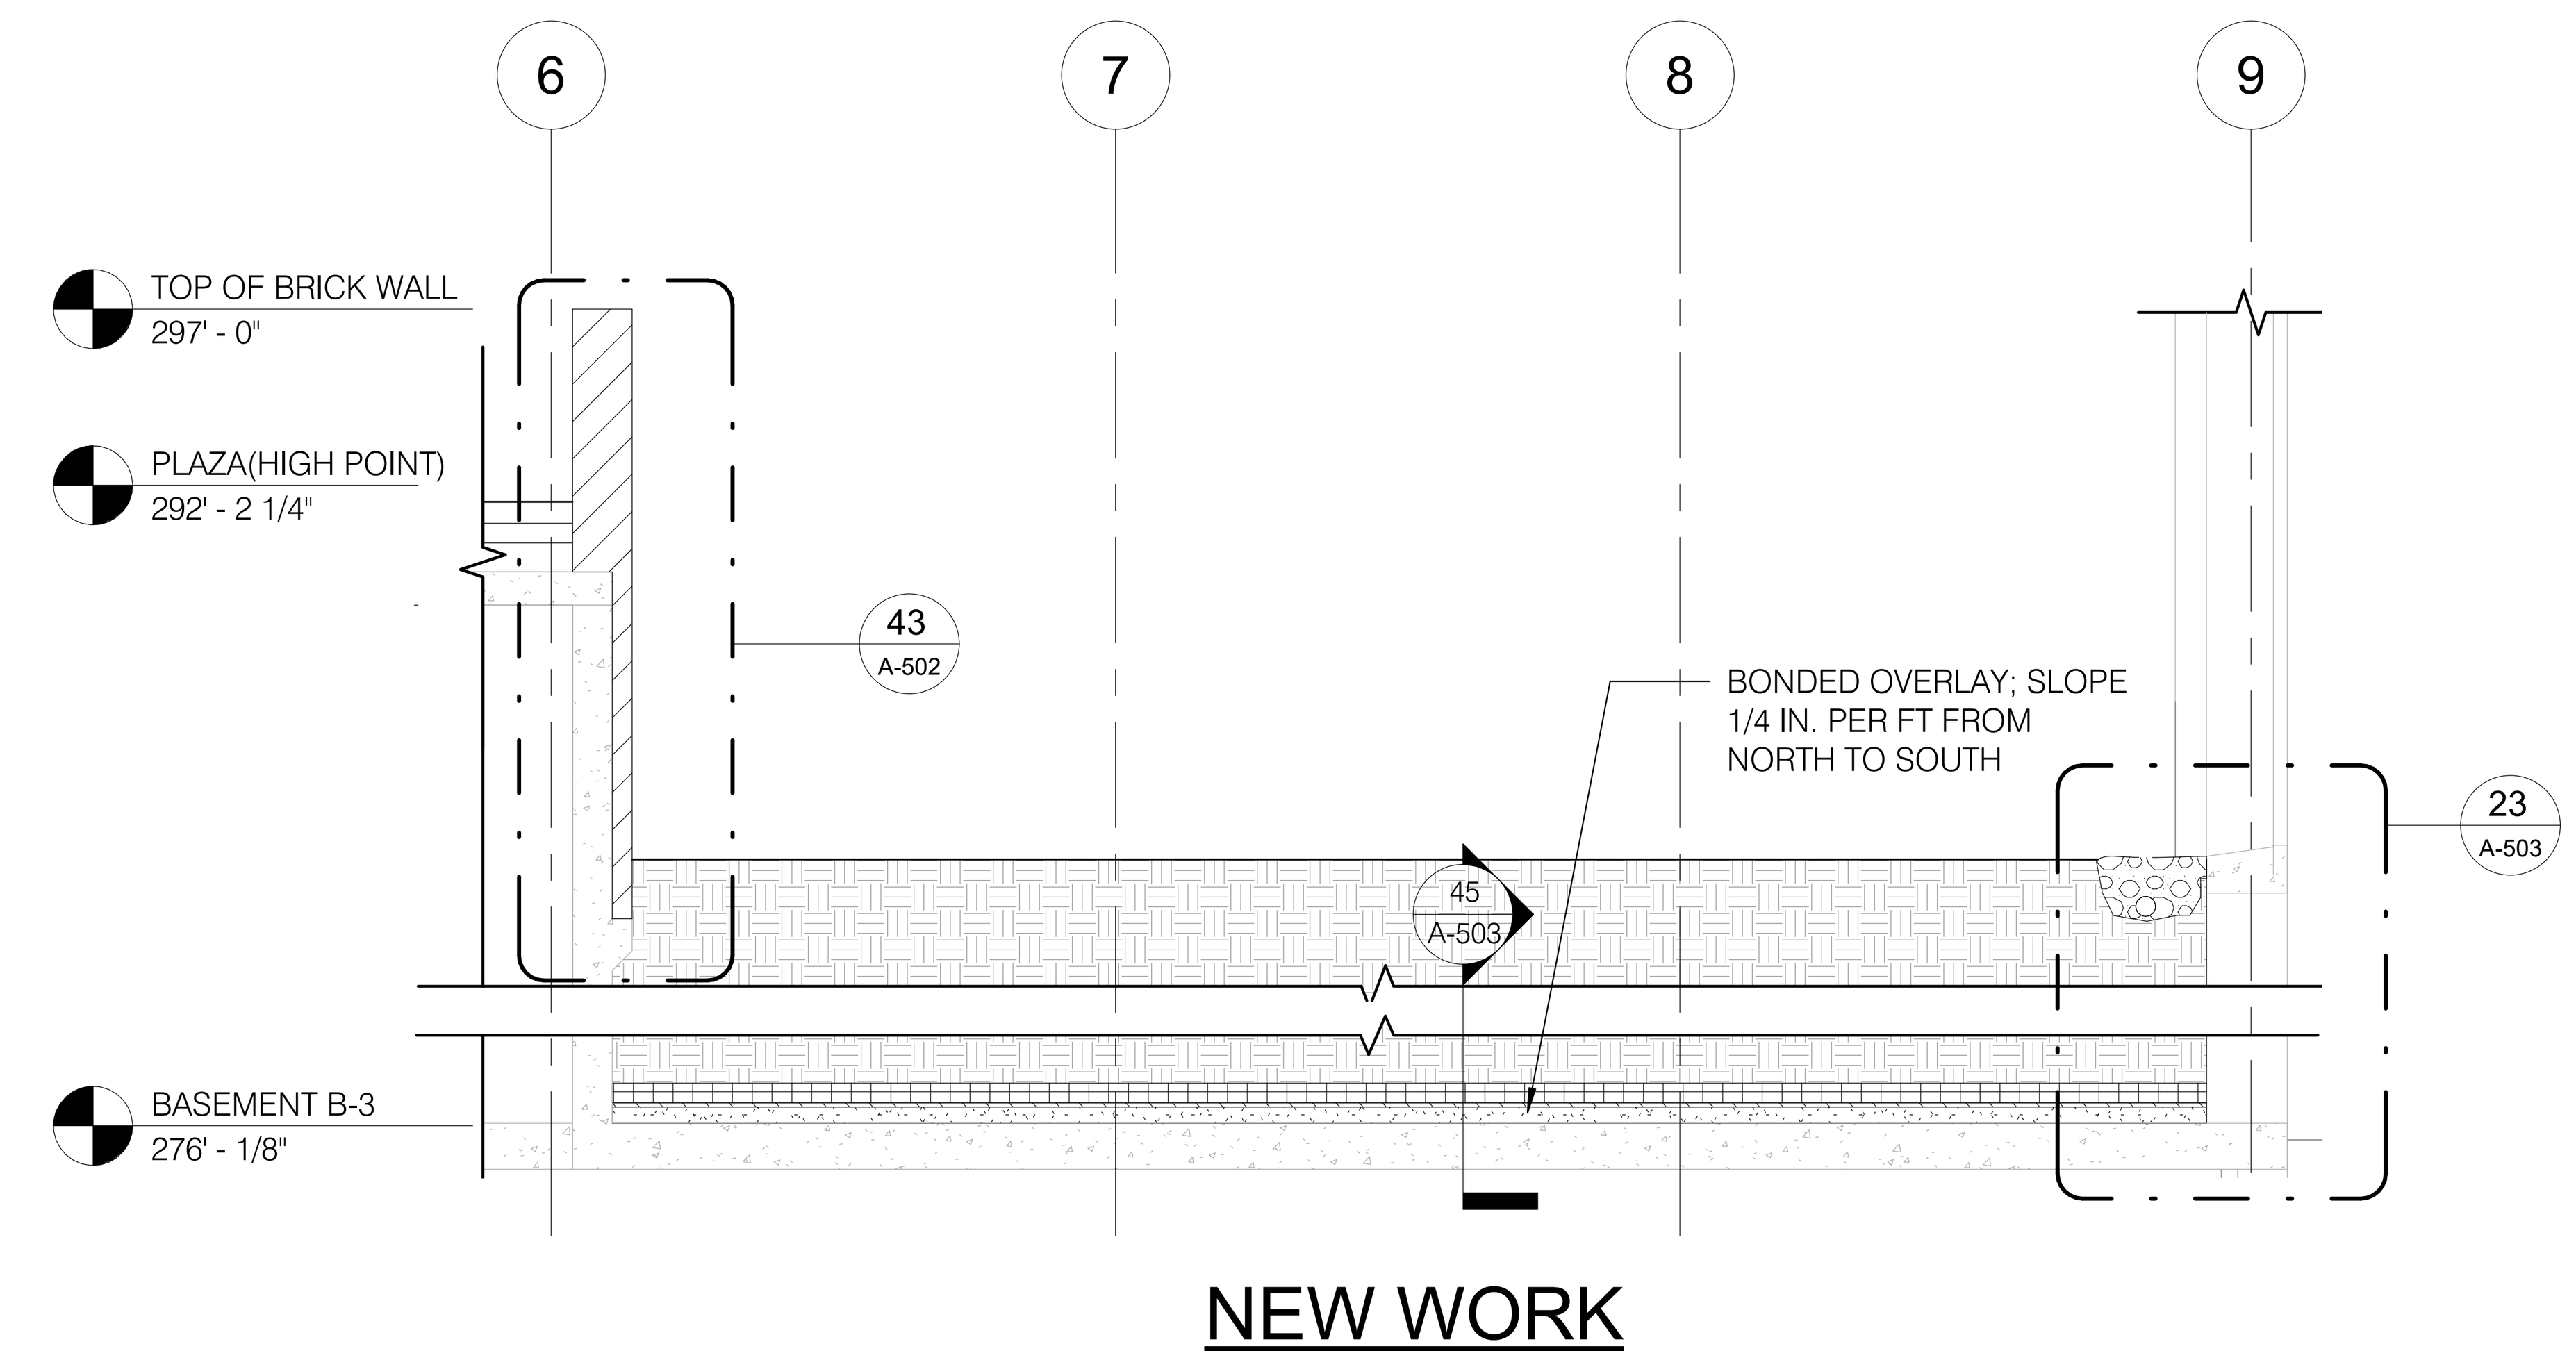

44 A-501 NEW WORK WALL SECTION - B
3/16" = 1'-0"
2 0 2 4 6 8 10 12 14
3/16" = 1'-0" SCALE FEET

PROPERTY OF THE UNITED STATES GOVERNMENT
FOR OFFICIAL USE ONLY
Do not remove this notice
Properly destroy documents when no longer needed

DEPARTMENT OF HEALTH & HUMAN SERVICES USA

LSY ARCHITECTS & LABORATORY PLANNERS
James Posey Associates
TIMMONS GROUP
SGH

Architect and Engineer Name and LOGO

ARCHITECT:	LOUVIERE, STRATTON & YOKEL, LLC 8484 GEORGIA AVE, SUITE 650 SILVER SPRING, MD 20910 (301) 588-1500
MEP ENGINEER:	JAMES POSEY ASSOCIATES INC 11155 RED RUN BLVD OWINGS MILLS, MD 21117 (410) 265-6100
CIVIL ENGINEER:	TIMMONS GROUP 2300 N ST NW SUITE 410B WASHINGTON, DC 20037 (202) 919-2245
STRUCTURAL ENGINEER:	SIMPSON GUMPERTZ & HEGER 1625 EYE STREET NW SUITE 900 WASHINGTON, DC 20006 (202) 239-4199

SEAL
ARCHITECT 14829 HEATHER K. JOHNSON STATE OF MARYLAND

REVISIONS

MARK	DATE	DESCRIPTION

CONTRACTORS

A/E CON. NO.	
A/E TASK NO.	
CONS. CONTR.	
CONS. WORK	
PRIME A/E	LSY ARCHITECTS
SUB A/E	JPA / TIMMONS / SGH
CONSTR. CON.	

BUILDING

FACILITY CODE	
BUILDING NO.	BUILDING 31B
NAME	NIH
STREET	9000 ROCKVILLE PIKE
CITY	BETHESDA
STATE/ZIP	MD / 20892
OTHER BUILDING NO.	

PROJECT

PROJ. NO.	24024
PROJ. OFFICER	MOHAMMED BISWAS
PROJ. MGR.	G.LEE
SUBMISSION	IFC SUBMISSION
SUB. DATE	08/26/25
WRK REQ. NO.	C116635

N

PROJECT TITLE: BUILDING 31B NEW ROOFING AND WP OF STRUCTURE BELOW GRADE

DRAWING TITLE: DEMOLITION AND NEW WORK SECTIONS

NIH National Institutes of Health
OFFICE OF RESEARCH FACILITIES
DIVISION OF FACILITIES PLANNING

DESIGNED BY	X.L.
DRAWN BY	G.L.
CHECKED BY	K.C.
DATE	08/26/25
FILE NAME	
DRAWING	A-501
SHEET NUMBER	OF

C:\Users\XLiu\Documents\24024 NIH Bldg 31B Landscape - Water Intrusion-2022_Xuan_LSY.rvt
8/27/2025 4:32:40 PM

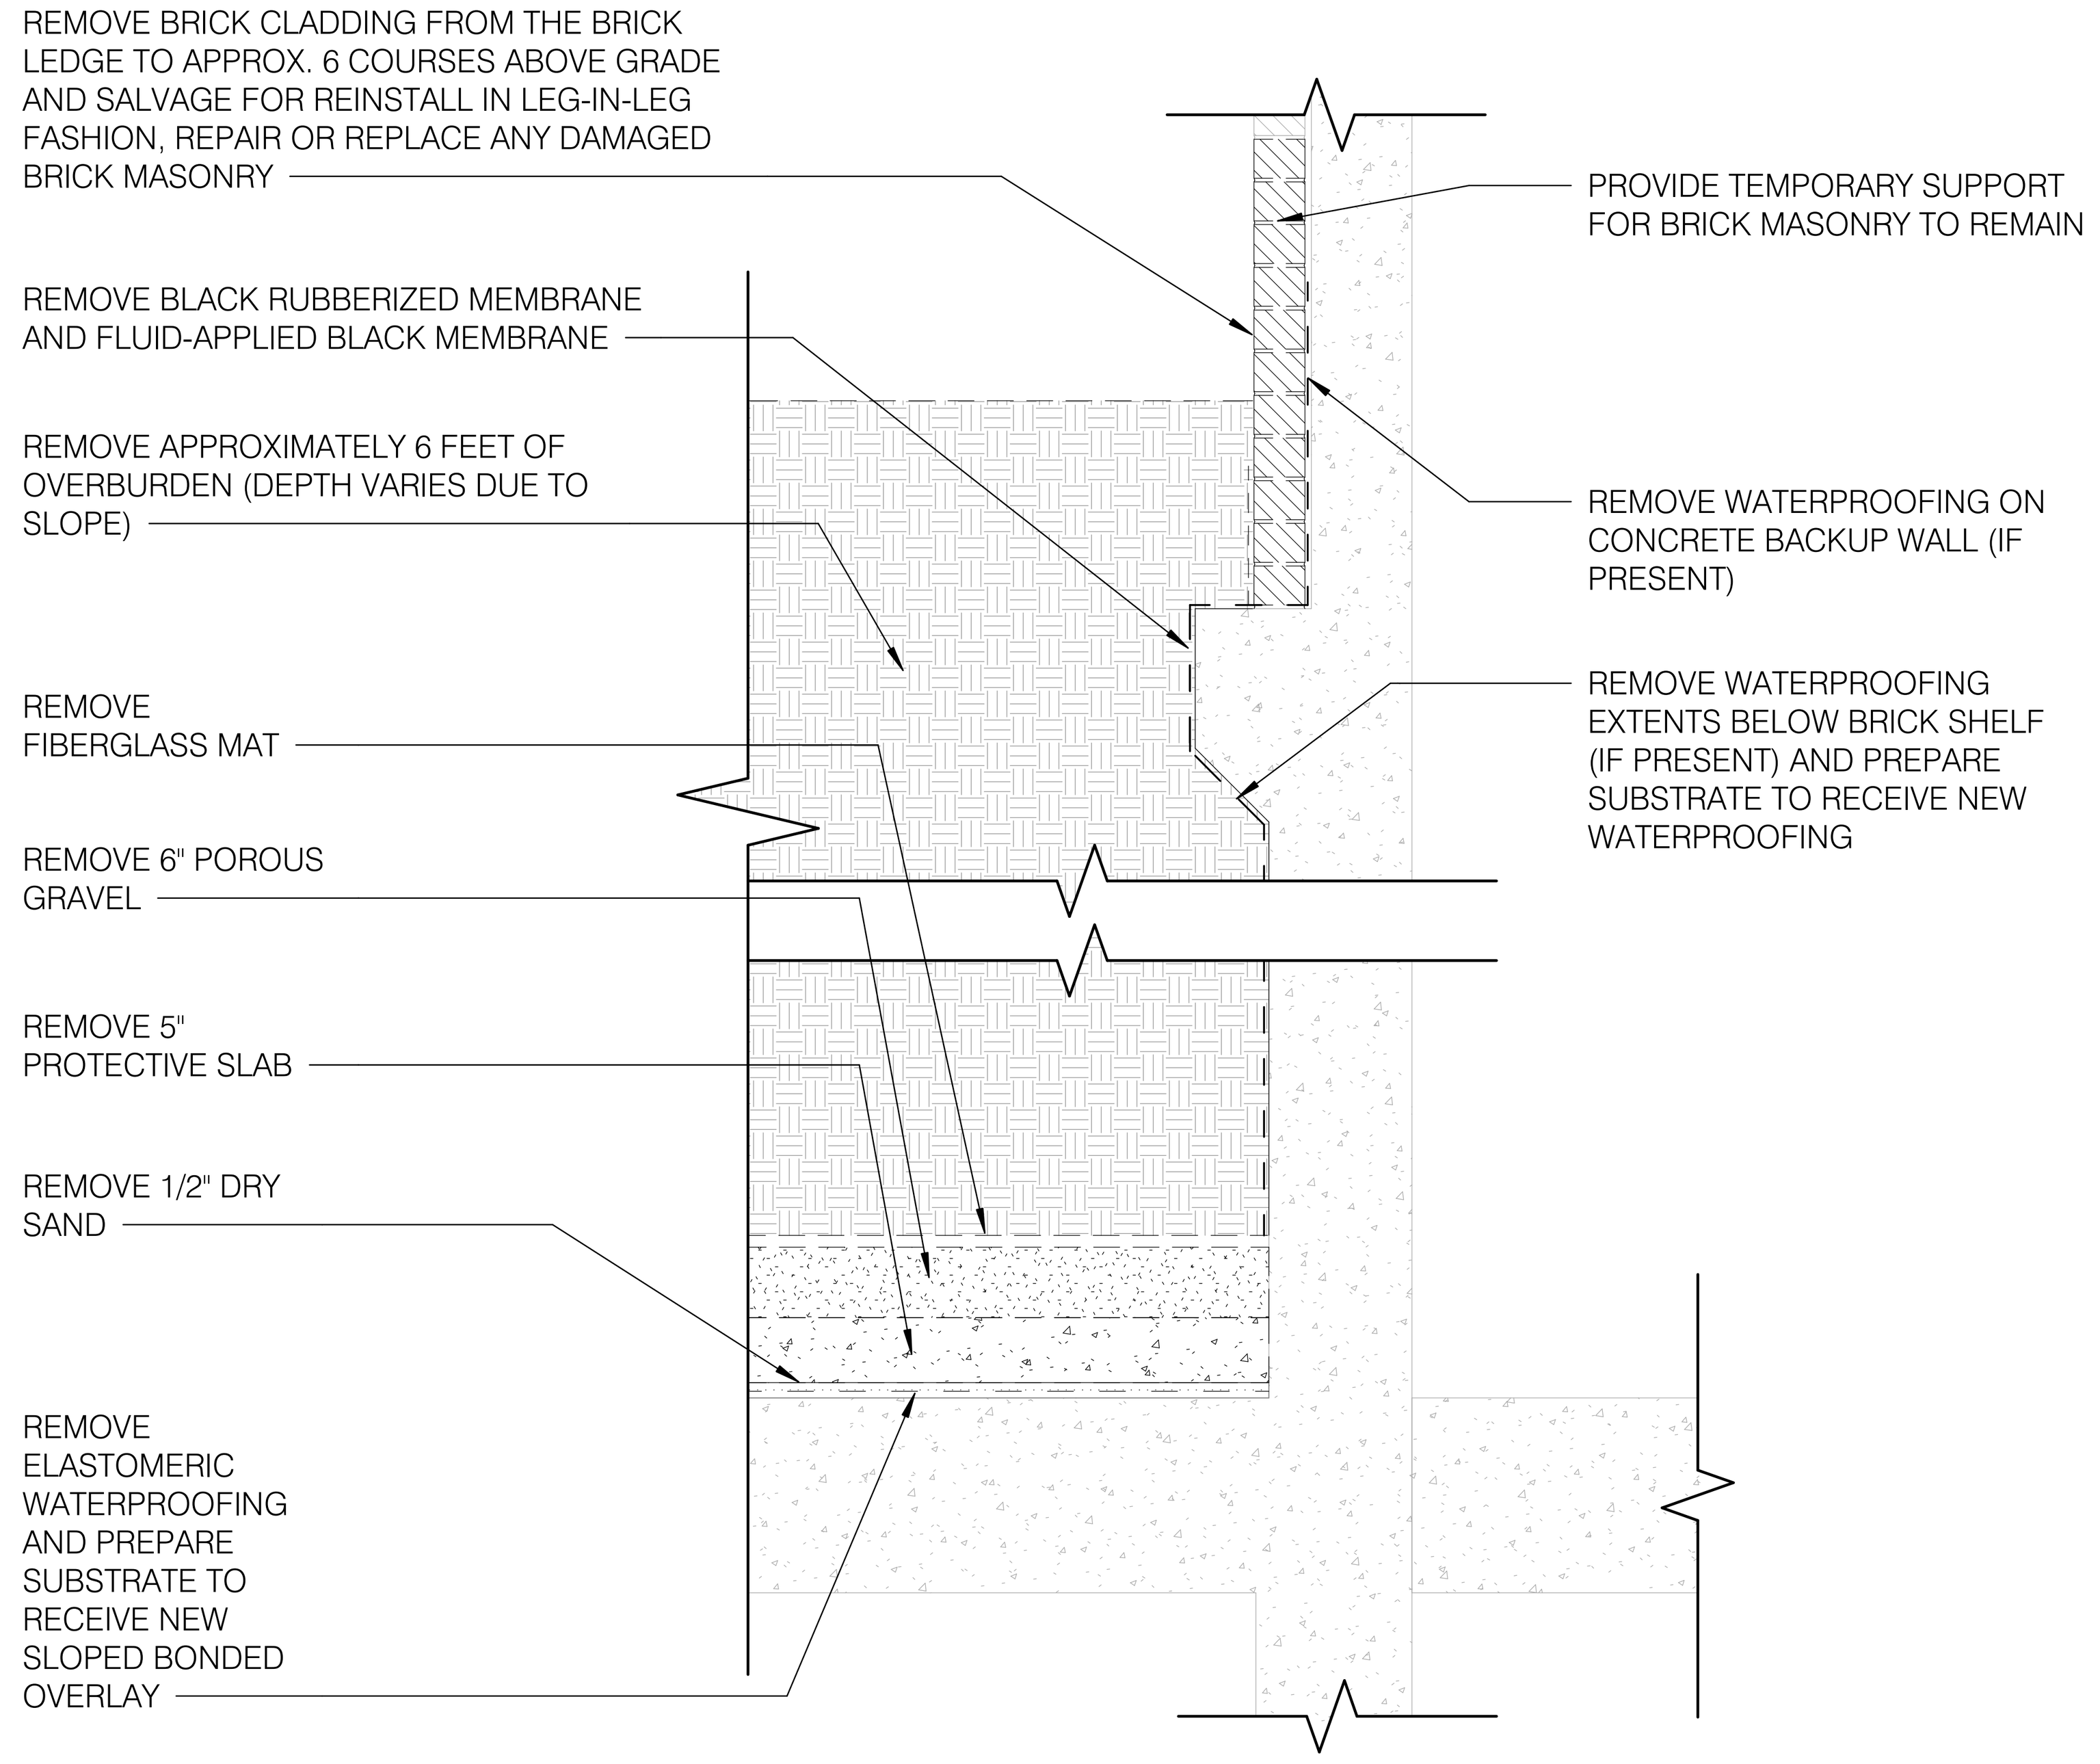

21 DEMOLITION WALL SECTION - NORTH
A-502 3/4" = 1'-0"
3/4" = 1'-0" SCALE 1 0 1 2 3 FEET

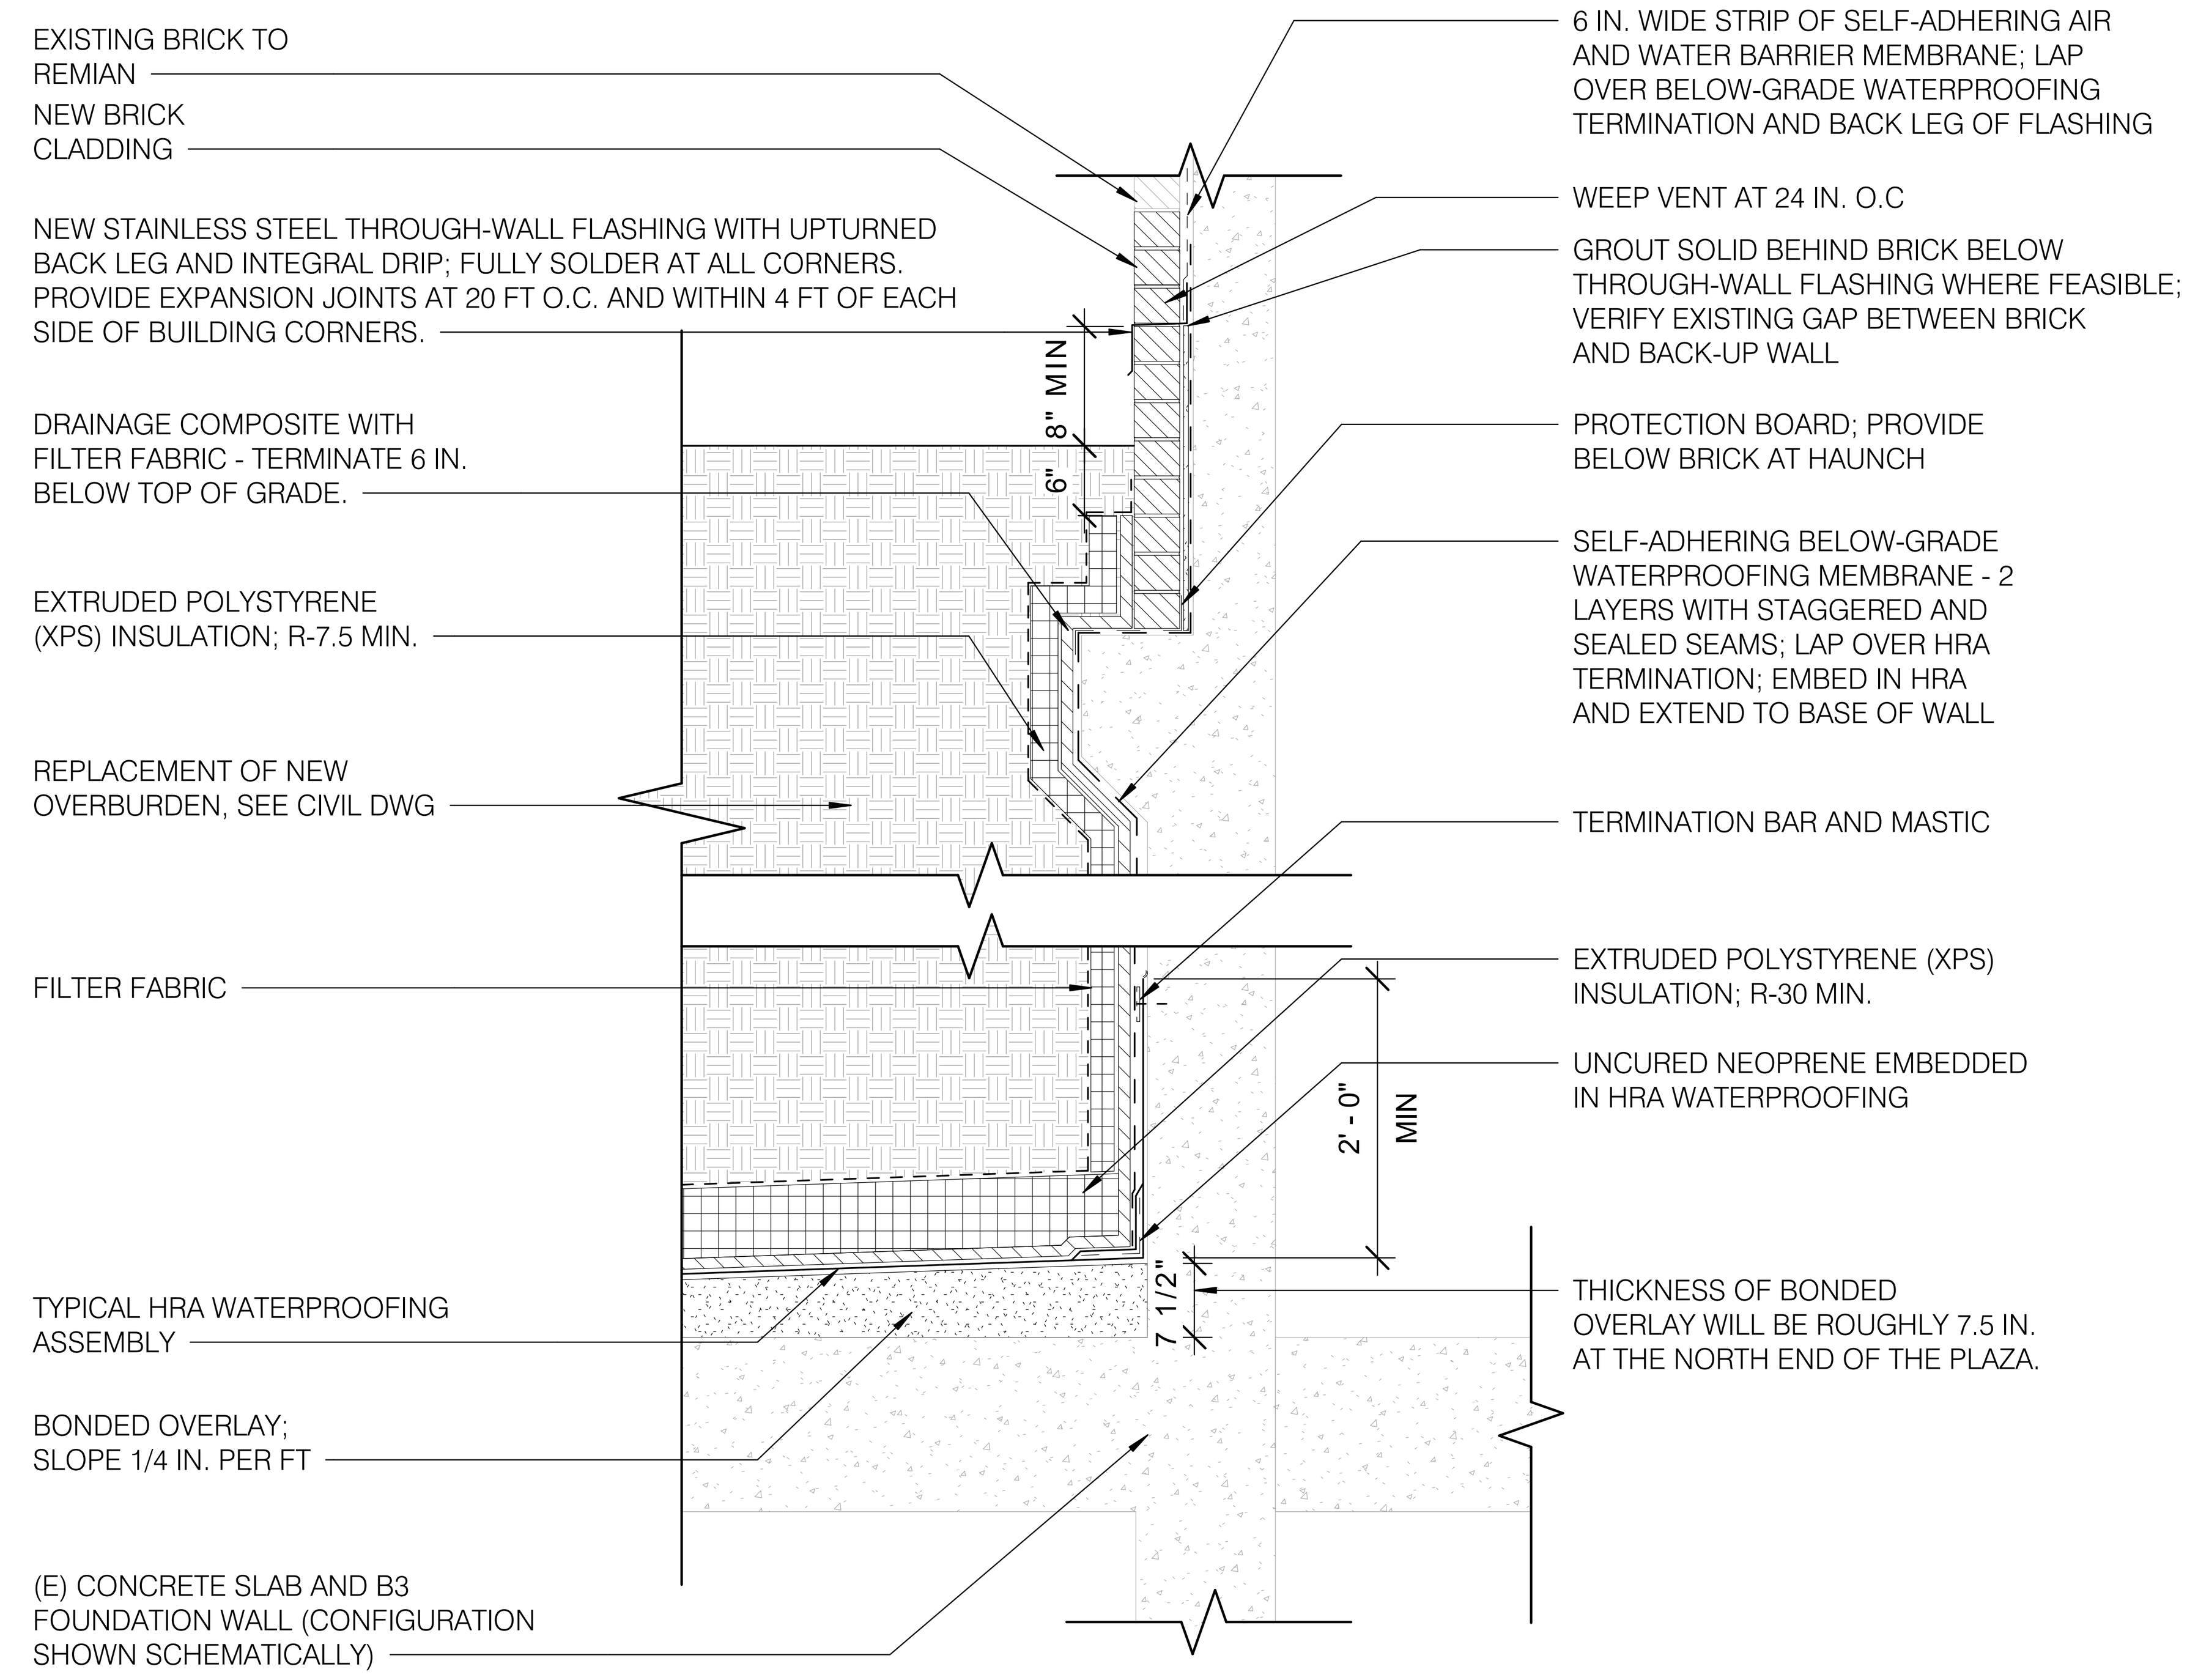

23 NEW WORK WALL SECTION - NORTH
A-502 3/4" = 1'-0"
3/4" = 1'-0" SCALE 1 0 1 2 3 FEET

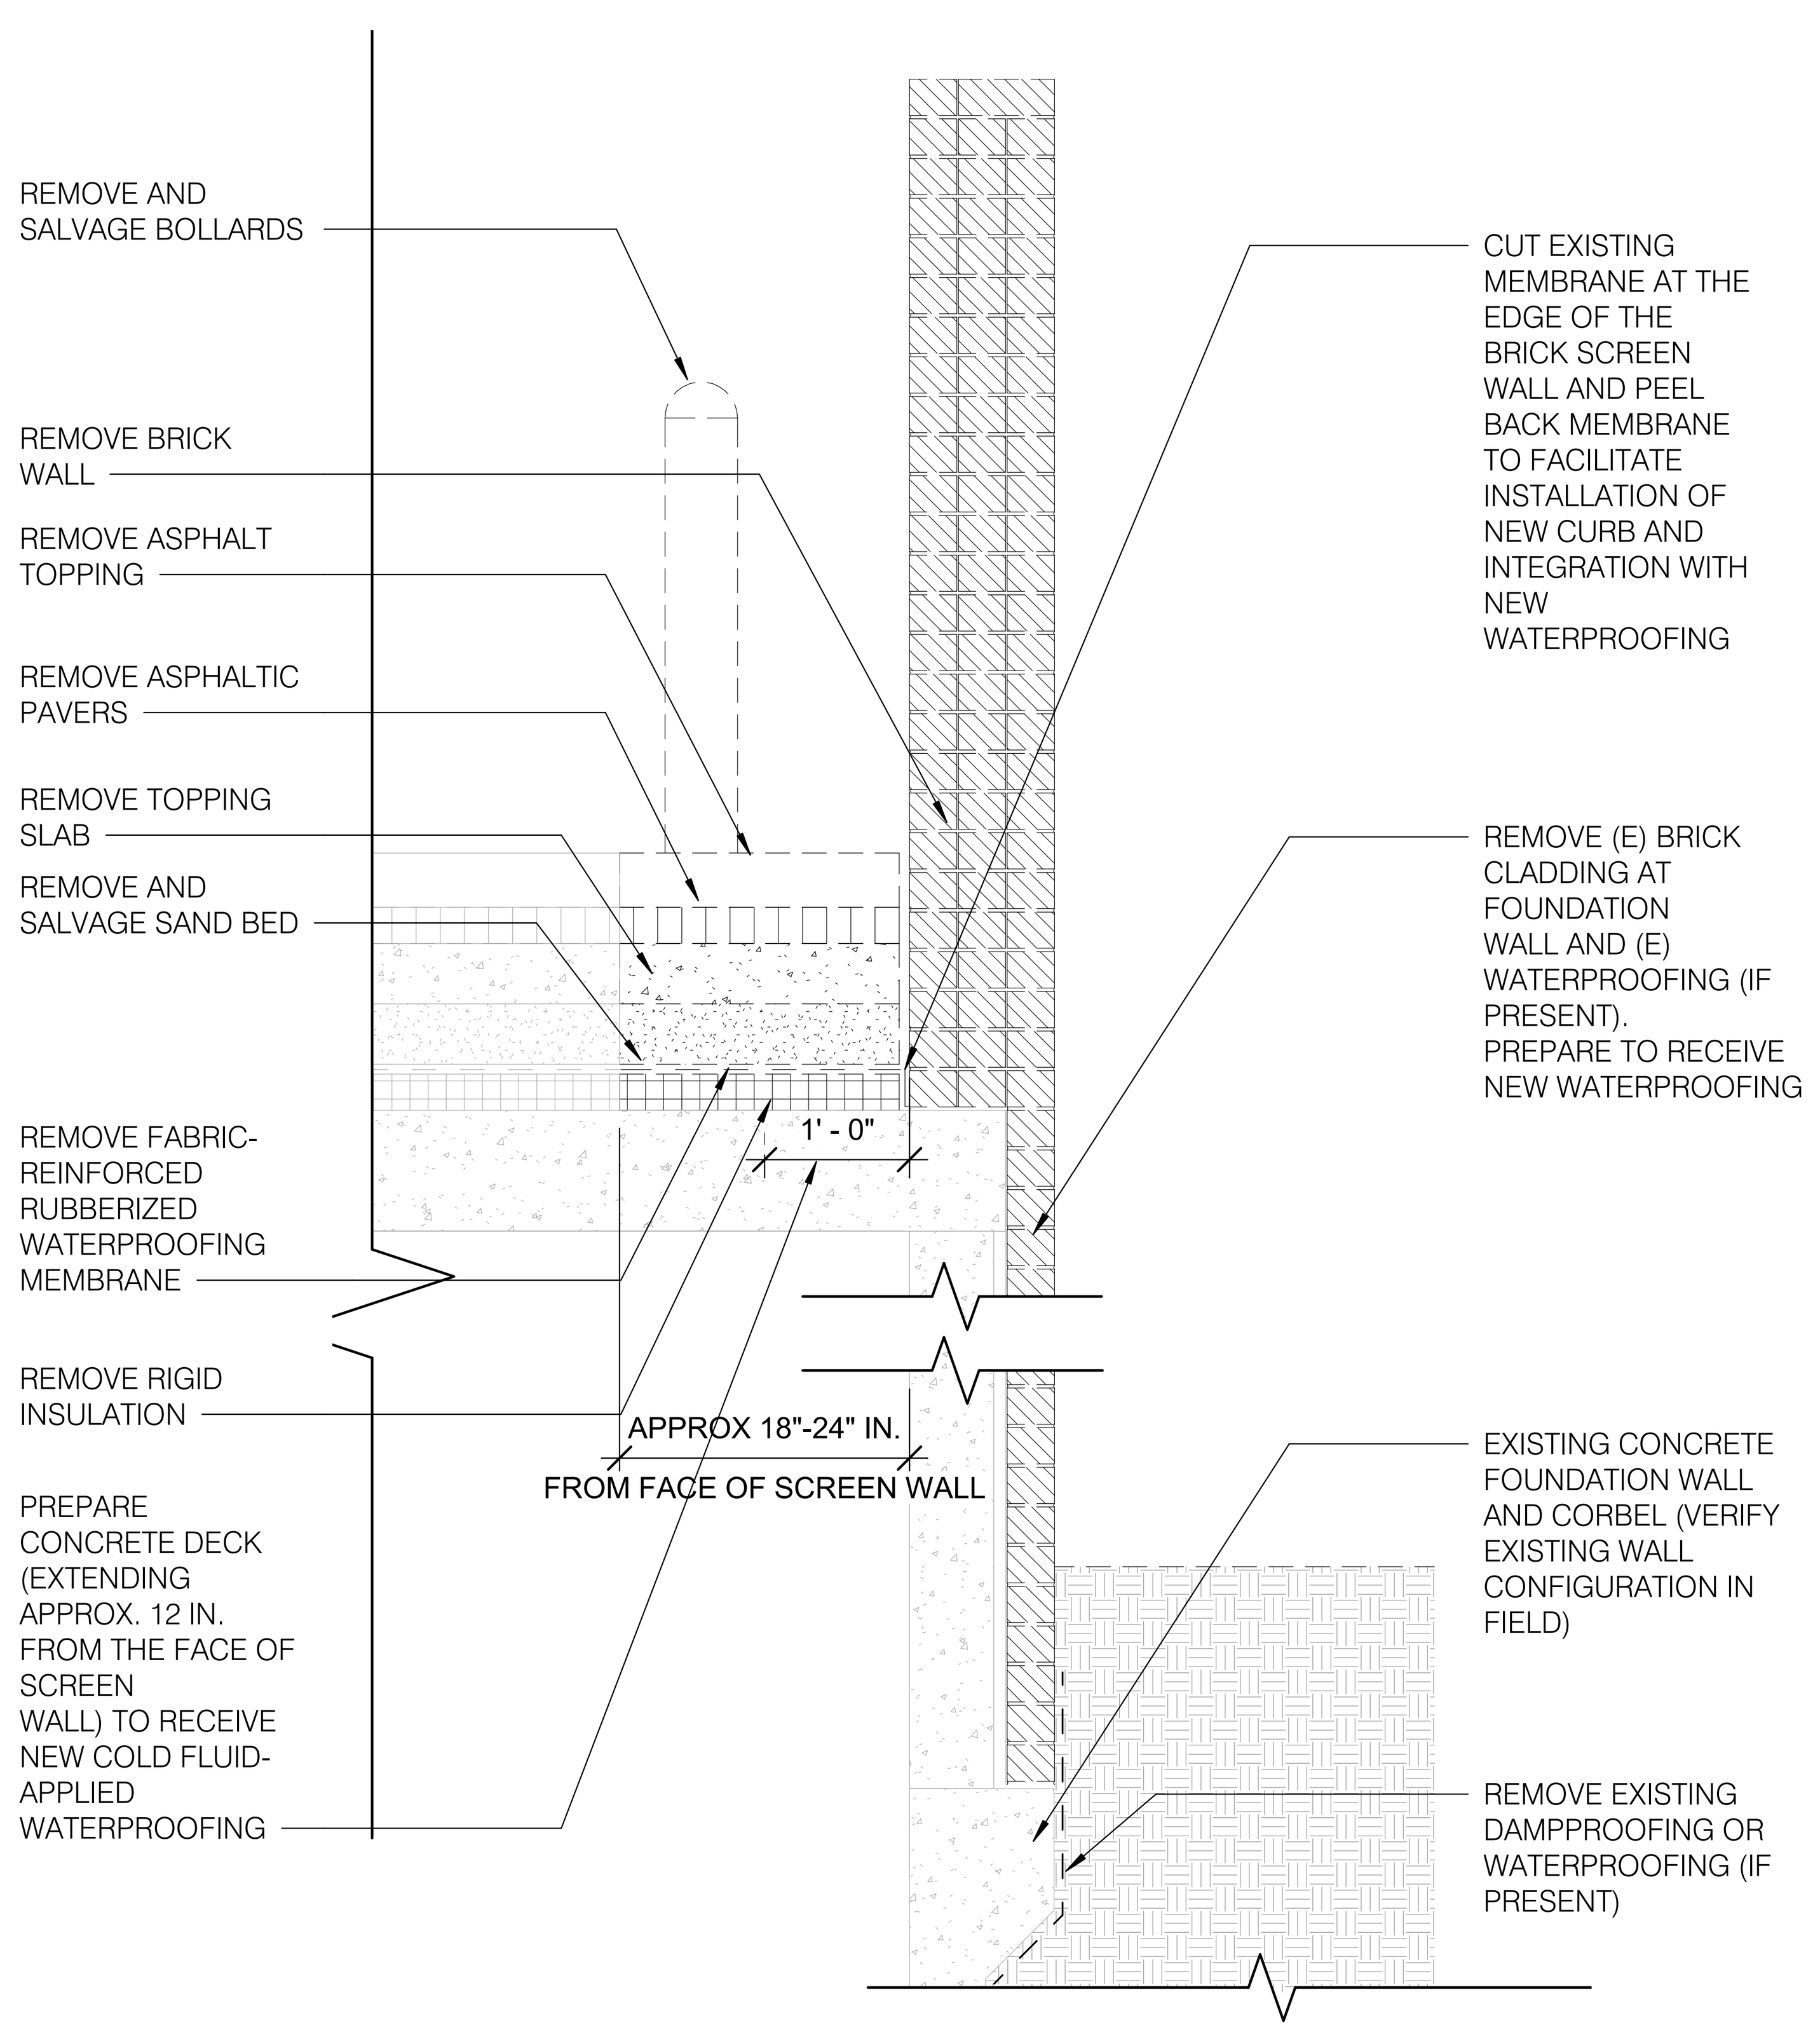

41 DEMOLITION WALL SECTION - WEST
A-502 3/4" = 1'-0"
3/4" = 1'-0" SCALE 1 0 1 2 3 FEET

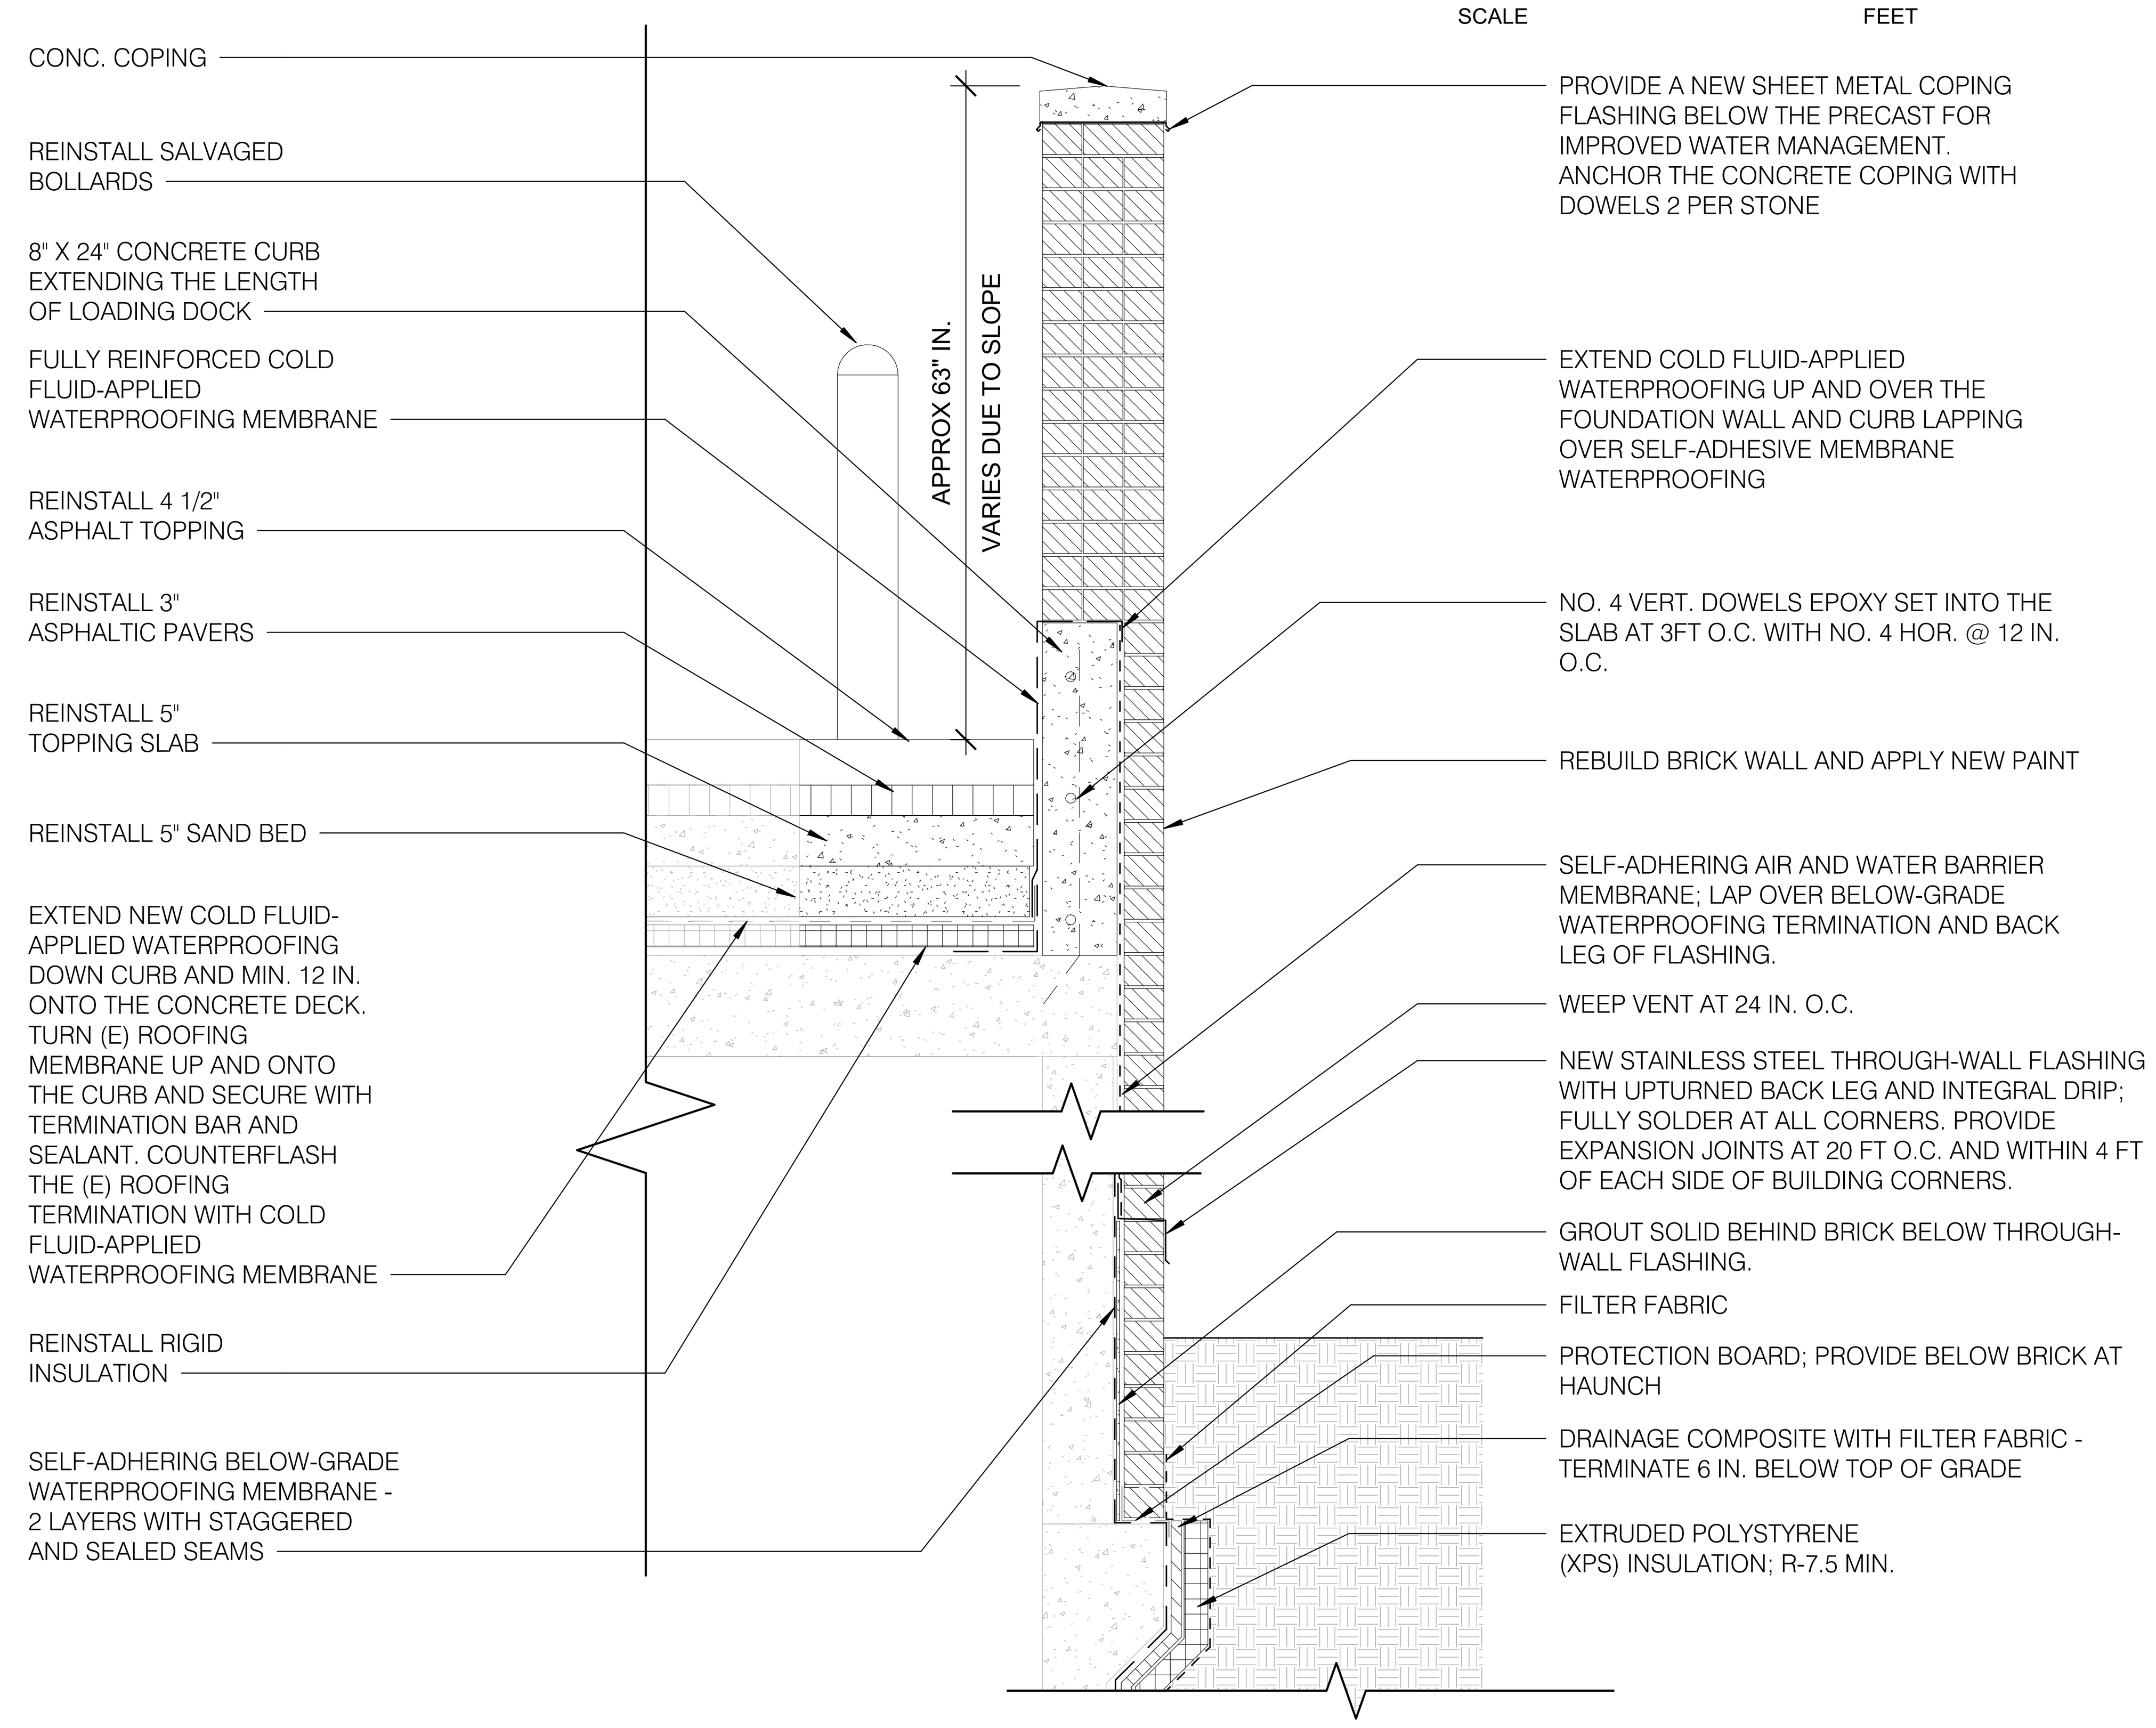

43 NEW WORK WALL SECTION - WEST
A-502 3/4" = 1'-0"
3/4" = 1'-0" SCALE 1 0 1 2 3 FEET

C:\Users\XLu\Documents\24024 NIH Bldg 31B Landscape - Water Intrusion-2022_Xuan_LSY.rvt
8/26/2025 4:10:23 PM

DEPARTMENT OF HEALTH & HUMAN SERVICES USA

LSY ARCHITECTS & LABORATORY PLANNERS

James Posey Associates Engineering Your Vision

TIMMONS GROUP

SGH

Architect and Engineer Name and LOGO

ARCHITECT: LOUVIERE, STRATTON & YOKEL, LLC
8484 GEORGIA AVE, SUITE 650
SILVER SPRING, MD 20910
(301) 588-1500

MEP ENGINEER: JAMES POSEY ASSOCIATES INC
11155 RED RUN BLVD
OWINGS MILLS, MD 21117
(410) 265-6100

CIVIL ENGINEER: TIMMONS GROUP
2300 N ST NW SUITE 410B
WASHINGTON, DC 20037
(202) 919-2245

STRUCTURAL ENGINEER: SIMPSON GUMPERTZ & HEGER
1625 EYE STREET NW SUITE 900
WASHINGTON, DC 20006
(202) 239-4199

SEAL
ARCHITECT 14829 HEATHER K. JOHNSON STATE OF MARYLAND

REVISIONS

MARK	DATE	DESCRIPTION

CONTRACTORS

A/E CON. NO.	
A/E TASK NO.	
CONS. CONTR.	
CONS. WORK	
PRIME A/E	LSY ARCHITECTS
SUB A/E	JPA / TIMMONS / SGH
CONSTR. CON.	

BUILDING

FACILITY CODE	
BUILDING NO.	BUILDING 31B
NAME	NIH
STREET	9000 ROCKVILLE PIKE
CITY	BETHESDA
STATE/ZIP	MD / 20892
OTHER BUILDING NO.	

PROJECT

PROJ. NO.	24024
PROJ. OFFICER	MOHAMMED BISWAS
PROJ. MGR.	G.LEE
SUBMISSION	IFC SUBMISSION
SUB. DATE	08/26/25
WRK REQ. NO.	C116635

N

PROJECT TITLE: BUILDING 31B NEW ROOFING AND WP OF STRUCTURE BELOW GRADE

DRAWING TITLE: DEMOLITION AND NEW WORK DETAILS

NIH
National Institutes of Health
OFFICE OF RESEARCH FACILITIES
DIVISION OF FACILITIES PLANNING

DESIGNED BY	G.L.
DRAWN BY	X.L.
CHECKED BY	K.C.
DATE	08/26/25
FILE NAME	

DRAWING
A-502

SHEET NUMBER OF

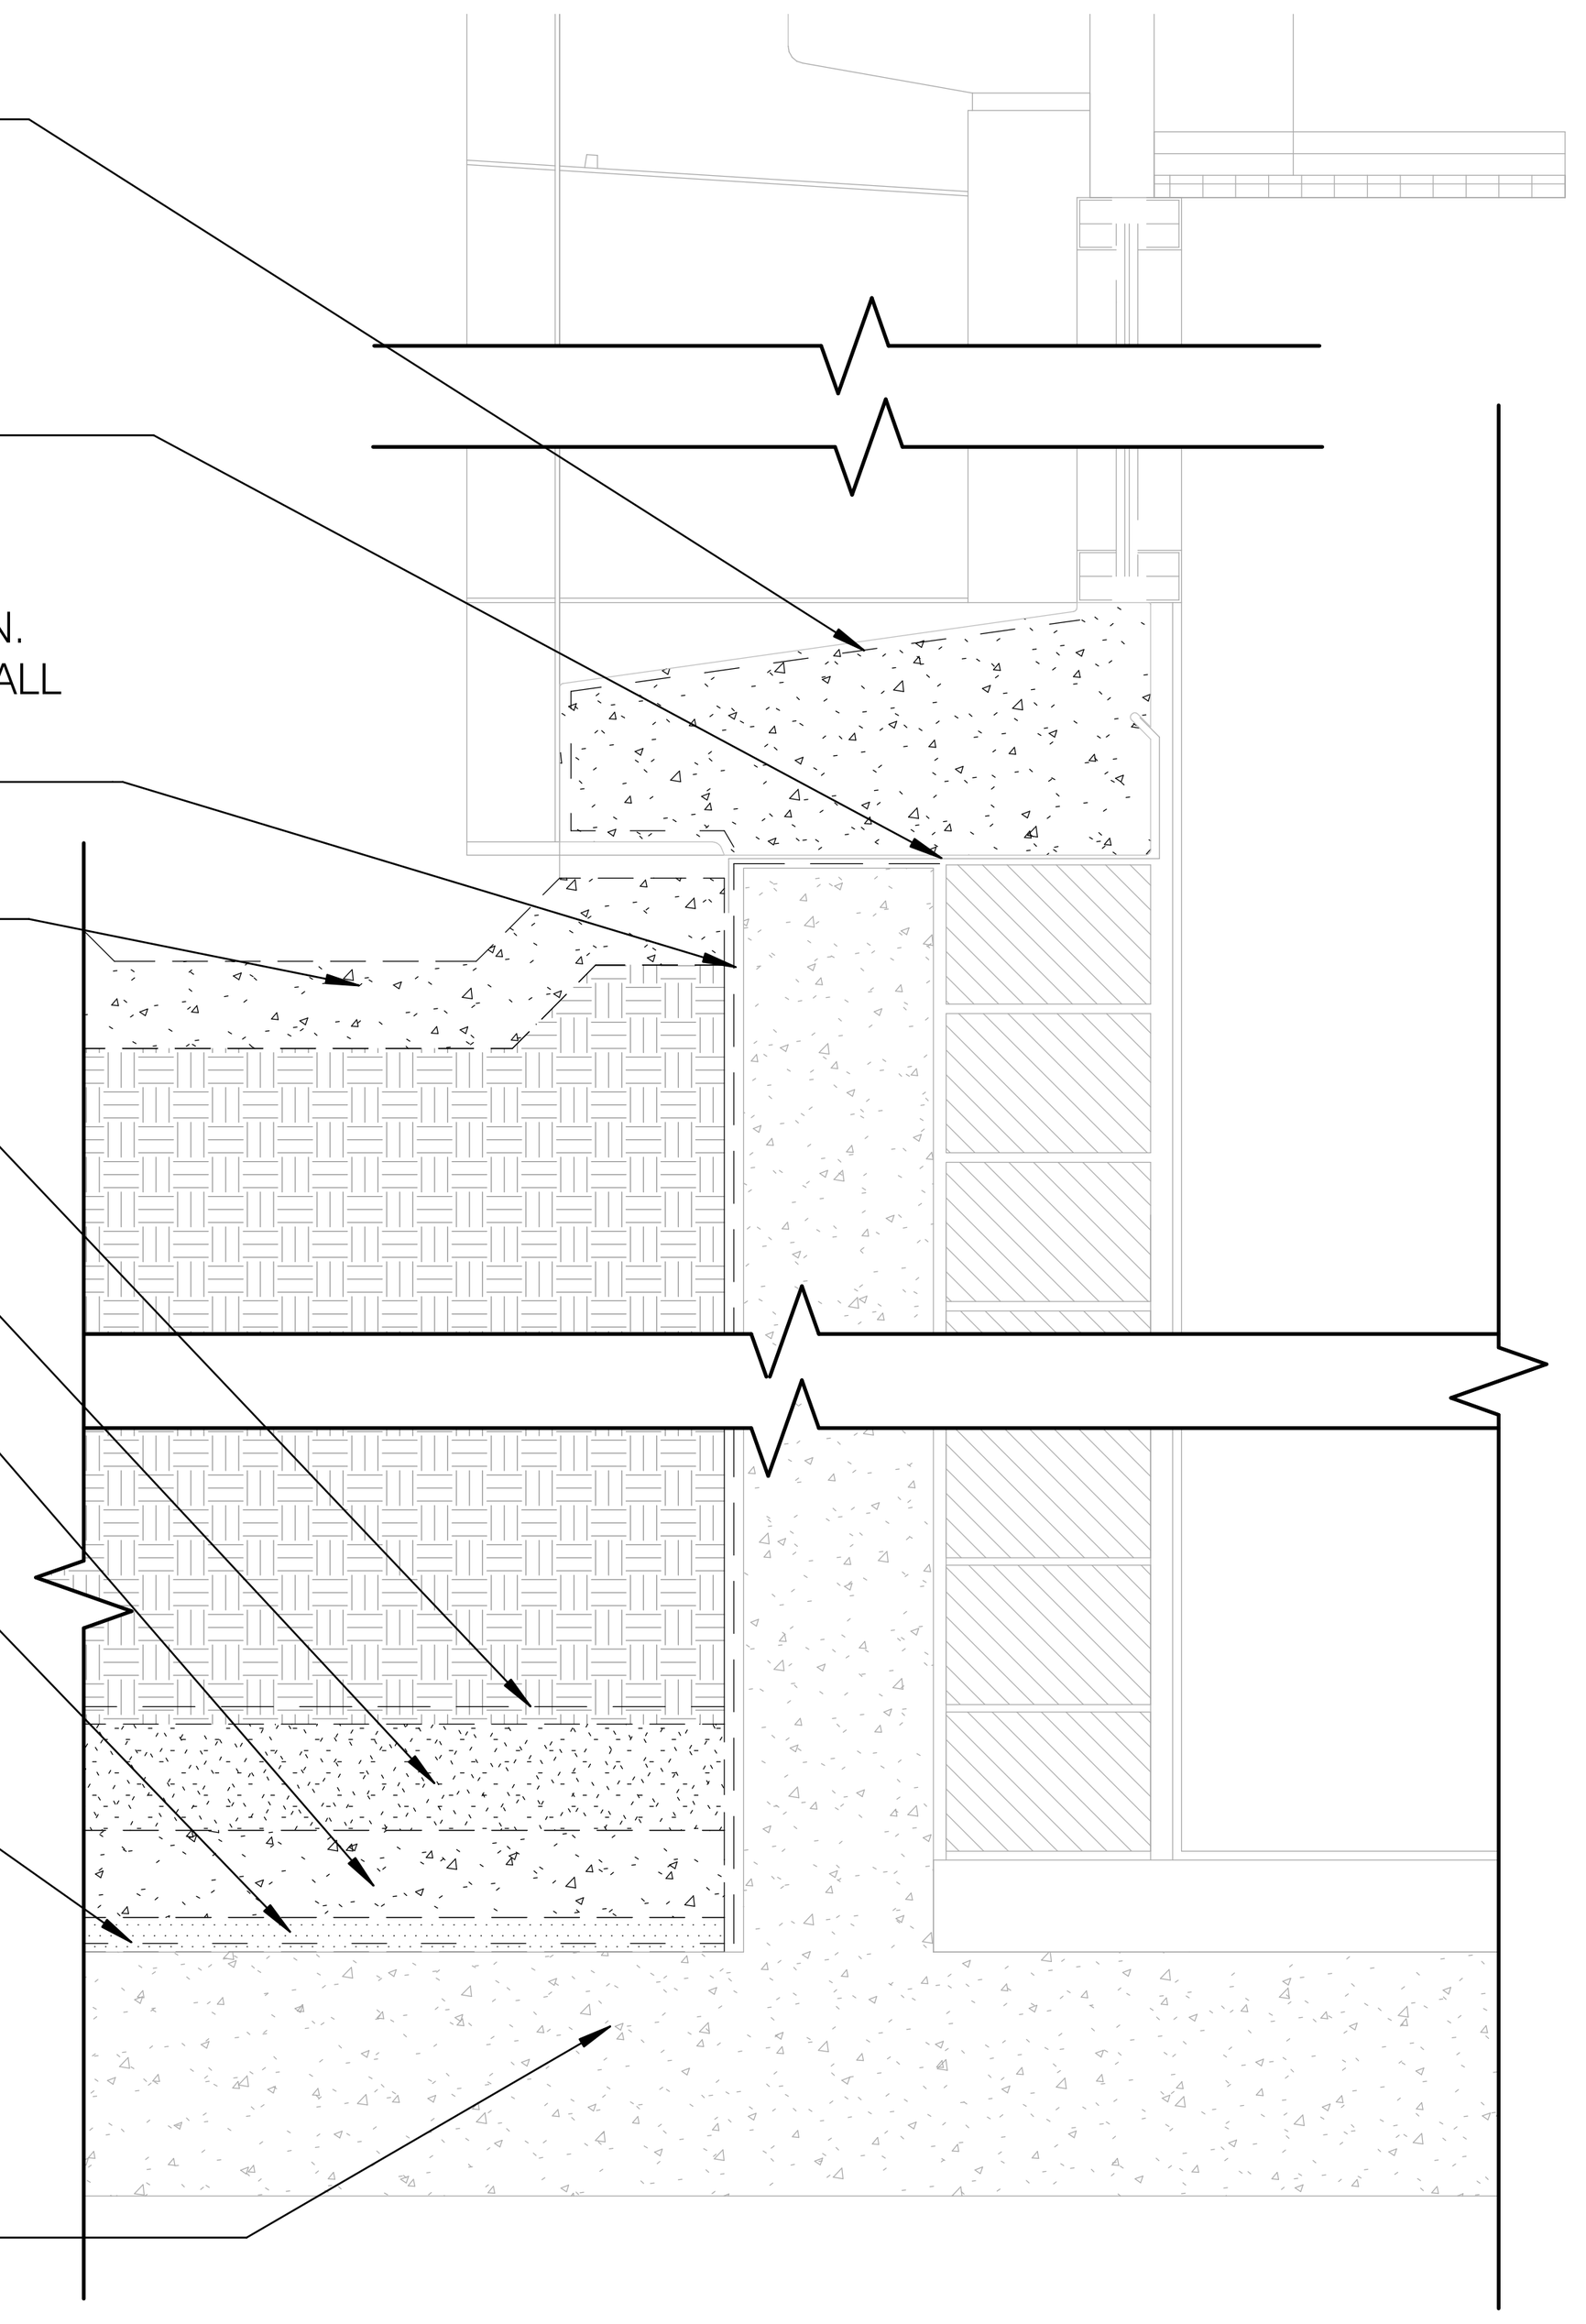

21 A-503 DEMOLITION WALL SECTION - EAST
3/4" = 1'-0"
3/4" = 1'-0" 1 0 1 2 3 SCALE FEET

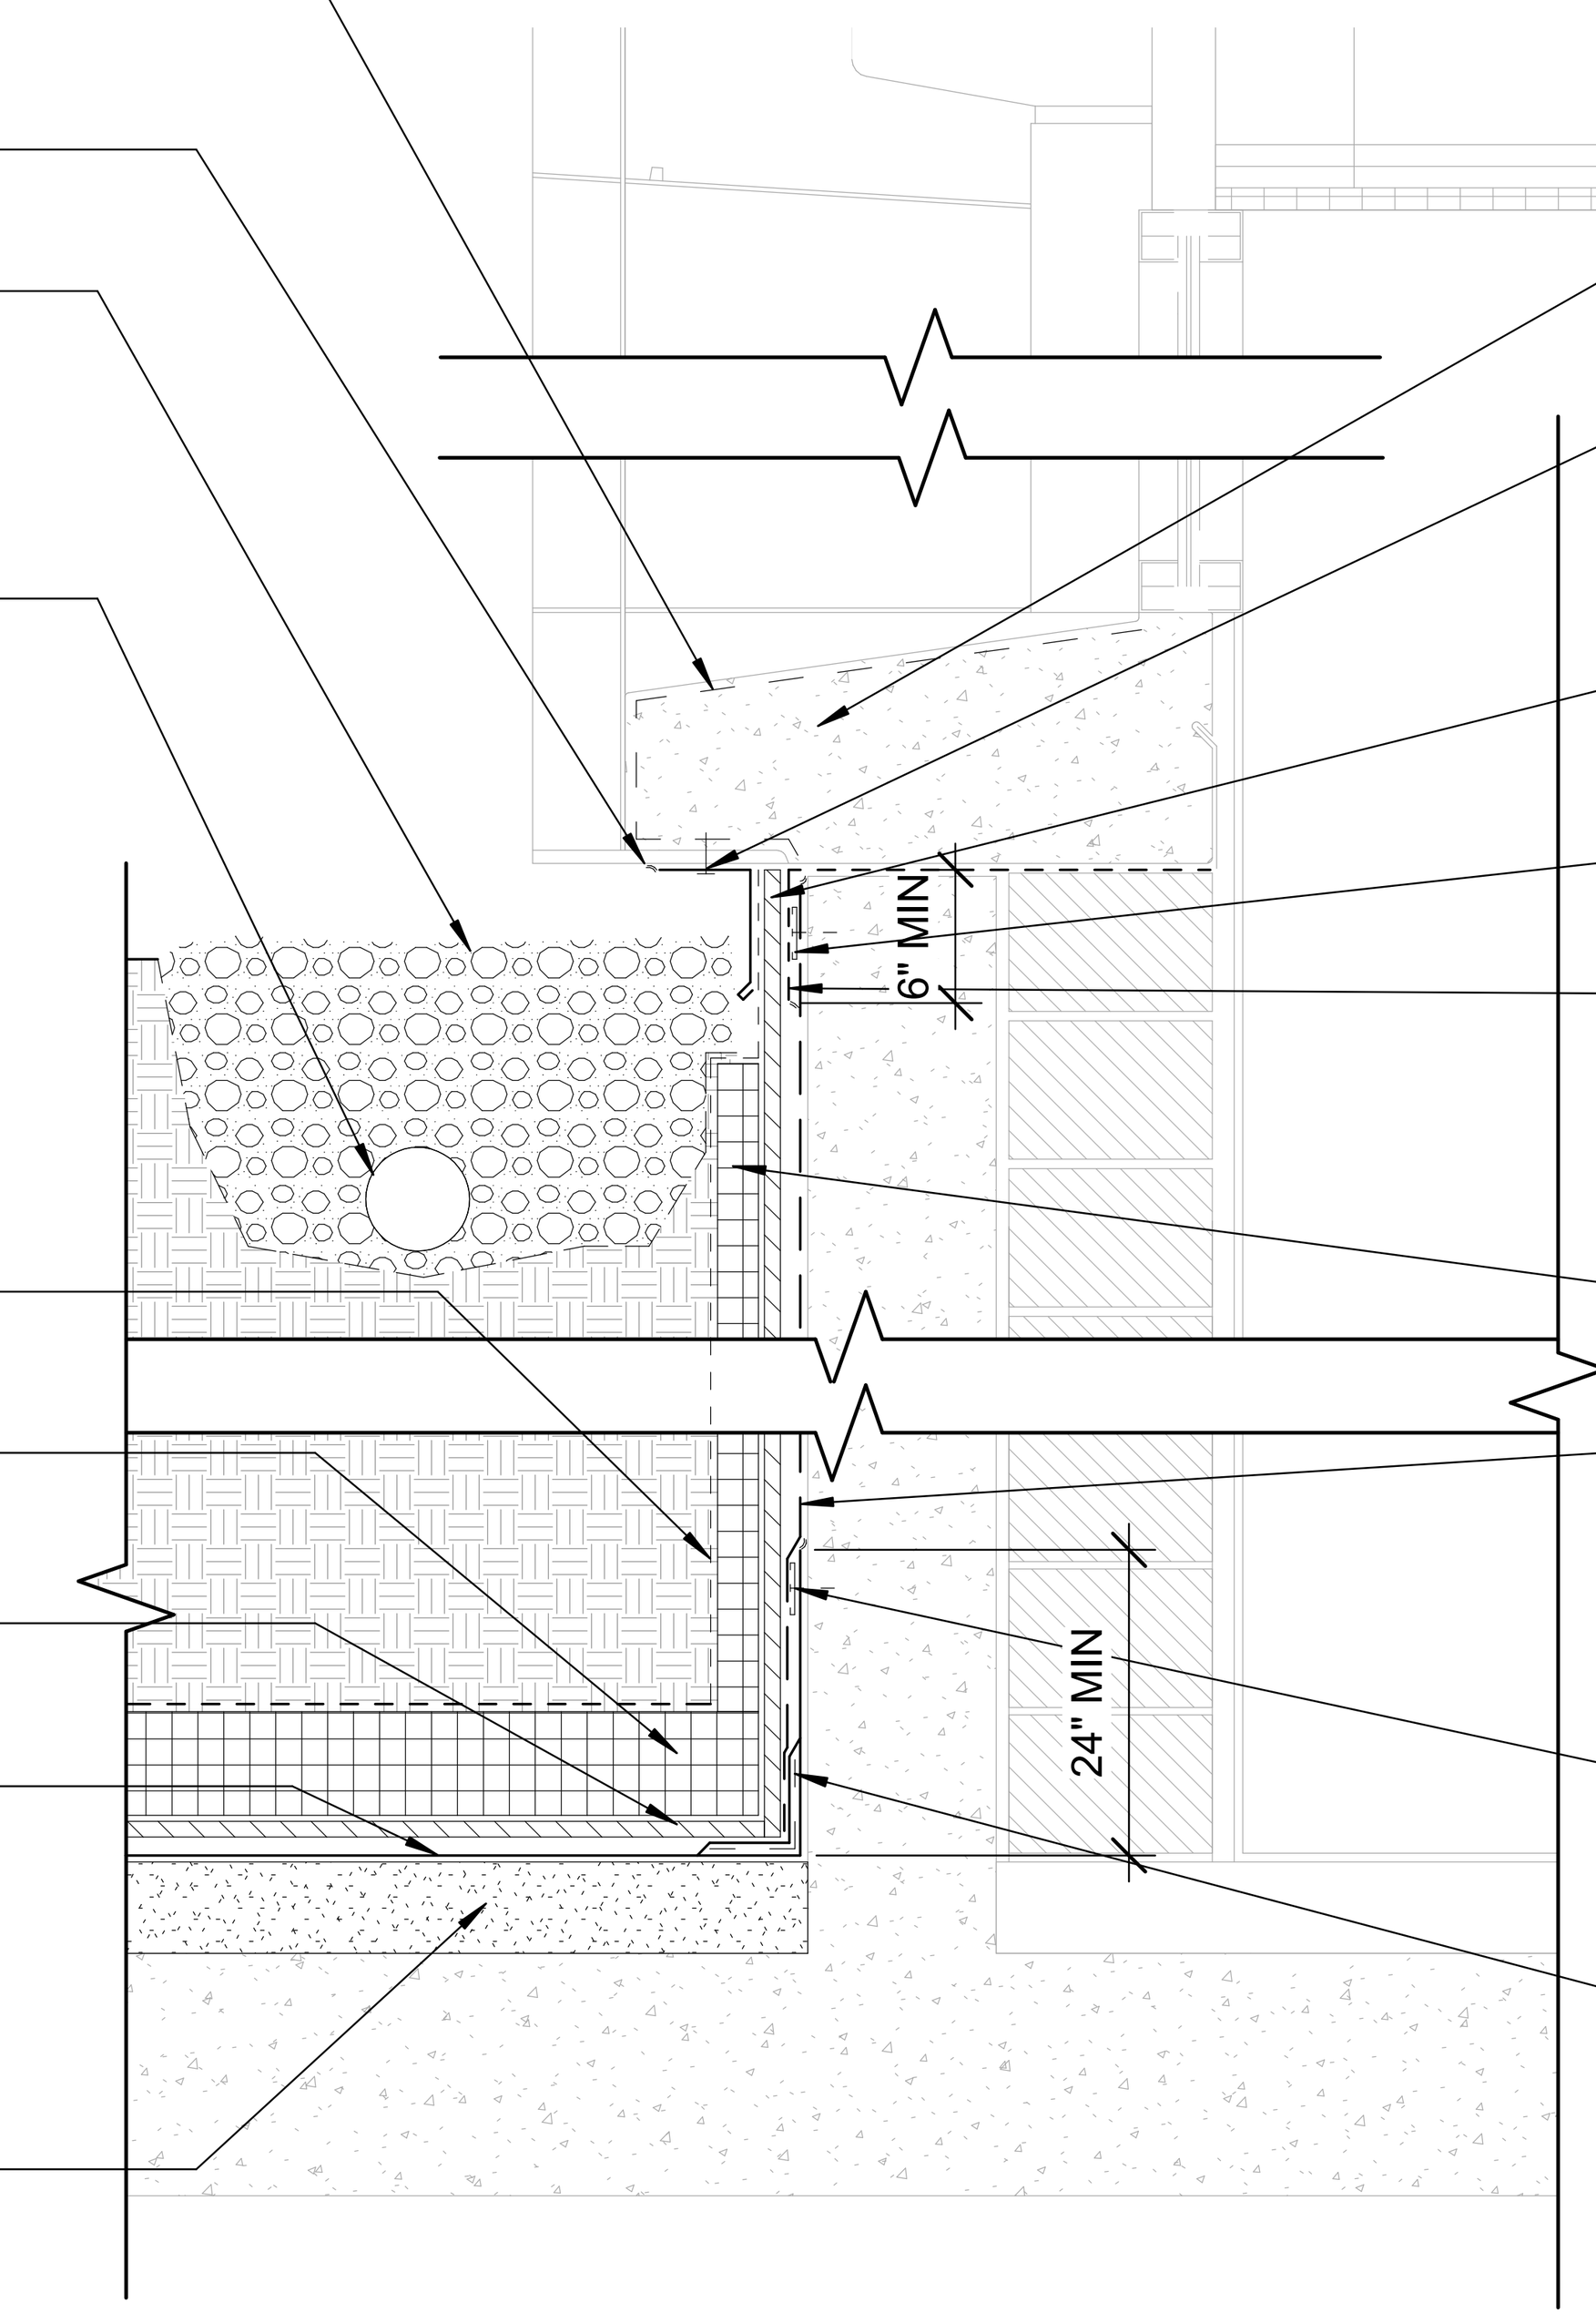

23 A-503 NEW WORK WALL SECTION - EAST
3/4" = 1'-0"
3/4" = 1'-0" 1 0 1 2 3 SCALE FEET

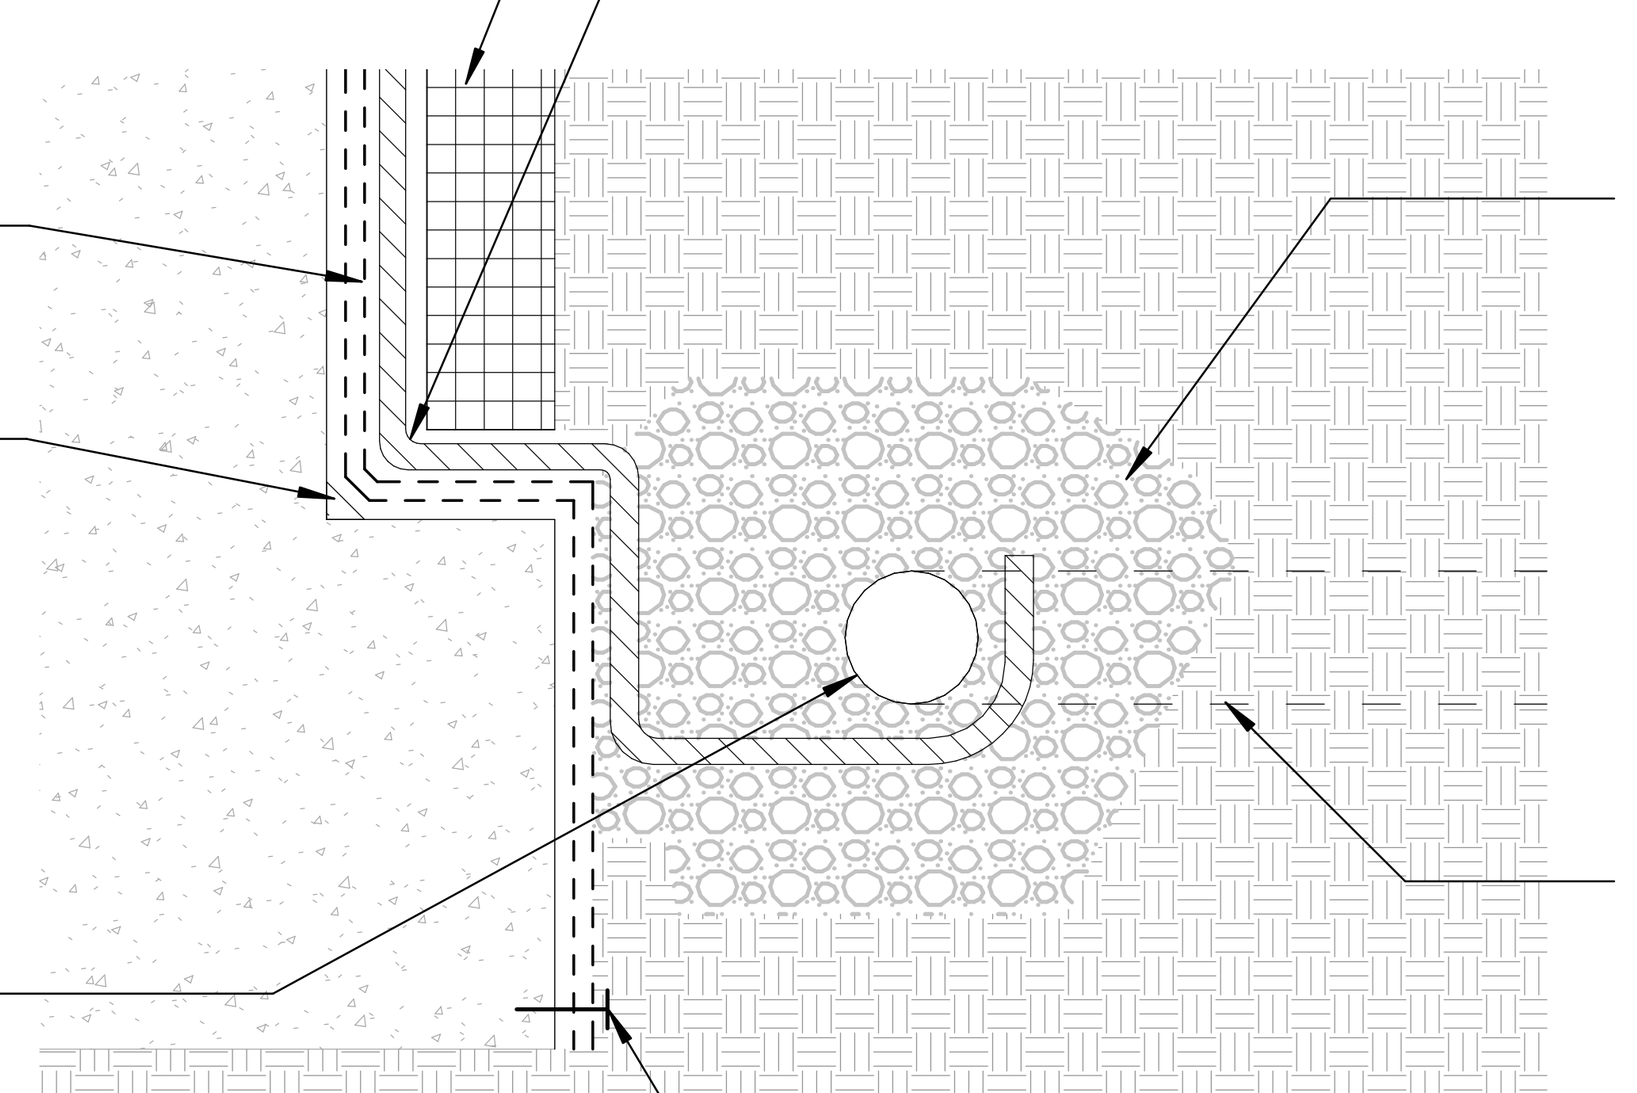

41 A-503 FOUNDATION DETAIL
1 1/2" = 1'-0"
1-1/2" = 1'-0" 12 0 12 SCALE INCH

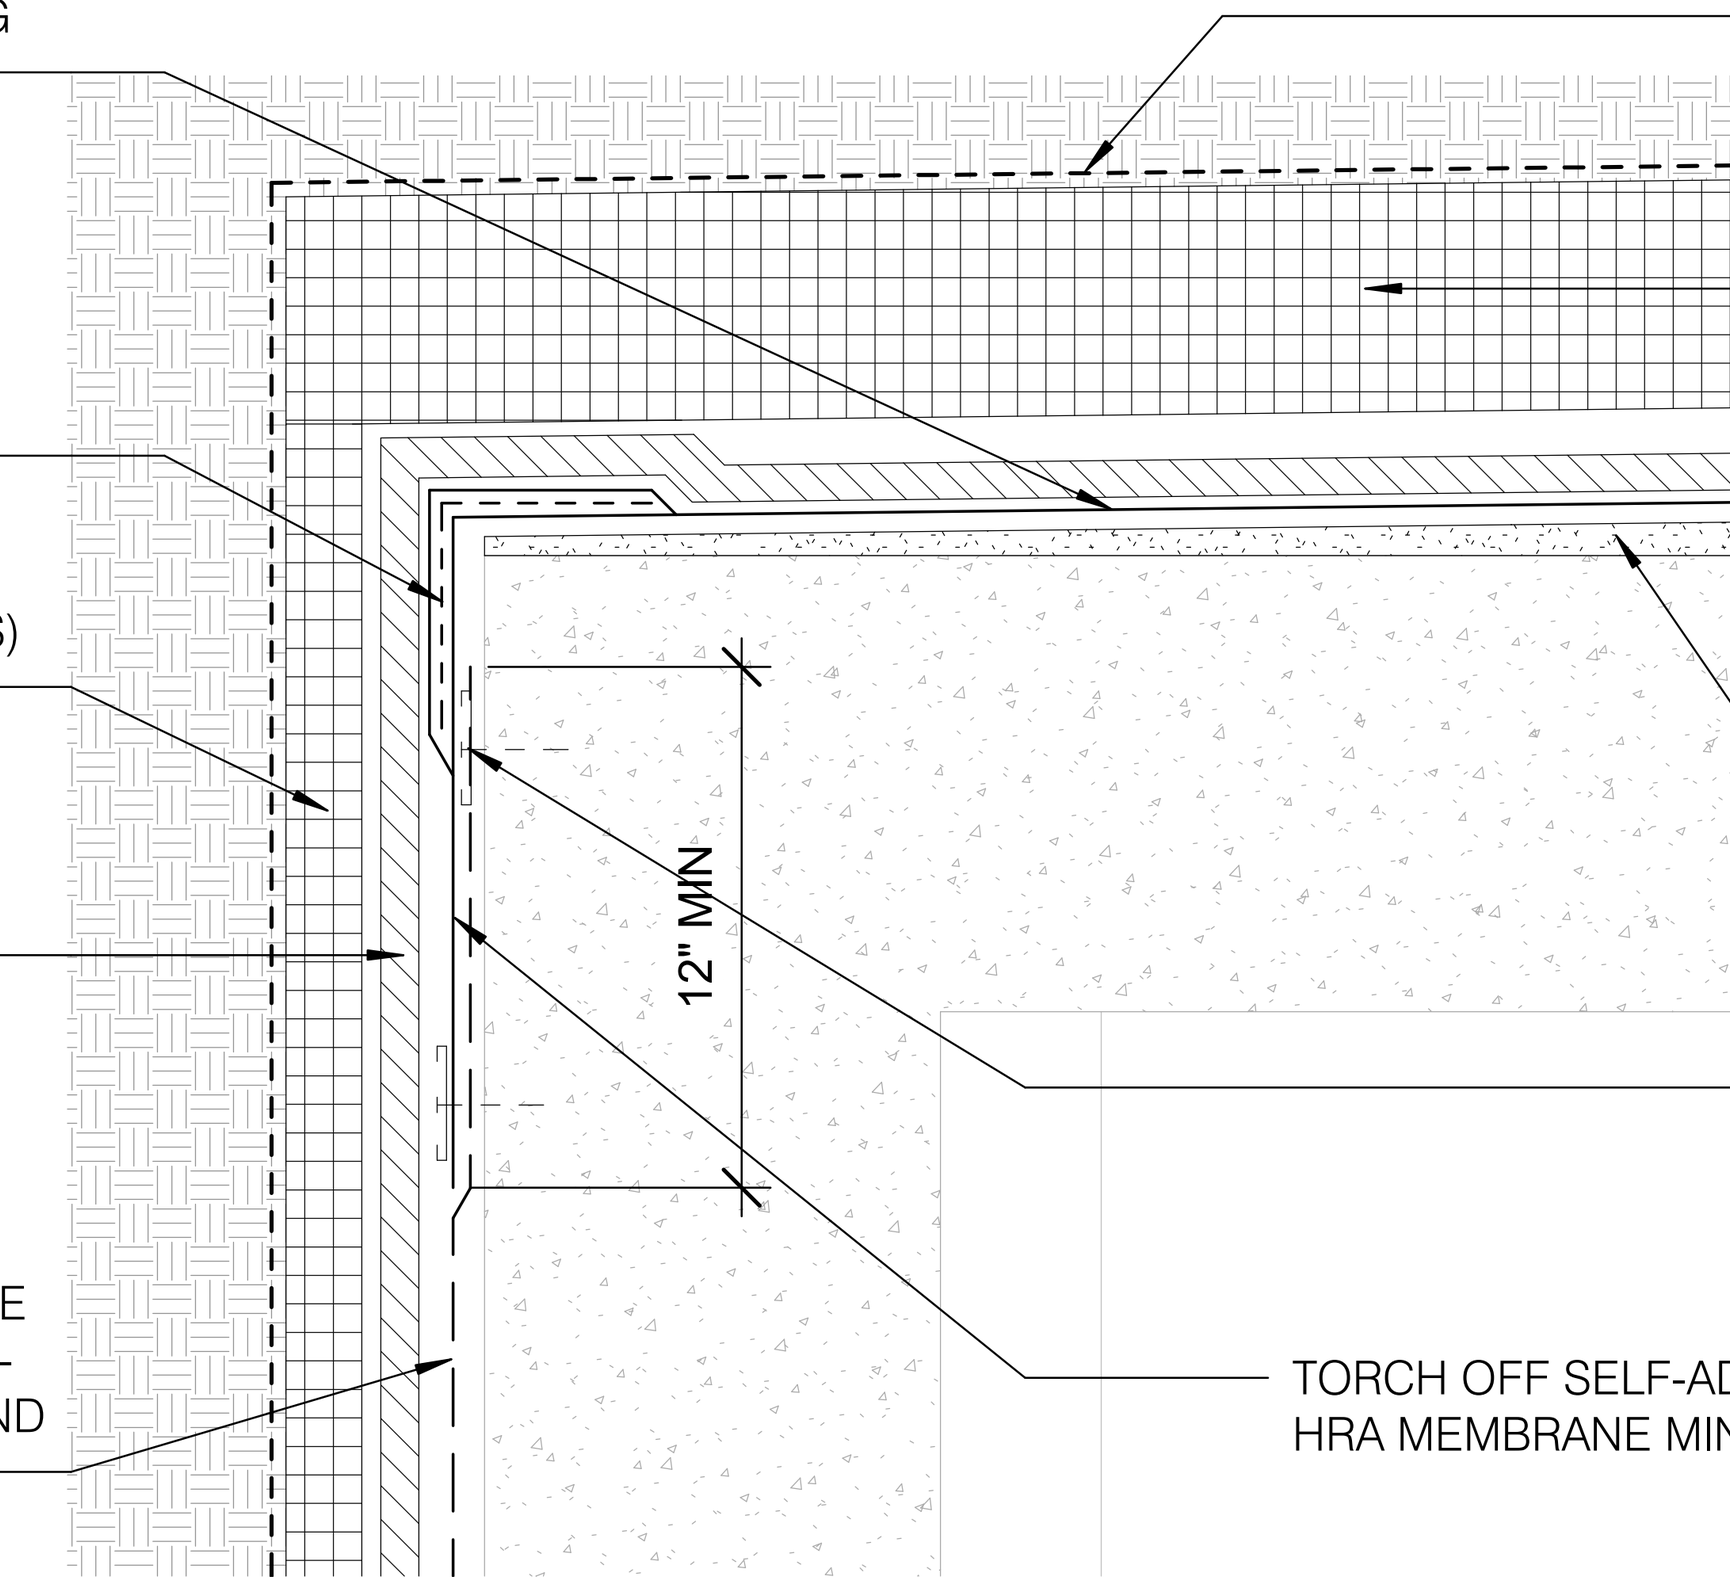

43 A-503 ROOF DETAIL AT SOUTH B3 SLAB EDGE
1 1/2" = 1'-0"
1-1/2" = 1'-0" 12 0 12 SCALE INCH

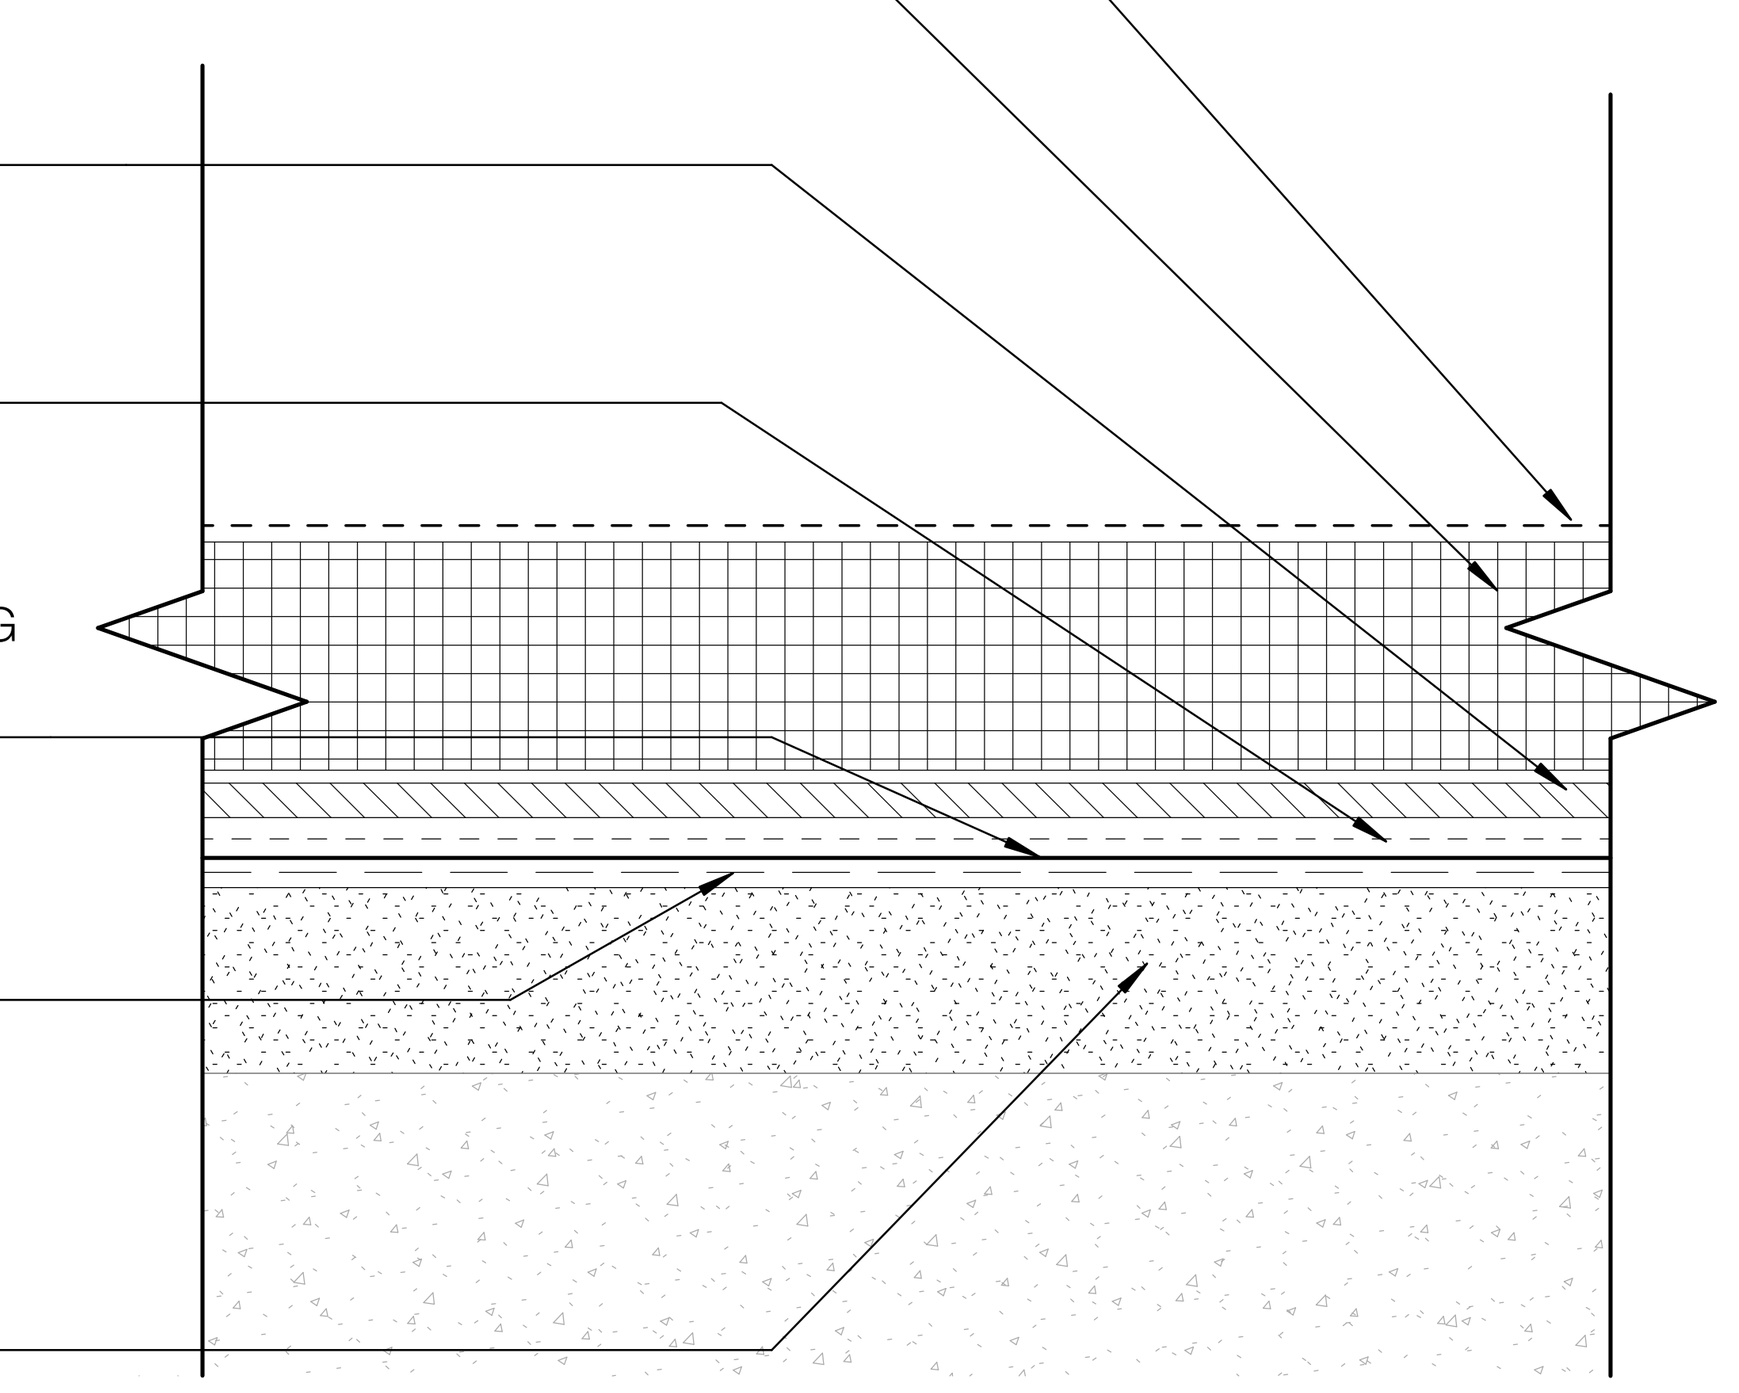

45 A-503 TYPICAL HRA WATERPROOFING ASSEMBLY
1 1/2" = 1'-0"
1-1/2" = 1'-0" 12 0 12 SCALE INCH

PROPERTY OF THE UNITED STATES GOVERNMENT
FOR OFFICIAL USE ONLY
Do not remove this notice
Properly destroy documents when no longer needed

DEPARTMENT OF HEALTH & HUMAN SERVICES USA

LSY ARCHITECTS & LABORATORY PLANNERS

James Posey Associates — Engineering Your Vision

TIMMONS GROUP

SGH

Architect and Engineer Name and LOGO

ARCHITECT: LOUVIERE, STRATTON & YOKEL, LLC
8484 GEORGIA AVE, SUITE 650
SILVER SPRING, MD 20910
(301) 588-1500

MEP ENGINEER: JAMES POSEY ASSOCIATES INC
11155 RED RUN BLVD
OWINGS MILLS, MD 21117
(410) 265-6100

CIVIL ENGINEER: TIMMONS GROUP
2300 N ST NW SUITE 410B
WASHINGTON, DC 20037
(202) 919-2245

STRUCTURAL ENGINEER: SIMPSON GUMPERTZ & HEGER
1625 EYE STREET NW SUITE 900
WASHINGTON, DC 20006
(202) 239-4199

SEAL

REVISIONS

MARK	DATE	DESCRIPTION

CONTRACTORS

A/E CON. NO.	
A/E TASK NO.	
CONS. CONTR.	
CONS. WORK	
PRIME A/E	LSY ARCHITECTS
SUB A/E	JPA / TIMMONS / SGH
CONSTR. CON.	

BUILDING

FACILITY CODE	
BUILDING NO.	BUILDING 31B
NAME	NIH
STREET	9000 ROCKVILLE PIKE
CITY	BETHESDA
STATE/ZIP	MD / 20892
OTHER BUILDING NO.	

PROJECT

PROJ. NO.	24024
PROJ. OFFICER	MOHAMMED BISWAS
PROJ. MGR.	G.LEE
SUBMISSION	IFC SUBMISSION
SUB. DATE	08/26/25
WRK REQ. NO.	C116635

N

PROJECT TITLE: BUILDING 31B NEW ROOFING AND WP OF STRUCTURE BELOW GRADE

DRAWING TITLE: DEMOLITION AND NEW WORK DETAILS

NIH National Institutes of Health
OFFICE OF RESEARCH FACILITIES
DIVISION OF FACILITIES PLANNING

DESIGNED BY	G.L.
DRAWN BY	X.L.
CHECKED BY	K.C.
DATE	08/26/25
FILE NAME	

DRAWING
A-503

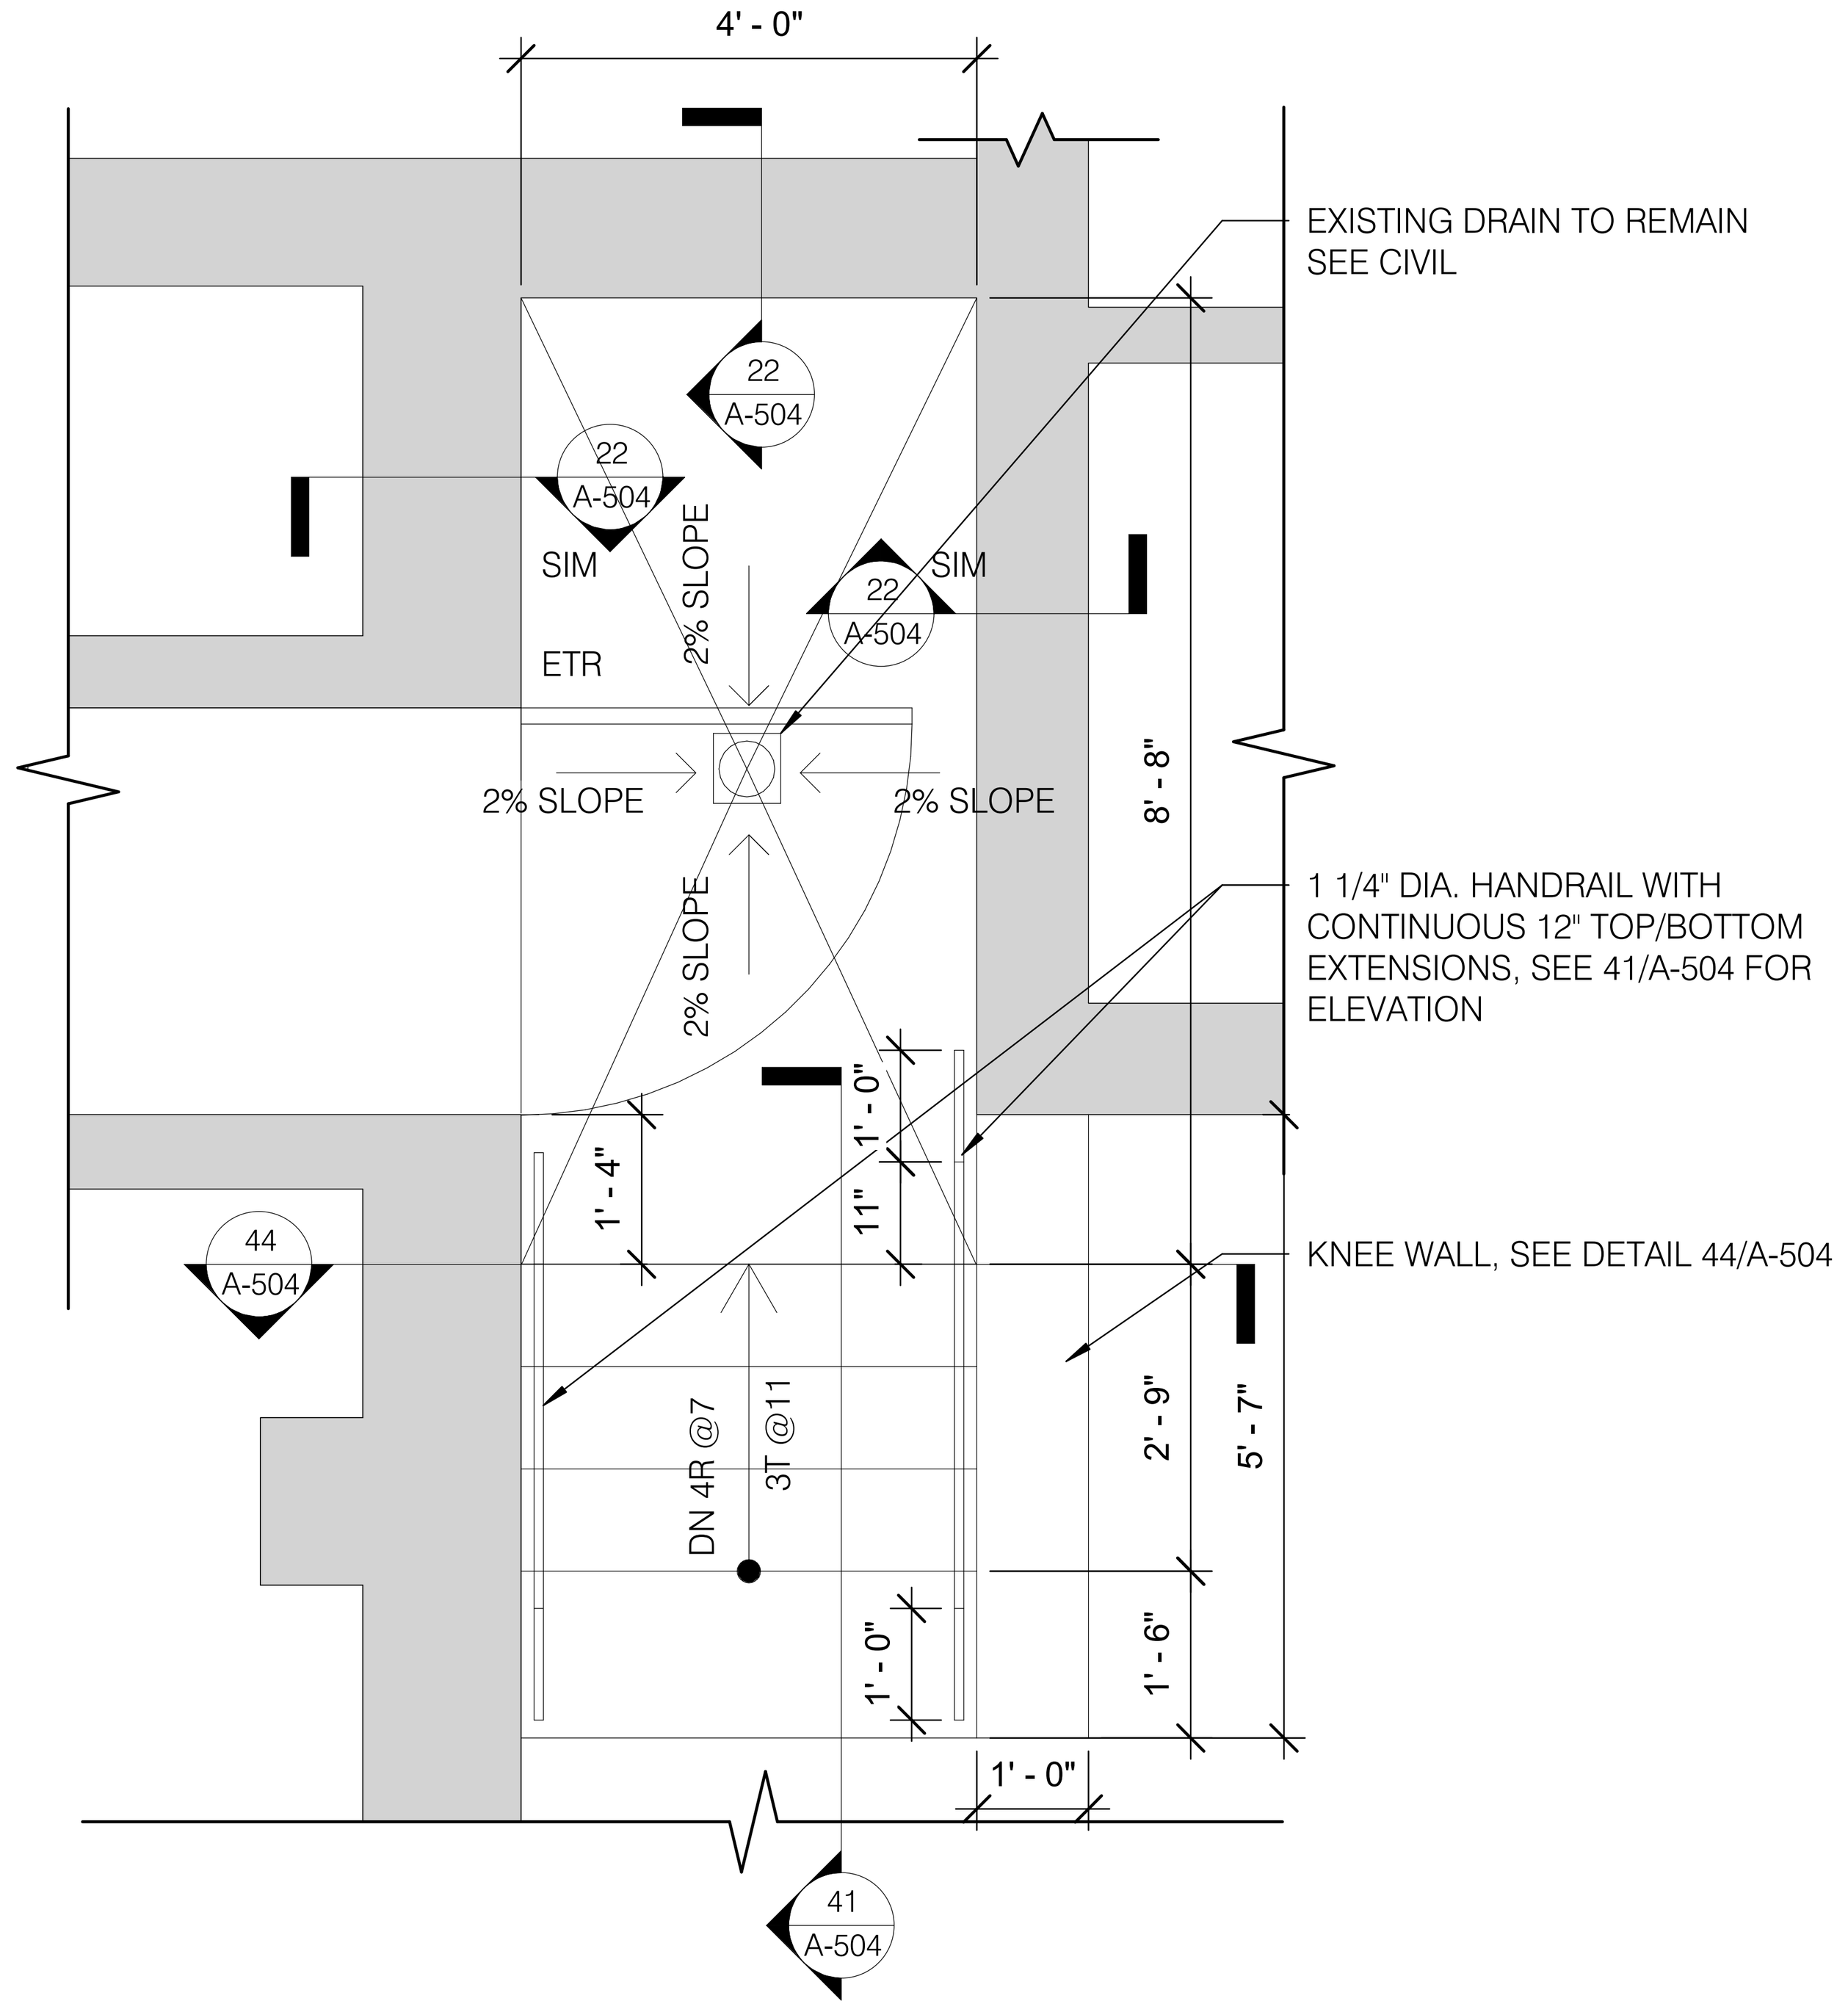

21 A-504
EXTERIOR STAIR PLAN DETAIL
1/2" = 1'-0"

1/2" = 1'-0" SCALE FEET

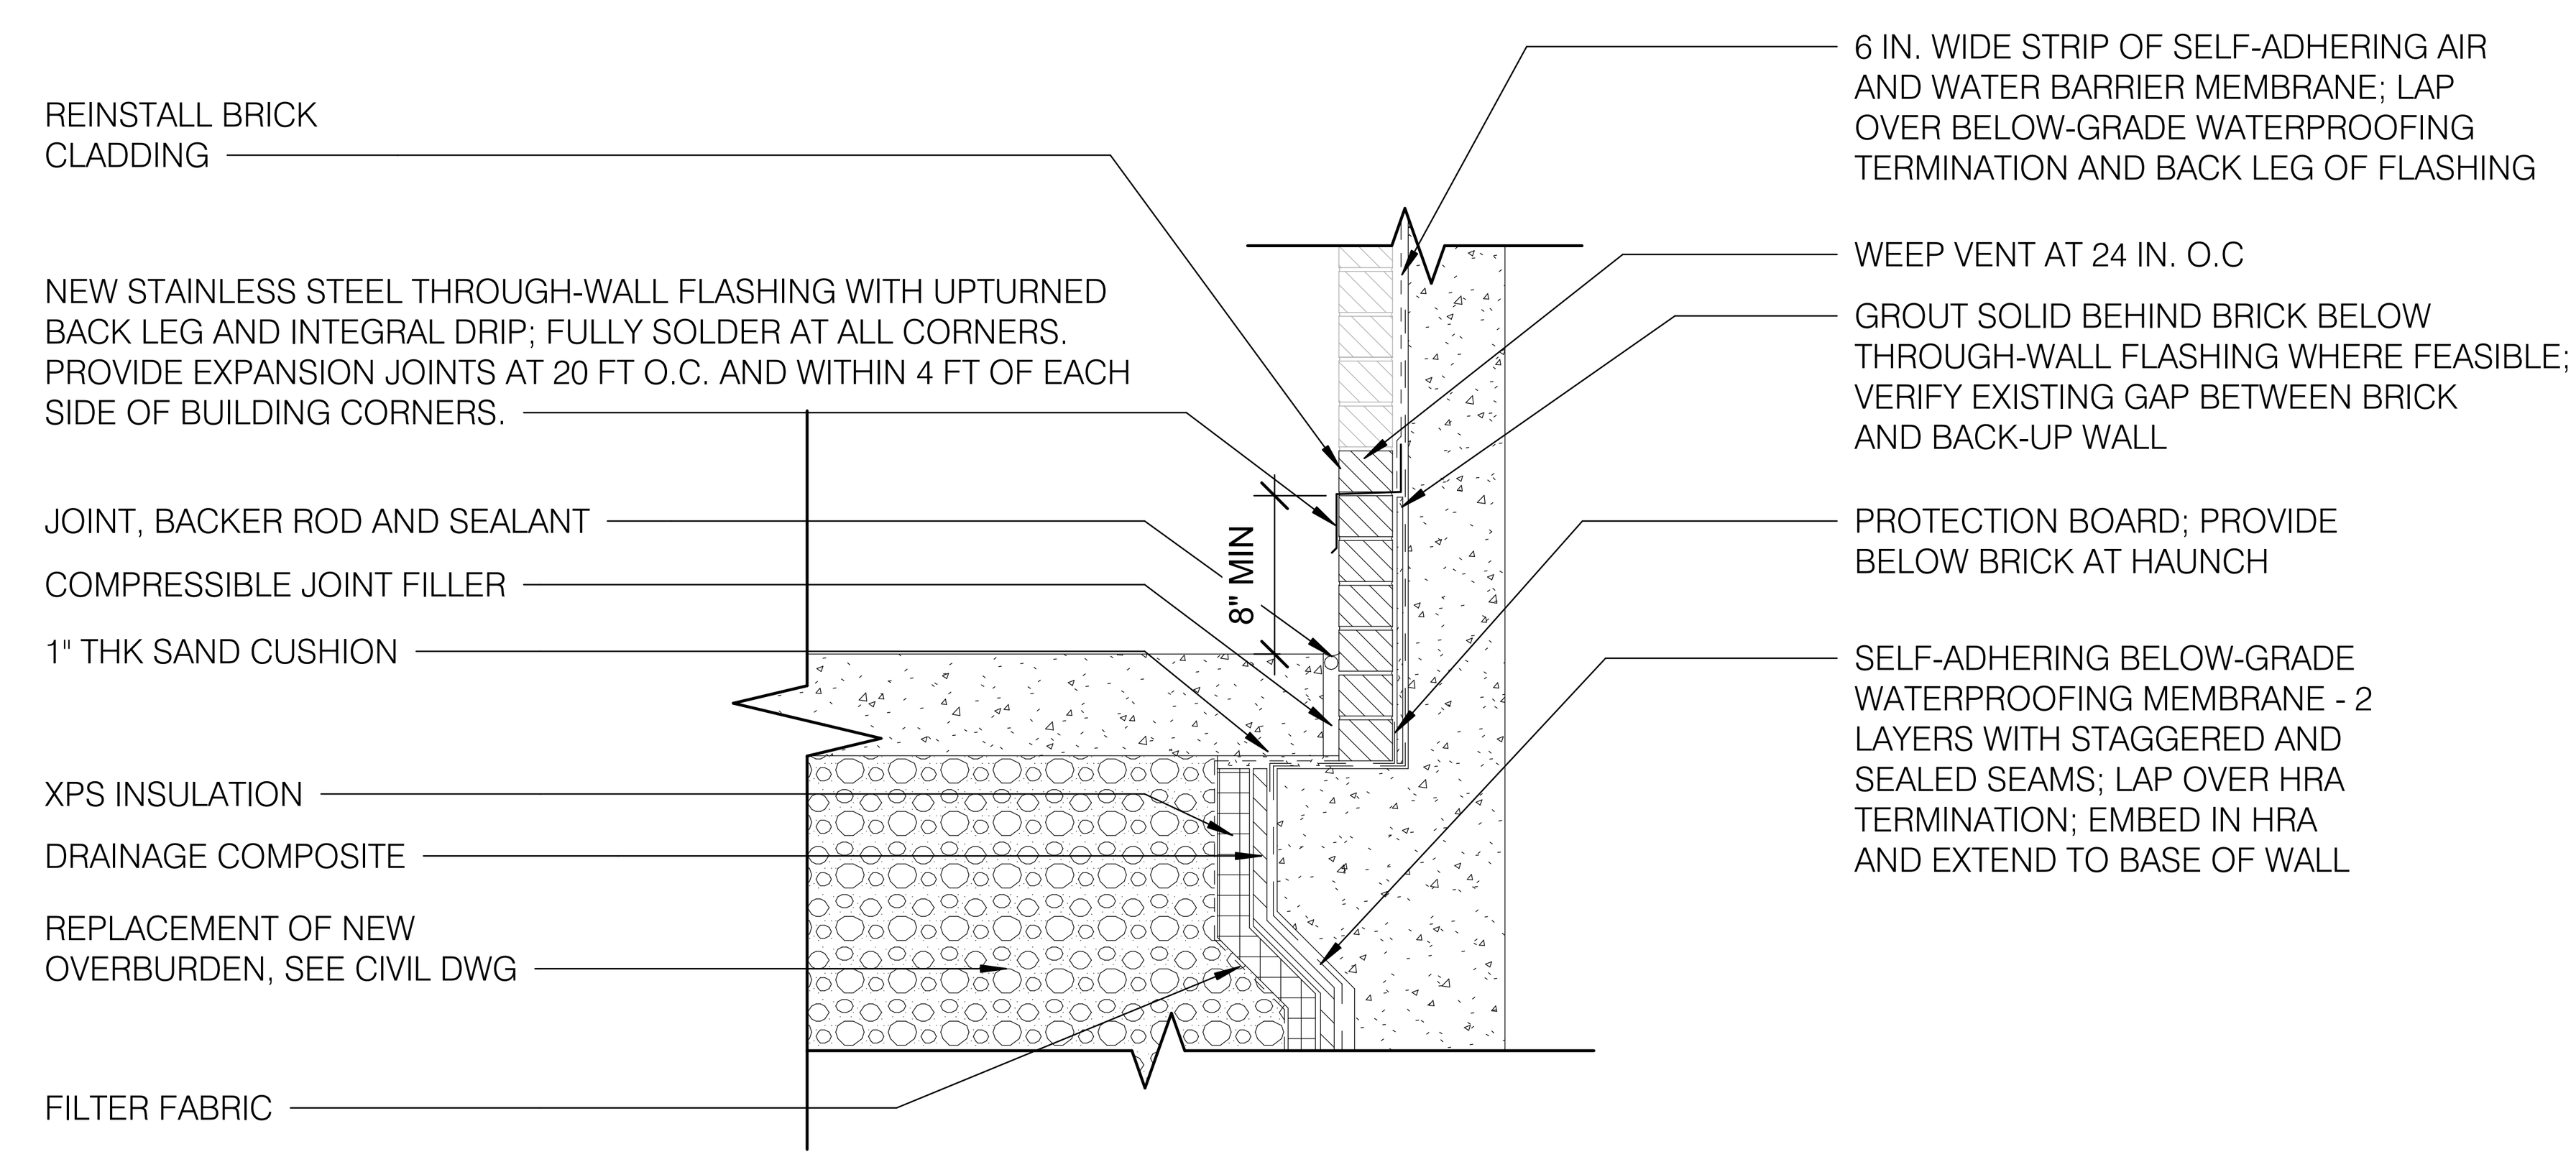

22 A-504
NEW WORK WALL SECTION - STAIR
3/4" = 1'-0"

3/4" = 1'-0" SCALE FEET

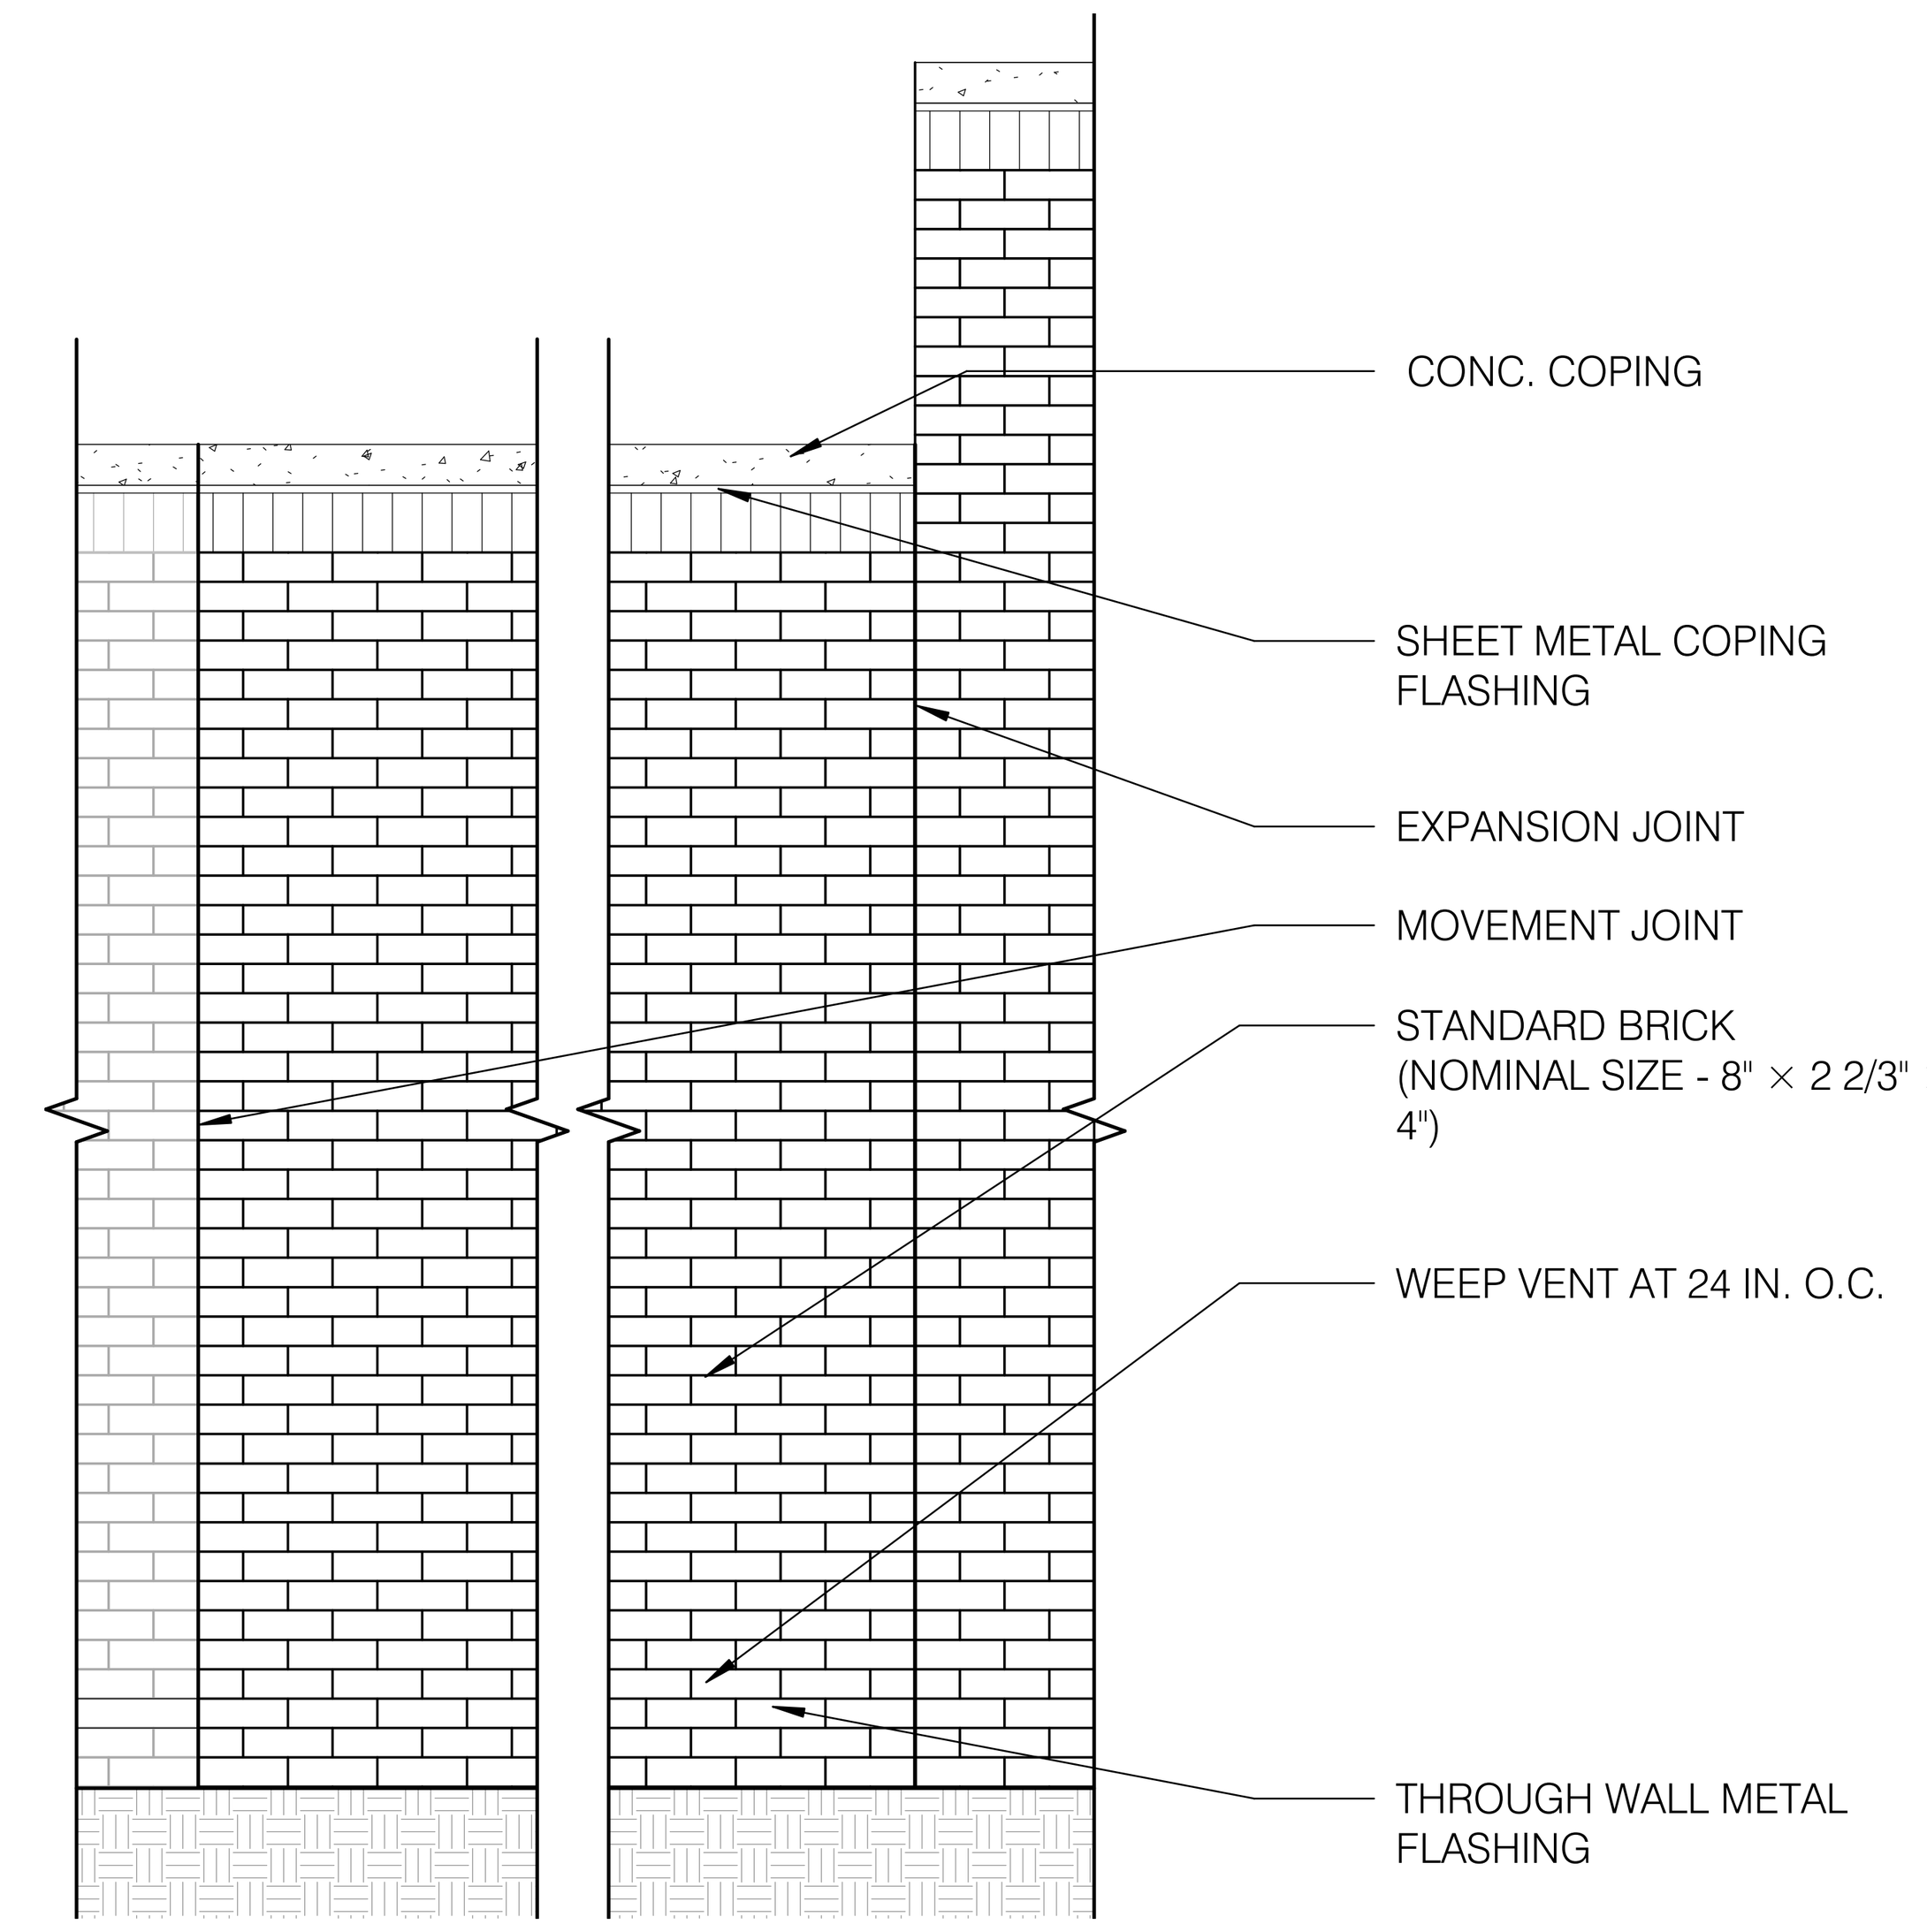

24 A-504
BRICK WALL ELEVATION
1/2" = 1'-0"

1/2" = 1'-0" SCALE FEET

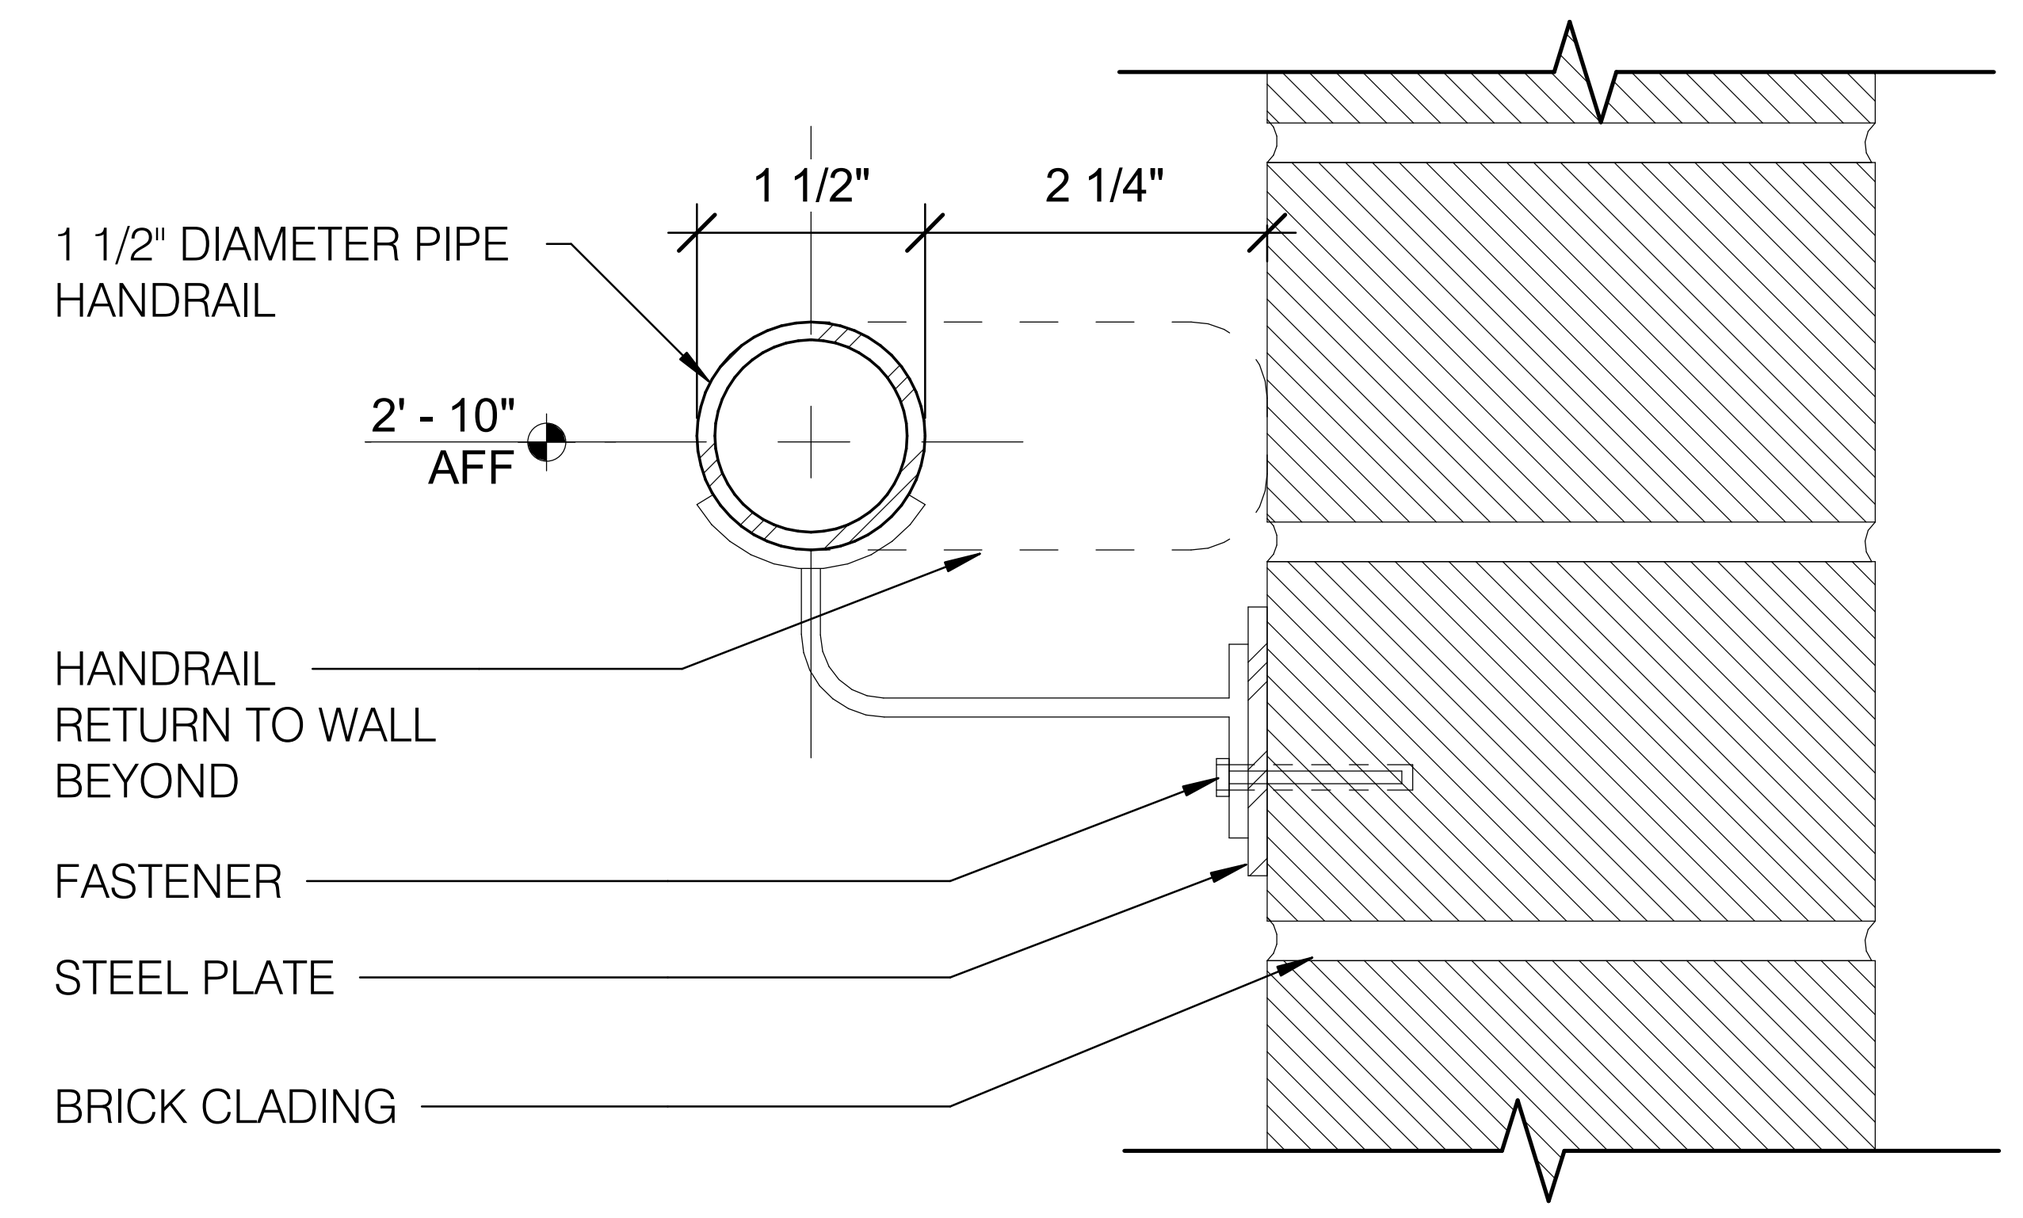

32 A-504
METAL STAIR HANDRAIL W/ WALL DETAIL
6" = 1'-0"

STRUCTURAL NOTES:

SUBMIT SHOP DRAWINGS, SIGNED AND SEALED BY A LICENSED THIRD-PARTY STRUCTURAL ENGINEER, FOR REVIEW AND APPROVAL BY THE NIH AND THE STRUCTURAL ENGINEER OF RECORD. SHOP DRAWINGS SHALL DEMONSTRATE COMPLIANCE WITH STRUCTURAL INTEGRITY REQUIREMENTS PRIOR TO COMMENCEMENT OF INSTALLATION.

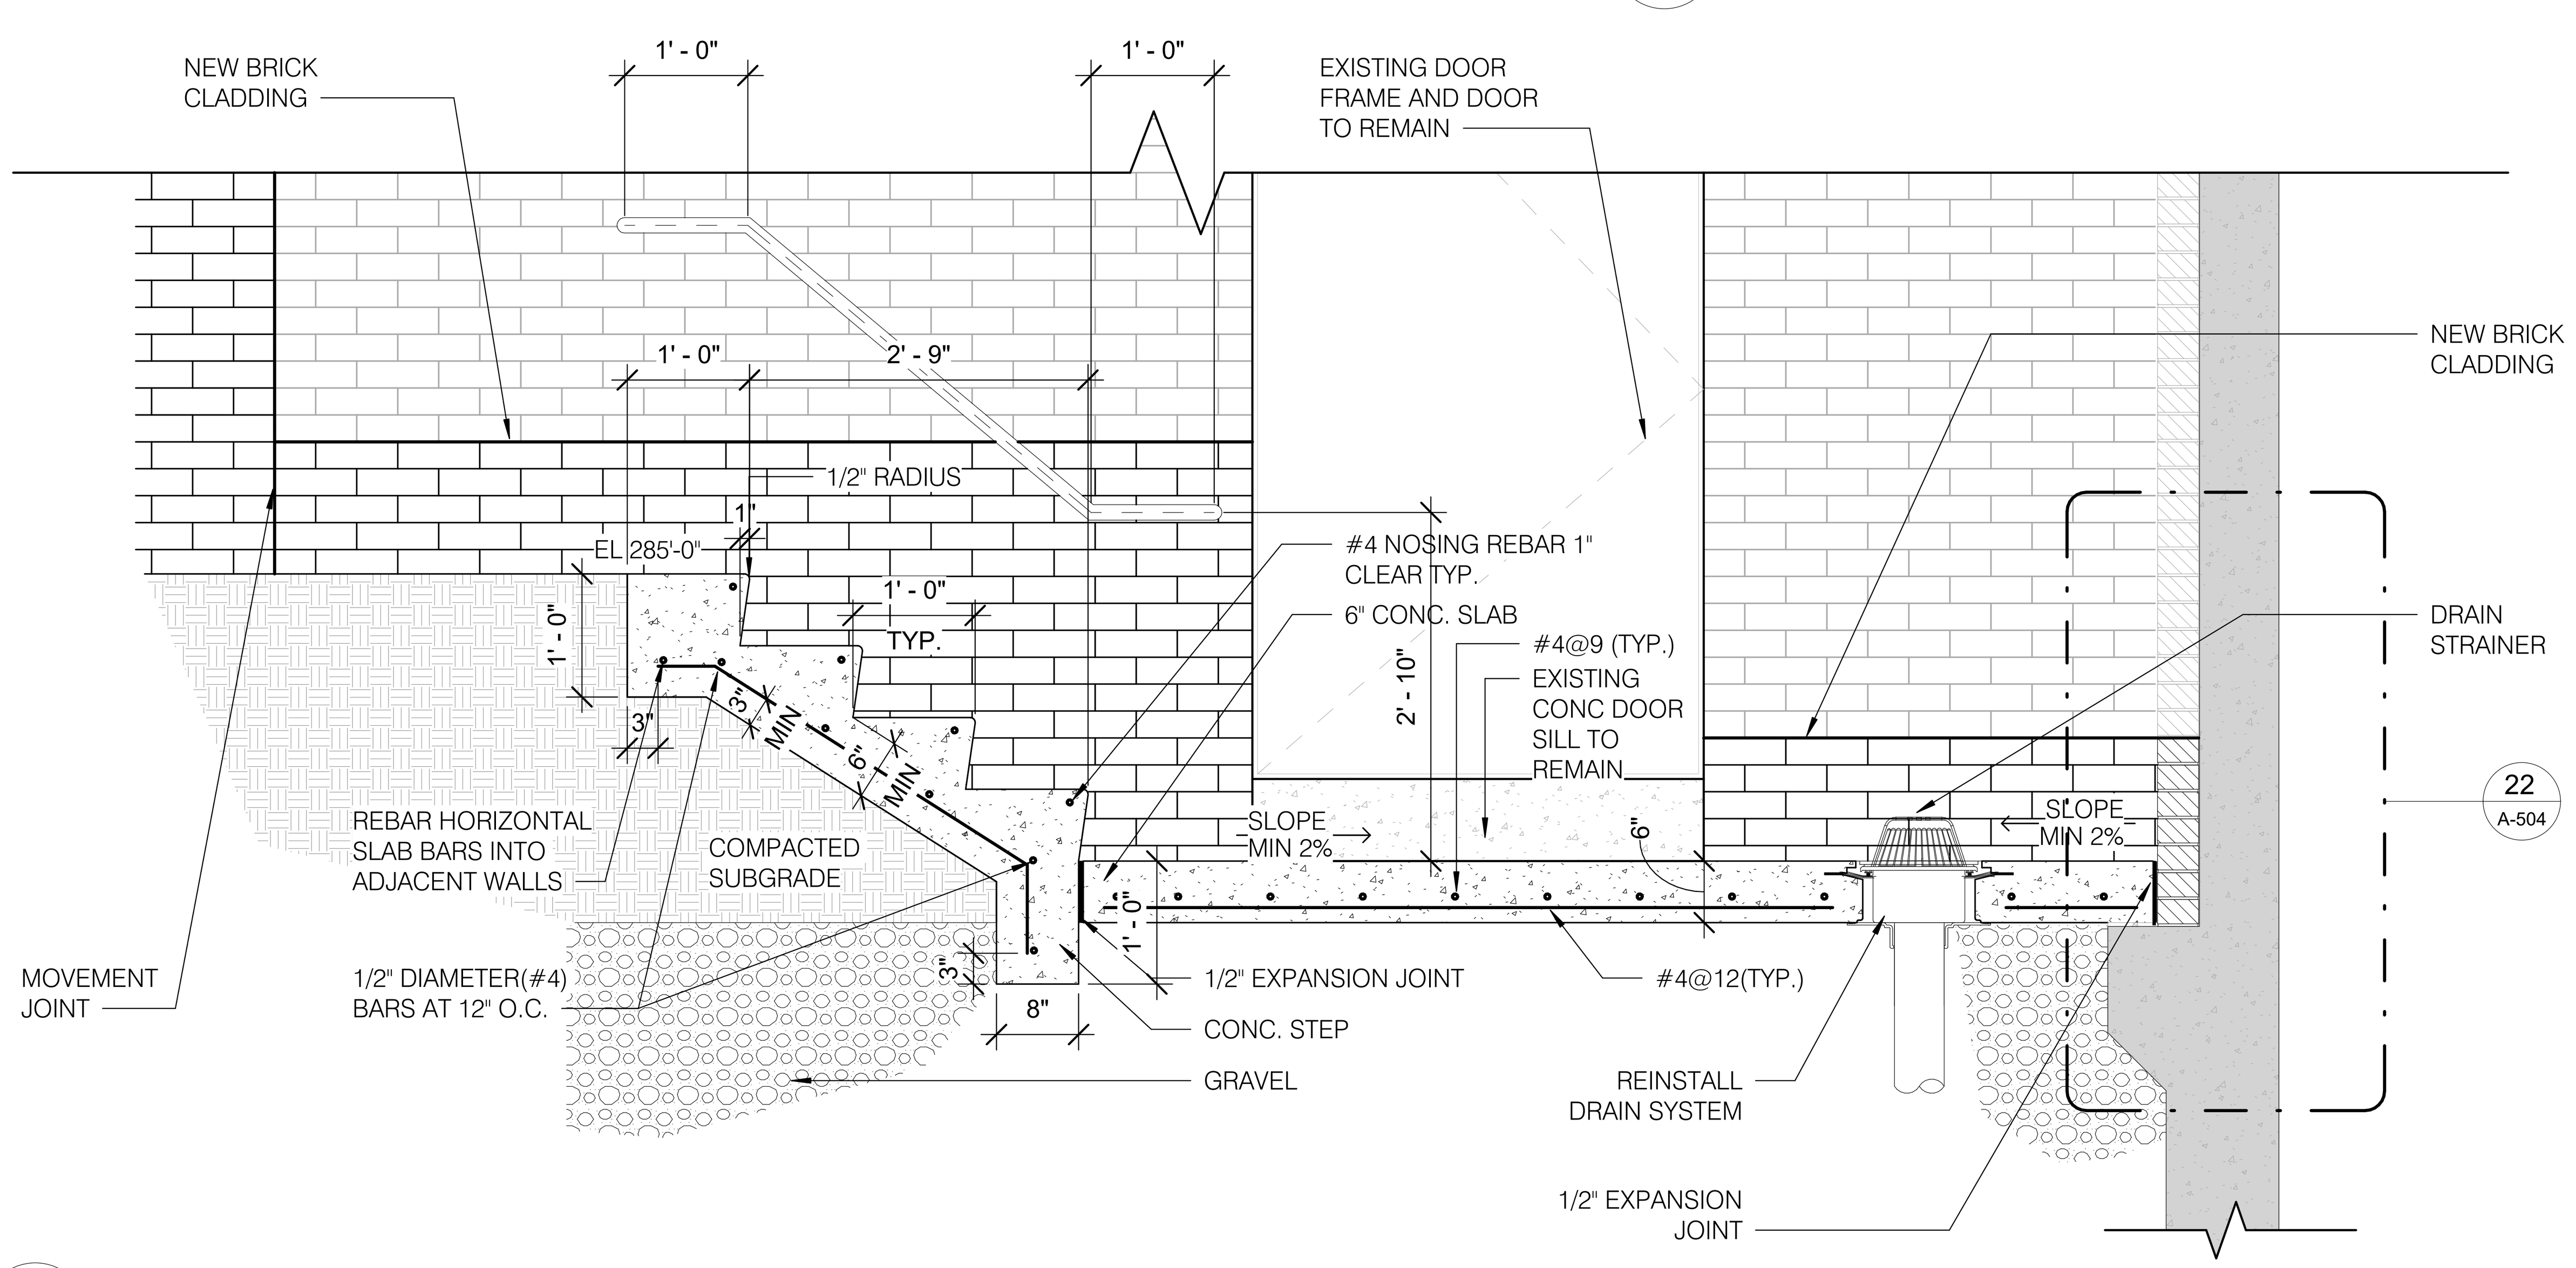

41 A-504
EXTERIOR STAIR SECTION DETAIL - A
3/4" = 1'-0"

3/4" = 1'-0" SCALE FEET

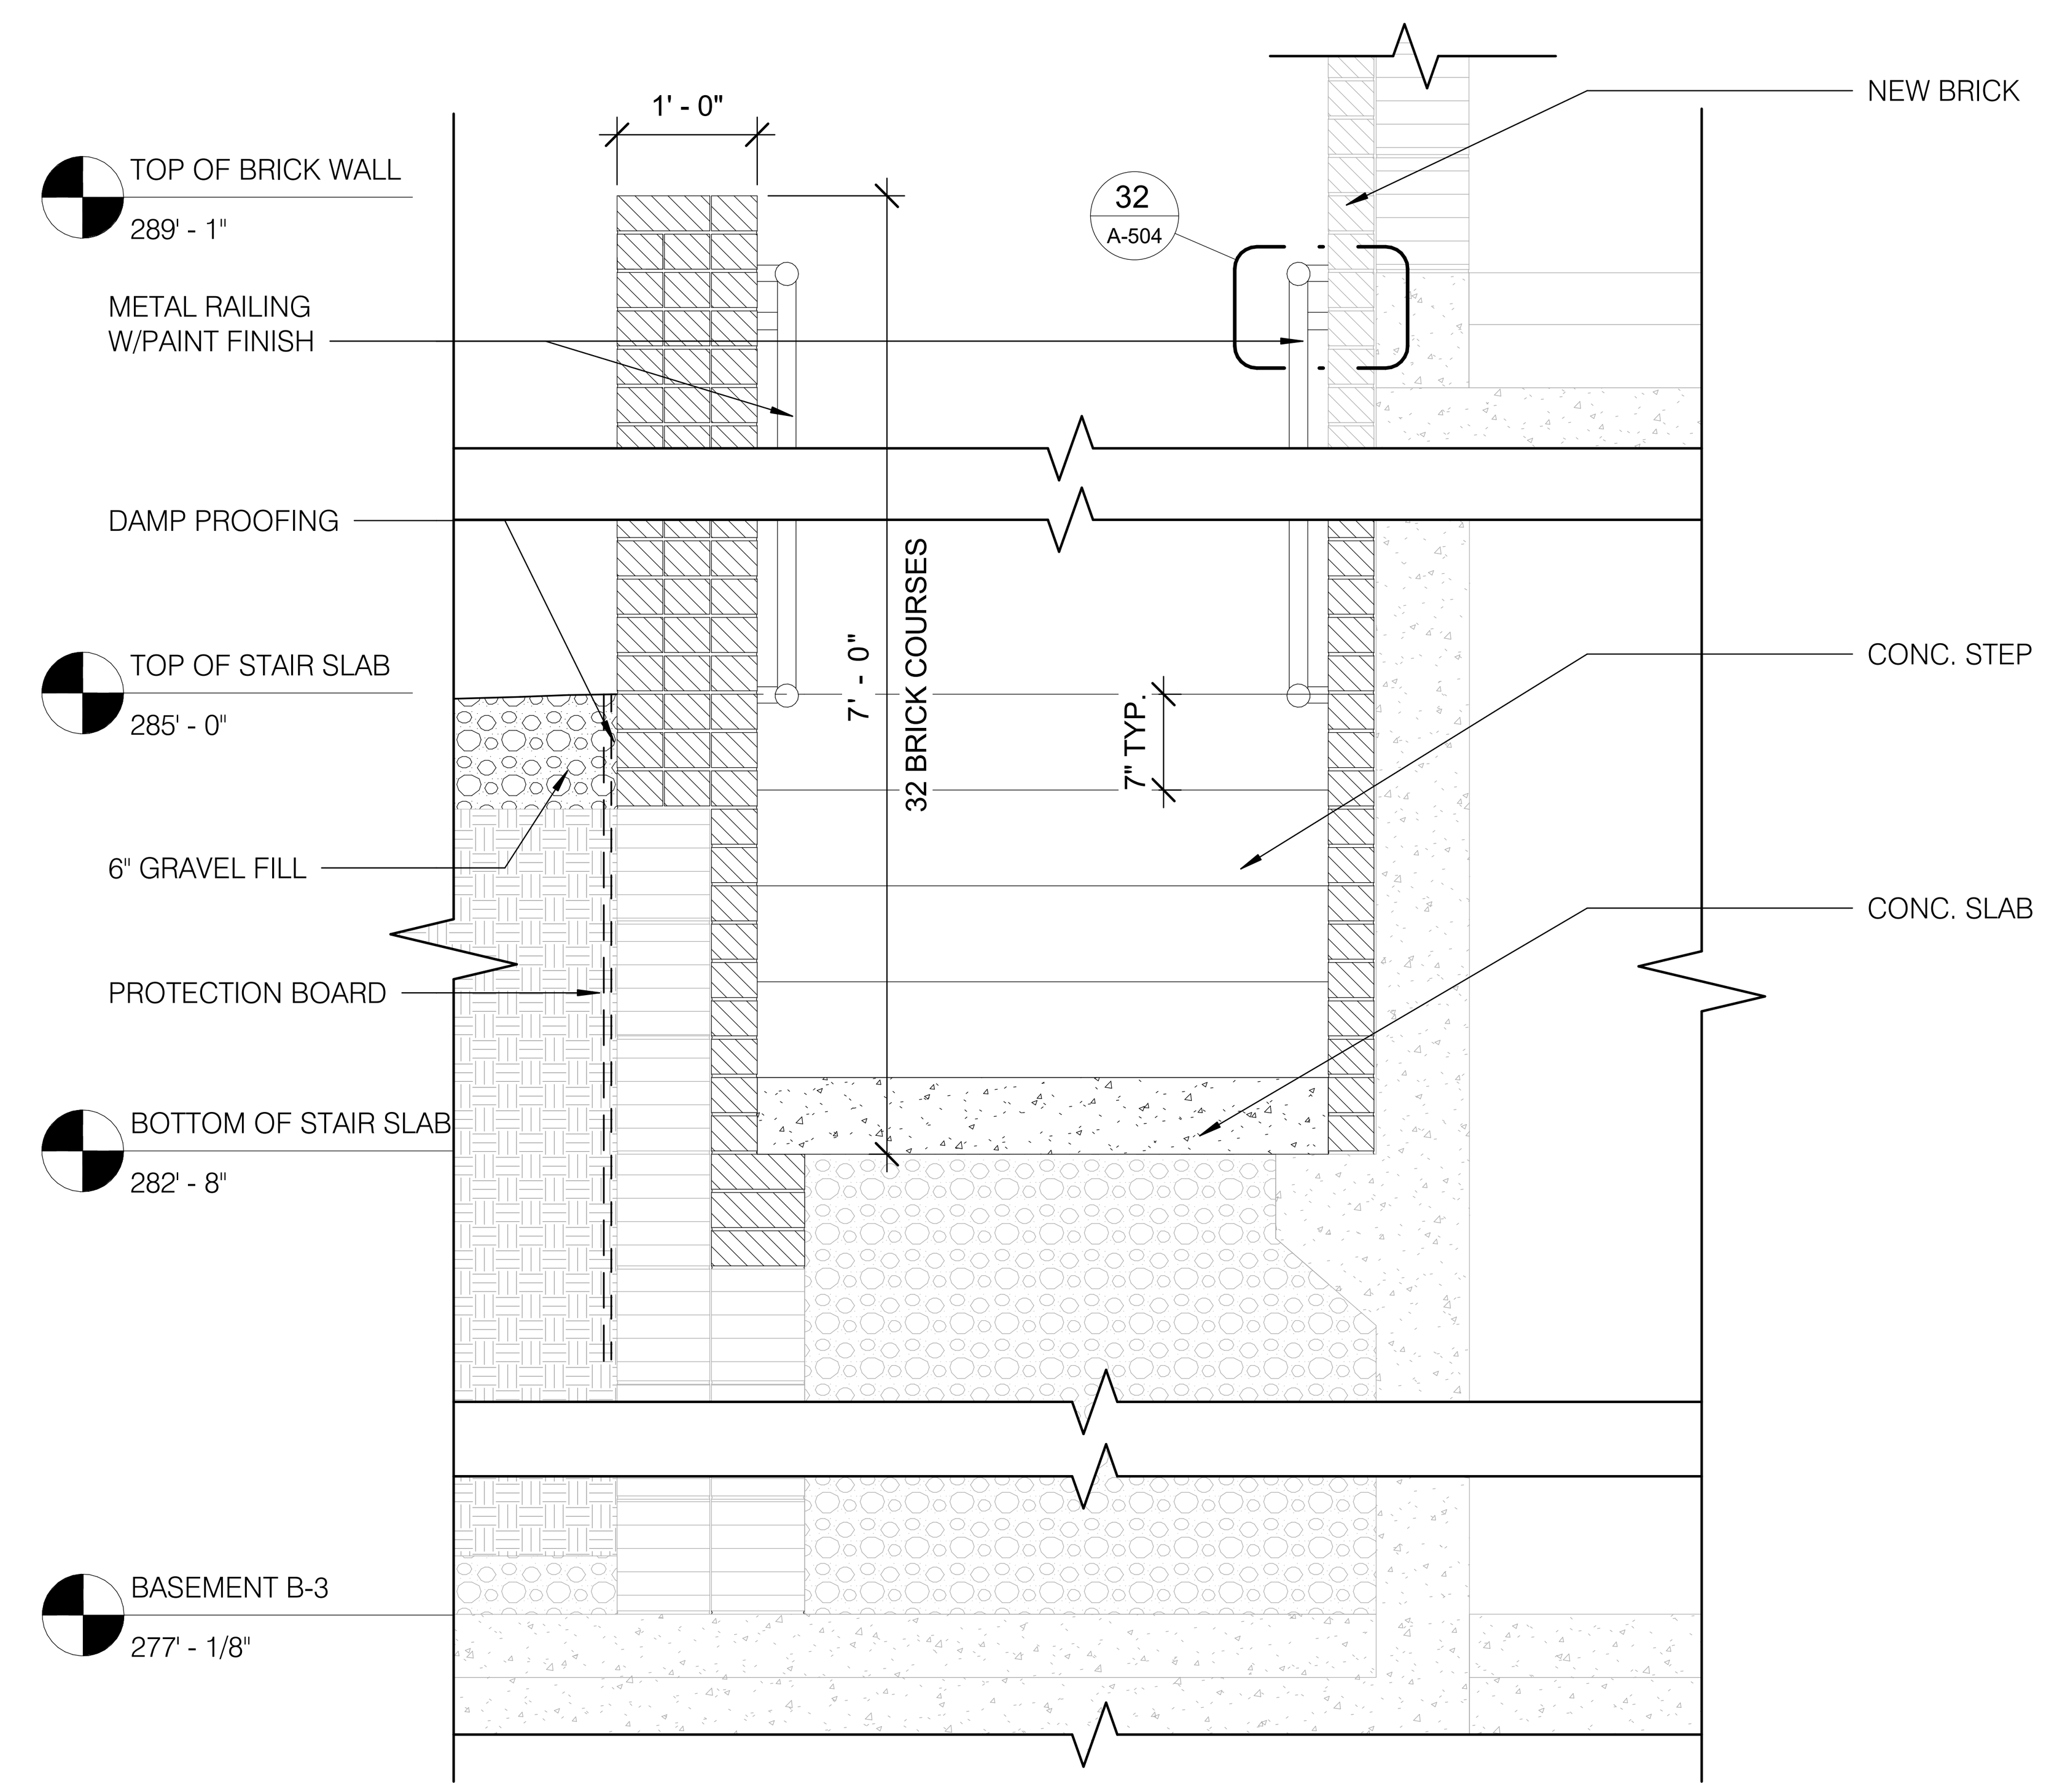

NOTE: THE GC SHALL REPAIR ANY DAMAGED BRICK COURSES OR REPLACE THEM AS REQUIRED TO MATCH THE EXISTING DURING CONSTRUCTION.

44 A-504
EXTERIOR STAIR PLAN DETAIL - B
3/4" = 1'-0"

3/4" = 1'-0" SCALE FEET

PROPERTY OF THE UNITED STATES GOVERNMENT
FOR OFFICIAL USE ONLY
Do not remove this notice
Properly destroy documents when no longer needed

DEPARTMENT OF HEALTH & HUMAN SERVICES USA

LSY ARCHITECTS & LABORATORY PLANNERS
James Posey Associates
TIMMONS GROUP
SGH

ARCHITECT: LOUVIERE, STRATTON & YOKEL, LLC, 8484 GEORGIA AVE, SUITE 650, SILVER SPRING, MD 20910, (301) 588-1500
MEP ENGINEER: JAMES POSEY ASSOCIATES INC, 11155 RED RUN BLVD, OWINGS MILLS, MD 21117, (410) 265-6100
CIVIL ENGINEER: TIMMONS GROUP, 2300 N ST NW SUITE 410B, WASHINGTON, DC 20037, (202) 919-2245
STRUCTURAL ENGINEER: SIMPSON GUMPERTZ & HEGER, 1625 EYE STREET NW SUITE 900, WASHINGTON, DC 20006, (202) 239-4199

ARCHITECT 14829 HEATHER K. JOHNSON STATE OF MARYLAND

MARK	DATE	DESCRIPTION

A/E CON. NO.	
A/E TASK NO.	
CONS. CONTR.	
CONS. WORK	
PRIME A/E	LSY ARCHITECTS
SUB A/E	JPA / TIMMONS / SGH
CONSTR. CON.	
FACILITY CODE	
BUILDING NO.	BUILDING 31B
NAME	NIH
STREET	9000 ROCKVILLE PIKE
CITY	BETHESDA
STATE/ZIP	MD / 20892
OTHER BUILDING NO.	
PROJ. NO.	24024
PROJ. OFFICER	MOHAMMED BISWAS
PROJ. MGR.	G.LEE
SUBMISSION	IFC SUBMISSION
SUB. DATE	08/26/25
WRK REQ. NO.	C116635

PROJECT TITLE: BUILDING 31B NEW ROOFING AND WP OF STRUCTURE BELOW GRADE

DRAWING TITLE: ARCHITECTURAL DETAILS

NIH National Institutes of Health
OFFICE OF RESEARCH FACILITIES
DIVISION OF FACILITIES PLANNING

DESIGNED BY	G.L.
DRAWN BY	X.L.
CHECKED BY	K.C.
DATE	08/26/25
FILE NAME	

DRAWING
A-504

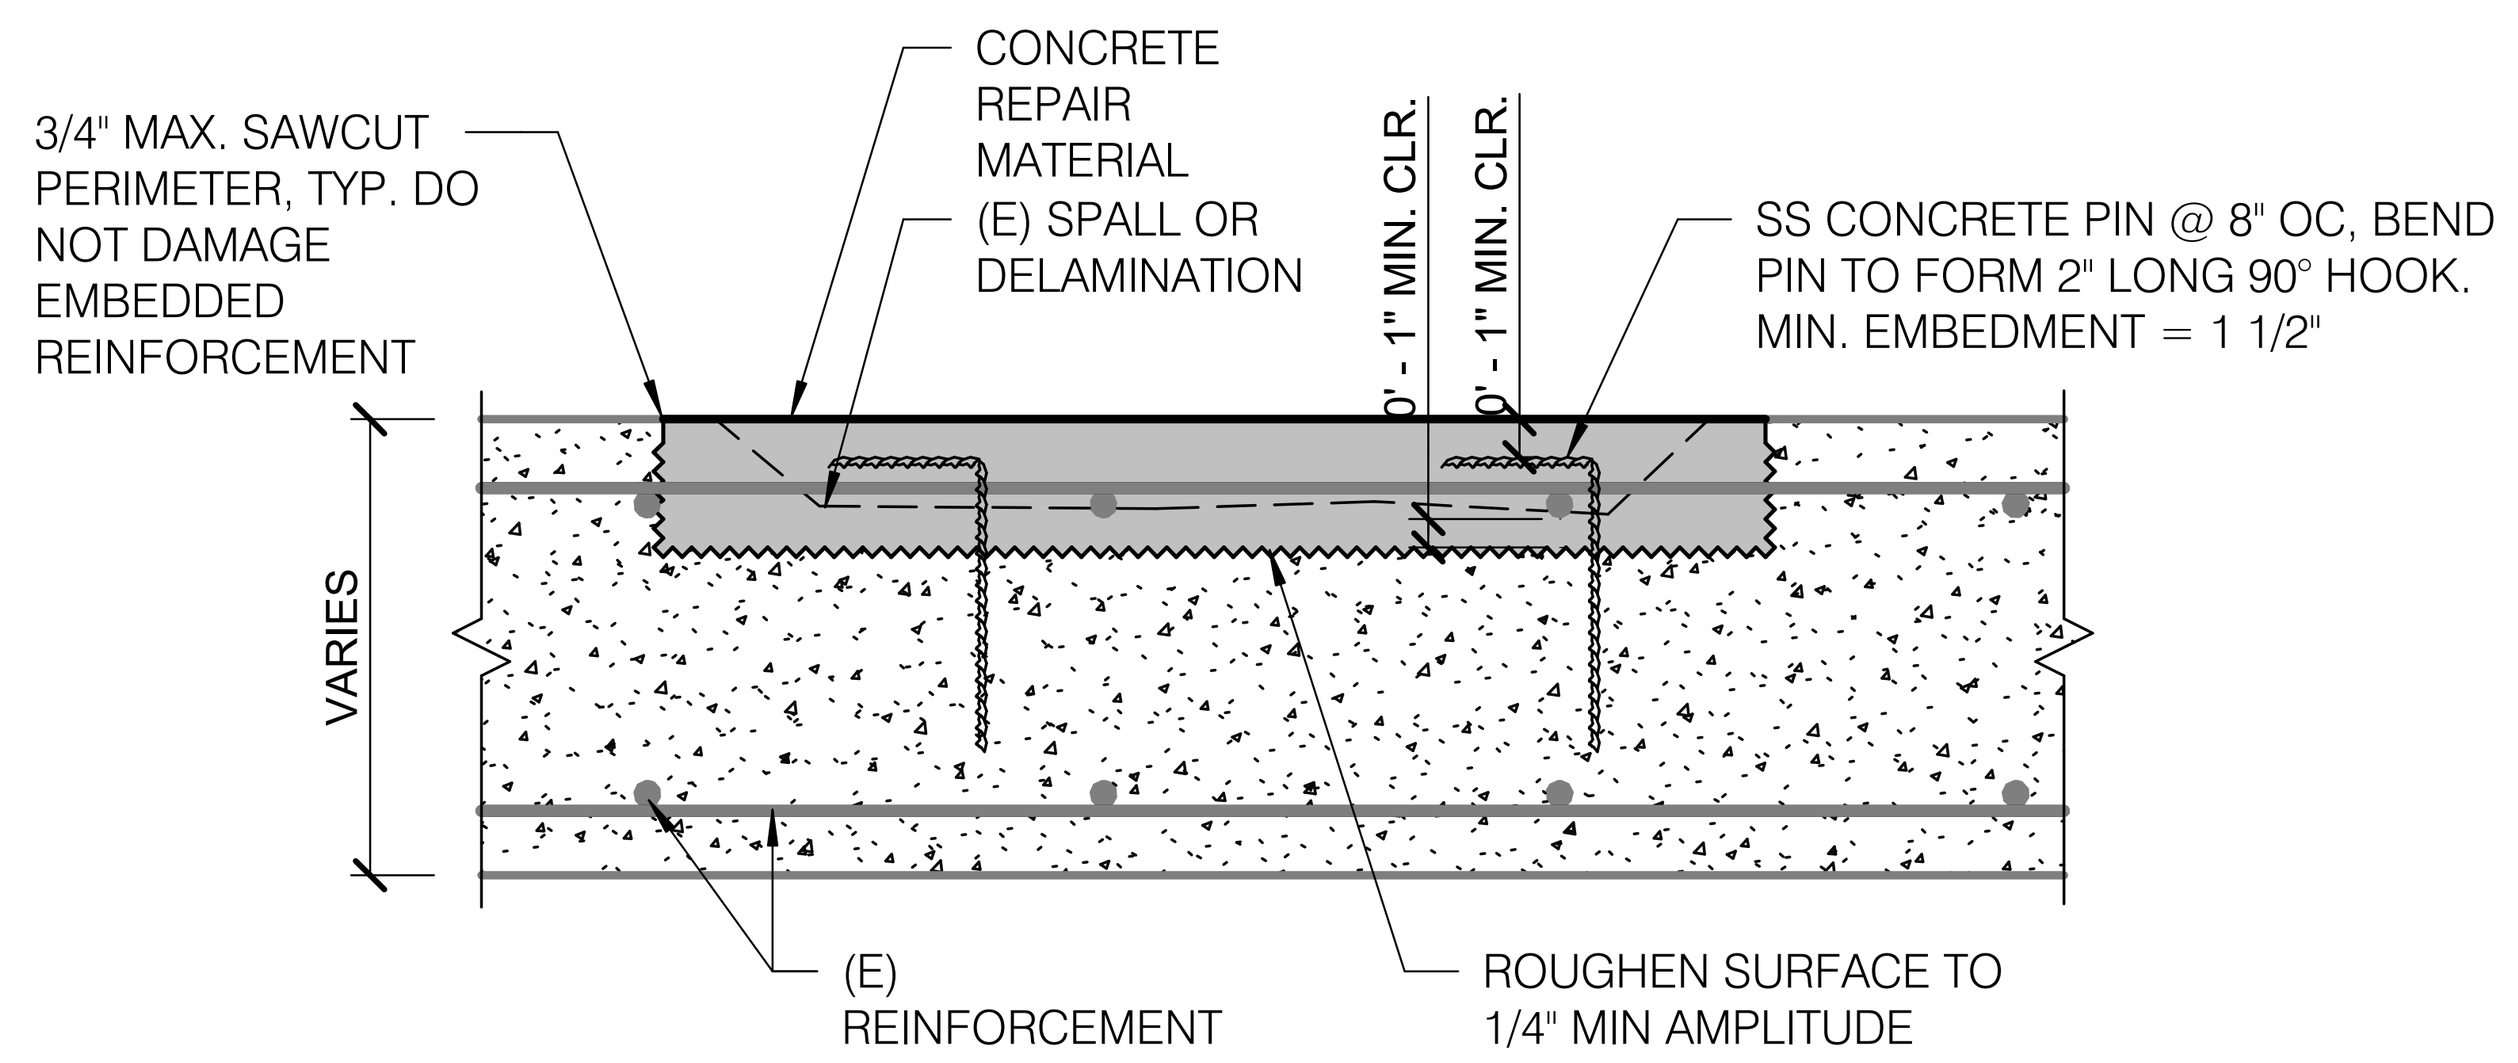

NOTES:
1. NOTIFY ENGINEER IF EXISTING REINFORCEMENT SECTION LOSS IS MORE THAN 15% OF THE ORIGINAL BAR CROSS SECTIONAL AREA.
2. CONCRETE REPAIRS WILL DIMINISH THE LOAD-CARRYING CAPACITY OF THE EXISITNG SLAB. CONTRACTOR SHALL BE RESPONSIBLE FOR THE DESIGN AND INSTALLATION OF TEMPORARY SHORING DURING CONCRETE REPAIRS

STRUCTURAL NOTES:
SUBMIT SHOP DRAWINGS, SIGNED AND SEALED BY A LICENSED THIRD-PARTY STRUCTURAL ENGINEER, FOR REVIEW AND APPROVAL BY THE NIH AND THE STRUCTURAL ENGINEER OF RECORD. SHOP DRAWINGS SHALL DEMONSTRATE COMPLIANCE WITH STRUCTURAL INTEGRITY REQUIREMENTS PRIOR TO COMMENCEMENT OF INSTALLATION.

21 CONCRETE REPAIR - SLAB TOPSIDE
A-505 1 1/2" = 1'-0"

1-1/2" = 1'-0" SCALE 12 0 12 INCH

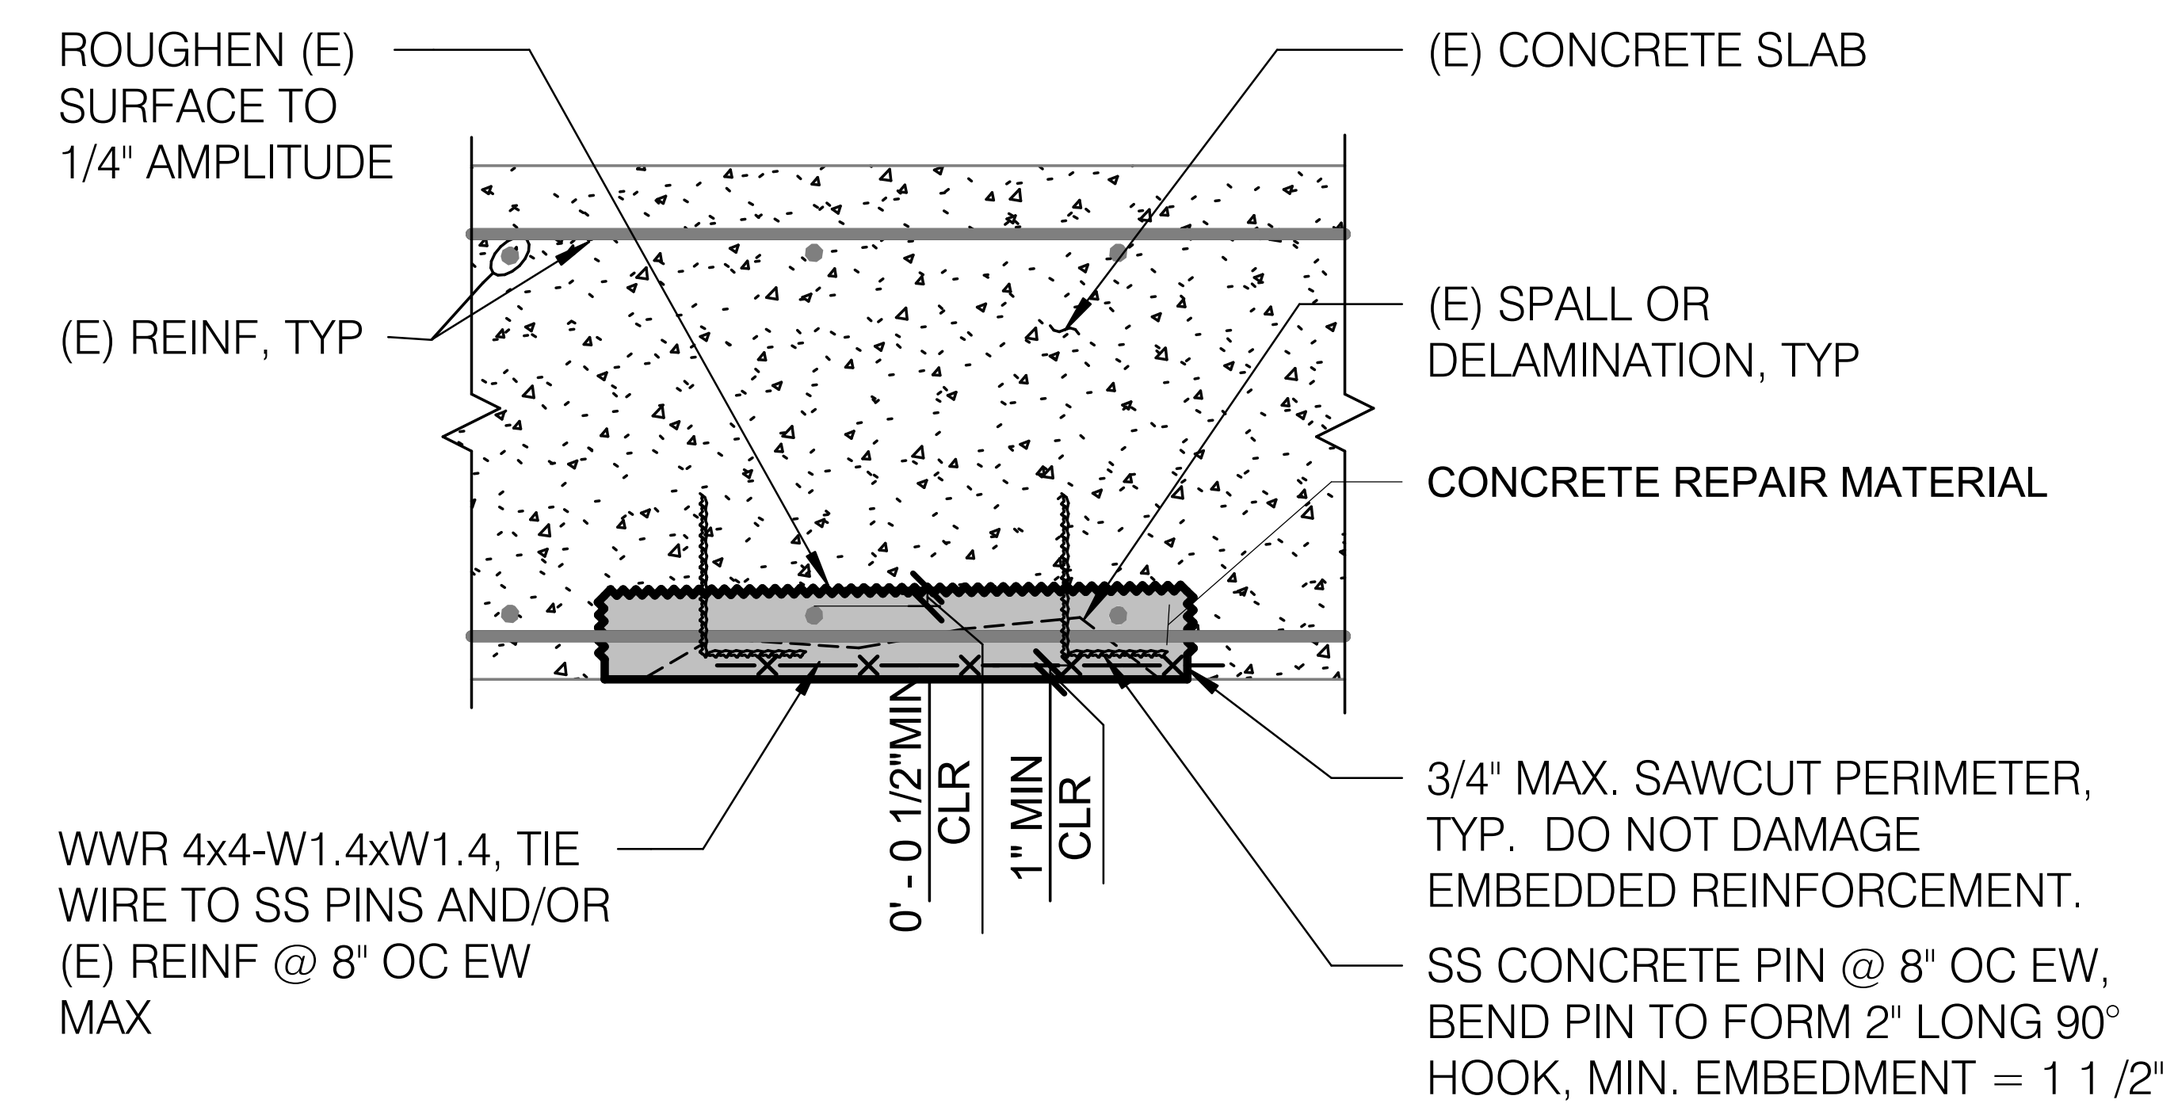

NOTES:
1. HAND LAYUP IS ACCEPTABLE AT LOCATIONS LESS THAN 1 SQ FT.
2. WWR NOT REQUIRED IF REPAIR EXPOSES MORE THAN TWO BARS IN EACH DIRECTION.
3. WHERE HAND APPLIED REPAIR MATERIAL IS USED, THE CONCRETE PINS SHALL ENGAGE THE OUTER LIFT.
4. NOTIFY ENGINEER IF EXISTING REINFORCEMENT SECTION LOSS IS MORE THAN 10% OF THE ORGINAL BAR DIAMETER ALONG ANY AXIS.
5. CONCRETE REPAIRS WILL DIMINISH THE LOAD-CARRYING CAPACITY OF THE EXISTING SLAB. CONCTRACTOR SHALL BE RESPONSIBLE FOR THE DESIGN AND INSTALLATION OF TEMPORARY SHORING DURING CONCRETE REPAIRS.

STRUCTURAL NOTES:
SUBMIT SHOP DRAWINGS, SIGNED AND SEALED BY A LICENSED THIRD-PARTY STRUCTURAL ENGINEER, FOR REVIEW AND APPROVAL BY THE NIH AND THE STRUCTURAL ENGINEER OF RECORD. SHOP DRAWINGS SHALL DEMONSTRATE COMPLIANCE WITH STRUCTURAL INTEGRITY REQUIREMENTS PRIOR TO COMMENCEMENT OF INSTALLATION.

23 CONCRET REPAIR - SLAB UNDERSIDE
A-505 1" = 1'-0"

1" = 1'-0" SCALE 1 0 1 2 FEET

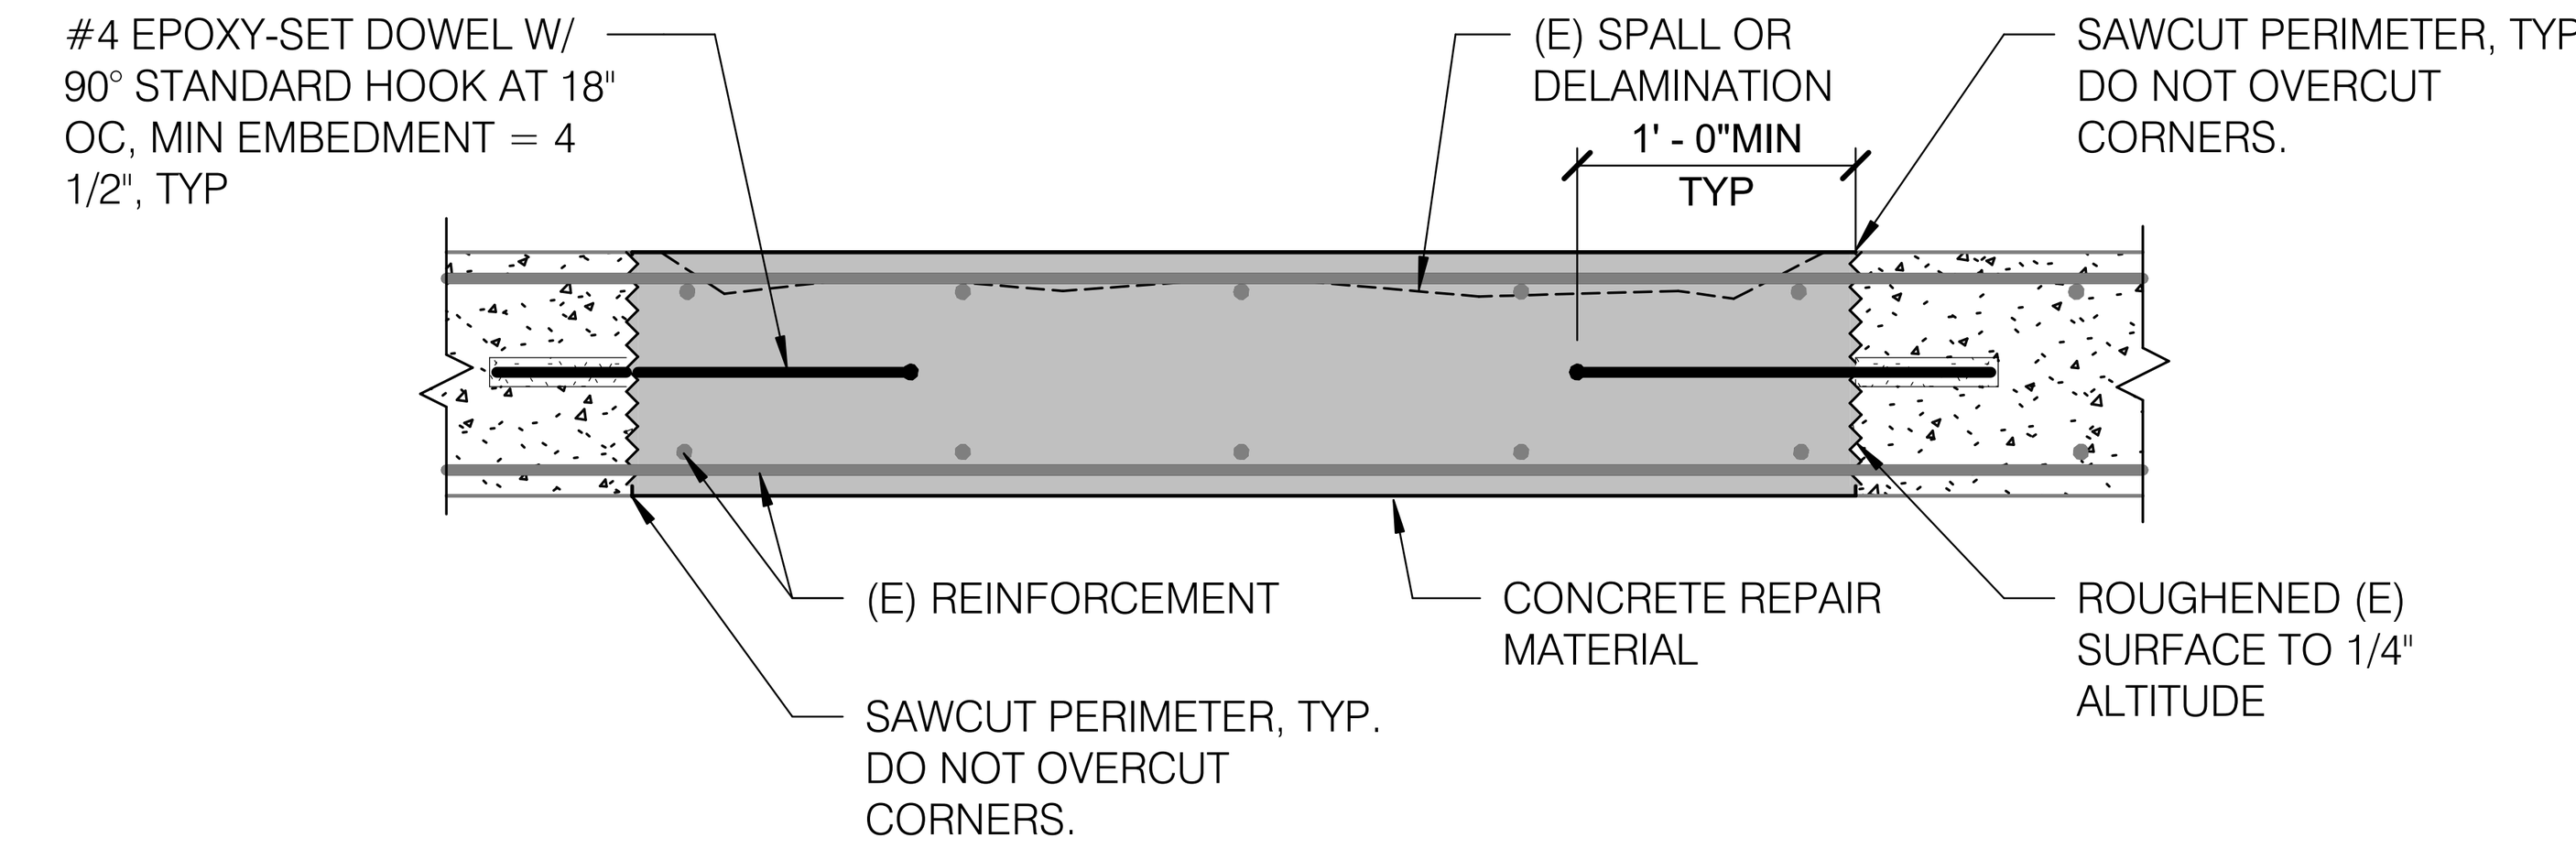

NOTES:
1. EPOXY-SET DOWELS NOT REQUIRED IF REPAIR EXPOSES MORE THAT TWO BARS IN EACH DIRECTION, TOP AND BOTTOM SPACED @ 12" MAX. EPOXY-SET DOWELS MAY BE REQUIRED IN LOCATIONS CLOSE TO COLUMNS AND LOAD-BEARING WALLS. INSTALL EPOXY-SET DOWELS IN ALL LOCATIONS AS DIRECTED BY ENGINEER.
2. NOTIFY ENGINEER IF EXISTING REINFORCEMENT SECTION LOSS IS MORE THAN 15% OF THE ORIGINAL BAR CROSS SECTIONAL AREA.
3. SEE SPECIFICATIONS FOR SHORING REQUIREMENTS. SHORING FOR CONCRETE COLUMNS AND FOUNDATION WALLS WILL BE REQUIRED AT FULL-DEPTH REPAIRS ADJACENT TO CONCRETE COLUMNS AND FOUNDATION WALLS.
4. REMOVE ALL LOOSE PARTICLES AND DELETERIOUS MATERIALS FROM EXPOSED SOUND CONCRETE, EXPOSED REINFORCING BARS, AND ACCESSORIES BY SAND BLASTING.

STRUCTURAL NOTES:
SUBMIT SHOP DRAWINGS, SIGNED AND SEALED BY A LICENSED THIRD-PARTY STRUCTURAL ENGINEER, FOR REVIEW AND APPROVAL BY THE NIH AND THE STRUCTURAL ENGINEER OF RECORD. SHOP DRAWINGS SHALL DEMONSTRATE COMPLIANCE WITH STRUCTURAL INTEGRITY REQUIREMENTS PRIOR TO COMMENCEMENT OF INSTALLATION.

25 CONCRETE REPAIR - FULL-DEPTH SLAB
A-505 1" = 1'-0"

1" = 1'-0" SCALE 1 0 1 2 FEET

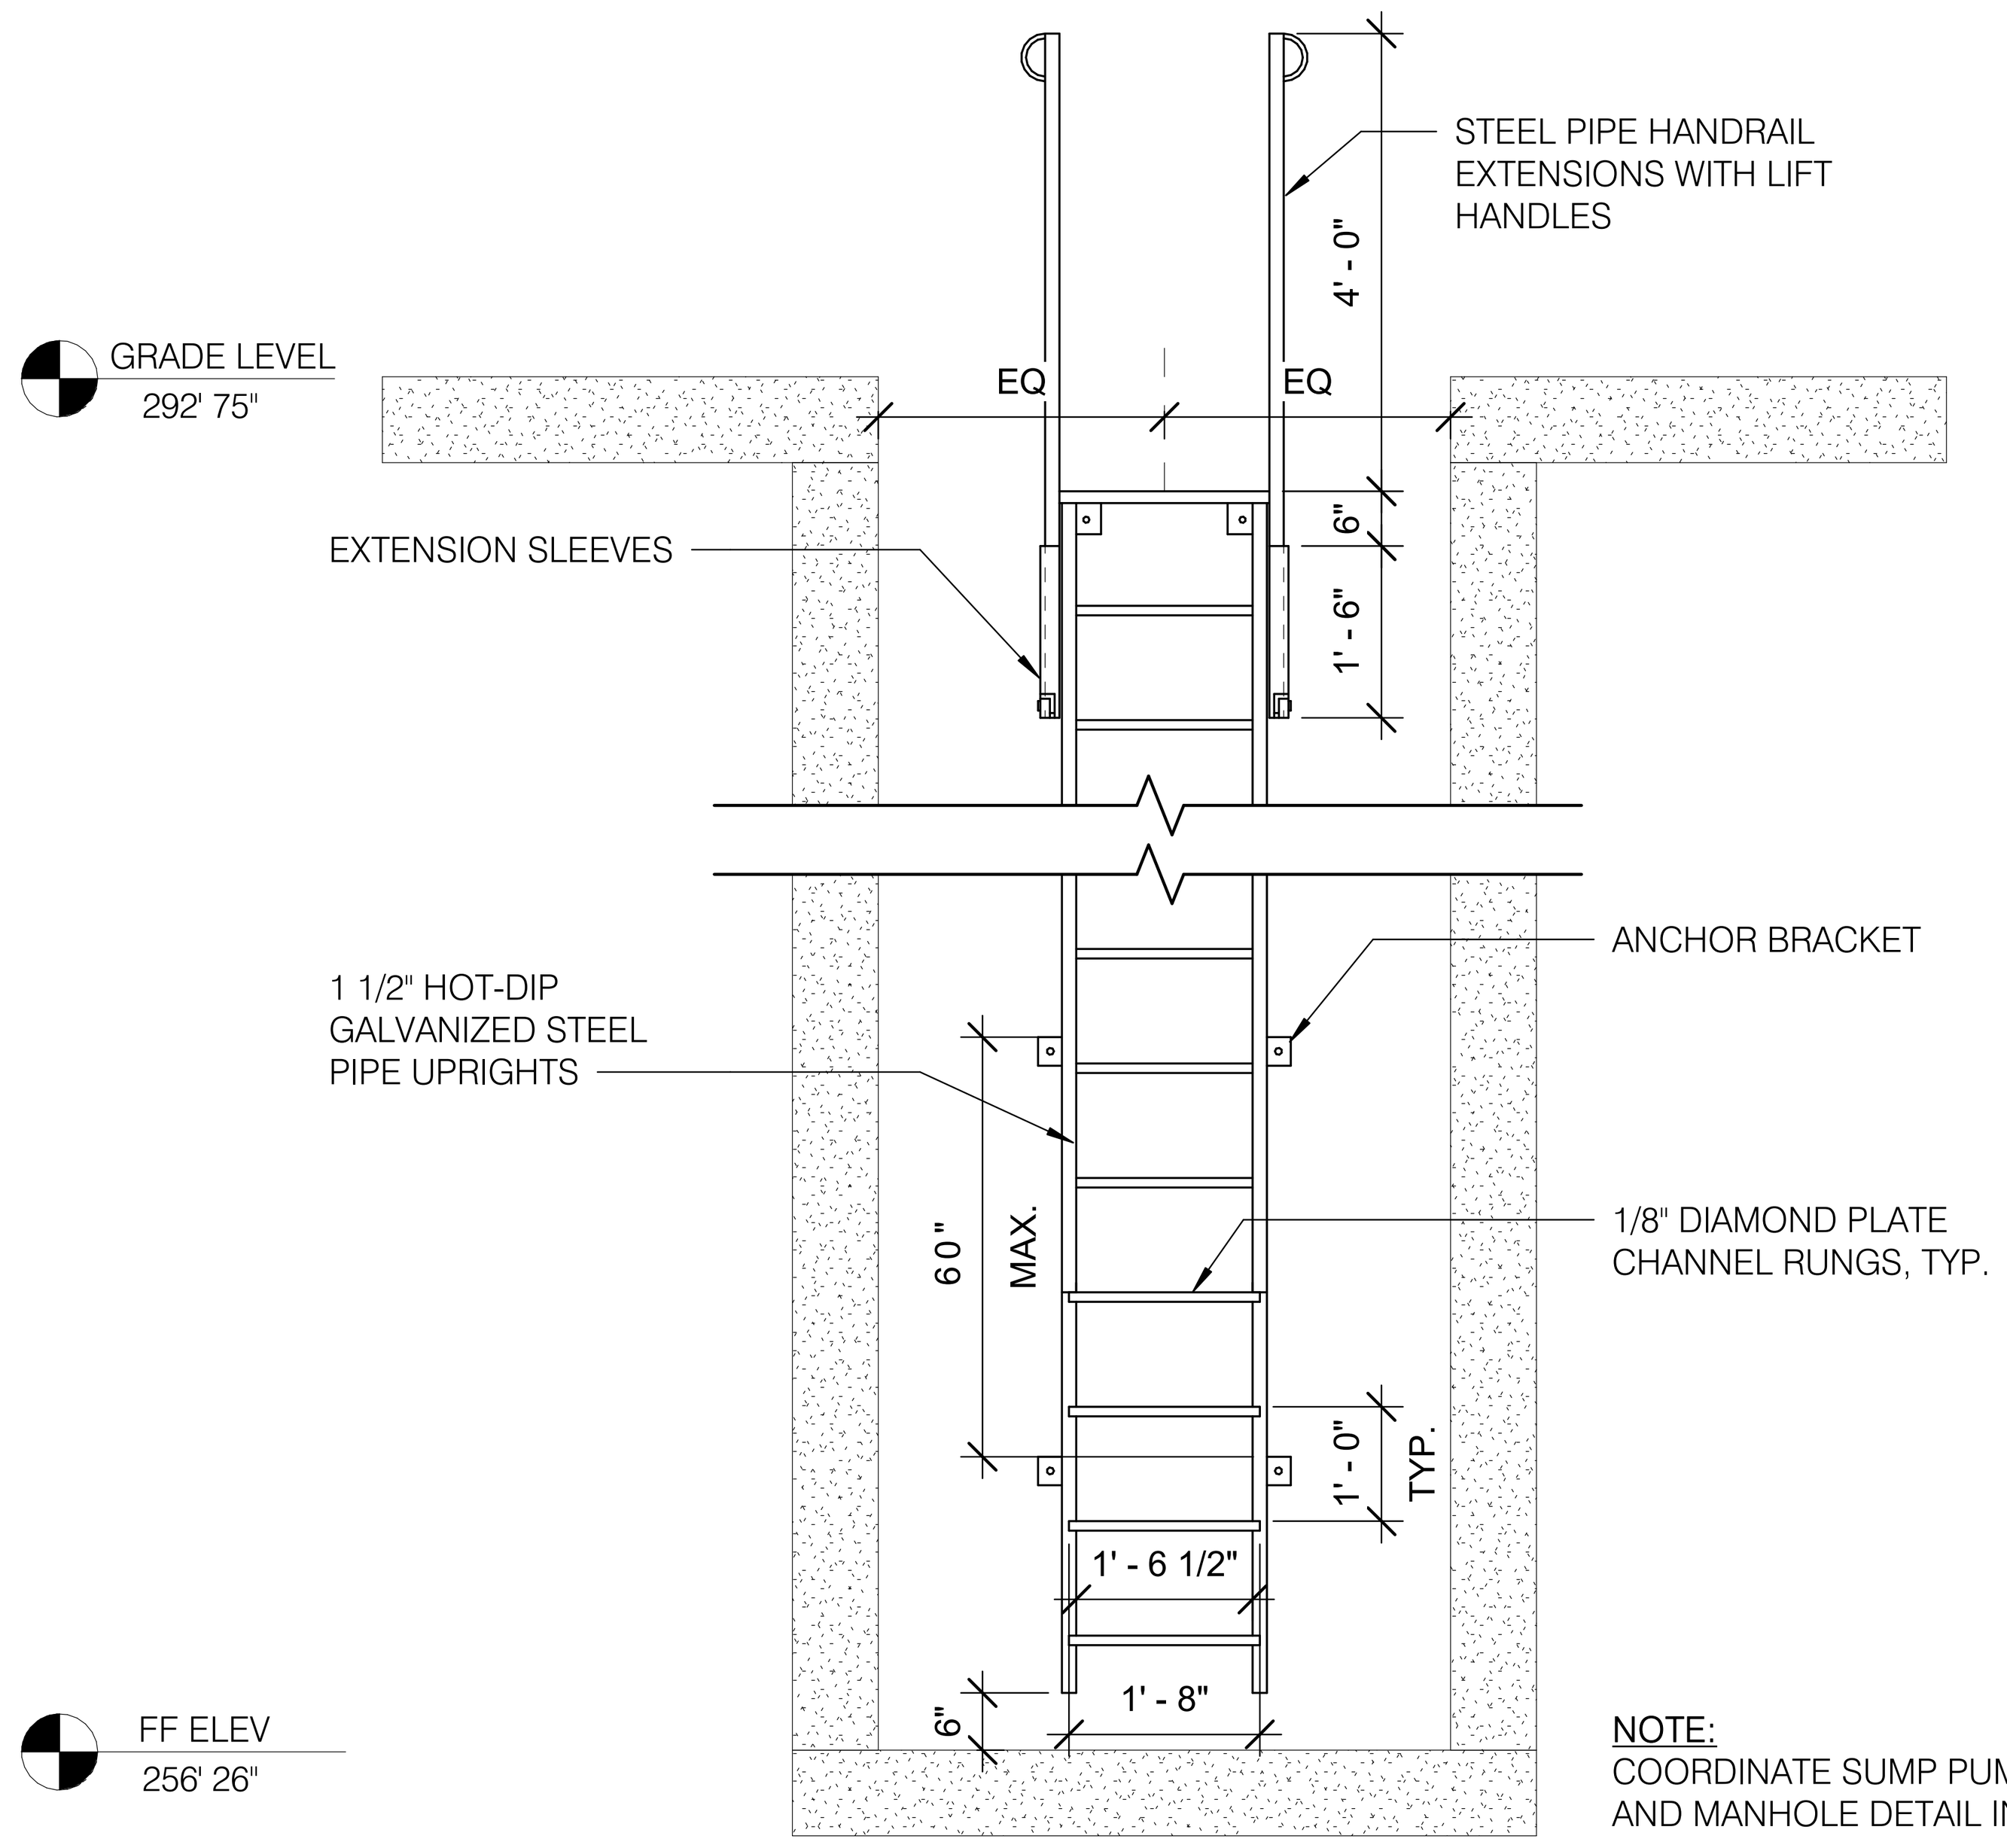

NOTE:
COORDINATE SUMP PUMPS LOCATION AND MANHOLE DETAIL IN PLUMBING DWG

41 LADDER ELEVATION DETAIL - FRONT VIEW
A-505 1/2" = 1'-0"

1/2" = 1'-0" SCALE 1 0 1 2 3 4 5 FEET

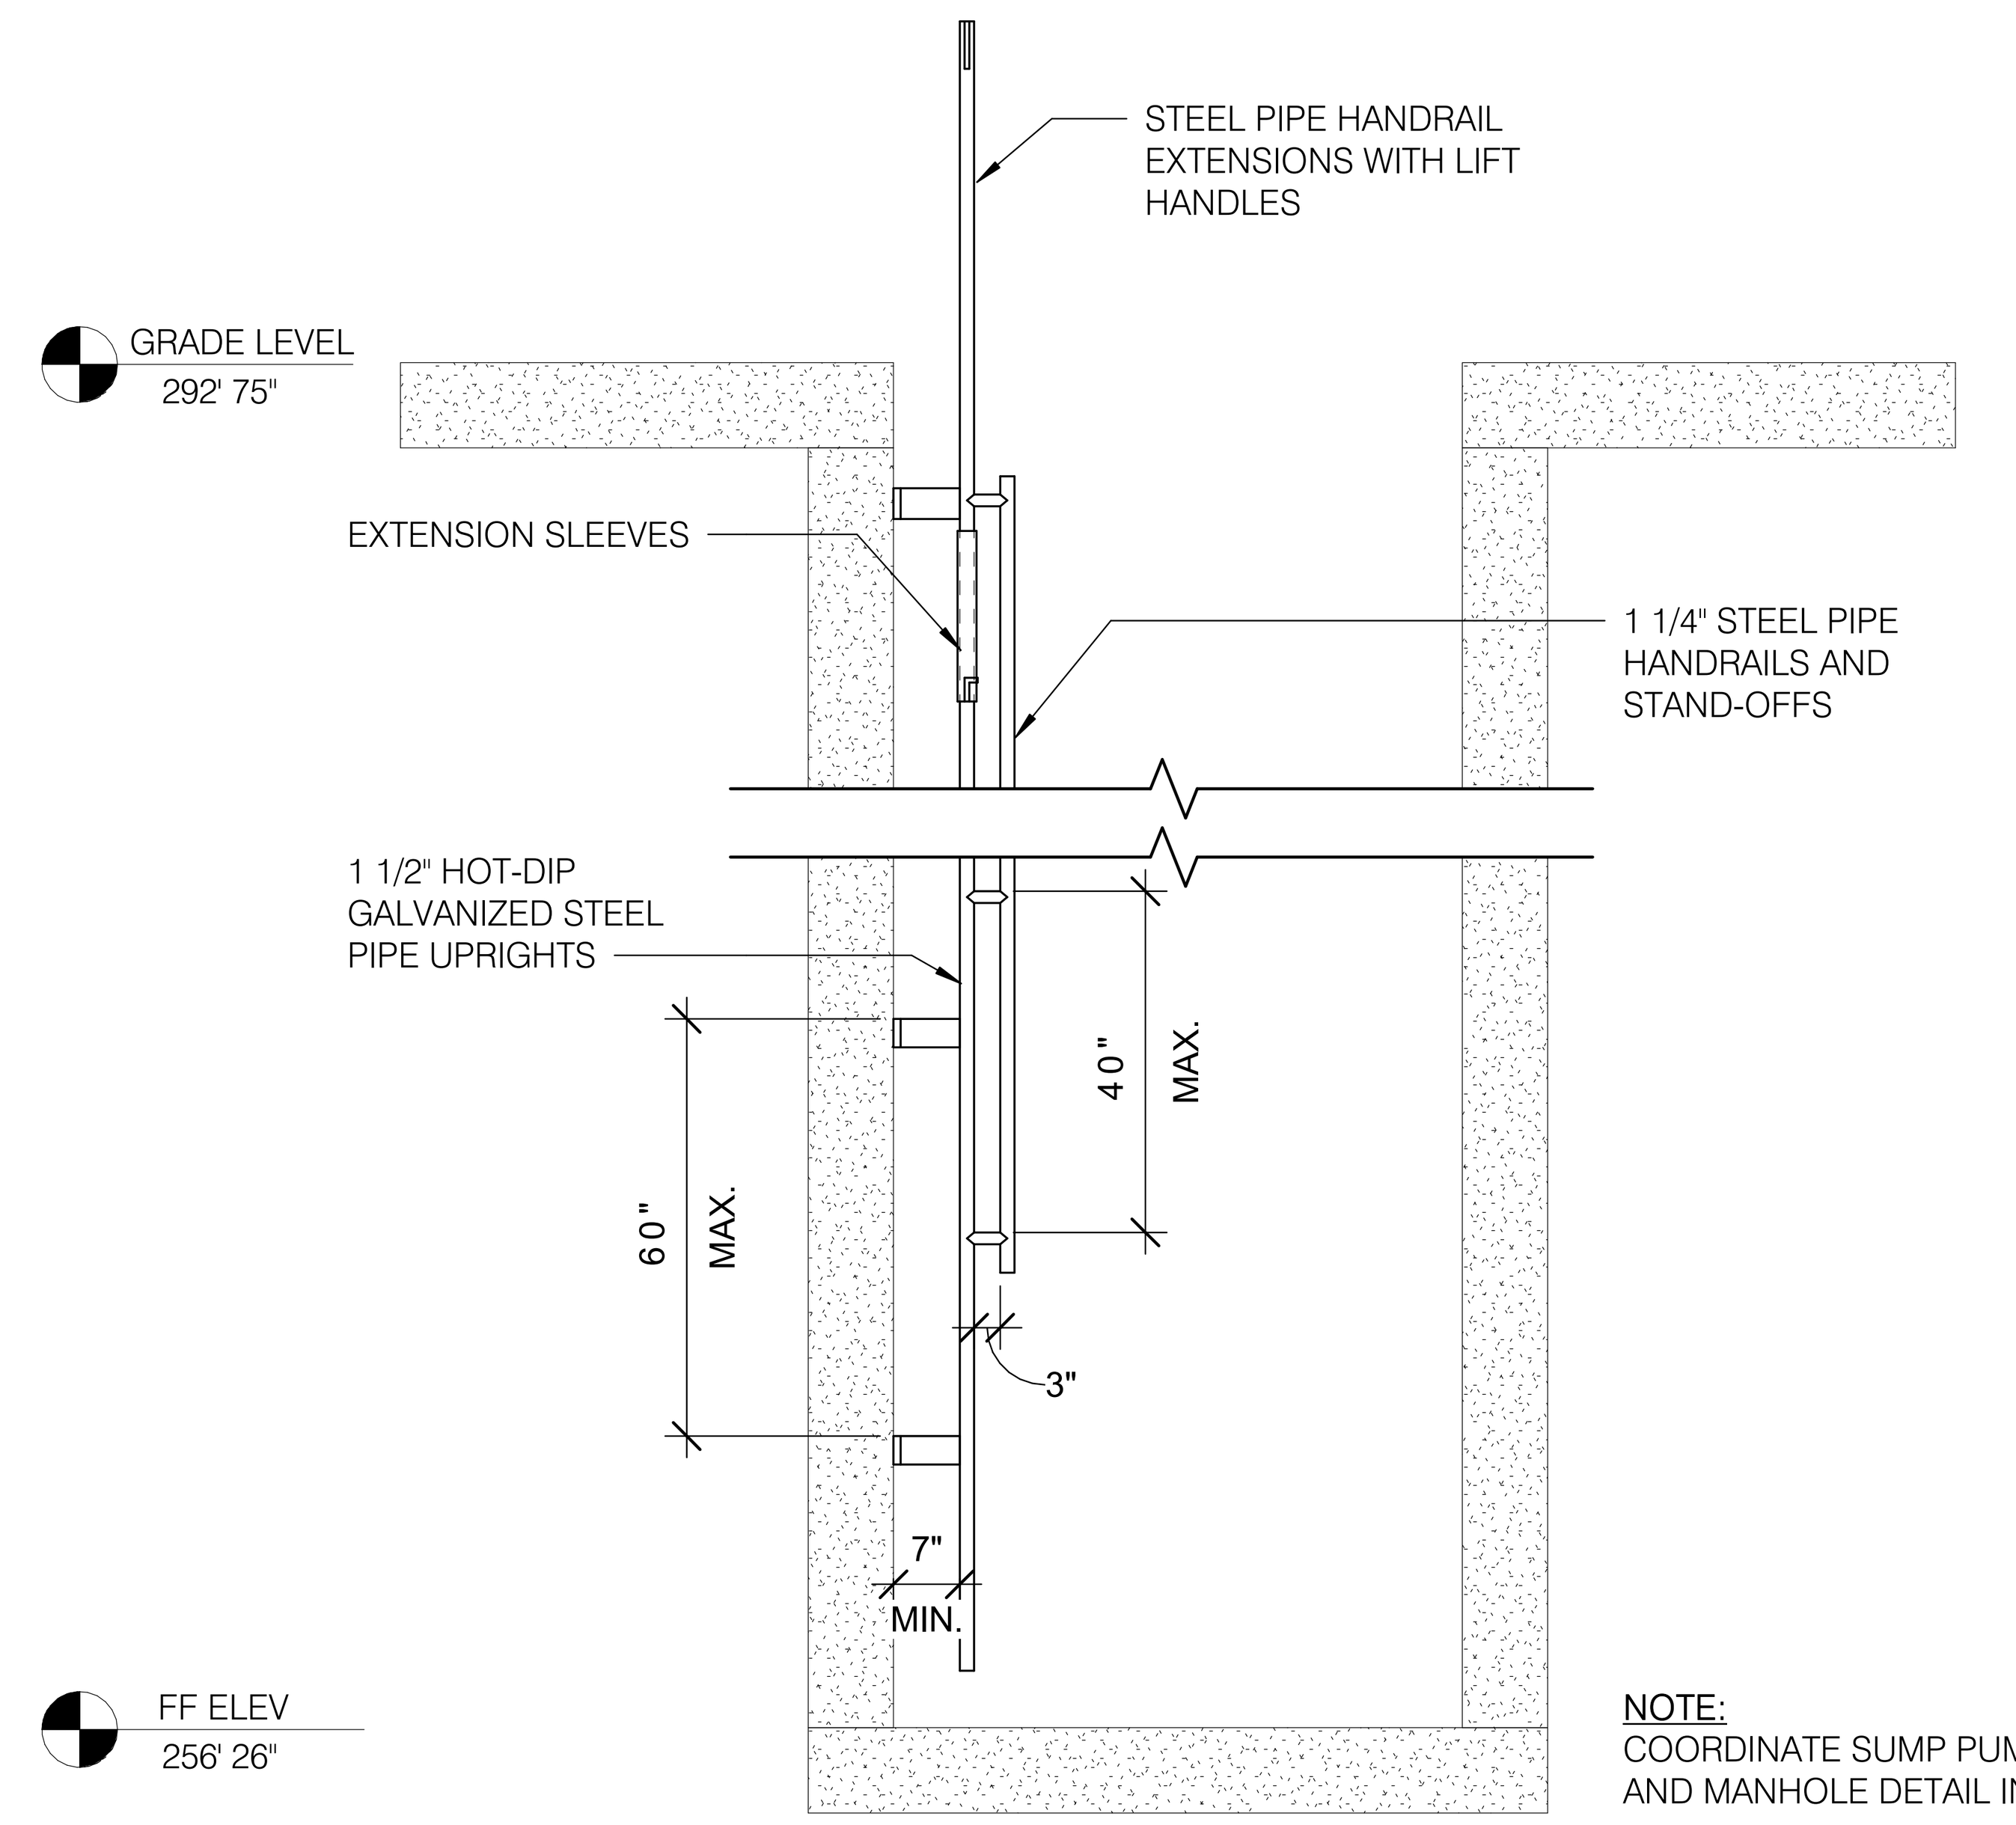

NOTE:
COORDINATE SUMP PUMPS LOCATION AND MANHOLE DETAIL IN PLUMBING DWG

43 LADDER ELEVATION DETAIL - SIDE VIEW
A-505 1/2" = 1'-0"

1/2" = 1'-0" SCALE 1 0 1 2 3 4 5 FEET

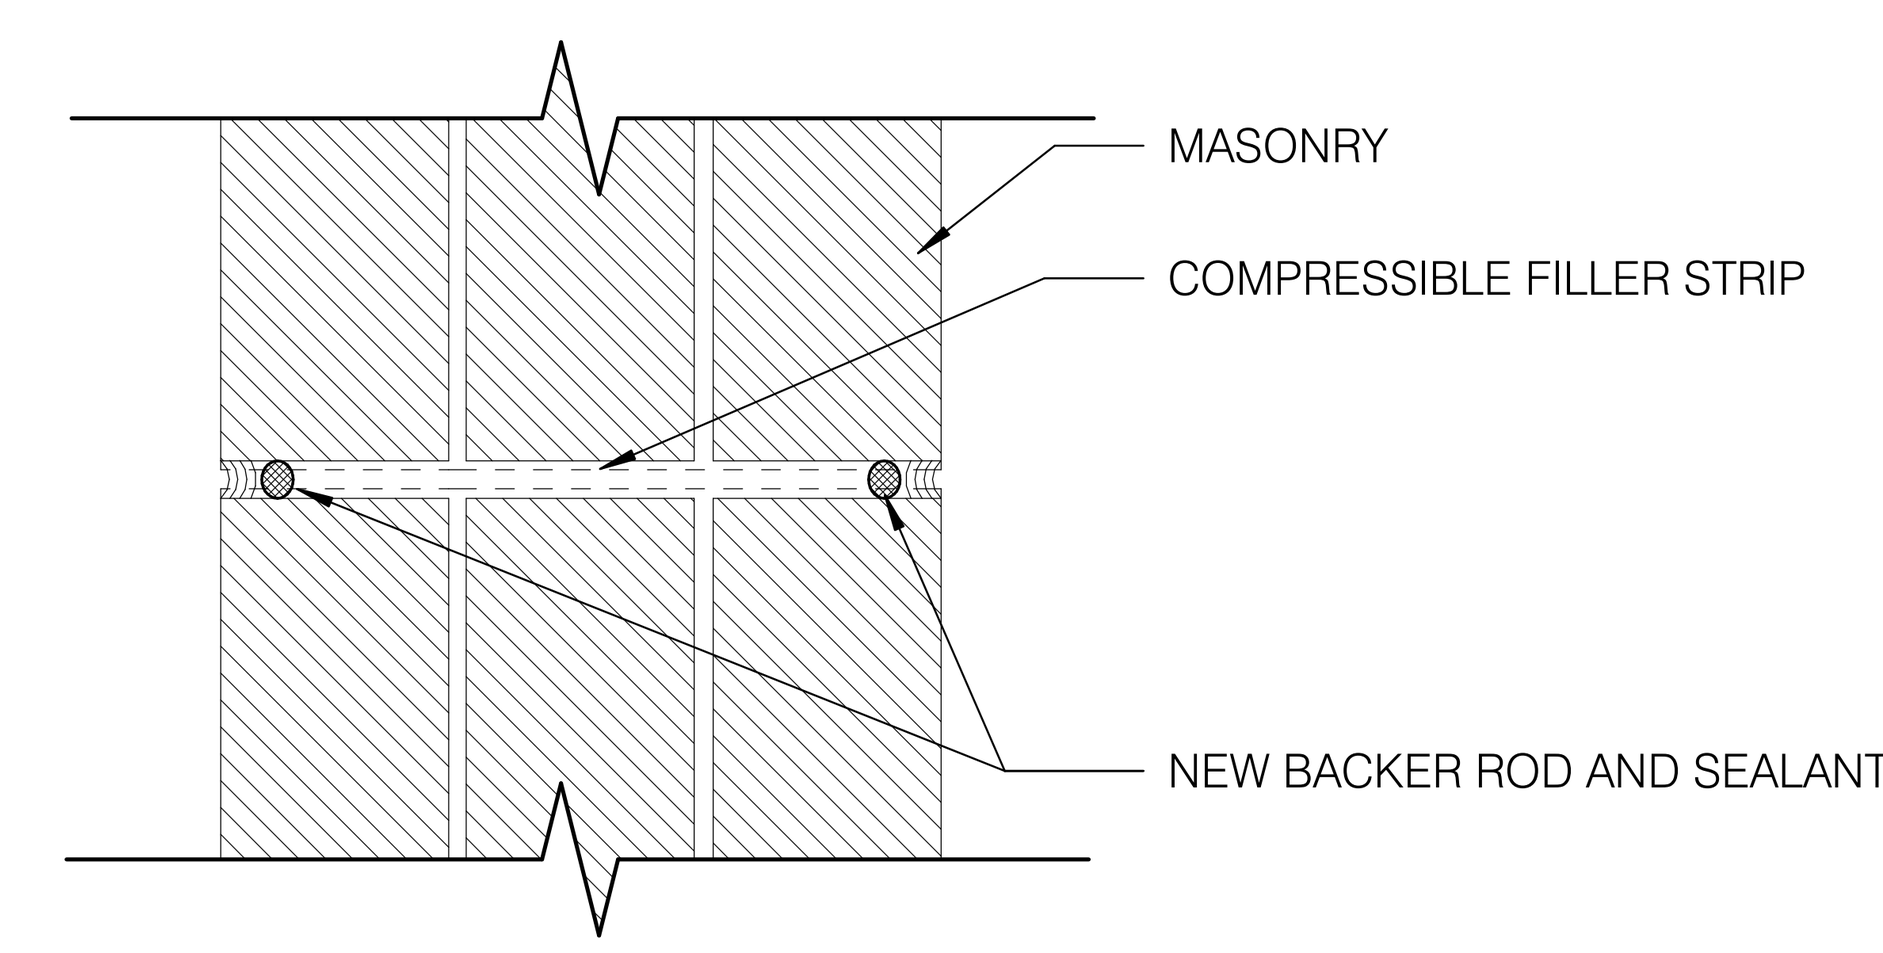

35 VERTICAL MOVEMENT JOINT DETAIL
A-505 3" = 1'-0"

3" = 1'-0" SCALE 3 0 3 6 9 INCH

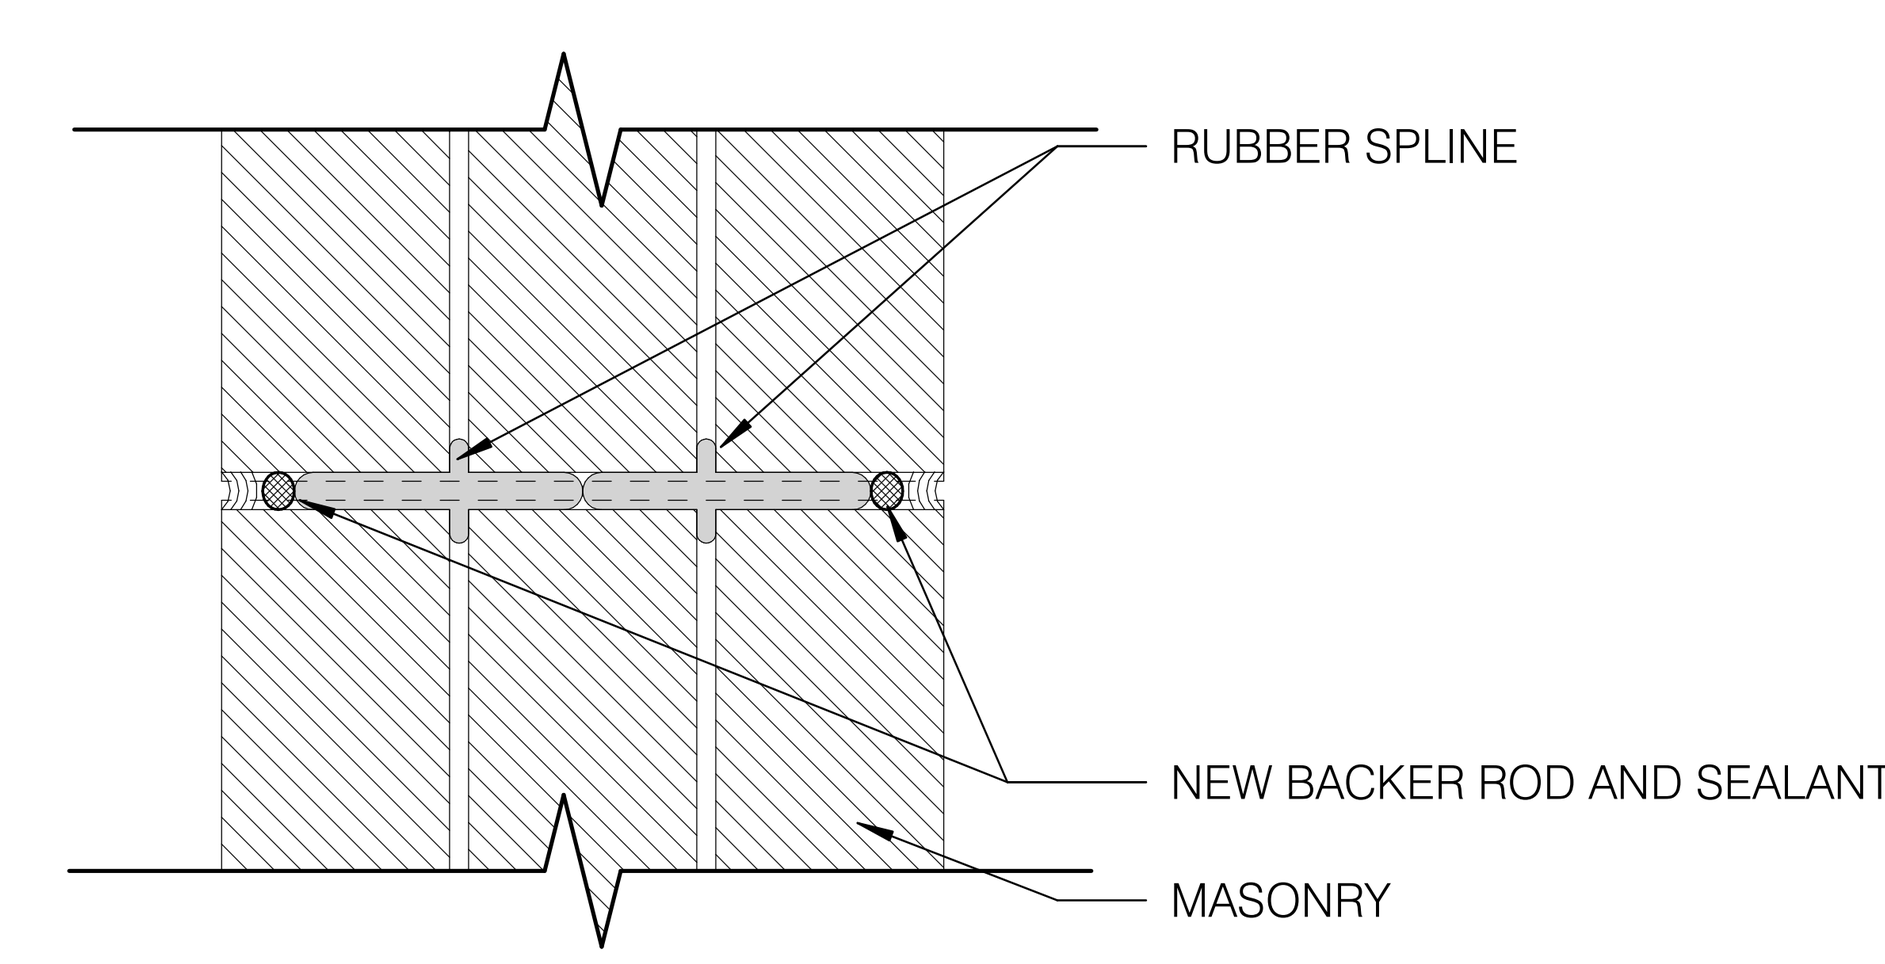

45 VERTICAL EXPANSION JOINT DETAIL
A-505 3" = 1'-0"

3" = 1'-0" SCALE 3 0 3 6 9 INCH

PROPERTY OF THE UNITED STATES GOVERNMENT
FOR OFFICIAL USE ONLY
Do not remove this notice
Properly destroy documents when no longer needed

DEPARTMENT OF HEALTH & HUMAN SERVICES USA

LSY ARCHITECTS & LABORATORY PLANNERS

James Posey Associates

TIMMONS GROUP

SGH

ARCHITECT: LOUVIERE, STRATTON & YOKEL, LLC, 8484 GEORGIA AVE, SUITE 650, SILVER SPRING, MD 20910, (301) 588-1500
MEP ENGINEER: JAMES POSEY ASSOCIATES INC, 11155 RED RUN BLVD, OWINGS MILLS, MD 21117, (410) 265-6100
CIVIL ENGINEER: TIMMONS GROUP, 2300 N ST NW SUITE 410B, WASHINGTON, DC 20037, (202) 919-2245
STRUCTURAL ENGINEER: SIMPSON GUMPERTZ & HEGER, 1625 EYE STREET NW SUITE 900, WASHINGTON, DC 20006, (202) 239-4199

ARCHITECT 14829 HEATHER K. JOHNSON STATE OF MARYLAND

MARK	DATE	DESCRIPTION

PRIME A/E	LSY ARCHITECTS
SUB A/E	JPA / TIMMONS / SGH
BUILDING NO.	BUILDING 31B
NAME	NIH
STREET	9000 ROCKVILLE PIKE
CITY	BETHESDA
STATE/ZIP	MD / 20892
PROJ. NO.	24024
PROJ. OFFICER	MOHAMMED BISWAS
PROJ. MGR.	G.LEE
SUBMISSION	IFC SUBMISSION
SUB. DATE	08/26/25
WRK REQ. NO.	C116635

N

PROJECT TITLE: BUILDING 31B NEW ROOFING AND WP OF STRUCTURE BELOW GRADE

DRAWING TITLE: ARCHITECTURAL DETAILS

NIH National Institutes of Health
OFFICE OF RESEARCH FACILITIES
DIVISION OF FACILITIES PLANNING

DESIGNED BY	G.L.
DRAWN BY	X.L.
CHECKED BY	K.C.
DATE	08/26/25
FILE NAME	
DRAWING	A-505

C:\Users\XLiu\Documents\24024 NIH Bldg 31B Landscape - Water Intrusion-2022_Xuan_LSY.rvt 8/26/2025 4:10:24 PM

SUMP PUMP SCHEDULE

DESIGNATION	SERVICE	LOCATION	MANHOLE S7 CHARACTERISTICS				PUMP PERFORMANCE CHARACTERISTICS				PUMP DISCHARGE (IN)	MINIMUM SOLIDS HANDLING (IN)	ELECTRICAL	BASIS OF DESIGN	NOTES
			DIAMETER (IN)	DEPTH (IN)	INLETS QTY AND SIZE	OUTLETS QTY AND SIZE	MIN FLOW RATE (GPM)	MIN PUMP HEAD (FT HD)	HP	RPM			VOLTS/PHASE/HZ		
SP-1/SP-2	FOUNDATION DRAINS	MANHOLE	60	318	3 @ 4"	1 @ 3"	45	28	0.5	3450	2 NPT	1.25	208/3/60	ZOELLER MODEL F292	1,2

NOTES:
1. FLOOR MOUNTED PUMP WITH STAINLESS STEEL PULL CHAIN.
2. PUMP FURNISHED WITH 20 FOOT POWER CORD AS STANDARD, PROVIDE CORD LENGTH REQUIRED FOR CONNECTION TO CONTROL PANEL.

PLUMBING SYMBOLS AND ABBREVIATIONS

SYMBOL	ABBR.	ITEM
	--	UNION
	--	FLANGED PIPE CONNECTION
	--	CONCENTRIC REDUCER
	--	FLOW DIRECTION ARROW
	SOV	SHUT-OFF VALVE
	CV	CHECK VALVE; (ARROWHEAD INDICATES DIRECTION OF FLOW)
	SW	STORM WATER PIPE
	--	FOUNDATION DRAIN PIPE
	APPROX	APPROXIMATE
	ASSOC	ASSOCIATED
	BOP	BOTTOM OF PIPE
	CONC	CONCRETE
	DIA	DIAMETER
	DWGS	DRAWINGS
	ELEV	ELEVATION
	FL	FLOOR
	FT HD	FEET OF HEAD
	GPM	GALLONS PER MINUTE
	HDPE	HIGH DENSITY POLYETHYLENE PIPING
	HP	HORSEPOWER
	HZ	HERTZ
	IN	INCHES
	INV	INVERT
	LBS	POUNDS
	NEMA	NATIONAL ELECTRICAL MANUFACTURER ASSOCIATION
	PSW	PUMPED STORMWATER
	PH	PHASE
	PVC	POLYVINYL CHLORIDE
	RPM	REVOLUTIONS PER MINUTE
	SP	SUMP PUMP
	S/S	STAINLESS STEEL
	TYP	TYPICAL
	V	VOLT
	W/	WITH
	W/O	WITHOUT
	%	PERCENT

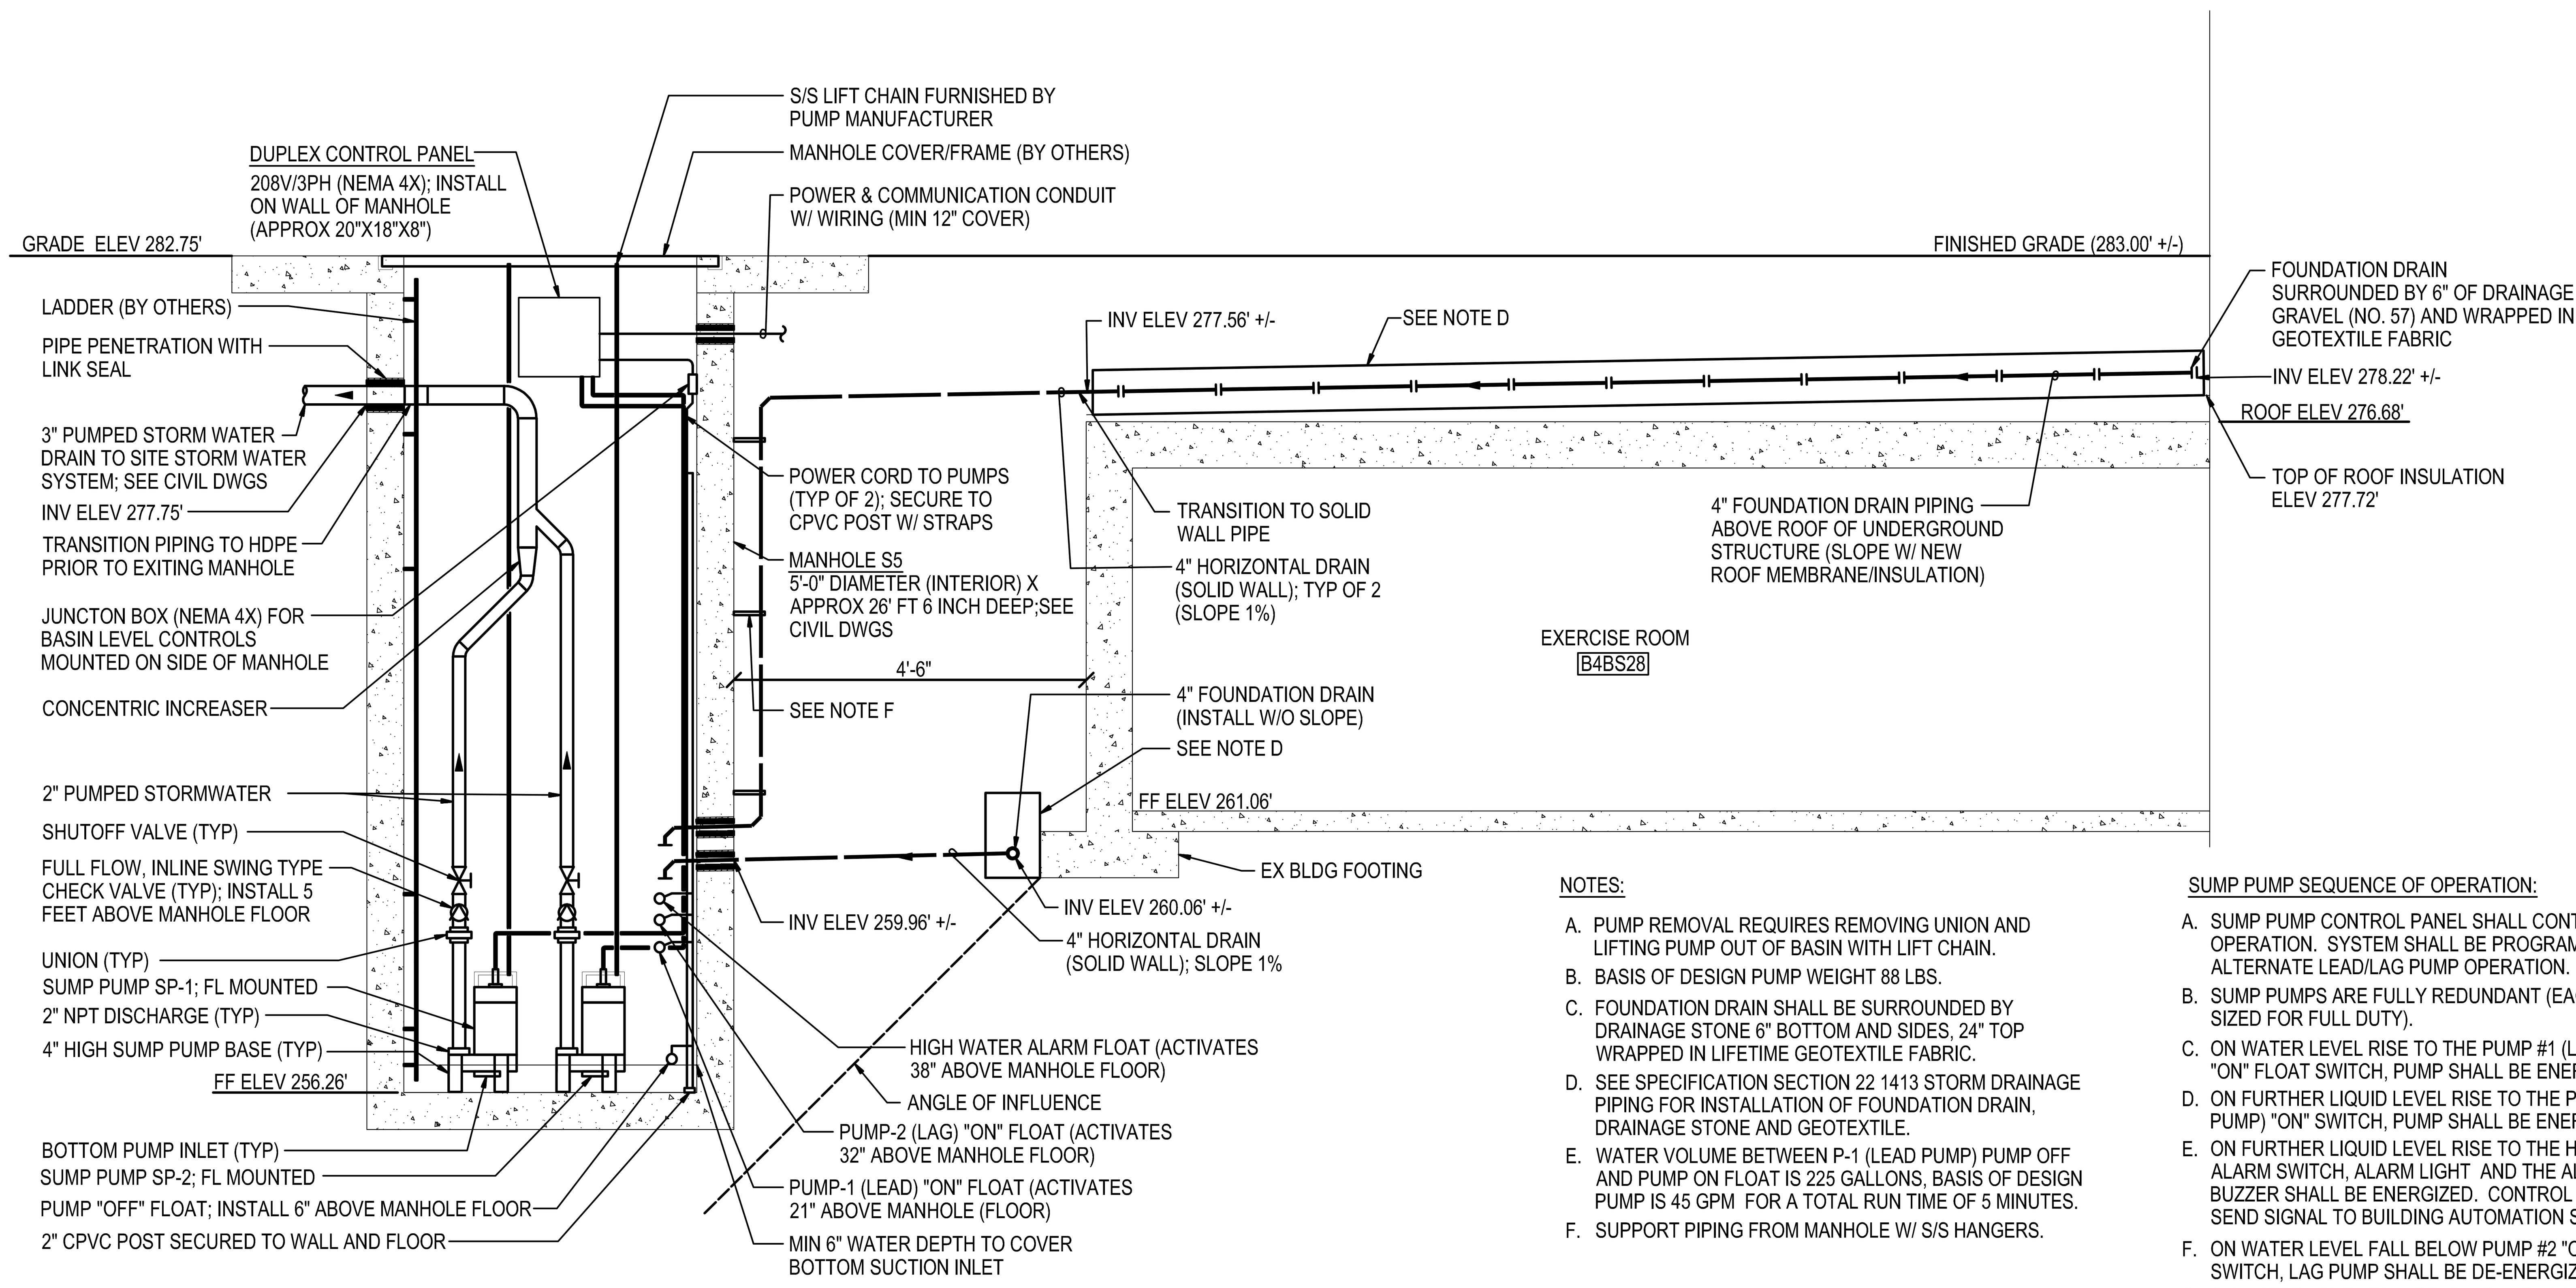

NOTES:

A. PUMP REMOVAL REQUIRES REMOVING UNION AND LIFTING PUMP OUT OF BASIN WITH LIFT CHAIN.
B. BASIS OF DESIGN PUMP WEIGHT 88 LBS.
C. FOUNDATION DRAIN SHALL BE SURROUNDED BY DRAINAGE STONE 6" BOTTOM AND SIDES, 24" TOP WRAPPED IN LIFETIME GEOTEXTILE FABRIC.
D. SEE SPECIFICATION SECTION 22 1413 STORM DRAINAGE PIPING FOR INSTALLATION OF FOUNDATION DRAIN, DRAINAGE STONE AND GEOTEXTILE.
E. WATER VOLUME BETWEEN P-1 (LEAD PUMP) PUMP OFF AND PUMP ON FLOAT IS 225 GALLONS, BASIS OF DESIGN PUMP IS 45 GPM FOR A TOTAL RUN TIME OF 5 MINUTES.
F. SUPPORT PIPING FROM MANHOLE W/ S/S HANGERS.

SUMP PUMP SEQUENCE OF OPERATION:

A. SUMP PUMP CONTROL PANEL SHALL CONTROL PUMP OPERATION. SYSTEM SHALL BE PROGRAMMED TO ALTERNATE LEAD/LAG PUMP OPERATION.
B. SUMP PUMPS ARE FULLY REDUNDANT (EACH PUMP IS SIZED FOR FULL DUTY).
C. ON WATER LEVEL RISE TO THE PUMP #1 (LEAD PUMP) "ON" FLOAT SWITCH, PUMP SHALL BE ENERGIZED.
D. ON FURTHER LIQUID LEVEL RISE TO THE PUMP #2 (LAG PUMP) "ON" SWITCH, PUMP SHALL BE ENERGIZED.
E. ON FURTHER LIQUID LEVEL RISE TO THE HIGH LEVEL ALARM SWITCH, ALARM LIGHT AND THE ALARM HORN OR BUZZER SHALL BE ENERGIZED. CONTROL PANEL SHALL SEND SIGNAL TO BUILDING AUTOMATION SYSTEM.
F. ON WATER LEVEL FALL BELOW PUMP #2 "ON" FLOAT SWITCH, LAG PUMP SHALL BE DE-ENERGIZED.
G. ON WATER LEVEL FALL BELOW PUMP #1 "ON" FLOAT SWITCH, LEAD PUMP SHALL BE DE-ENERGIZED.
H. PACKAGED CONTROL PANEL ALARMS SHALL ANNUNCIATE VIA EXISTING BUILDING 31B BUILDING AUTOMATION SYSTEM.

DETAIL 1 P001

SUMP PUMPS SP-1 & SP-2 AND MANHOLE

NOT TO SCALE

August 28, 2025 2:36 p.m.

DEPARTMENT OF HEALTH & HUMAN SERVICES, USA

LSY ARCHITECTS & LABORATORY PLANNERS

James Posey Associates — Engineering Your Vision

TIMMONS GROUP

SGH

Architect and Engineer Name and LOGO

ARCHITECT: LOUVIERE, STRATTON & YOKEL, LLC
8484 GEORGIA AVE, SUITE 650
SILVER SPRING, MD 20910
(301) 588-1500

MEP ENGINEER: JAMES POSEY ASSOCIATES INC
11155 RED RUN BLVD
OWINGS MILLS, MD 21117
(410) 265-6100

CIVIL ENGINEER: TIMMONS GROUP
2300 N ST NW SUITE 410B
WASHINGTON, DC 20037
(202) 919-2245

STRUCTURAL ENGINEER: SIMPSON GUMPERTZ & HEGER
1625 EYE STREET NW SUITE 900
WASHINGTON, DC 20006
(202) 239-4199

SEAL: STATE OF MARYLAND — KEVIN RAYMOND McCARTHY — PROFESSIONAL ENGINEER

REVISIONS

MARK	DATE	DESCRIPTION

CONTRACTORS

A/E CON. NO.	
A/E TASK NO.	
CONS. CONTR.	
CONS. WORK	
PRIME A/E	LSY ARCHITECTS
SUB A/E	JPA / TIMMONS / SGH
CONSTR. CON.	

BUILDING

FACILITY CODE	
BUILDING NO.	BUILDING 31B
NAME	NIH
STREET	9000 ROCKVILLE PIKE
CITY	BETHESDA
STATE/ZIP	MD / 20892
OTHER BUILDING NO.	

PROJECT

PROJ. NO.	24024
PROJ. OFFICER	MOHAMMED BISWAS
PROJ. MGR.	G.LEE
SUBMISSION	IFC SUBMISSION
SUB. DATE	08/26/25
WRK REQ. NO.	C116635

N

PROJECT TITLE: BUILDING 31B LANDSCAPE WATER INTRUSION

DRAWING TITLE: SYMBOLS, ABBREVIATIONS, & DETAILS

NIH
National Institutes of Health
OFFICE OF RESEARCH FACILITIES
DIVISION OF FACILITIES PLANNING

DESIGNED BY	KRMC
DRAWN BY	JAC
CHECKED BY	KRMC
DATE	08/26/25
FILE NAME	

DRAWING NO. P-001

OF

SHEET NUMBER

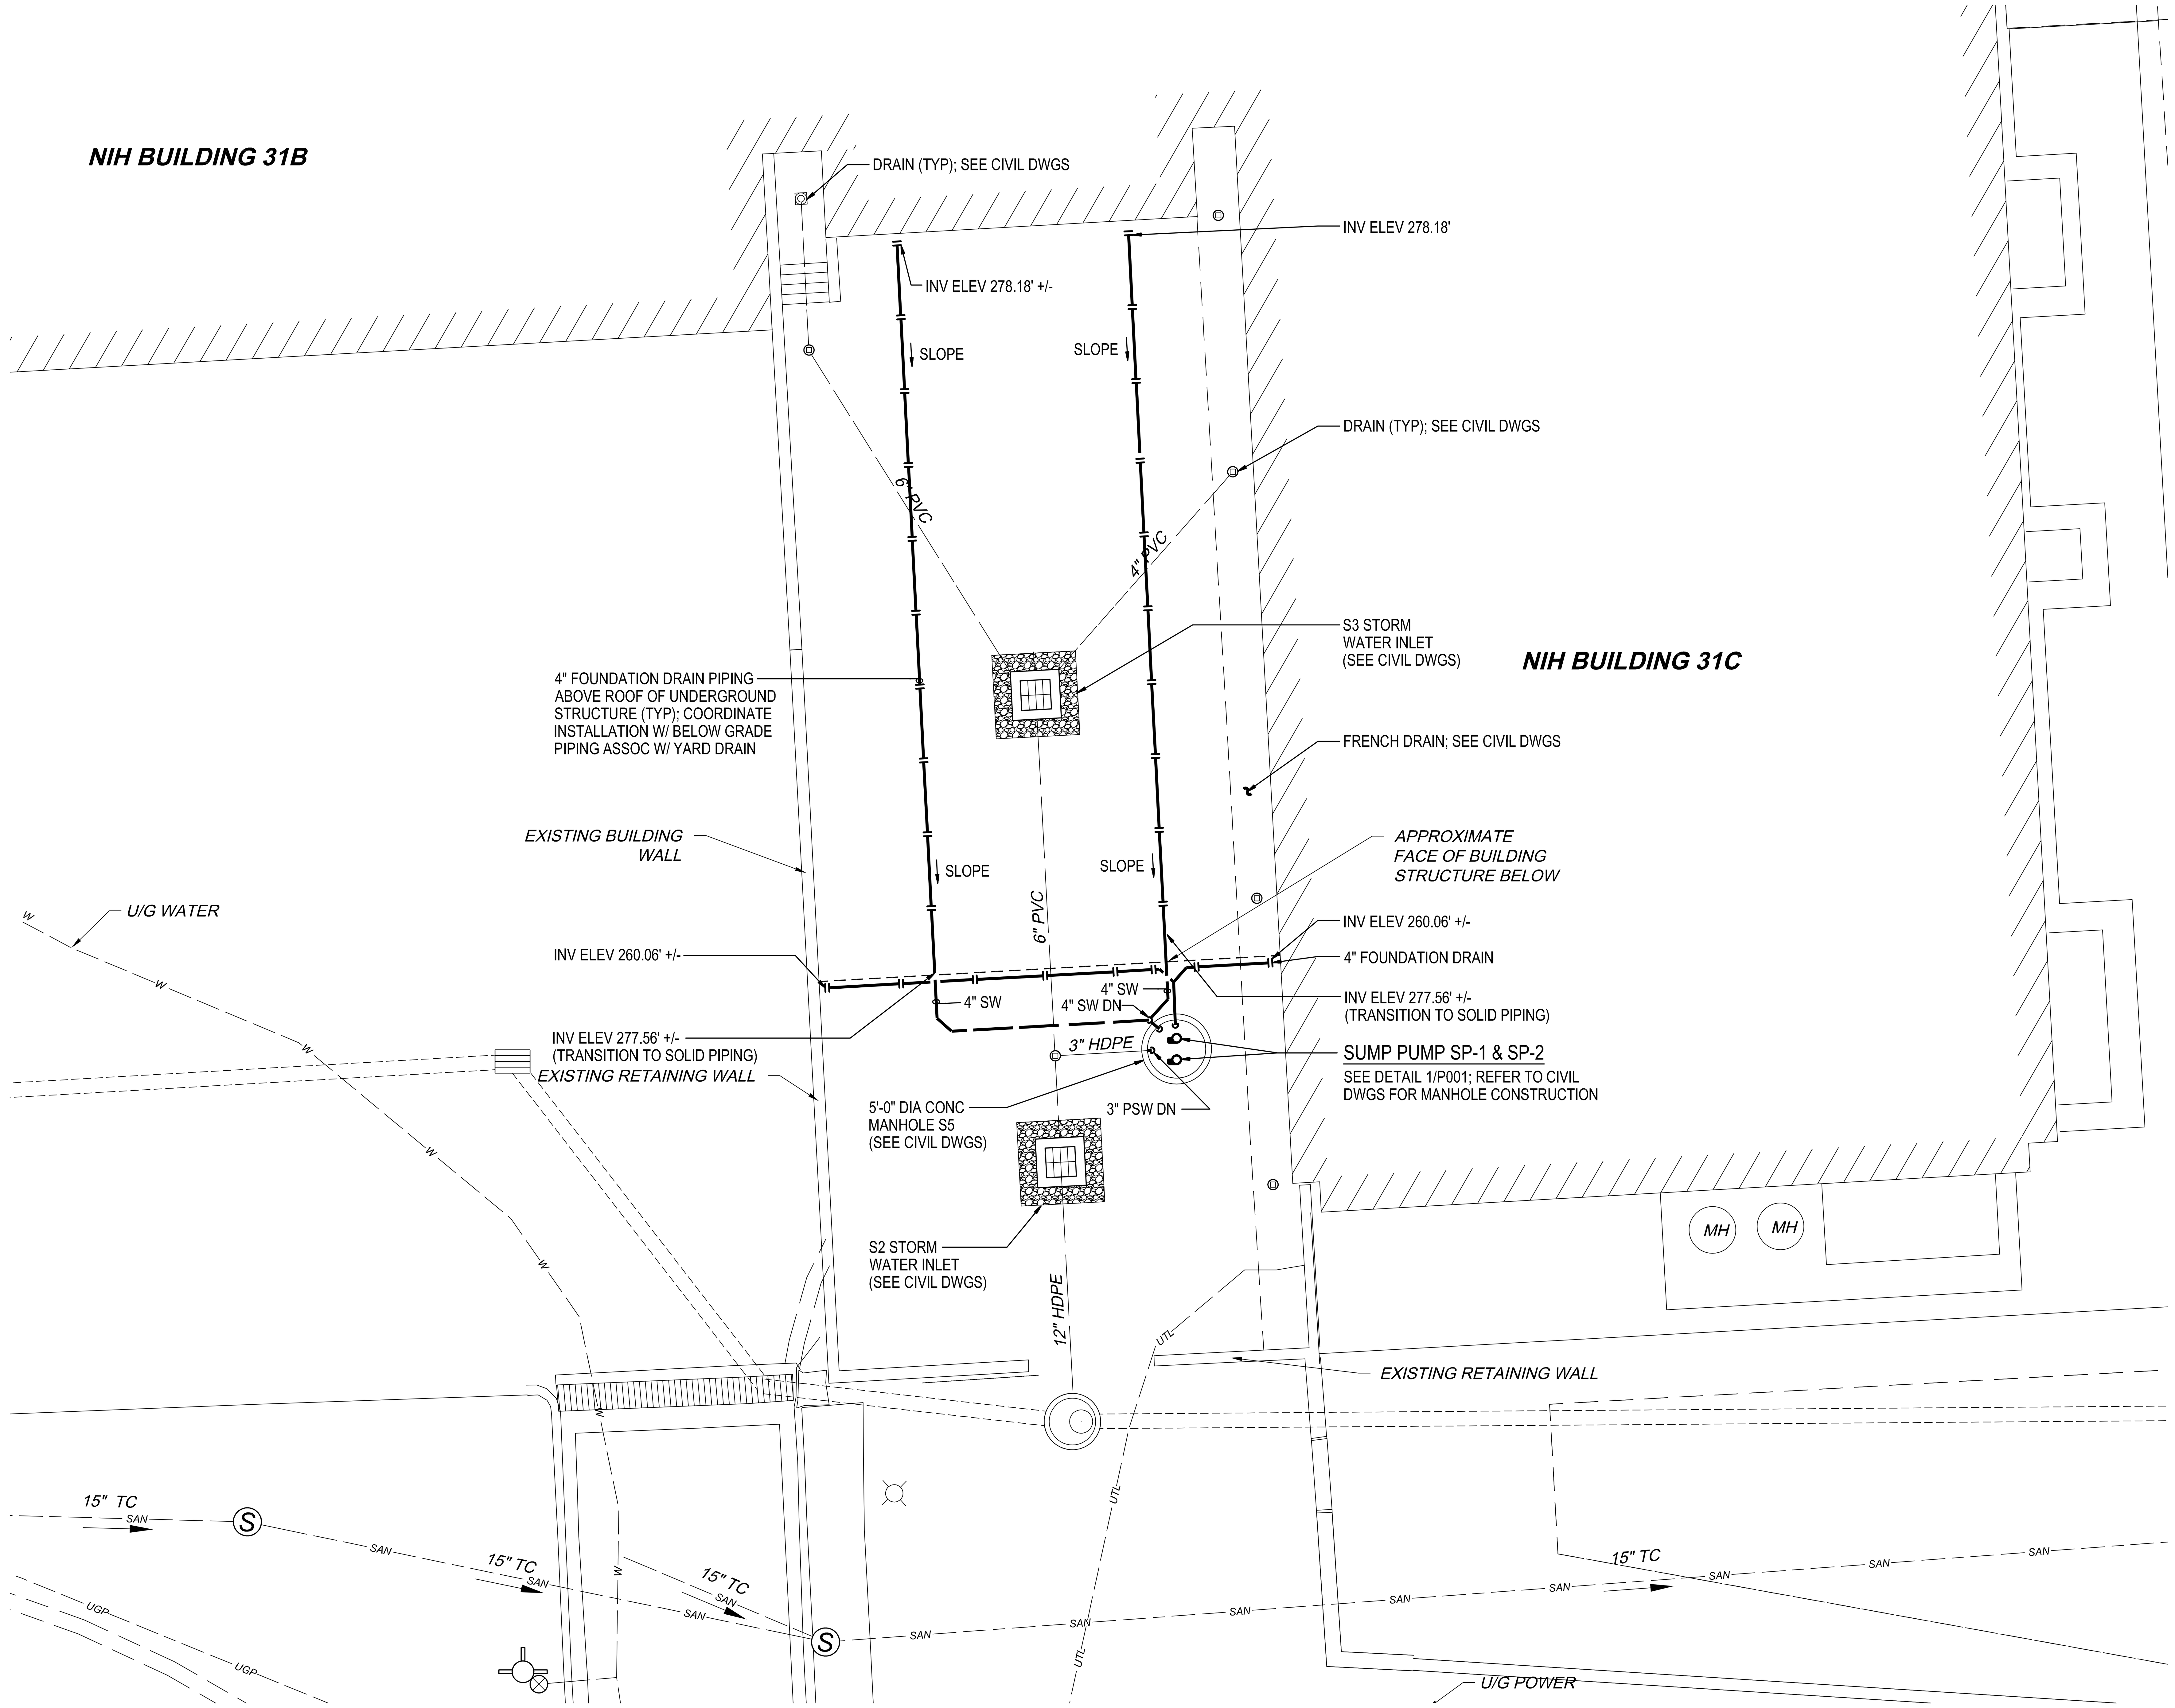

A
P101

PART CAMPUS PLAN

PLUMBING

SCALE: 1/8"=1'-0"

GENERAL NOTES:

A. INFORMATION SHOWN ON THIS DRAWING PERTAINING TO EXISTING CONDITIONS HAS BEEN OBTAINED FROM AVAILABLE BUILDING DRAWINGS OR GENERAL FIELD OBSERVATIONS AND MAY NOT INDICATE EXISTING CONDITIONS IN DETAIL OR DIMENSION. DETERMINE EXISTING CONDITIONS PRIOR TO FABRICATION OR PERFORMANCE OF ANY WORK. SHOULD CONDITIONS BE DISCOVERED THAT PREVENT EXECUTION OF THE WORK AS INDICATED, IMMEDIATELY NOTIFY THE ARCHITECT IN WRITING AND AWAIT DIRECTION BEFORE PROCEEDING WITH THE WORK.

B. DO NOT LOCATE DUCTWORK OR PIPING ABOVE ELECTRICAL PANELS OR EQUIPMENT.

August 28, 2025 2:36 p.m.

DEPARTMENT OF HEALTH & HUMAN SERVICES, USA

LSY
ARCHITECTS & LABORATORY PLANNERS

James Posey Associates
Engineering Your Vision

TIMMONS GROUP

SGH

Architect and Engineer Name and Logo

ARCHITECT: LOUVIERE, STRATTON & YOKEL, LLC
8484 GEORGIA AVE, SUITE 650
SILVER SPRING, MD 20910
(301) 588-1500

MEP ENGINEER: JAMES POSEY ASSOCIATES INC
11155 RED RUN BLVD
OWINGS MILLS, MD 21117
(410) 265-6100

CIVIL ENGINEER: TIMMONS GROUP
2300 N ST NW SUITE 410B
WASHINGTON, DC 20037
(202) 919-2245

STRUCTURAL ENGINEER: SIMPSON GUMPERTZ & HEGER
1625 EYE STREET NW SUITE 900
WASHINGTON, DC 20006
(202) 239-4199

SEAL

STATE OF MARYLAND
KEVIN RAYMOND McCARTHY
PROFESSIONAL ENGINEER

REVISIONS

MARK	DATE	DESCRIPTION

CONTRACTORS

A/E CON. NO.	
A/E TASK NO.	
CONS. CONTR.	
CONS. WORK	
PRIME A/E	LSY ARCHITECTS
SUB A/E	JPA / TIMMONS / SGH
CONSTR. CON.	

BUILDING

FACILITY CODE	
BUILDING NO.	BUILDING 31B
NAME	NIH
STREET	9000 ROCKVILLE PIKE
CITY	BETHESDA
STATE/ZIP	MD / 20892
OTHER BUILDING NO.	

PROJECT

PROJ. NO.	24024
PROJ. OFFICER	MOHAMMED BISWAS
PROJ. MGR.	G.LEE
SUBMISSION	IFC SUBMISSION
SUB. DATE	08/26/25
WRK REQ. NO.	C116635

N

PROJECT TITLE: BUILDING 31B LANDSCAPE WATER INTRUSION

DRAWING TITLE: PART CAMPUS PLAN - PLUMBING

NIH
National Institutes of Health
OFFICE OF RESEARCH FACILITIES
DIVISION OF FACILITIES PLANNING

DESIGNED BY	KRMC
DRAWN BY	JAC
CHECKED BY	KRMC
DATE	08/26/25
FILE NAME	

DRAWING NO. P-101

OF
SHEET NUMBER

GENERAL NOTES:

A. INFORMATION SHOWN ON THIS DRAWING PERTAINING TO EXISTING CONDITIONS HAS BEEN OBTAINED FROM AVAILABLE BUILDING DRAWINGS OR GENERAL FIELD OBSERVATIONS AND MAY NOT INDICATE EXISTING CONDITIONS IN DETAIL OR DIMENSION. DETERMINE EXISTING CONDITIONS PRIOR TO FABRICATION OR PERFORMANCE OF ANY WORK. SHOULD CONDITIONS BE DISCOVERED THAT PREVENT EXECUTION OF THE WORK AS INDICATED, IMMEDIATELY NOTIFY THE ARCHITECT IN WRITING AND AWAIT DIRECTION BEFORE PROCEEDING WITH THE WORK.

SPECIFIC NOTES:

1 PROVIDE AND CONNECT TO NEW 3P-15A GFCI-TYPE BREAKER IN EXISTING PANEL B3LA. SEE PANEL SCHEDULE ON SHEET E002. BREAKER SHALL MATCH EXISTING PANELBOARD CHARACTERISTICS. EXISTING PANELBOARD IS A GENERAL ELECTRIC TYPE NAB.

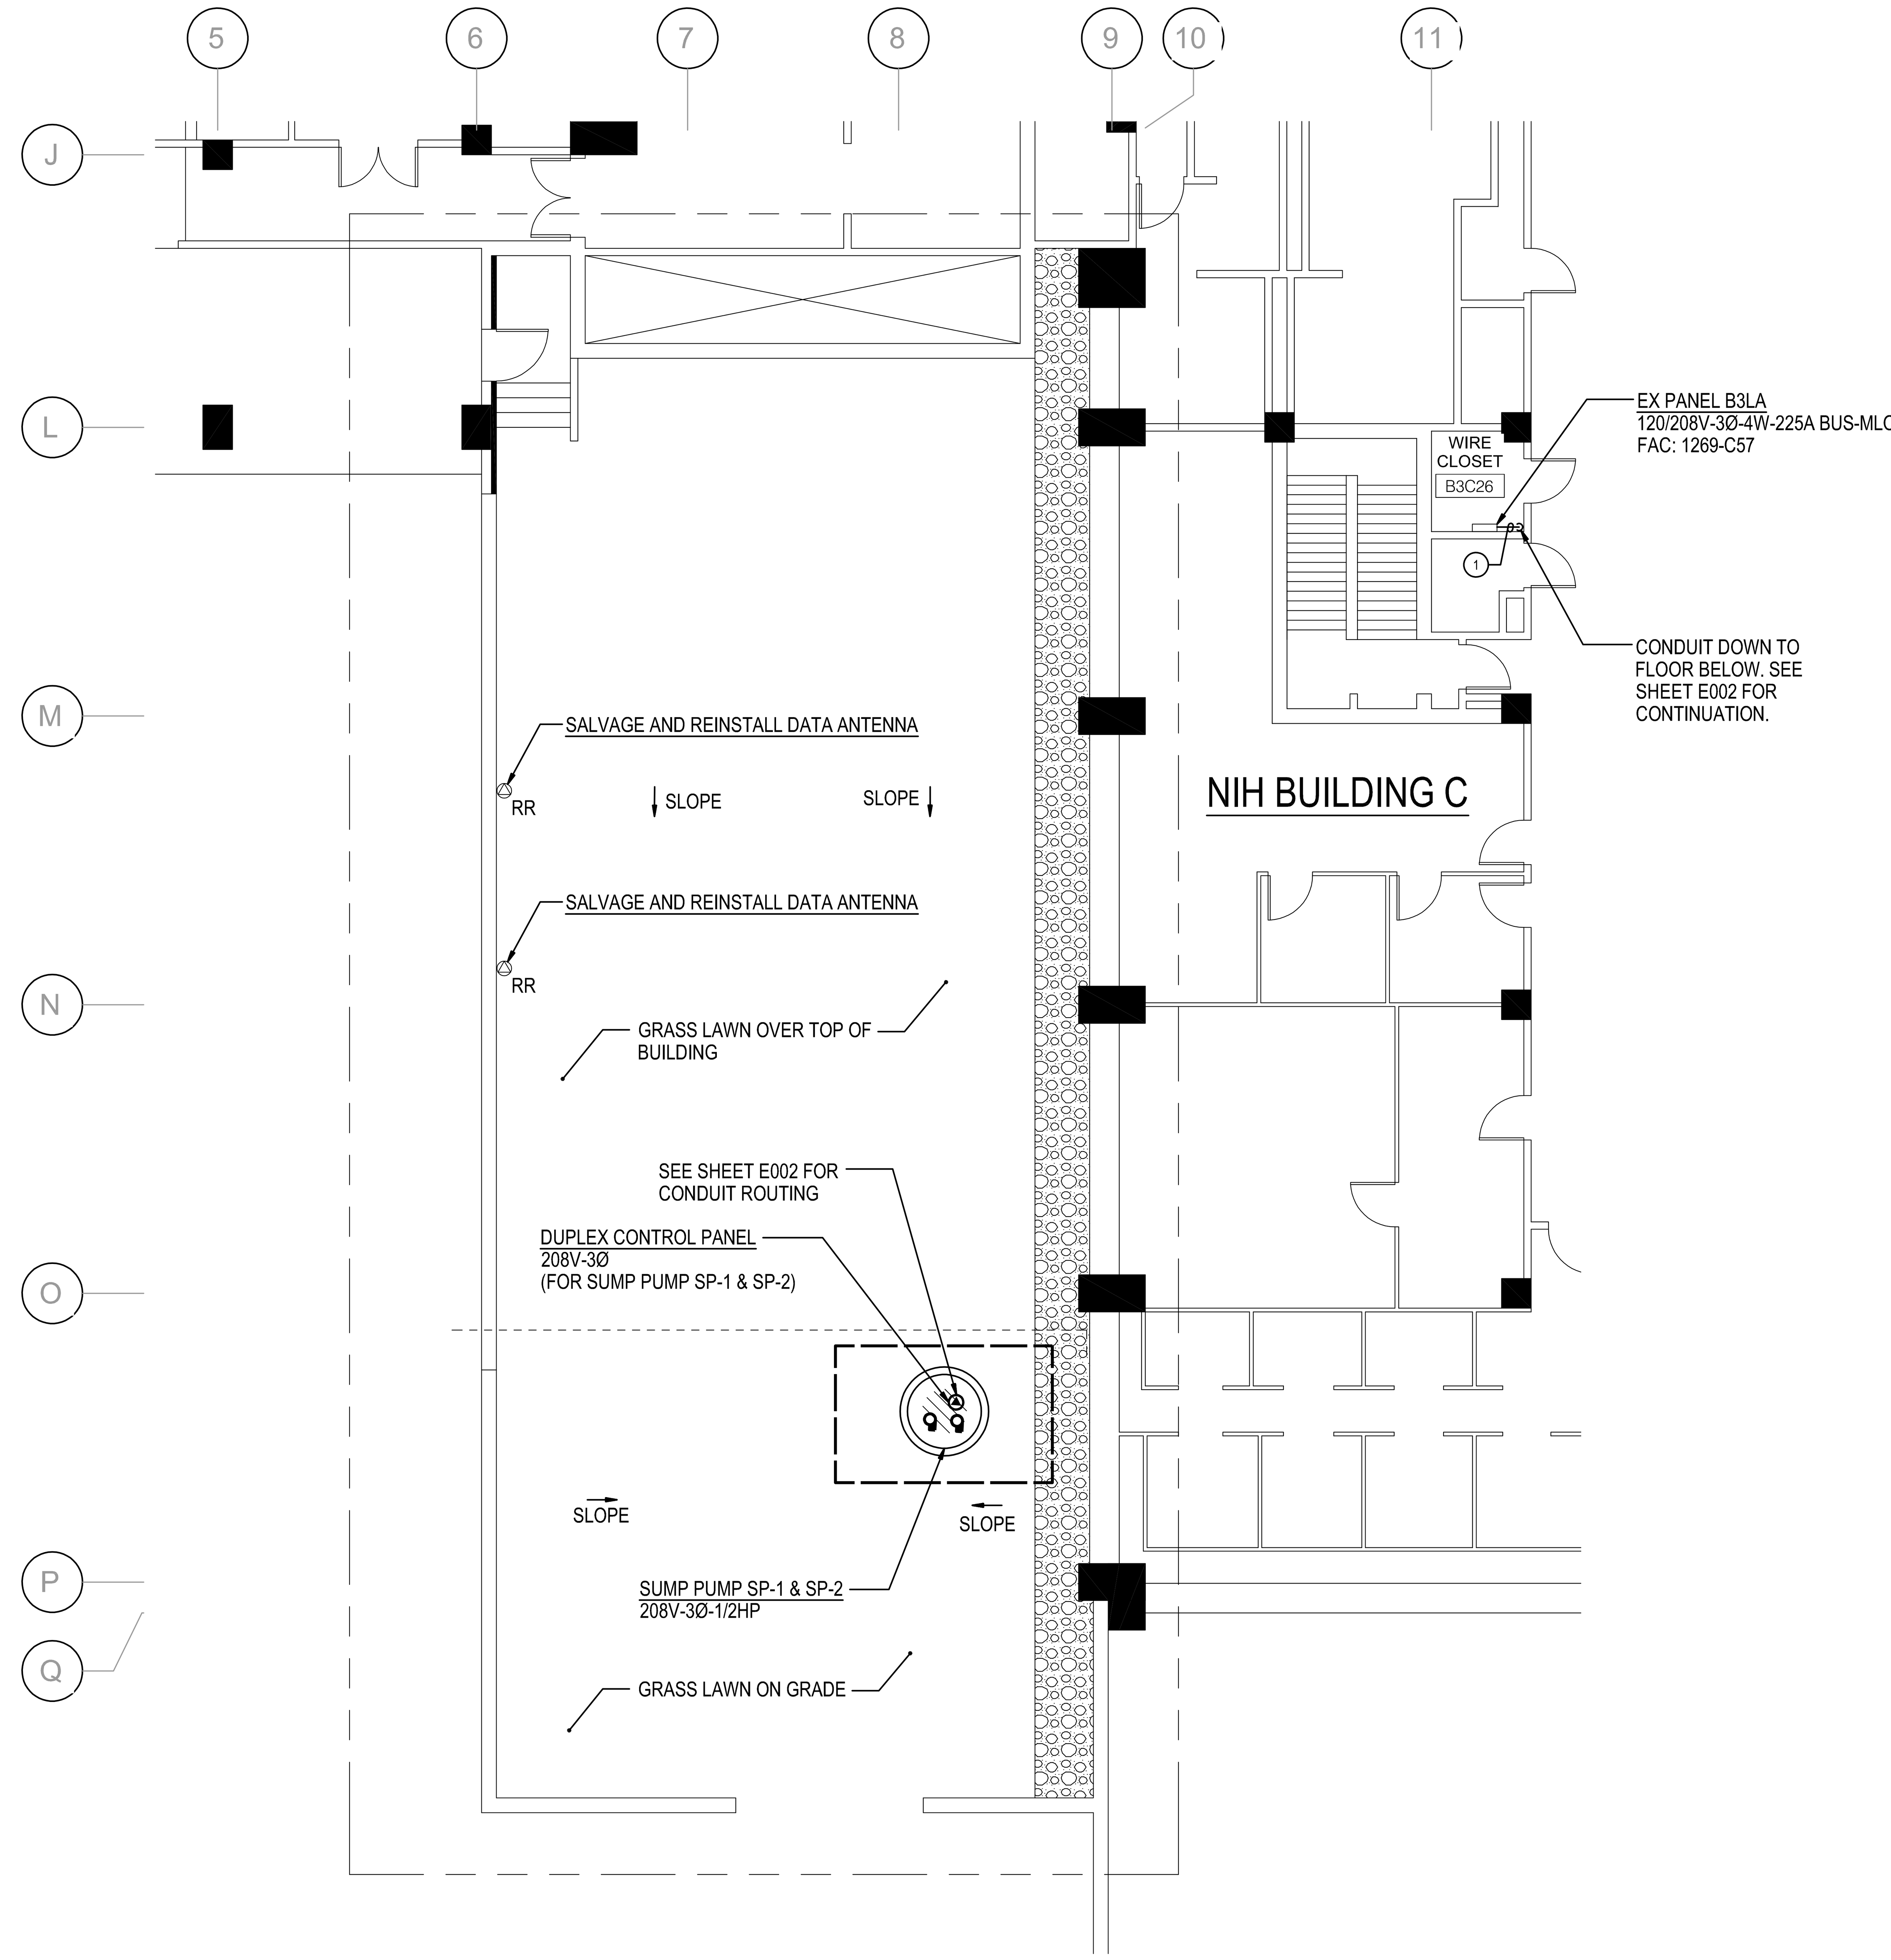

A
E001
PART CAMPUS PLAN
ELECTRICAL - LEVEL B3
SCALE: 1/8"=1'-0"

ELECTRICAL SYMBOLS AND ABBREVIATIONS

GENERAL

ALL SYMBOLS SHOWN ON THE PLANS AS HEAVY DASHED (– – – –) ARE EXISTING AND SHALL BE DISCONNECTED AND REMOVED UNLESS OTHERWISE NOTED. ALL SYMBOLS SHOWN ON THE PLANS AS LIGHT CONTINUOUS (———) ARE EXISTING TO REMAIN UNLESS OTHERWISE NOTED.

DETAIL NUMBER
1
E-001
1/E-001
DRAWING NUMBER WHERE DETAIL EXISTS

NOTES

1. ALL MOUNTING HEIGHTS ARE TO TOP OF DEVICES UNLESS OTHERWISE NOTED.
2. REFER TO ARCHITECTURAL ELEVATIONS FOR ADDITIONAL MOUNTING HEIGHT INFORMATION.
3. WIRING DEVICES AND DEVICE OUTLET BOXES SHALL BE RECESSED IN NEW WALL CONSTRUCTION AND SURFACE MOUNTED ON EXISTING MASONARY CONSTRUCTION UNLESS OTHERWISE NOTED.
4. ELECTRICAL CONTRACTOR SHALL NOT DRILL OR PENETRATE EXISTING STRUCTUAL BEAMS TO ROUTE CONDUIT UNLESS APPROVED BY THE PROJECT OFFICER.
5. CONTRACTOR SHALL PREPARE AND SUMBIT AS-BUILD DRAWINGS UPON COMPLETION OF WORK FOR OWNER'S RECORD OR WORK.

ABBREVIATIONS

A, AMP	AMPERE, AMPS	LTG	LIGHTING
AF	ABOVE FLOOR	MCB	MAIN CIRCUIT BREAKER
AFF	ABOVE FINISHED FLOOR	MLO	MAIN LUGS ONLY
AWG	AMERICAN WIRE GAUGE	MOA	MULTI OUTLET ASSEMBLY
C	CONDUIT	MTD	MOUNTED
CB	CIRCUIT BREAKER	NIC	NOT IN CONTRACT
CKT	CIRCUIT	NTS	NOT TO SCALE
DISC	DISCONNECT	P	POLE
DN	DOWN	REC	RECEPTACLE
DWG	DRAWING	RGS	RIGID GALVANIZED STEEL
DX	DISCONNECT EXISTING	RM	ROOM
EC	EMPTY CONDUIT	RX	REMOVE EXISTING
ECB	ENCLOSED CIRCUIT BREAKER	SW	SWITCH
EF	EXHAUST FAN	TYP	TYPICAL
EM	EMERGENCY	UON	UNLESS OTHERWISE NOTED
EMT	ELECTRICAL METALLIC TUBING	V	VOLTS
ETR	EXISTING TO REMAIN	W	WATTS, WIRE
EX EXH	EXISTING EXHAUST	WP	WEATHERPROOF
G, GRD	GROUND, GFCI	XFMR	TRANSFORMER
GFCI	GROUND FAULT CIRCUIT INTERRUPTER	1/C	SINGLE CONDUCTOR
		3/C	THREE CONDUCTOR
JB	JUNCTION BOX	Ø	PHASE
KVA	KILO-VOLT-AMPERES	Δ	DELTA
KW	KILOWATTS	Y	WYE

EXISTING

EXISTING TO REMAIN SURFACE MOUNTED 120/208V PANELBOARD.

RR EXISTING EQUIPMENT CONNECTION SALVAGED AND REINSTALLED, AS NOTED. SURFACE OR FLUSH MOUNTED AS INDICATED.

POWER

EQUIPMENT CONNECTION, AS NOTED, SIZE AS REQUIRED. SURFACE OR FLUSH MOUNTED AS INDICATED.

20A-125V DUPLEX GROUNDING TYPE CONVENIENCE RECEPTACLE WITH WEATHERPROOF COVER, NEMA CONFIGURATION 5-20R, MOUNTED 20" ABOVE FLOOR TO TOP OF BOX, UNLESS OTHERWISE NOTED.

WIRING

CONDUIT AND WIRING CONCEALED IN WALL, CEILING SPACE, OR LANDSCAPING UNLESS OTHERWISE NOTED.

DIRECT BURIED CONDUIT AND WIRING. PROVIDE PULL CORDS FOR EMPTY CONDUITS.

HOMERUN TO PANELBOARD. NUMBER OF ARROWS INDICATES NUMBER OF CIRCUITS. NUMBER OF HASH MARKS INDICATES NUMBER OF PHASE AND NEUTRAL CONDUCTORS. WHERE NO HASH MARKS APPEAR, TWO CONDUCTORS PLUS GROUND ARE IMPLIED. PROVIDE GROUND CONDUCTOR WITH ALL FEEDERS AND BRANCH CIRCUITS.

JUNCTION BOX.

8 4 0 8 16
SCALE: 1/8" = 1'-0"

PROPERTY OF THE UNITED STATES GOVERNMENT
FOR OFFICIAL USE ONLY
Do not remove this notice
Properly destroy documents when no longer needed

DEPARTMENT OF HEALTH & HUMAN SERVICES, USA

LSY ARCHITECTS & LABORATORY PLANNERS
James Posey Associates
TIMMONS GROUP
SGH

Architect and Engineer Name and Logo

ARCHITECT: LOUVIERE, STRATTON & YOKEL, LLC
8484 GEORGIA AVE, SUITE 650
SILVER SPRING, MD 20910
(301) 588-1500

MEP ENGINEER: JAMES POSEY ASSOCIATES INC
11155 RED RUN BLVD
OWINGS MILLS, MD 21117
(410) 265-6100

CIVIL ENGINEER: TIMMONS GROUP
2300 N ST NW SUITE 410B
WASHINGTON, DC 20037
(202) 919-2245

STRUCTURAL ENGINEER: SIMPSON GUMPERTZ & HEGER
1625 EYE STREET NW SUITE 900
WASHINGTON, DC 20006
(202) 239-4199

SEAL
STATE OF MARYLAND
THOMAS M CLIPPINGER
PROFESSIONAL ENGINEER

REVISIONS

MARK	DATE	DESCRIPTION

CONTRACTORS

A/E CON. NO.	
A/E TASK NO.	
CONS. CONTR.	
CONS. WORK	
PRIME A/E	LSY ARCHITECTS
SUB A/E	JPA / TIMMONS / SGH
CONSTR. CON.	

BUILDING

FACILITY CODE	
BUILDING NO.	BUILDING 31B
NAME	NIH
STREET	9000 ROCKVILLE PIKE
CITY	BETHESDA
STATE/ZIP	MD / 20892
OTHER BUILDING NO.	

PROJECT

PROJ. NO.	24024
PROJ. OFFICER	MOHAMMED BISWAS
PROJ. MGR.	G.LEE
SUBMISSION	IFC SUBMISSION
SUB. DATE	08/26/25
WRK REQ. NO.	C116635

N

PROJECT TITLE: BUILDING 31B LANDSCAPE WATER INTRUSION

DRAWING TITLE: PART CAMPUS PLAN - ELECTRICAL - LEVEL B3

NIH
National Institutes of Health
OFFICE OF RESEARCH FACILITIES
DIVISION OF FACILITIES PLANNING

DESIGNED BY	JHK
DRAWN BY	JHK
CHECKED BY	TMC
DATE	08/26/25
FILE NAME	

DRAWING
DRAWING NO. E-001

OF
SHEET NUMBER

August 28, 2025 3:33 p.m.

GENERAL NOTES:

A. INFORMATION SHOWN ON THIS DRAWING PERTAINING TO EXISTING CONDITIONS HAS BEEN OBTAINED FROM AVAILABLE BUILDING DRAWINGS OR GENERAL FIELD OBSERVATIONS AND MAY NOT INDICATE EXISTING CONDITIONS IN DETAIL OR DIMENSION. DETERMINE EXISTING CONDITIONS PRIOR TO FABRICATION OR PERFORMANCE OF ANY WORK. SHOULD CONDITIONS BE DISCOVERED THAT PREVENT EXECUTION OF THE WORK AS INDICATED, IMMEDIATELY NOTIFY THE ARCHITECT IN WRITING AND AWAIT DIRECTION BEFORE PROCEEDING WITH THE WORK.

B. CONTRACTOR SHALL REMOVE AND REINSTALL EXISTING CEILING TILES WITHIN CONSTRUCTION AREAS AS REQUIRED.

SPECIFIC NOTES:

1. CONDUIT PENETRATION BELOW GRADE. CONDUIT SHALL ENTER THE BUILDING AND INTO ACCESSIBLE ABOVE CEILING SPACE ON LEVEL B4. CONDUIT SHALL BE ROUTED UP TO PANEL B3LA IN WIRE CLOSET B3C26 ON LEVEL B3. CONTRACTOR SHALL MAKE CUTS AND PATCHES TO DRYWALL AS NECESSARY TO ROUTE THE EXTERIOR CONDUIT PENETRATION WITHIN THE INTERIOR OF THE BUILDING. SEE DETAIL B/E002 ON THIS SHEET FOR ADDITIONAL INFORMATION.

2. CONTRACTOR SHALL KEEP DISTURBANCES TO A MINIMUM DURING INSTALLATION OF NEW CONDUIT AND WIRING ABOVE CEILING. REPLACE AND REINSTALL ANY CEILING TILES DAMAGED DURING CONSTRUCTION.

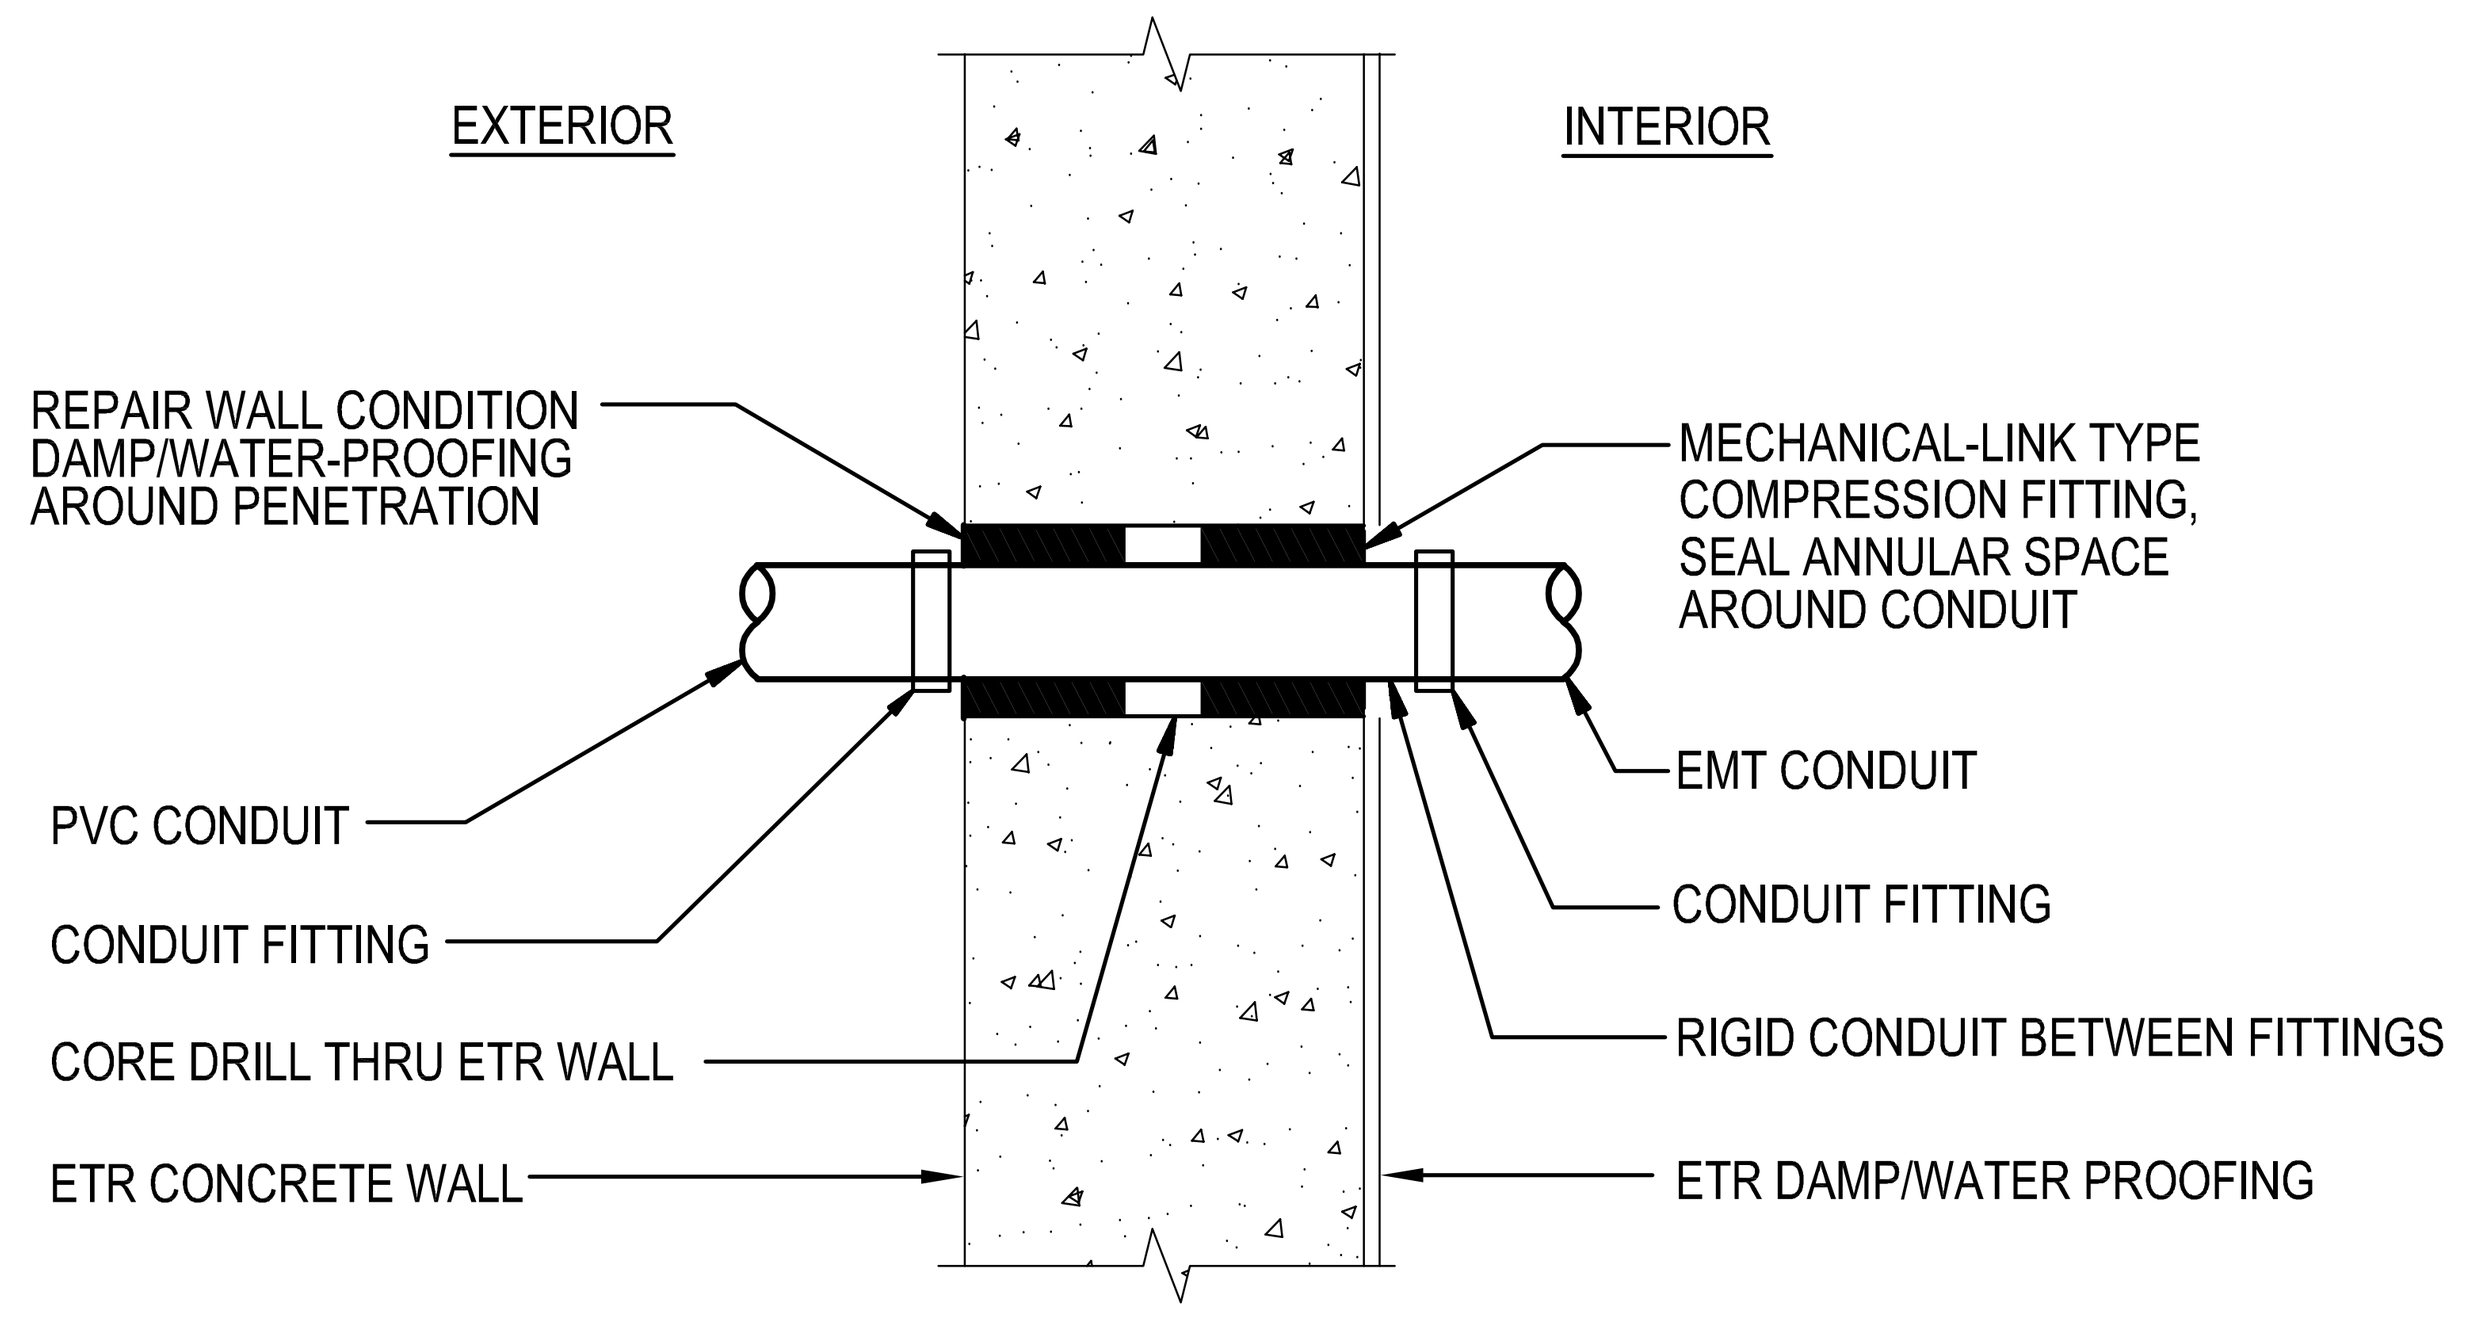

DETAIL B / E002
CONDUIT PENETRATION THROUGH BELOW GRADE EXTERIOR WALL
NOT TO SCALE

EXISTING WIRING PANEL SCHEDULE B3LA

120 / 208 VOLTS — 3 PHASE 4 WIRE — 225 AMP BUS — SURFACE MOUNTED

CIR-CUIT	POLE	DESCRIPTION	WIRE/ CONDUIT	BREAKER POLE	BREAKER AMP	KVA / Ø AØ		BØ		CØ		CIR-CUIT	POLE	DESCRIPTION	WIRE/ CONDUIT	BREAKER POLE	BREAKER AMP
1	1	EX. FLOOR REC	ETR	1	20	-	-					2	2	EX. REC B3C23	ETR	1	20
3	3	EX. FLOOR REC	ETR	1	20			-	-			4	4	EX. CIRCUIT	ETR	1	20
5	5	EX. FLOOR REC	ETR	1	20					-	-	6	6	EX. REC B3C33	ETR	1	20
7	7	EX. CIRCUIT	ETR	1	20	-	-					8	8	EX. REC B3C36	ETR	1	20
9	9	EX. REC BC3-33D CENTER	ETR	1	20			-	-			10	10	EX. REC B3C23	ETR	1	20
11	11	EX. REC BC3-33D EAST	ETR	1	20					-	-	12	12	EX. REC B3C3D	ETR	1	20
13	13	EX. SYSTEMS FURN	ETR	1	20	-	-					14	14	EX. REC TEL BOOTH LTG	ETR	1	20
15	15	EX. WIRE & TEL CLOSET	ETR	1	20			-	-			16	16	EX. WATER COOLER	ETR	1	20
17	17	EX. CORR REC	ETR	1	20					-	-	18	18	EX. FURNITURE OUTLET	ETR	1	20
19	19	EX. CIRCUIT	ETR	1	20	-	-					20	20	EX. CIRCUIT	ETR	1	20
21	21	EX. CIRCUIT	ETR	1	20			-	-			22	22	EX. CIRCUIT	ETR	1	20
23	23	EX. CIRCUIT	ETR	1	20					-	-	24	24	EX. CIRCUIT	ETR	1	20
25	25	EX. EXHAUST FAN LAN	ETR	1	20	-	-					26	26				
27	27							-	-			28	28	EX. AIR CURTAIN	ETR	3	50
29	29	EX. SYSTEMS FURN	ETR	3	70					-	-	30	30				
31	31					-	-					32	32	EX. FRONT DOORS C SIDE	ETR	1	20
33	33	EX. CIRCUIT	ETR	1	20			-	-			34	34	EX. 13D ATM REC	ETR	1	20
35	**35**									0.3	-	36	36	SPACE & PROVISION	-	1	-
37	**37**	**SP-1 & SP-2 CONTROL PANEL (1)**	**3#12+ #12G- 3/4"C**	**3**	**15**	0.3	-					38	38	SPACE & PROVISION	-	1	-
39	**39**							0.3	-			40	40	SPACE & PROVISION	-	1	-
41	**41**	**REC MANHOLE CONV. (2)**	**#12-3/4"C**	**1**	**20**					0.2	-	42	42	SPACE & PROVISION	-	1	-
						0.3	0.0	0.3	0.0	0.5	0.0						
						0.3		0.3		0.5							

ADDED CONNECTED LOAD = 1.0 KVA

ADDED DEMAND LOAD = 1.0 KVA

EXISTING MIN AIC RATING = 10,000 AMPS SYMMETRICAL

MAIN LUGS ONLY
EX. MFGR: GE TYPE NAB
FAC: 1269-C57
LOCATION CLOSET B-3-C-26

PANELBOARD NOTES:

1. PROVIDE NEW 3P-15A-240V-10,000 AIC CIRCUIT BREAKER IN AVAILABLE SPACE. NEW BREAKER SHALL MATCH EXISTING PANELBOARD CHARACTERISTICS. PRIOR TO ORDERING, VERIFY EXISTING PANELBOARD CHARACTERISTICS.

2. PROVIDE NEW 1P-20A-240V-10,000 AIC CIRCUIT BREAKER IN AVAILABLE SPACE. NEW BREAKER SHALL MATCH EXISTING PANELBOARD CHARACTERISTICS. PRIOR TO ORDERING, VERIFY EXISTING PANELBOARD CHARACTERISTICS.

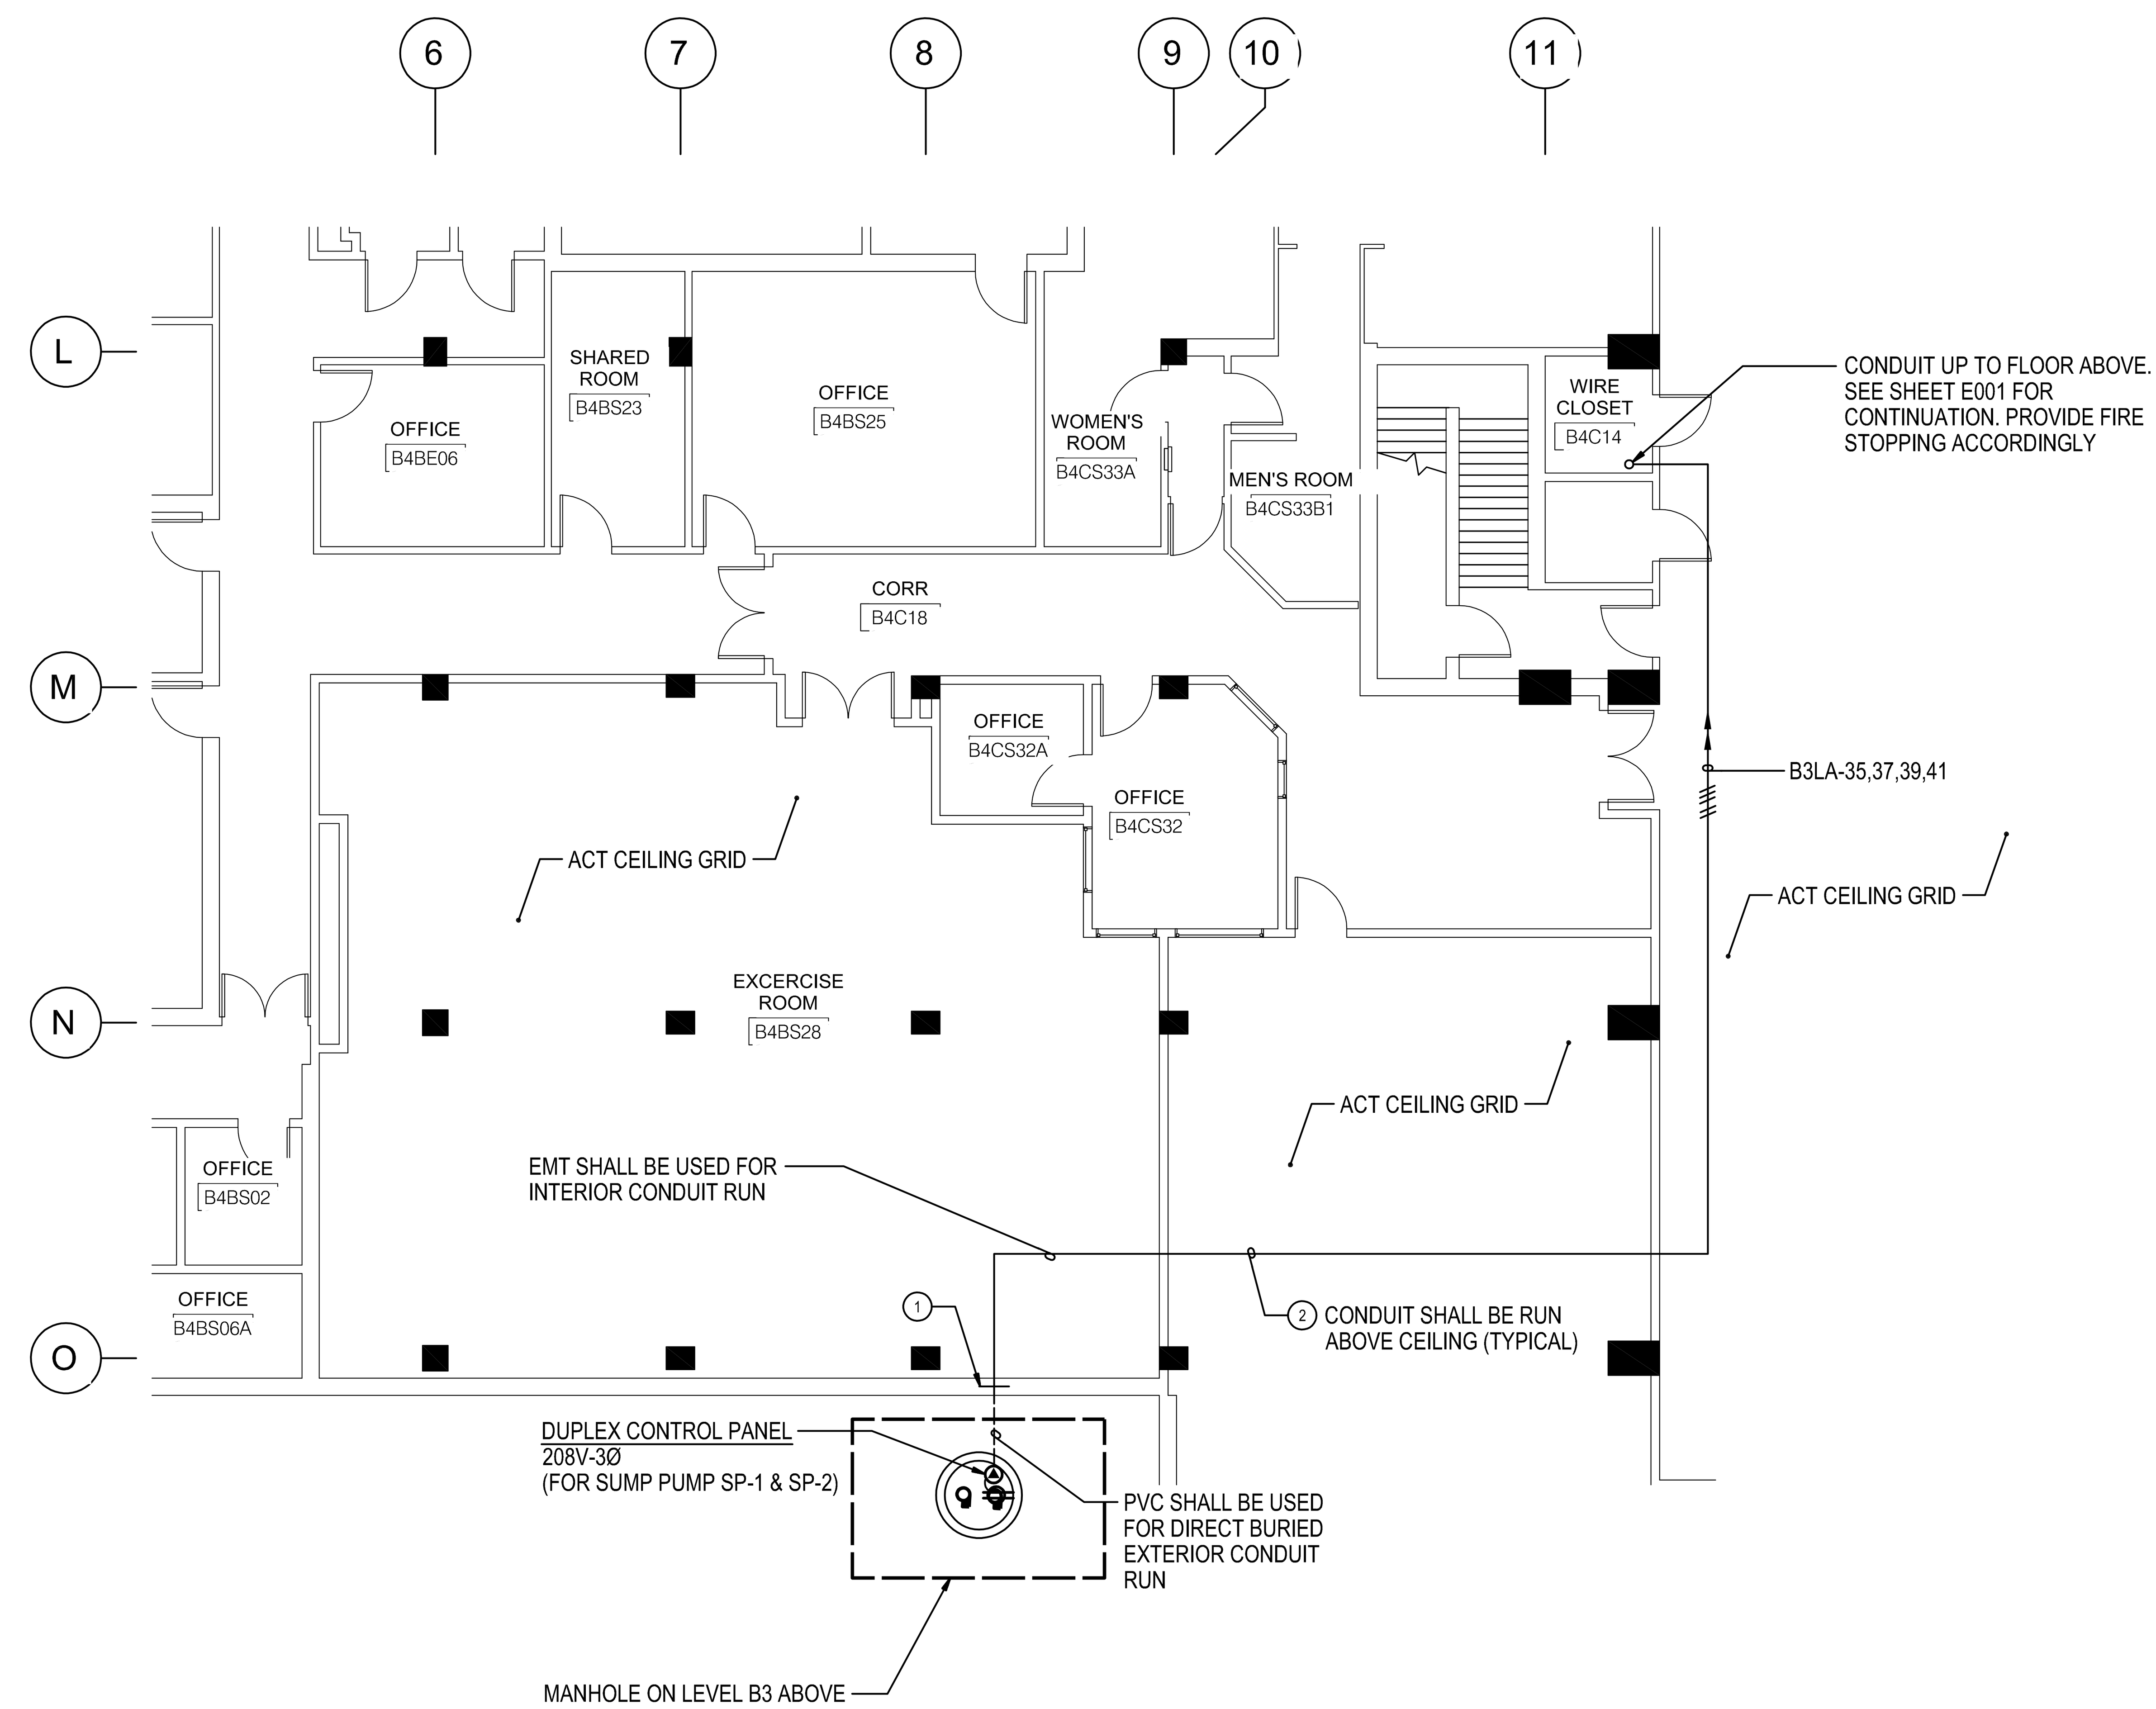

PART CAMPUS PLAN A / E002
ELECTRICAL - LEVEL B4
SCALE: 1/8"=1'-0"

8 4 0 8 16
SCALE: 1/8" = 1'-0"

PROPERTY OF THE UNITED STATES GOVERNMENT
FOR OFFICIAL USE ONLY
Do not remove this notice
Properly destroy documents when no longer needed

LSY ARCHITECTS & LABORATORY PLANNERS
James Posey Associates
TIMMONS GROUP
SGH

Architect and Engineer Name and LOGO

ARCHITECT: LOUVIERE, STRATTON & YOKEL, LLC, 8484 GEORGIA AVE, SUITE 650, SILVER SPRING, MD 20910, (301) 588-1500

MEP ENGINEER: JAMES POSEY ASSOCIATES INC, 11155 RED RUN BLVD, OWINGS MILLS, MD 21117, (410) 265-6100

CIVIL ENGINEER: TIMMONS GROUP, 2300 N ST NW SUITE 410B, WASHINGTON, DC 20037, (202) 919-2245

STRUCTURAL ENGINEER: SIMPSON GUMPERTZ & HEGER, 1625 EYE STREET NW SUITE 900, WASHINGTON, DC 20006, (202) 239-4199

SEAL: STATE OF MARYLAND — THOMAS M CLIPPINGER — PROFESSIONAL ENGINEER — No. 32060

REVISIONS

MARK	DATE	DESCRIPTION

CONTRACTORS
A/E CON. NO.
A/E TASK NO.
CONS. CONTR.
CONS. WORK
PRIME A/E: LSY ARCHITECTS
SUB A/E: JPA / TIMMONS / SGH
CONSTR. CON.

BUILDING
FACILITY CODE
BUILDING NO.: BUILDING 31B
NAME: NIH
STREET: 9000 ROCKVILLE PIKE
CITY: BETHESDA
STATE/ZIP: MD / 20892
OTHER BUILDING NO.

PROJECT
PROJ. NO.: 24024
PROJ. OFFICER: MOHAMMED BISWAS
PROJ. MGR.: G.LEE
SUBMISSION: IFC SUBMISSION
SUB. DATE: 08/26/25
WRK REQ. NO.: C116635

N

PROJECT TITLE: BUILDING 31B LANDSCAPE WATER INTRUSION

DRAWING TITLE: PART CAMPUS PLAN - ELECTRICAL - LEVEL B4

NIH National Institutes of Health
OFFICE OF RESEARCH FACILITIES
DIVISION OF FACILITIES PLANNING

DESIGNED BY: JHK
DRAWN BY: JHK
CHECKED BY: TMC
DATE: 08/26/25
FILE NAME

DRAWING NO. E-002
OF
SHEET NUMBER

August 28, 2025 3:24 p.m. JAMES.KANG