



Mezzanine area to be reinforced:



- Area under mezzanine will be cleared of all govt equipment prior to work starting
- Contractor will be able to use adjacent roll-up door for access
- Contractor can store materials and equipment under mezzanine for the duration of the work (after-hours access will not be authorized)

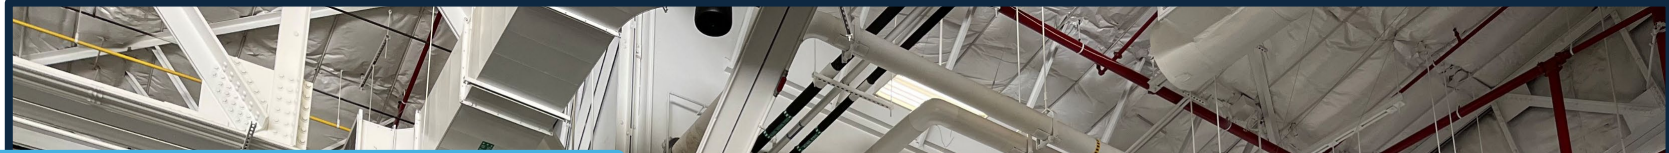



Approximate location of 3 beams:

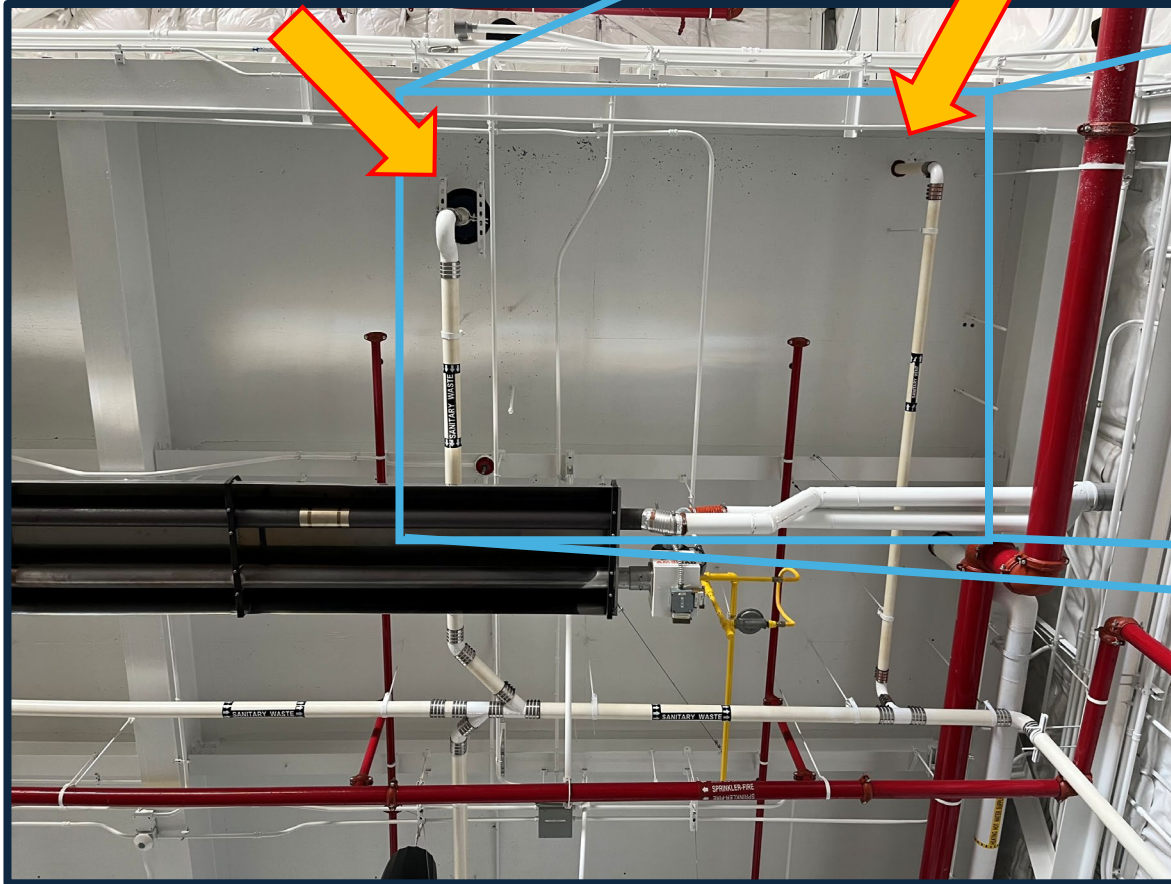

- The beams will sit against the slab (these are just lines drawn onto a photo)
- Although not clearly illustrated, the conduit is approximately 12 to 15 inches below where the new beams will be installed and will not interfere.
- Note penetrations  for reference in other photos

Additional under-slab photos

- Note 2 penetration locations for reference in other photos

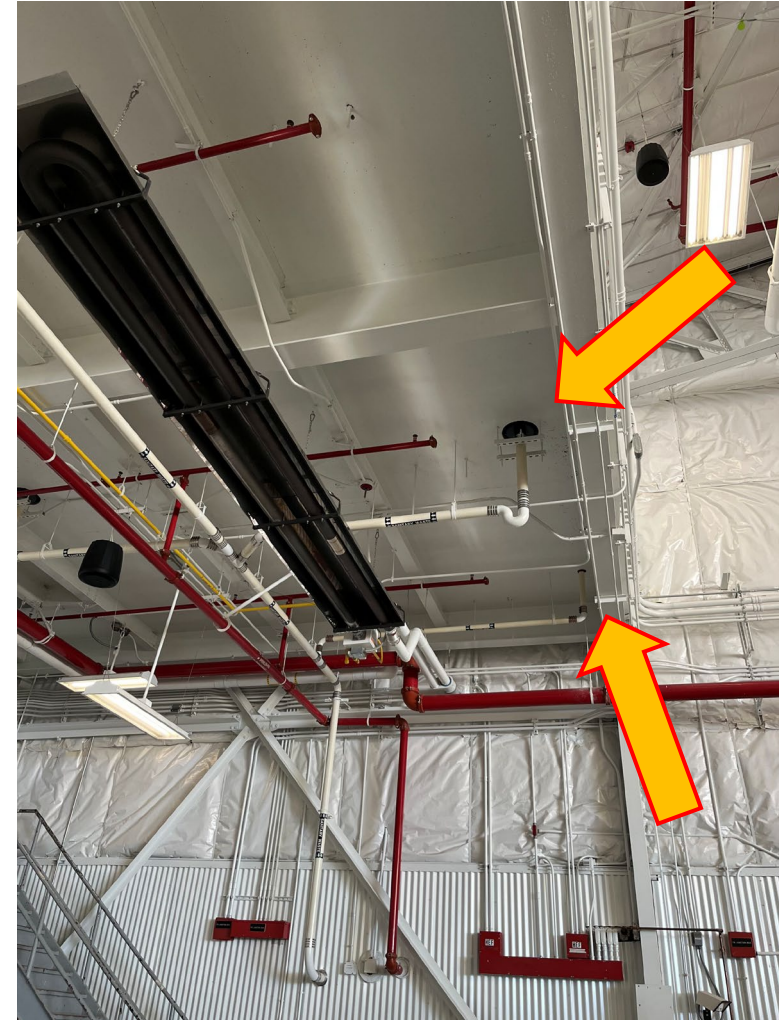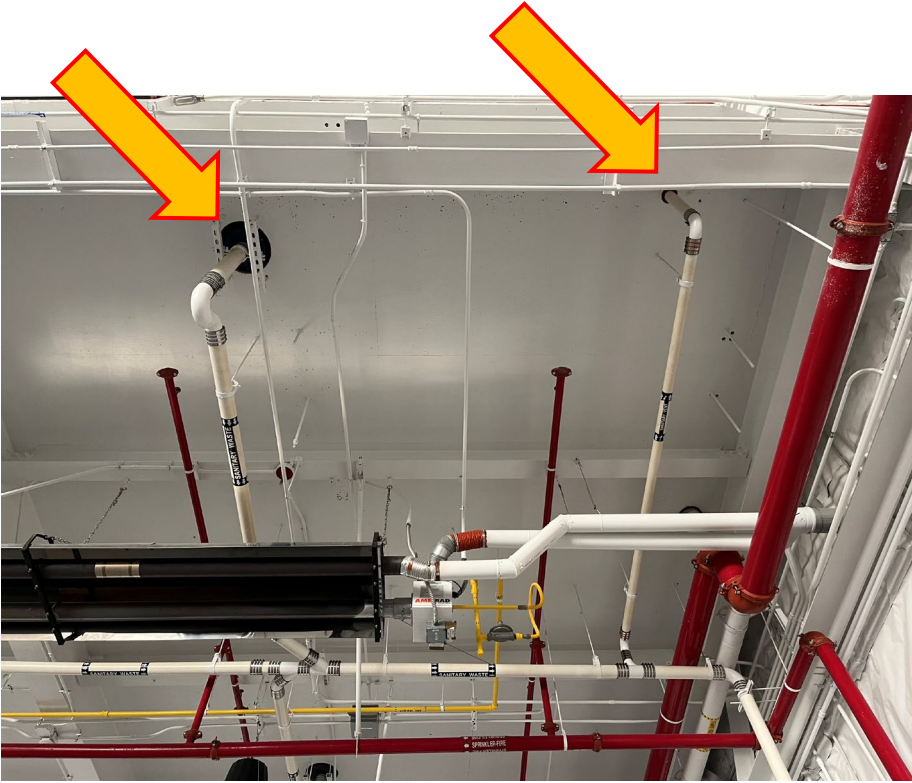

Equipment room in mezzanine

- Note penetration location for reference

