





150' 240V 20 AMP 3P
 150' 240V 20 AMP 3P
 MHC235
 TYPE 1 ENCLOSURE
 GABINETE TIPO NEMA 1
 80041-208-01
 SQUARE D COMPANY
 MADE IN U.S.A.



ELECTRIC CABINET
 FRONT
 INS. LE 140 5-8201

PNL 125 Fed from NEMA 1
 208Y/120V 3P 4W

Circuit Directory
 84kg 3676 Rev 95

1. Recip Air-95	2. Diesel Controller
3. Unit Heater	4. Spare for Diesel Controller
5. Spare	6. Spare
7. 24VDC Power Supply	8. Spare
9. Blank	10. Blank
11. Blank	12. Blank
13. Blank	14. Blank
15. Blank	16. Blank
17. Blank	18. Blank
19. Blank	20. Blank
21. Blank	22. Blank
23. Blank	24. Blank




FIRETROL
ELECTRIC AFFF JOCKEY PUMP CONTROLLER
MODEL FTA 500
CONTRACT NO. N62467-96-C-0778
ACCEPTED DATE 2/5/99
AFFF JOCKEY PUMP

! WARNING

THE AUTOMATIC LOW LEVEL FOAM
FIRE SUPPRESSION SYSTEM IN THIS
HANGAR IS OUT OF SERVICE

BE ALERT TO THE PRESENCE OF
FIRE OR SMOKE CONDITIONS AND
EXIT THE BUILDING IMMEDIATELY
THEN CALL EMERGENCY DISPATCH
AT 911



EMERGENCY RUN
PUSH/TURN TO LOCK

ON OFF ON

Sales
Supply, Inc.
100
MINICAL, INC.
Oak St.
Tampa, FL 33602
830-2800
830-2827

CAUTION
EFFECTIVE EQUIPMENT
DO NOT OPERATE



Firetrol[®], Inc.
Cary, NC USA

Cary, NC USA

11-00000-00000

467

PH 900-277-23-181-1-1081

TYPE

JOCKEY PUP CONTROLLER

Horsepower

ADP5

18

1.2

VOLTAGE

PHASE

[illegible]

400-850-5515

1

WARNING

The opening of the branch circuit protective device may be an indication that a fault current has been interrupted. To reduce the risk of fire or electric shock, current carrying parts and other components should be examined and replaced if damaged. If burnout of the current element of an overload relay occurs, the complete overload relay must be replaced.

11. 1250

* Performance data is based on conditions and methods of use as described above.
 † Performance data is for general reference only. Actual performance depends on many factors.

WATER-REPELLENT CLASSIFICATION	WATER-REPELLENT METHOD	WATER-REPELLENT CLASSIFICATION	Performance CLASSIFICATION	Performance CLASSIFICATION
100% W.R.	100% W.R.	100% W.R.	100% W.R.	100% W.R.
90% W.R.	90% W.R.	90% W.R.	90% W.R.	90% W.R.
80% W.R.	80% W.R.	80% W.R.	80% W.R.	80% W.R.
70% W.R.	70% W.R.	70% W.R.	70% W.R.	70% W.R.
60% W.R.	60% W.R.	60% W.R.	60% W.R.	60% W.R.
50% W.R.	50% W.R.	50% W.R.	50% W.R.	50% W.R.
40% W.R.	40% W.R.	40% W.R.	40% W.R.	40% W.R.
30% W.R.	30% W.R.	30% W.R.	30% W.R.	30% W.R.
20% W.R.	20% W.R.	20% W.R.	20% W.R.	20% W.R.
10% W.R.	10% W.R.	10% W.R.	10% W.R.	10% W.R.
0% W.R.	0% W.R.	0% W.R.	0% W.R.	0% W.R.

100% W.R. = 100% W.R. (100% W.R.)
 90% W.R. = 90% W.R. (90% W.R.)
 80% W.R. = 80% W.R. (80% W.R.)
 70% W.R. = 70% W.R. (70% W.R.)
 60% W.R. = 60% W.R. (60% W.R.)
 50% W.R. = 50% W.R. (50% W.R.)
 40% W.R. = 40% W.R. (40% W.R.)
 30% W.R. = 30% W.R. (30% W.R.)
 20% W.R. = 20% W.R. (20% W.R.)
 10% W.R. = 10% W.R. (10% W.R.)
 0% W.R. = 0% W.R. (0% W.R.)

The image shows a technical manual for the Firetrol 4000 Series Thermostat. The manual is divided into several sections, each with a heading and a corresponding diagram or table.

Wiring Diagrams: The manual includes several wiring diagrams, such as "Wiring Diagram - 1/2" and "Wiring Diagram - 1/2" (repeated). These diagrams show the internal wiring of the thermostat and how it connects to other components. The diagrams are labeled with "1" and "2" to indicate the two main wiring paths.

Component Specifications: The manual lists the specifications for the thermostat components, including the "4000 Series Thermostat" and the "4000 Series Thermostat" (repeated). The specifications include the "4000 Series Thermostat" and the "4000 Series Thermostat" (repeated).

Installation Instructions: The manual provides detailed instructions for installing the thermostat, including the "4000 Series Thermostat" and the "4000 Series Thermostat" (repeated). The instructions are written in a clear, step-by-step format.

Tables: The manual contains several tables, including a "4000 Series Thermostat" table and a "4000 Series Thermostat" table (repeated). These tables provide technical data and specifications for the thermostat components.

Firetrol Inc. Logo: The Firetrol Inc. logo is visible in the bottom left corner of the page. The logo consists of a stylized "F" inside a circle, followed by the text "Firetrol Inc." and "A Division of Honeywell International Inc."

Firetrol, Inc.
CARY, NORTH CAROLINA
800-572-2222



WARNING

The opening of the knock-out protective device may be an indication that a fault current has been interrupted. To reduce the risk of electric shock, do not touch any parts and the cover should be replaced and secured. If a fault is detected, the cover should be replaced and the system reset.

Table with 2 columns: Parameter, Value

Model	FD-300
Rating	24VDC
Power	10W
Current	0.42A
Voltage	24VDC
Resistance	57.1Ω
Inductance	0.1mH
Capacitance	0.01μF
Frequency	50Hz
Temperature	0°C to 50°C
Humidity	10% to 90%
Pressure	1013hPa
Altitude	0 to 1000m
Weight	0.5kg
Dimensions	100x100x50mm

Technical specifications and installation instructions for the fire alarm control panel. The text includes details about the device's rating, power consumption, and environmental conditions. It also provides instructions for installation, including the location of the knock-out protective device and the steps to be followed in the event of a fault.







Product No. 1000
Pump Controller

MODEL 1000
SERIAL NO. 1000-1000-1000
1000-1000-1000
1000-1000-1000

WARNING
THE AUTOMATIC LOW LEVEL FLOW
FIRE SUPPRESSION SYSTEM IN THIS
HARDWARE IS OUT OF SERVICE.
BE ALERT TO THE PRESENCE OF
FIRE OR SMOKE IMMEDIATELY AND
EXIT THE BUILDING IMMEDIATELY
THEN CALL EMERGENCY SERVICES
AT 911



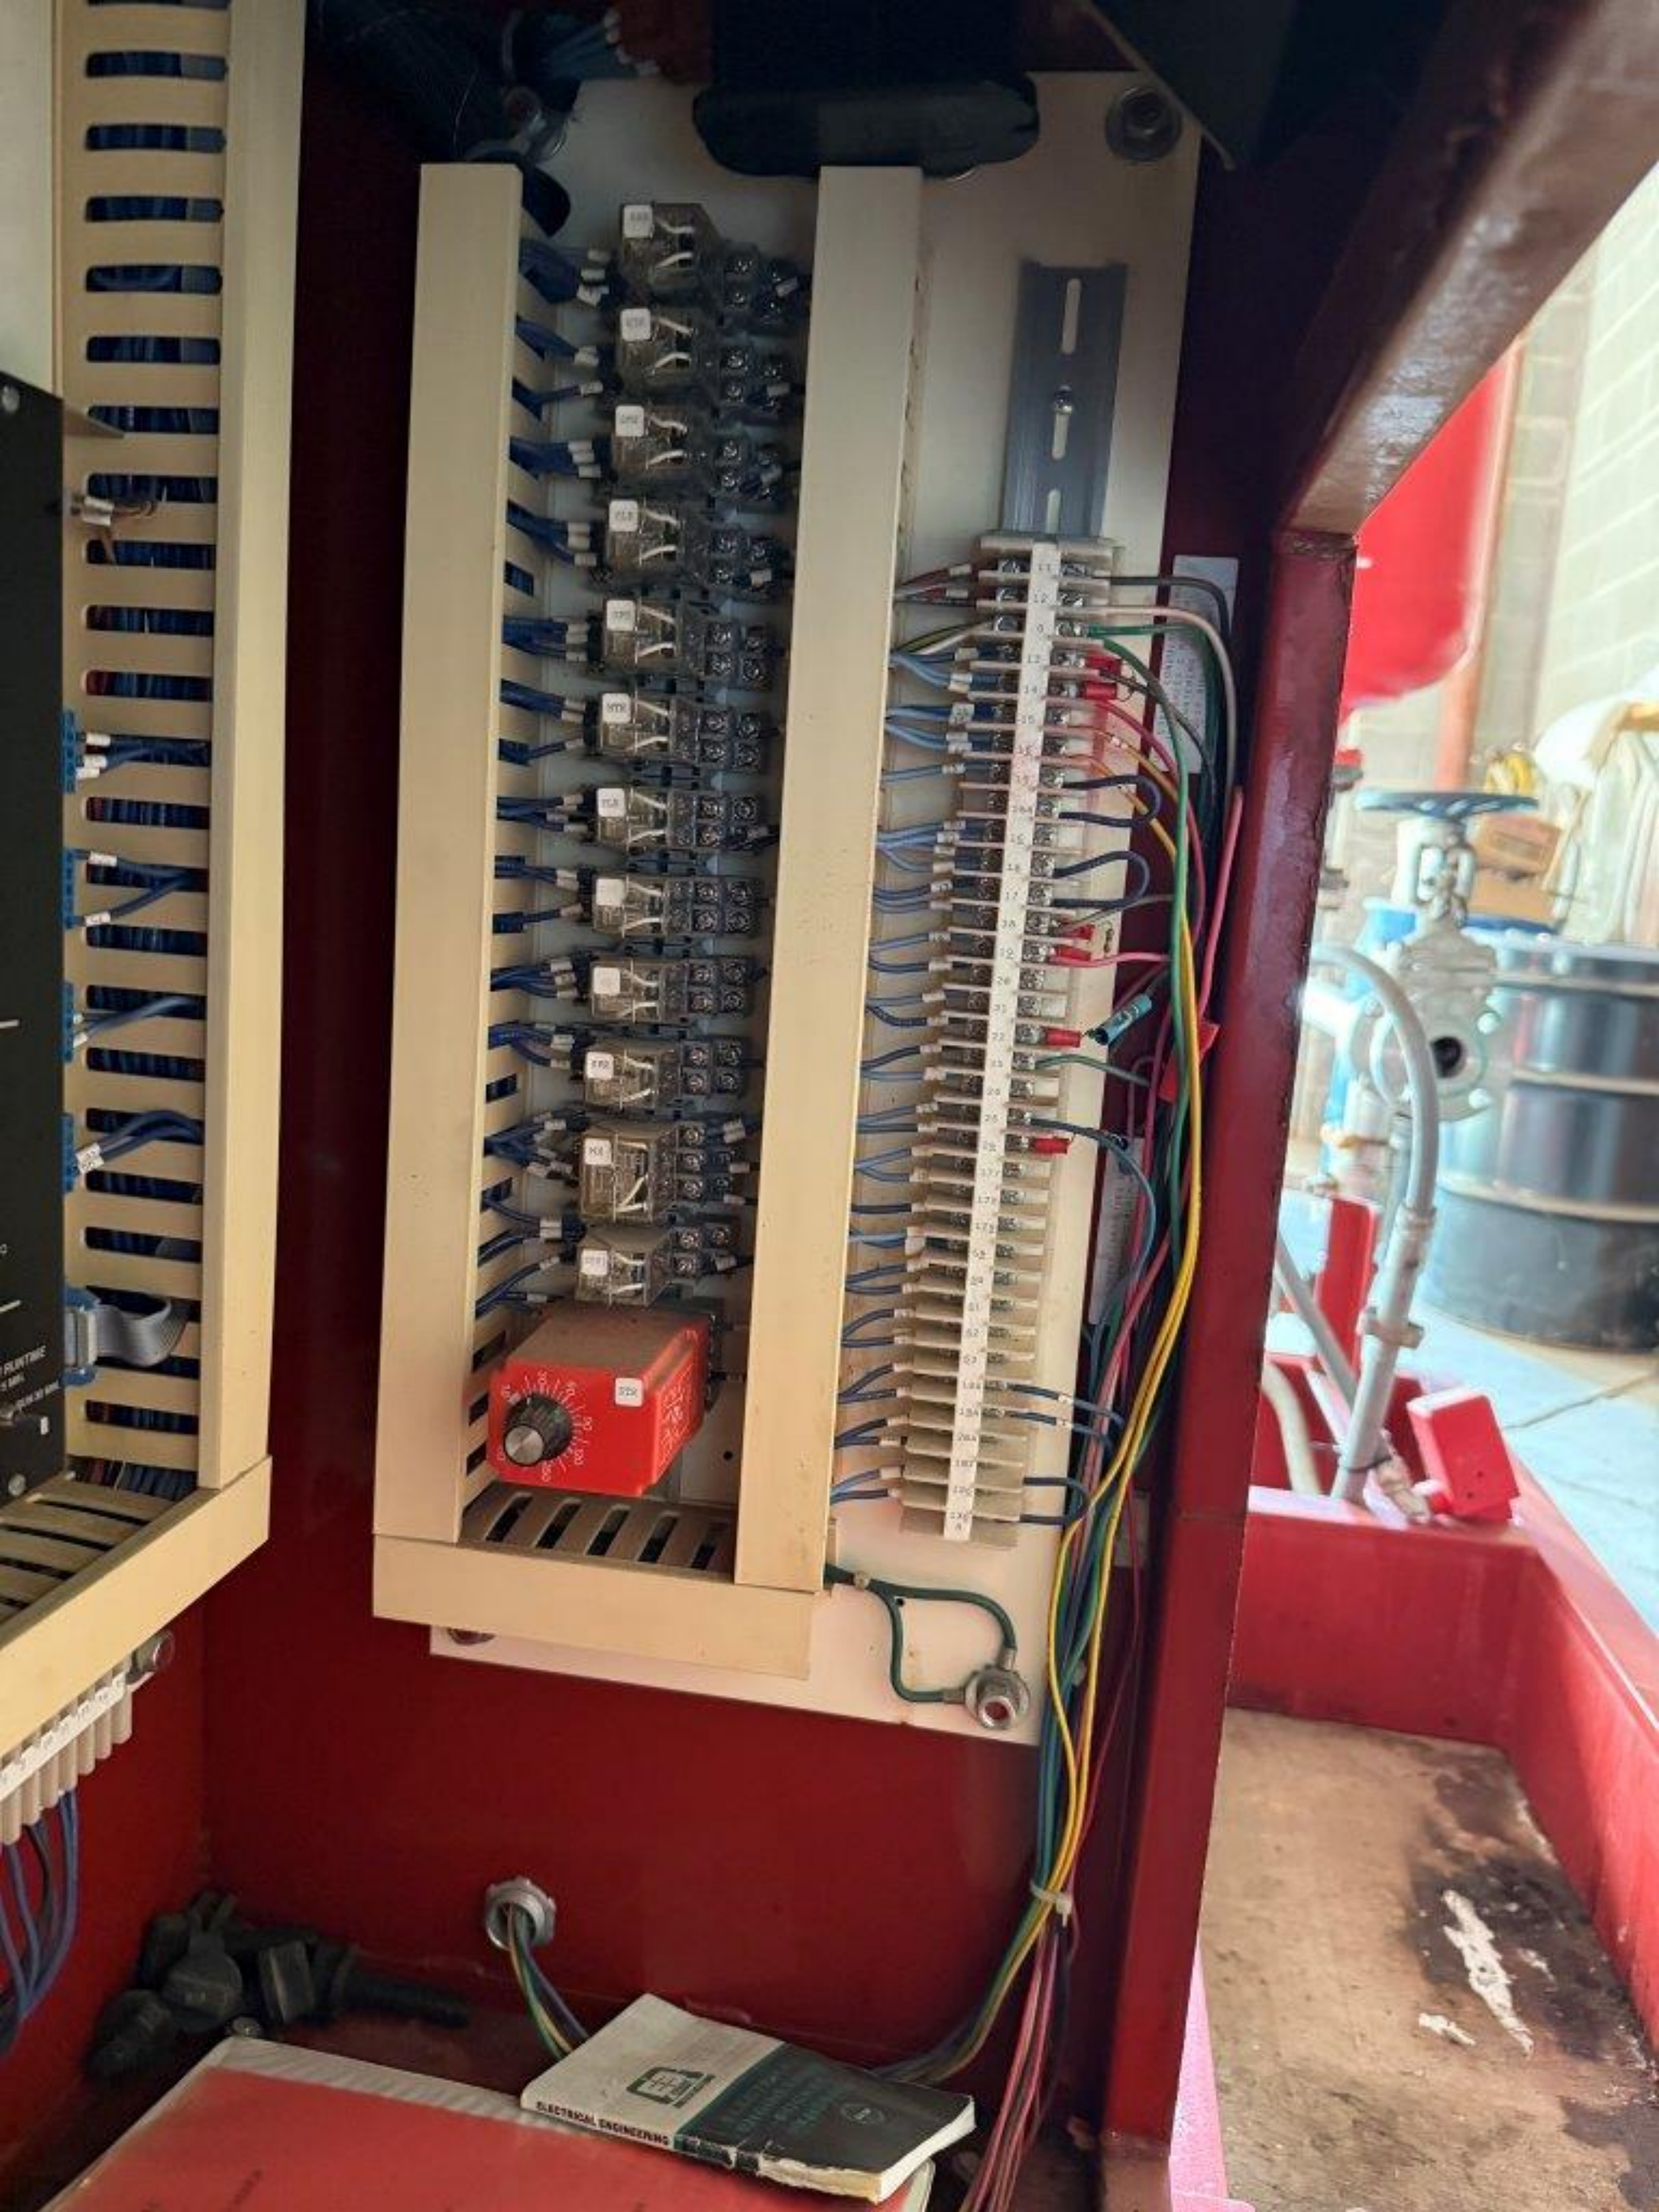

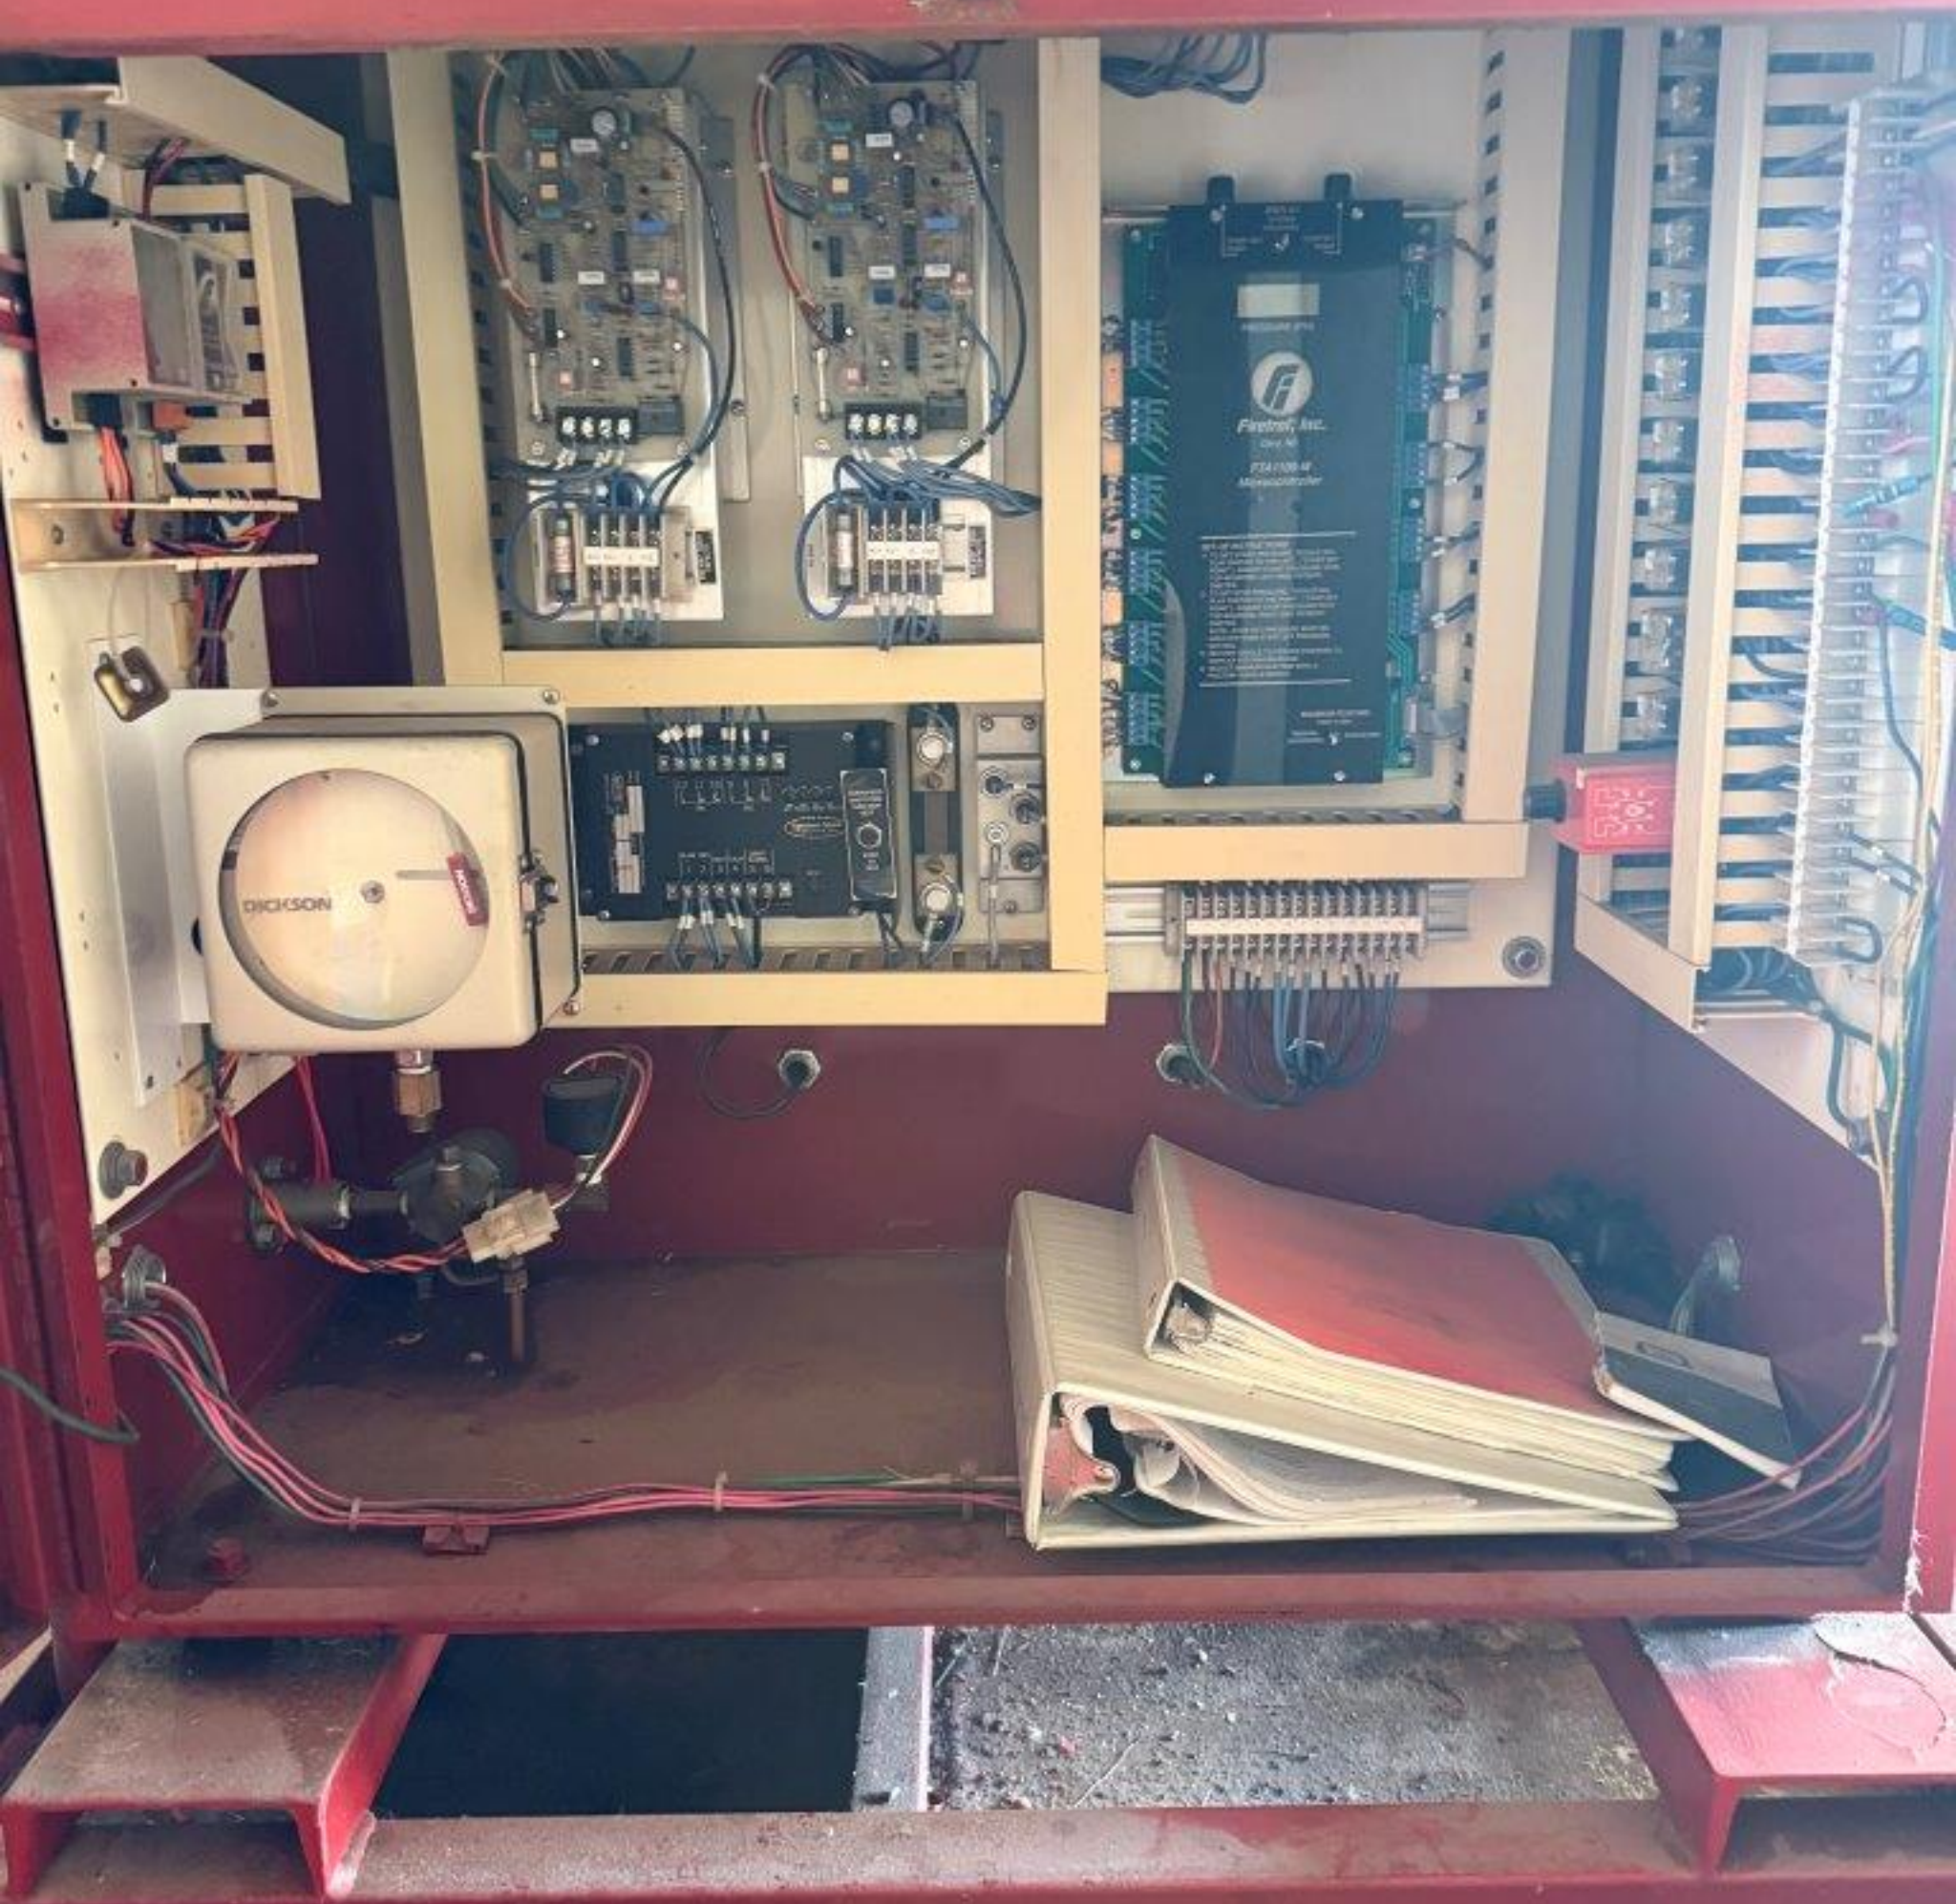



FV-DOC-ACID



- © 2008 Blackwell Publishing Ltd *Journal of Internal Medicine* 263: 111–120



Firetrol, Inc.
 10000 Highway 100, Suite 100
 Houston, TX 77036
 713/661-1111

Note
If something
looks like a duck, it
could be a duck. But
don't judge a book
by its cover.




NOTICE

1. Incoming line terminals are provided to accommodate wire size at 100% of manufacturer's ampacity per NFPA 70, Article 310, and NFPA 72, Table 430-104(c)(1). Refer to Field Connection Drawing for controller for wire and terminal capacity.

2. Controller is phase rotation sensitive. Incoming lines 1, 2, and 3 must be in the correct phase rotation sequence prior to energizing the system.

10/20/14

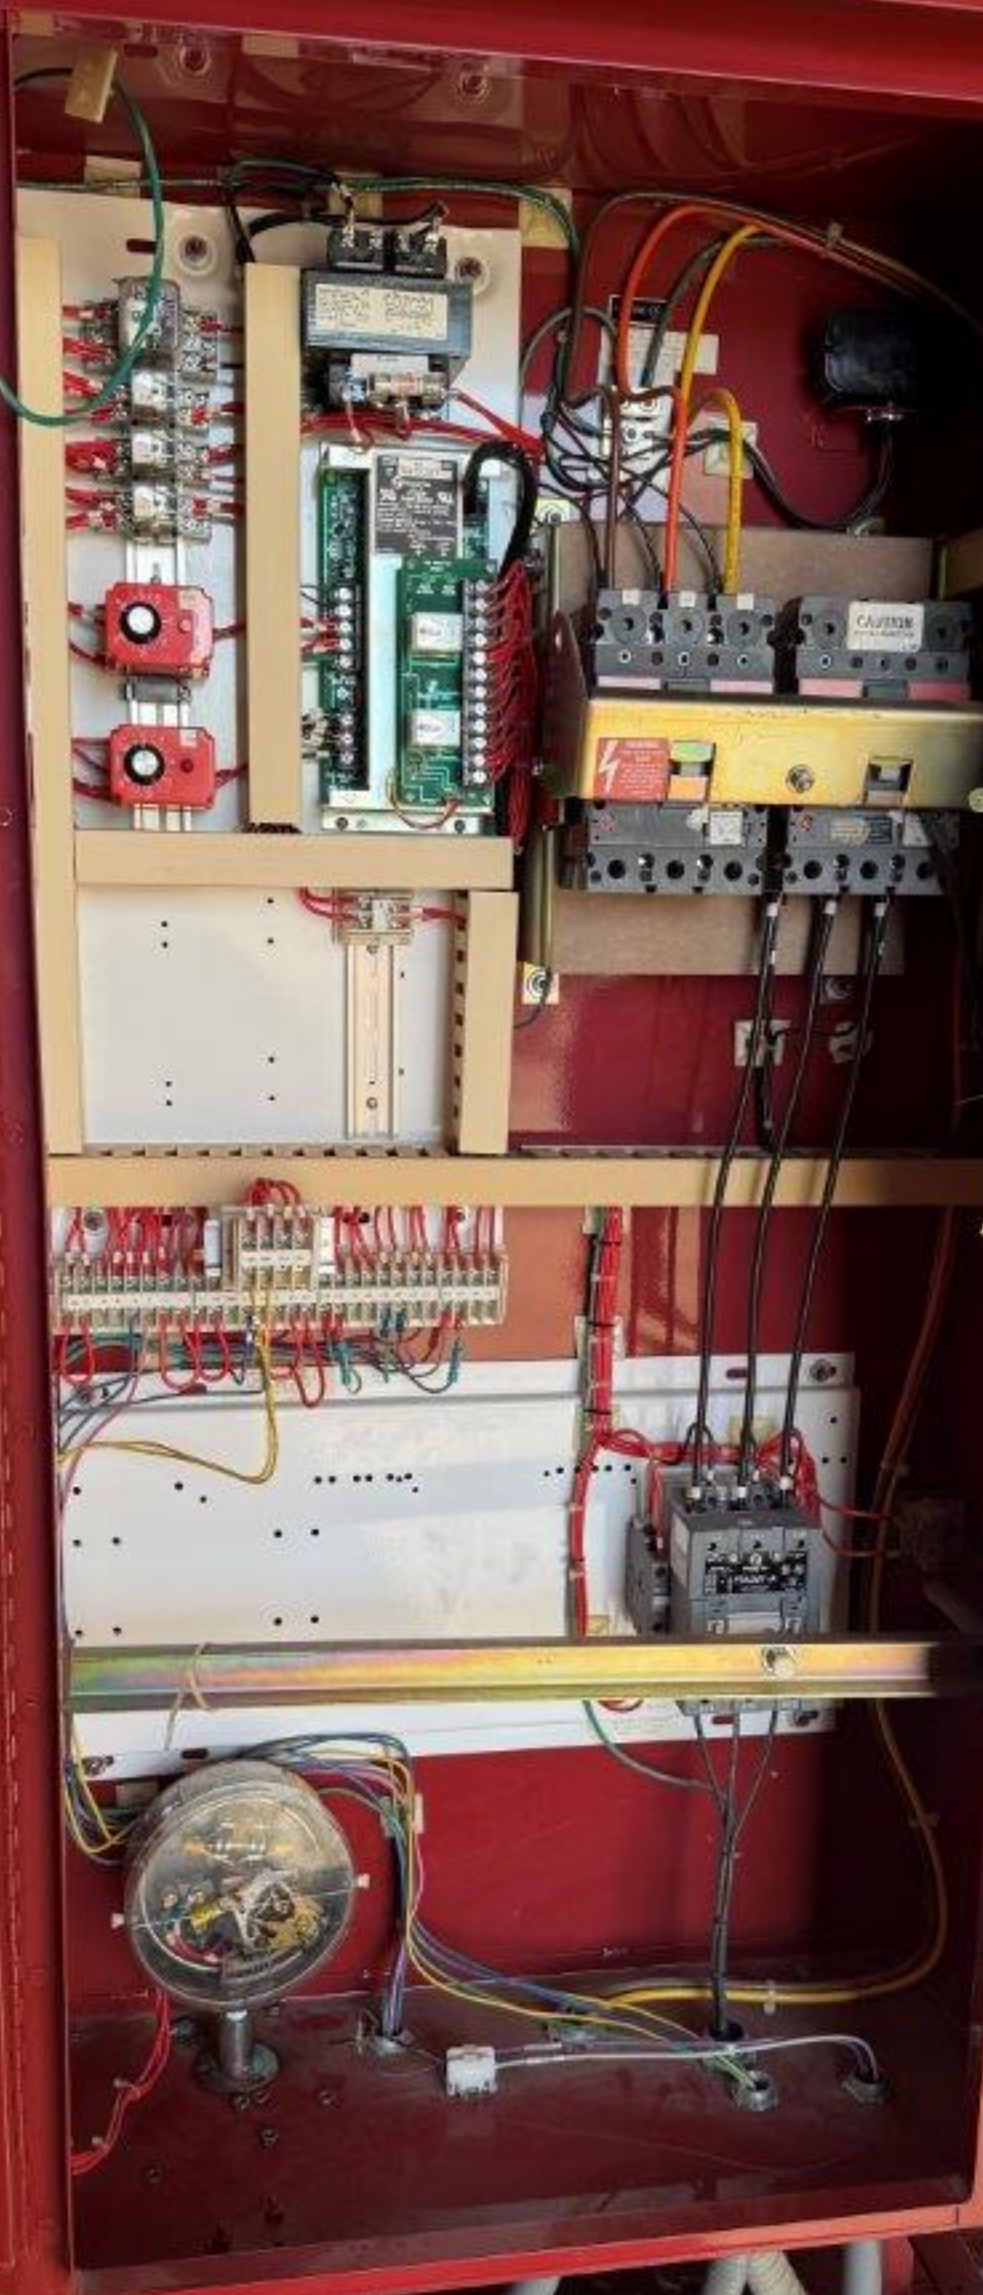

FIRETRON
ELECTRIC APP Jockey Pump Controller
MODEL FTA 500
CONTRACT NO. 762047-90-0-0770
ACCEPTED DATE 2/0/99
APP Jockey Pump

! WARN

THE AUTOMATIC LOW LEVEL
FIRE SUPPRESSION SYSTEM
HANGAR IS OUT OF SERVICE.

BE ALERT TO THE PRESENCE
OF FIRE OR SMOKE CONDITIONS.
EXIT THE BUILDING IMMEDIATELY
THEN CALL EMERGENCY SERVICE
AT 911.







LD5



LD5



WALL INFORMATION		LOCAL SERVICES	
ADDRESS: 1000 N. 10th St.		Phone: (505) 241-1111	
Room No.	Room Name	Room No.	Room Name
1000	1000	1000	1000
1001	1001	1001	1001
1002	1002	1002	1002
1003	1003	1003	1003
1004	1004	1004	1004
1005	1005	1005	1005
1006	1006	1006	1006
1007	1007	1007	1007
1008	1008	1008	1008
1009	1009	1009	1009
1010	1010	1010	1010
1011	1011	1011	1011
1012	1012	1012	1012
1013	1013	1013	1013
1014	1014	1014	1014
1015	1015	1015	1015
1016	1016	1016	1016
1017	1017	1017	1017
1018	1018	1018	1018
1019	1019	1019	1019
1020	1020	1020	1020

UN 11G/X/ 0125 /USA/ +AB3893 / 1634.4 / 908
TARE WEIGHT: 31.1419 kg

Metal!
QUESTAR
cell.
HazBox

www.QuestarUSA.com
QUESTAR, INC.
(330)966-2070

NON-REUSABLE CONTAINER
DO NOT STACK MORE THAN 2 HIGH
SOLIDS ONLY NOT TO BE USED FOR MATERIALS CONTAINING FREE LIQUID





