

B09 OR ISLANDS NWR-NEWPORT HEAT PUMP-140FC126Q0017-Amend 2-Questions and Answer

1. Are the interior air handler units being replaced?

Answer: No. We would like an in-kind replacement of the existing unit that will use the r-410A refrigerant to match the existing air handlers. My understanding is that existing units using Freon can be installed even though new units that use this refrigerant type are no longer manufactured.

2. Please provide the model and serial numbers for the interior units.

Answer: I've attached photos of the related components.

Carrier
Air Conditioning



Division of Carrier Corporation



MODEL 40RR-016---030--


SERIAL 3094F06076

COMP	QTY	VOLTS AC	PH	HZ	RLA	LRA	REFRIG/ SYSTEM R-	12/22/500	DESIGN / TEST PRESSURE GAGE	
COMP							LBS	kg	HIGH PSI 410	kPa 2827
FAN MOTORS	QTY	VOLTS AC	PH	HZ	FLA		LBS	kg	LOW PSI	kPa
OUTDOOR								HP		KW OUT
OUTDOOR										
INDOOR										
OTHER										
HEATERS										
POWER SUPPLY										TOTAL NOT SUITABLE FOR OUTDOOR USE
PERMISSIBLE VOLTAGE AT UNIT		VOLTS	PH	HZ	CKT	MIN CIRCUIT AMPS		MAX OVERCURRENT PROTECTIVE DEVICE AMPS		
MAX					1					
MIN					2					
POWER SUPPLY		VOLTS	PH	HZ	AMPS					
MIN CLEARANCE TO COMBUSTIBLE MATERIALS _____ INCHES _____ mm. FOR FIRST _____ INCHES _____ mm. OF DUCT WHEN ELECTRIC HEATER IS INSTALLED										
TEST WITH EXTERNAL STATIC _____ inches _____ 0.35 inches _____ 0.09 kPa H ₂ O.										
CHARGE SYSTEM PER INSTALLATION INSTRUCTIONS										99NA505293

MADE IN USA

WMS

SAFETY CODE CERT

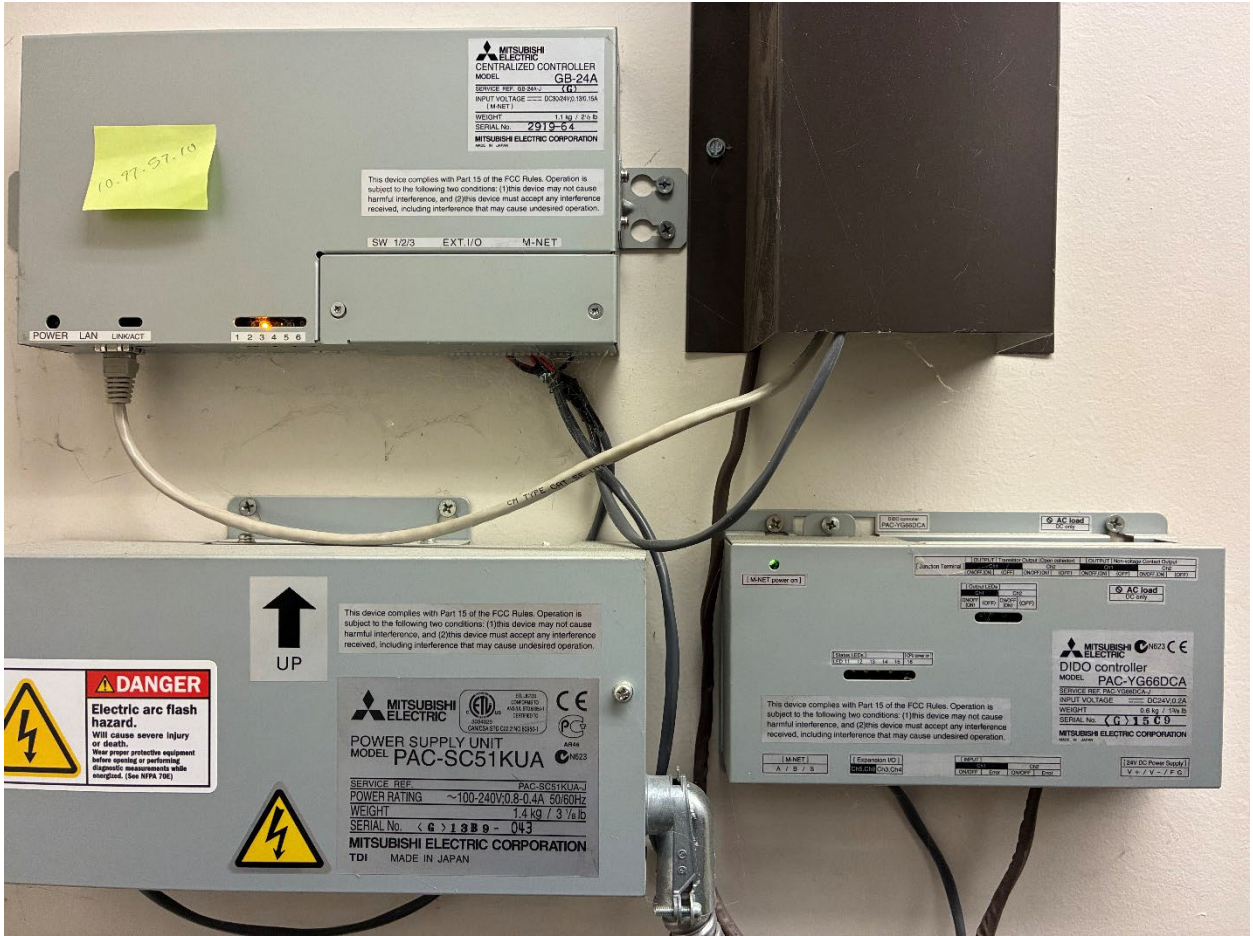

PNEUMATECH[®] INC.

4909 70th AVENUE
KENOSHA , WI 53144 U.S.A.

NON-CYCLING REFRIGERATED AIR DRYER

MODEL: ADA-20

CAPACITY:	<u>20 SCFM</u>	SERIAL NUMBER:	<u>9412-T119156-ST</u>
MAX. AIR PRESSURE:	<u>175 PSIG</u>	VOLTAGE:	<u>115V-1PH-60HZ</u>
MAX. INLET AIR TEMP:	<u>180 ° F</u>	COMPRESSOR HP:	<u>1/4</u>
MAX. AMBIENT TEMP:	<u>100 ° F</u>	COMPRESSOR RLA:	<u>4.30</u> LRA: <u>28.0</u>
MIN. AMBIENT TEMP:	<u>40 ° F</u>	FAN MOTOR HP:	<u>6 WATT</u> RLA: <u>0.50</u>
MIN. CIRCUIT AMPACITY:	<u>5.9</u>	MAX. FUSE or CIRCUIT BREAKER SIZE:	<u>15 AMP.</u>
REFRIGERANT TYPE:	<u>R-134a</u>	FACTORY REFRIGERANT CHARGE:	<u>9 OZ.</u>
REFRIGERANT MAX. PRESSURE	-	LOW SIDE: <u>150 PSIG</u>	HIGH SIDE: <u>235 PSIG</u>

**REFRIGERANT
SUCTION
PRESSURE**

PL-216

