




OPTRON HMP7812-TAZN MINI PTZ CAMERA

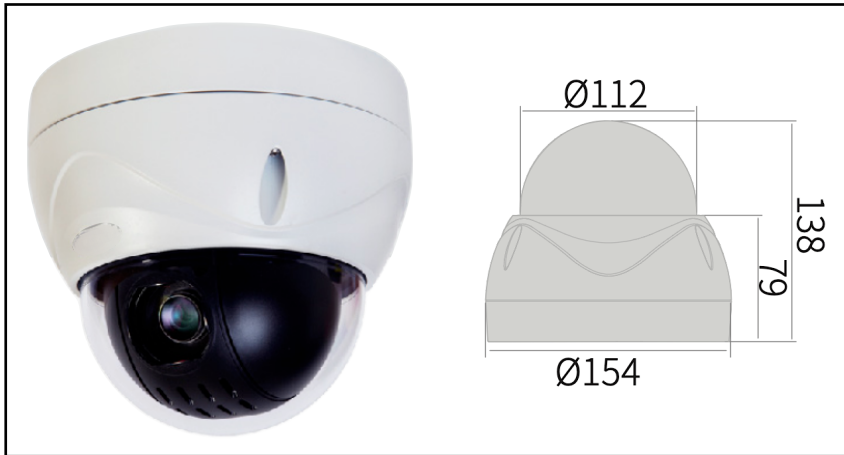

KEY FEATURES

- Sony Starvis 1/2.8" Progressive Scan CMOS Sensor
- 144x AF Zoom
(12x optical zoom, 12x digital zoom)
- Full Pan, 180° Tilt Capable
- 1080p 30(25)fps
- True Day&Night
- True WDR
- Intelligent Features
- IP66

SPECIFICATIONS

Image Sensor	1/2.8" Exmor R Progressive Scan CMOS
Effective Pixels	2.13MP 1945(H) x 1097(V)
Video Output mode	TVI / AVI
Max. Video Resolution	1080p@30(25fps)
Synchronization system	Internal
Min.Illumination	Day mode : 0.08Lux(F1.6, DSS off) Night mode : 0.06Lux(F1.6, DSS off)
S/N Rate	More than 52dB(AGC off, DSS off)
Lens	Type AF Optical zoom lens(DC Iris), IR Corrective
	Focal Length f=5.3mm~64mm
	F-value F1.6(W)~2.8(T)
	Angle of View Horizontal 58.2°(W)~4.83°(T), Vertical 34°(W)~2.8(T)°
Zoom ratio	Optical 12x / Digital 12x
Focus Min.Working Distance	0.01m(Wide)/1.0m(Tele)~∞
Focus Control	Auto/Manual/Semi Auto
Pan Range	360° Continuous Rotation
Pan Speed	Max. 360°/sec
Tilt Range	0~180°
Sequence	Preset(253ea), Tour(8ea), Pattern(6ea)
Auto Tracking	8 Auto Scan
Azimuth	Available(E/W/S/N/NE/NW/SE/SW OSD)
D&N Mode	Auto/Day(Color)/Night(BW)
IR LED	NIL
Viewable Distance	NIL
AE mode	Auto/Shutter Priority/Iris Priority/Manual
Brightness	0~14
Manual Shutter	x32~x2(Low shutter), 1/30(25), 1/60(50)~1/30000
Manual Iris	F1.6~F19, Close
Sense-up	Off~32fields
ETC	Spot AE, Slow AE

White Balance	ATW/Indoor/Outdoor/Push/Manual
Image Freeze	NIL
Image Flip	Off/Horizontal/Vertical/H+V(180° Flip)
Privacy Mask zone	8 Zones/8 mask color selectable
Digital Image Stabilization	Yes
Motion Detection	OFF/ON
D-WDR	Off/Low/Middle/High
WDR	Off/Low/Middle/High
BLC	Off/0~10
HLC	Off/0~20
AGC	-3dB, Off, 2dB ~ 58dB
Sharpness	Adjustable(0~15)
3D-DNR	On/Off(1~5)
2D-DNR	AUTO
Defog	NIL
Preset Position	253 position Presets(Zoom,Focus), 16Memory Presets, Custom Preset
Language	English
Communi- cation	RS485 Available
	Protocol Pelco-D/P
	Baud rate 2400/4800/9600/19200/38400/57600bps
Alarm / Audio I/O	UTC Available
	Alarm In 4 Normal Dry Contact (Selectable NC/NO)
	Alarm Out 1 Normal Relay 12VDC/500mA
	Audio In NIL
	Audio Out NIL
Supply Voltage	24VAC(±10%), Optional : Available DC12V
Power Consumption	43W (Heater on)
Color/Material	Ivory/ Aluminium / PC
Dimension(mm)	Ø154 *138mm (Bubble Dome:Ø112)
Weight	Approx. 1.5Kg
Operating Temperature	-10°C~+50°C, Humidity(20~80%)
Storage Temperature	-20°C~+60°C, Humidity(20~95%)
Ingress Protection Grade	IP66
Vandal Resistance	NIL