

Application


The IDHE series is the industry's first and only electric duct heater approved by UL for multiple mounting positions. This allows the control cabinet to be installed on either side of a horizontal duct or in any orientation on a vertical duct. The control cabinet is offset from the heating elements similar to traditional heaters. However, the IDHE affords the installer the flexibility to position the offset on the left or right as preferred.

The IDHE has the following standard features:

- UL 1996 certified
- 50/60 Hz compatibility
- Zero clearance rating
- Hinged control cabinet cover
- Power and control terminal boards
- Automatic reset thermal safety switch for primary over temperature protection
- Heavy gauge G60 construction

Individual maximum capacities are dependent on voltage/phase, control type, and heater dimensions.

Absolute maximum capacity: 478.8 kW

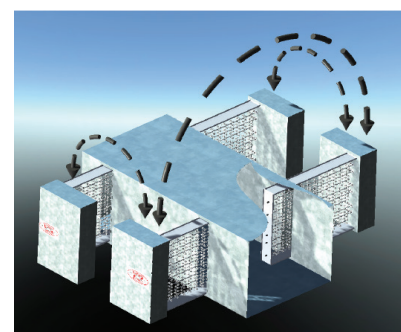

* The Greenheck model IDHE duct heater is universally configured to allow airflow in either direction in all mounting orientations.

Construction

	Standard	Optional
Airflow Direction	Universal	-
Contactor	Magnetic	-
Control Box Offset	Universal	-
Control Voltage	24 Vac	-
Element Wire	Standard	80/20
Heater Control	Stage	SCR, Vernier SCR*
Heater Type	Slip in**	Flange
Heater Voltage/Phase	120/1	208/1, 208/3, 240/1, 240/3, 277/1, 480/1, 480/3
Material	Galvanized Steel	-
Recess (in.)	None	1, 2, 3
Control Transformer	Unfused	Fused, None
Deration (kW)	None	.035, .025

* Vernier SCR is required in heaters greater than 48 amps to comply with NEC requirements.

** Slip in heaters are 1/8 in. (3 mm) undersized for the width and 1/4 in. (6 mm) undersized for the height.

Options available:

- Airflow switch (adjustable or fixed set point)
- Disconnect switch with door interlock
- Duct thermostat (available with SCR control)
- Dust tight box with gasketed door
- Fan interlock
- Pilot light
- Power fusing required when 48 amps or larger
- Recess for internally insulated ducts
- Room thermostat
- Stainless steel hardware
- Time delay relay - delay heater or delay stages
- Vapor barrier



Size Limitations

W x H	Minimum Size	Maximum Size
Inches	8 x 8	120 x 144*
mm	203 x 203	3048 x 3658

* Consult factory for heights larger than 90 in. (2286mm)

IDHE: Air Flow Requirements

Minimum Air Velocity: See charts below
Maximum Inlet Air Temp: 110°F
Maximum Heater KW: 30 KW per Square Foot of Duct Cross Section

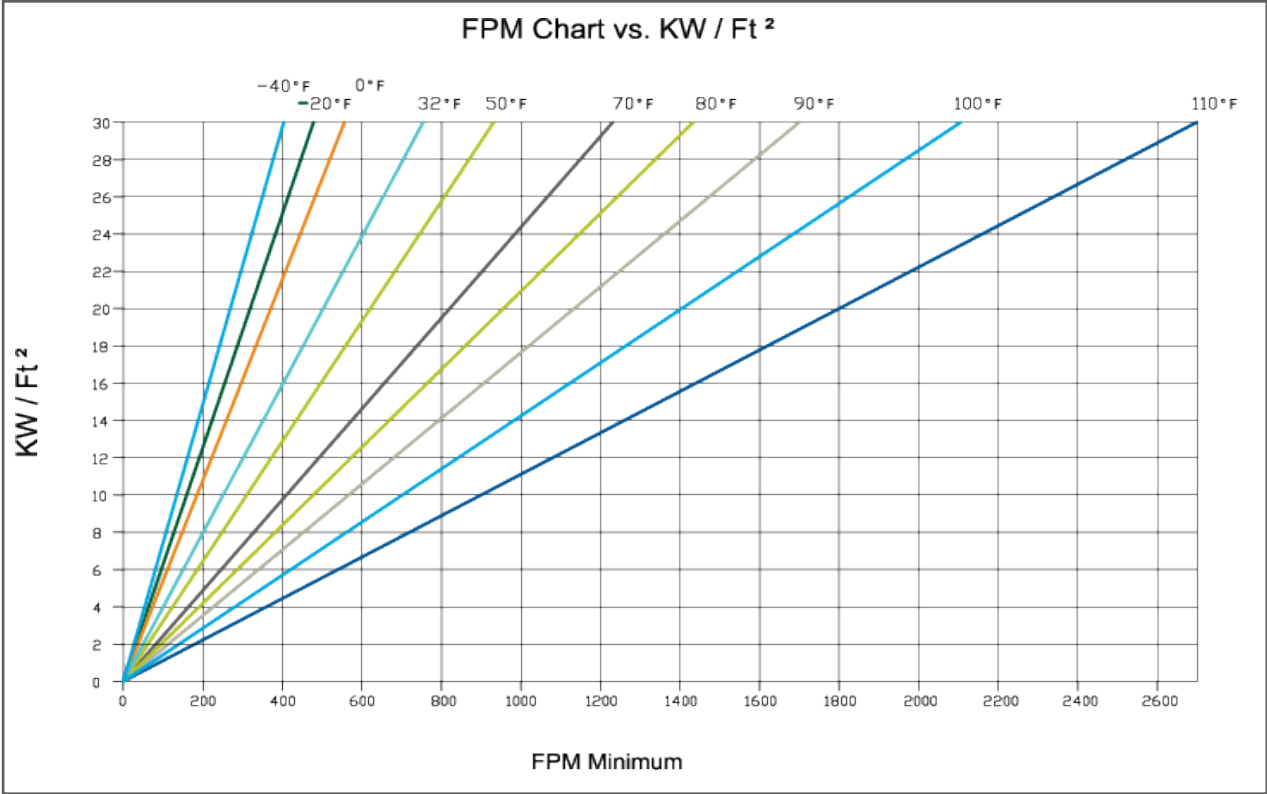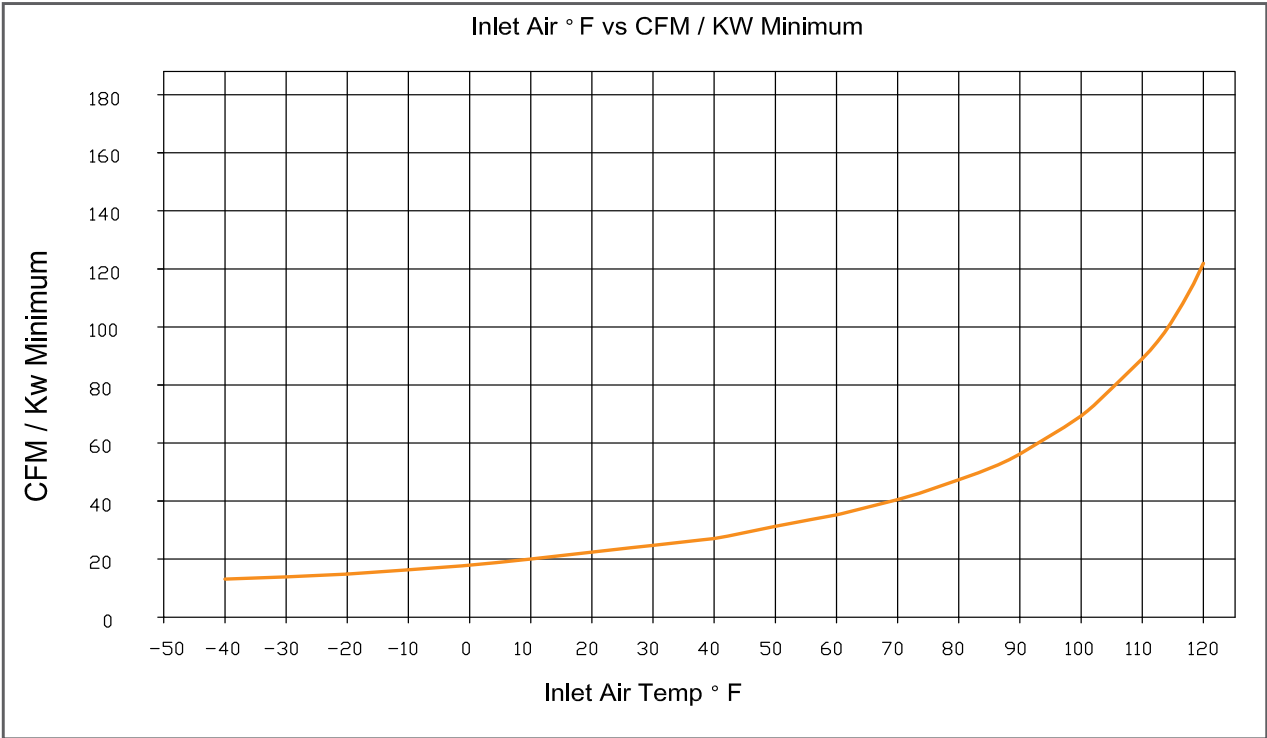



[INSTALLATION](#)




[TRIFOLD](#)



[SELECTION GUIDE](#)



[SPECIFICATIONS](#)



[WARRANTY](#)