

HIGH PERFORMANCE CASED VERTICAL MODELS - CV SERIES

400 - 2,200 CFM

HIGH PERFORMANCE CASED / CLOSET BASIC BOTTOM RETURN / CV-B

The Cased Vertical Basic (CV-B) is a high performance, high static (up to .50 ESP), ducted vertical fan coil with a bottom return. Primarily used in floor mounted or hideaway applications, the CV-B is furred into partition walls, hidden closets, or utility rooms with a ducted discharge. A removable front access panel facilitates easy servicing. The CV-B comes with a coil, easy slide out blower/motor assembly with quick connect plug and a galvanized steel, powder coated epoxy drain pan covered with $\frac{1}{8}$ " thick insulation. The galvanized steel cabinet is insulated with $\frac{1}{2}$ " thick, over three pound density, neoprene coated fiberglass. A one inch duct flange is standard on the top panel.

Front Return Basic (CV-K) and Front Return Deluxe (CV-J) also available. Customized drawings available upon request.



HIGH PERFORMANCE CASED / CLOSET BOTTOM RETURN DELUXE PAINTED CABINET / CV-D

The Cased Vertical Deluxe (CV-D) is a high performance, high-static (up to .50 ESP), ducted vertical fan coil with a bottom return. Primarily use in floor mounted exposed applications the cabinet is finished in a soft white powder coated epoxy. A removable front access panel facilitates easy servicing. The CV-D comes with comes with a coil, easy slide out blower/motor assembly with quick connect plug and a galvanized steel, powder coated epoxy drain pan covered with $\frac{1}{8}$ " thick insulation. The cabinet is insulated with $\frac{1}{2}$ " thick, over three pound density, neoprene coated fiberglass. A one inch duct flange is standard on the top panel.

Front Return Basic (CV-K) and Front Return Deluxe (CV-J) also available. Customized drawings available upon request.




HIGH PERFORMANCE CASED VERTICAL MODELS - CV SERIES

400 - 2,200 CFM

HIGH PERFORMANCE CASED / CLOSET FRONT RETURN / CV-F

The Cased Vertical Front Return (CV-F) is a high performance, high static (up to .50ESP), ducted vertical fan coil for installation in a closet type enclosure. A removable front access panel facilitates easy servicing. The CV-F comes with a coil, easy slide out blower/motor assembly with quick-connect plug and a galvanized steel, powder coated epoxy drain pan covered with $\frac{1}{8}$ " thick insulation. The galvanized steel cabinet is insulated with $\frac{1}{2}$ " thick, over three pound density, neoprene coated fiberglass. A one inch duct flange is standard on the top panel.

Rear Return/Bottom Supply (CV-G) and Rear Return/Bottom Supply Deluxe (CV-Q) also available. Customized drawings available upon request.

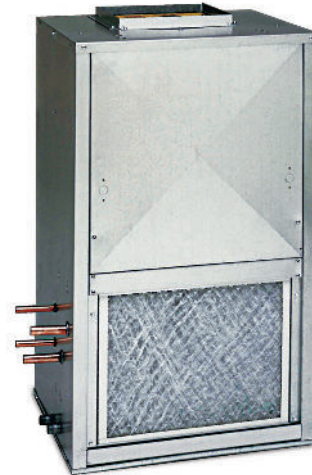

HIGH PERFORMANCE CASED CLOSET FRONT RETURN PAINTED CABINET / CV-R

The Cased Vertical Front Return (CV-R) is a high performance, high static (up to .50ESP), ducted vertical fan coil for installation in a closet type enclosure. A removable front access panel facilitates easy servicing. The CV-R comes with a coil, easy slide-out blower/motor assembly with quick connect plug and a galvanized steel, powder coated epoxy drain pan covered with $\frac{1}{8}$ " thick insulation. The galvanized steel cabinet has a front access panel finished in a soft white powder-coat epoxy and insulated with $\frac{1}{2}$ " thick, over three pound density, neoprene coated fiberglass. A one-inch duct flange is standard on the top panel.



HIGH-PERFORMANCE CASED / CLOSET REAR-RETURN / CV-G

The Cased/Closet Vertical Bottom Supply with Rear Return (CV-G) is a high performance, high static (up to .50 ESP), ducted vertical fan coil. Primarily used in floor-mounted or hideaway applications, the CV-G is furred into partition walls, hidden closets, or utility rooms with a ducted discharge. A removable access panel facilitate easy servicing. The CV-G comes with a coil, easy slide out blower/motor assembly with quick-connect plug and a galvanized steel, powder coated epoxy drain pan



covered with 1/8" thick insulation. The galvanized steel cabinet is insulated with 1/2" thick, over three pound density, neoprene coated fiberglass. A one inch duct flange on return and supply air openings is standard.


HIGH-PERFORMANCE CASED / CLOSET REAR RETURN / CV-Q

The Cased Vertical Bottom Supply with Rear Return (CV-Q) is a high performance, high static (up to .50 ESP), ducted vertical fan coil. Primarily used in floor mounted or hideaway applications, the CV-Q is furred into partition walls, hidden closets, or utility rooms with a ducted discharge. A removable access panel facilitate easy servicing. The CV-Q comes with a coil, easy slide out blower/motor assembly with quick connect plug and a galvanized steel, powder coated epoxy drain pan covered with 1/8" thick insulation. The galvanized steel cabinet is insulated with 1/2" thick, over three pound density, neoprene coated fiberglass. A one inch duct flange on return and supply air openings is standard. *(This is a custom designed fan coil, certified dimensional drawings provided upon request.)*



HIGH PERFORMANCE CASED / CLOSET HEAT ONLY / CV-H

The Cased Vertical (CV-H) is a Heat Only model. It is a high performance, high static (up to .50 ESP), ducted vertical fan coil for installation virtually anywhere. The front panel is removable for easy filter removal and service access to the slide out blower, equipped with a quick connect plug. The top discharge opening has a one inch duct collar. This heat only version does not need a drain pan and may be installed horizontally

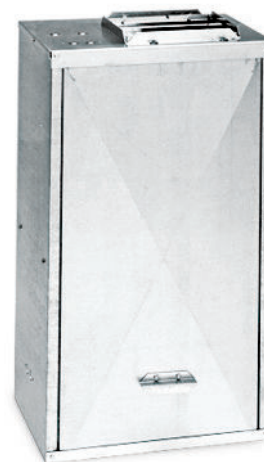

HIGH PERFORMANCE CASED / CLOSET HEAT ONLY PAINTED CABINET / CV-O

The Cased Vertical (CV-O) is a Heat Only model. It is a high performance, high-static (up to .50 ESP) ducted vertical fan coil for installation virtually anywhere. The front panel is removable for easy filter removal and service access to the slide out blower, equipped with a quick connect plug. The top discharge opening has a one inch duct collar. This heat only version does not need a drain pan and may be installed horizontally. The CV-O is finished in a soft white powder coated epoxy.



HIGH PERFORMANCE CASED VERTICAL MODELS - CV SERIES

400 - 2,200 CFM

- FRONT RETURN BASIC / CV-K
- FRONT RETURN DELUXE / CV-J
- VERTICAL FRONT SUPPLY AND RETURN / CV-S

Heavy gauge galvanized steel cabinet with ½" thick over three pound density, neoprene coated fiberglass. CV-J is constructed of heavy gauge cold rolled steel finished in a soft-white powder coated epoxy. Coils ½" OD copper tube with aluminum fins (12FPI) equipped with manual air vent. DX and steam coils do not include manual air vent. DX and steam coils do not include manual air vent. Coils are 100% underwater pressure tested at 350 PSI with a 300 PSI working pressure. Galvanized drain pan is powder coated epoxy with a ¼" thick closed cell insulation and has primary and secondary drain connections. Three speed 115/1/60 PSC motor with quick connect plug. Easy slide out draw through blower and motor assembly. Controls and motors are factory wired and terminated in a junction box for single point power supply. 1" fiberglass, throwaway filter. Protective cardboard covers openings during shipment and construction. Individually tagged and crated as scheduled for installation. ETL certified, AHRI certified and 100% factory tested.



VERTICAL STACK MODELS ER & DR SERIES

300 - 1,200 CFM

EASY RISER BASIC / ER-B

For concealed application virtually anywhere in the room, the Easy Riser Basic Vertical Stack (ER-B) comes standard in a heavy gauge 88" galvanized steel cabinet, insulated with 1/2" thick, neoprene coated fiberglass. This standard unit features a 1/2" OD copper tube coil, slide out blower assembly with quick disconnect plug, insulated drain pan and filter. Risers are ordered separately due to size changes throughout the building.

EASY RISER DELUXE (PAINTED) / ER-D

For exposed applications along walls and in corners, the Easy Riser Deluxe Vertical Stack (ER-D) is the model of choice. In addition to the same internal features as the ER-B, the Easy Riser Deluxe comes with an epoxy, powder-coat exterior and is subjected to a 1,500-hour salt spray test in accordance with ASTM B117. When greater architectural appeal is desired, the ER-B with cabinet enclosure is the preferred choice.

DESIGNER RISER BASIC / DR-B

The Designer Riser Basic Vertical Stack (DR-B) is for concealed applications along walls and in corners. This model comes standard in an extended 97" galvanized steel cabinet, insulated with 1/2" thick neoprene coated fiberglass. Like the ER-B, this unit features a 1/2" OD copper tube coil, slide out blower assembly with quick disconnect plug, insulated drain pan and filter.

DESIGNER RISER DELUXE (PAINTED) / DR-D

The Designer Riser Deluxe Vertical Stack (DR-D) is for exposed applications also along walls and in corners. In addition to the same internal features as the DR-B, the Designer Riser Deluxe's 97" cabinet includes a epoxy, powder coat exterior and is subjected to a 1,500 hour salt spray test in accordance with ASTM B117. When greater architectural appeal is desired, the DR-B with cabinet enclosure is the preferred choice.



VERTICAL STACK MODELS ER & DR SERIES

300 - 1,200 CFM

EASY RISER / MAIN & SECONDARY / ER-M / ER-S

The Easy Riser Main/Secondary Vertical Stack units (ER-M and ER-S) have the same internal components as our Basic model, yet are designed to share a common riser set. The Main/Secondary combination features two separate units piped to a common set of risers, each with individual valves and controls. These units come in an 88" galvanized steel cabinet.

DESIGNER RISER / MAIN & SECONDARY DR-M / DR-S

The Designer Riser Main/Secondary Vertical Stack units (DR-M and DR-S) have the same internal components as our Basic model, yet are designed to share a common riser set. The Main/Secondary combination features two separate units piped to a common set of risers, each with individual valves and controls. These units come in a 97" galvanized steel cabinet.



TWINPACK / ER-D

The TwinPack is a Main/Secondary combination that is pre-piped and housed in a common cabinet assembly at the factory. TwinPack Vertical Stack units include a UL 1 Hour Through Penetration Firestop W-L-7089 system. Local codes may dictate exact amount and placement of drywall. Each unit has it's own set of valves and controls.

TWINPACK DELUXE / DR-D

The TwinPack is a Main/Secondary combination that is pre-piped and housed in a common cabinet assembly at the factory. TwinPack Vertical Stack units include a UL 1 Hour Through Penetration Firestop W-L-7089 system. Local codes may dictate exact amount and placement of drywall. Each unit has it's own set of valves and controls.



VERTICAL FAN COILS - LV SERIES

200 - 1,200 CFM

VERTICAL BASIC / LV-B

The slim, compact design of our Vertical Basic fan coil (LV-B) is intended for furred in applications with a field fabricated, custom enclosure. Housed in a heavy gauge galvanized steel cabinet and insulated with ½" thick neoprene coated fiberglass, this reliable fan coil is ideal for almost any through the wall installation.



VERTICAL DELUXE / LV-D

Our basic unit in a soft white, powder coated epoxy finished cabinet. The Vertical Deluxe fan coil (LV-D) is designed for exposed wall mounting. Most commonly installed under windows, the one piece, wrap around front panel is easily removed for servicing. Filters are concealed and can be removed without the need for tools.



VERTICAL SLOPE TOP / LV-S

The Vertical Slope Top (LV-S) is our Vertical Deluxe model, only the cabinet is designed with a full sloping top. The vertical slope top also features solid side panels so that units may be set side by side for long corridor applications. This unit is ideal for any application in which books or materials are likely to be placed over discharge grilles.



VERTICAL WRAP SLOPE TOP / LV-W

The vertical wrap slope top (LV-W) is our standard vertical slope top, only the cabinet is designed with a wrap around front panel. The cabinet top is flat for three inches out from the wall to accommodate blinds or draperies, then gradually slopes forward. Ideal for hotel, motel and dormitory rooms, this modified cabinet still discourages items being placed over the discharge grille.



VERTICAL FAN COILS - LV SERIES

200 - 1,200 CFM

VERTICAL MODULAR / LV-M

Our Vertical Modular (LV-M) is our standard vertical slope top model with a flat top cabinet. A removable, single piece front panel provides complete access to the unit for servicing the motor, coil, valve package, drain pan, filter and all other components. The cabinet includes top discharge and front-return grilles.



VERTICAL FRONT DISCHARGE / LV-F

In a modified version of our Vertical Modular, the cabinet of the Vertical Front Discharge (LV-F) is designed with front discharge and return air grilles. Removable front panel below the front discharge air grille provides total access to the unit for servicing. The vertical front discharge is an attractive, exposed unit that is ideal for perimeter heating and cooling in a wide variety of building environments.



VERTICAL RECESSED / LV-R AND LS-R

Our Vertical Recessed is designed for recessed wall installation where space is limited. The design is well suited for hallways, bathrooms and other smaller areas. The Vertical Recessed has a soft white, epoxy powder coat access panel that's easily removed for service.



LOW SILHOUETTE VERTICAL BASIC / LS-B

Designed for furred in, under the window applications, the low silhouette vertical basic (LS-B) stands only 15 1/2" high and accommodates a field furnished and installed decorative enclosure that conceals the unit. The basic unit consists of a chassis, fan deck, drain pan, throwaway filter and a top-discharge duct collar.



LOW SILHOUETTE VERTICAL DELUXE TOP DISCHARGE / LS-D

The Low Silhouette Vertical Deluxe (LS-D) is similar to the Basic, only specifically designed for exposed under window applications. The attractive, streamlined cabinetry blends with any room decor and is a favorite of architects and contractors. The cabinet comes with our soft white, powder coated epoxy. Also available as Front Discharge and Recessed



LOW SILHOUETTE FRONT DISCHARGE VERTICAL CABINET / LS-F

The Vertical Low-Silhouette Front Discharge is a low-static (up to .25 ESP) fan coil with a draw through design. The LS-F fan coil comes with a coil, blower/ motor assembly and a galvanized steel, powder coated epoxy drain pan covered with ⅛" thick insulation. The cabinet is insulated with ½" thick neoprene coated fiberglass. The LS-F cabinet and top control access panel are finished in a soft white powder coated epoxy with black bar type front discharge and return air grilles. Freestanding at 14½ inches in height.

(This is a custom designed fan coil, certified dimensional drawings provided upon request.)

