


REV: 1.0	ENGINEERING DATA REQUIREMENTS (ATTACHMENT "A")	
NOTE: MILITARY SPECIFICATIONS / STANDARDS WILL NOT BE FURNISHED IN THE BID SET.		
1. THE FOLLOWING INSTRUCTIONS ARE FURNISHED FOR THE MANUFACTURE OF A: Cable Assy - Electrical Branched, W5E		
2. PART NUMBER: 14161-402-1	3. NATIONAL STOCK NUMBER: 6150-014531163	

4. In the SAW Form 761,for 'CRITICALITY CODE':
WAS: X
IS: M
A cataloging change has been initiated.
5. Engineering Data List (EDL) and part procurability information is attached.
6. See below for corrected 14161-402 drawing. Page 2 of the drawing should be Rev C of 14161-402.

PREPARED BY:	OFFICE SYMBOL: 414 SCMS/GUEA	DATE: 2 FEB 2026
--------------	-------------------------------------	-------------------------

Page 2 of 3

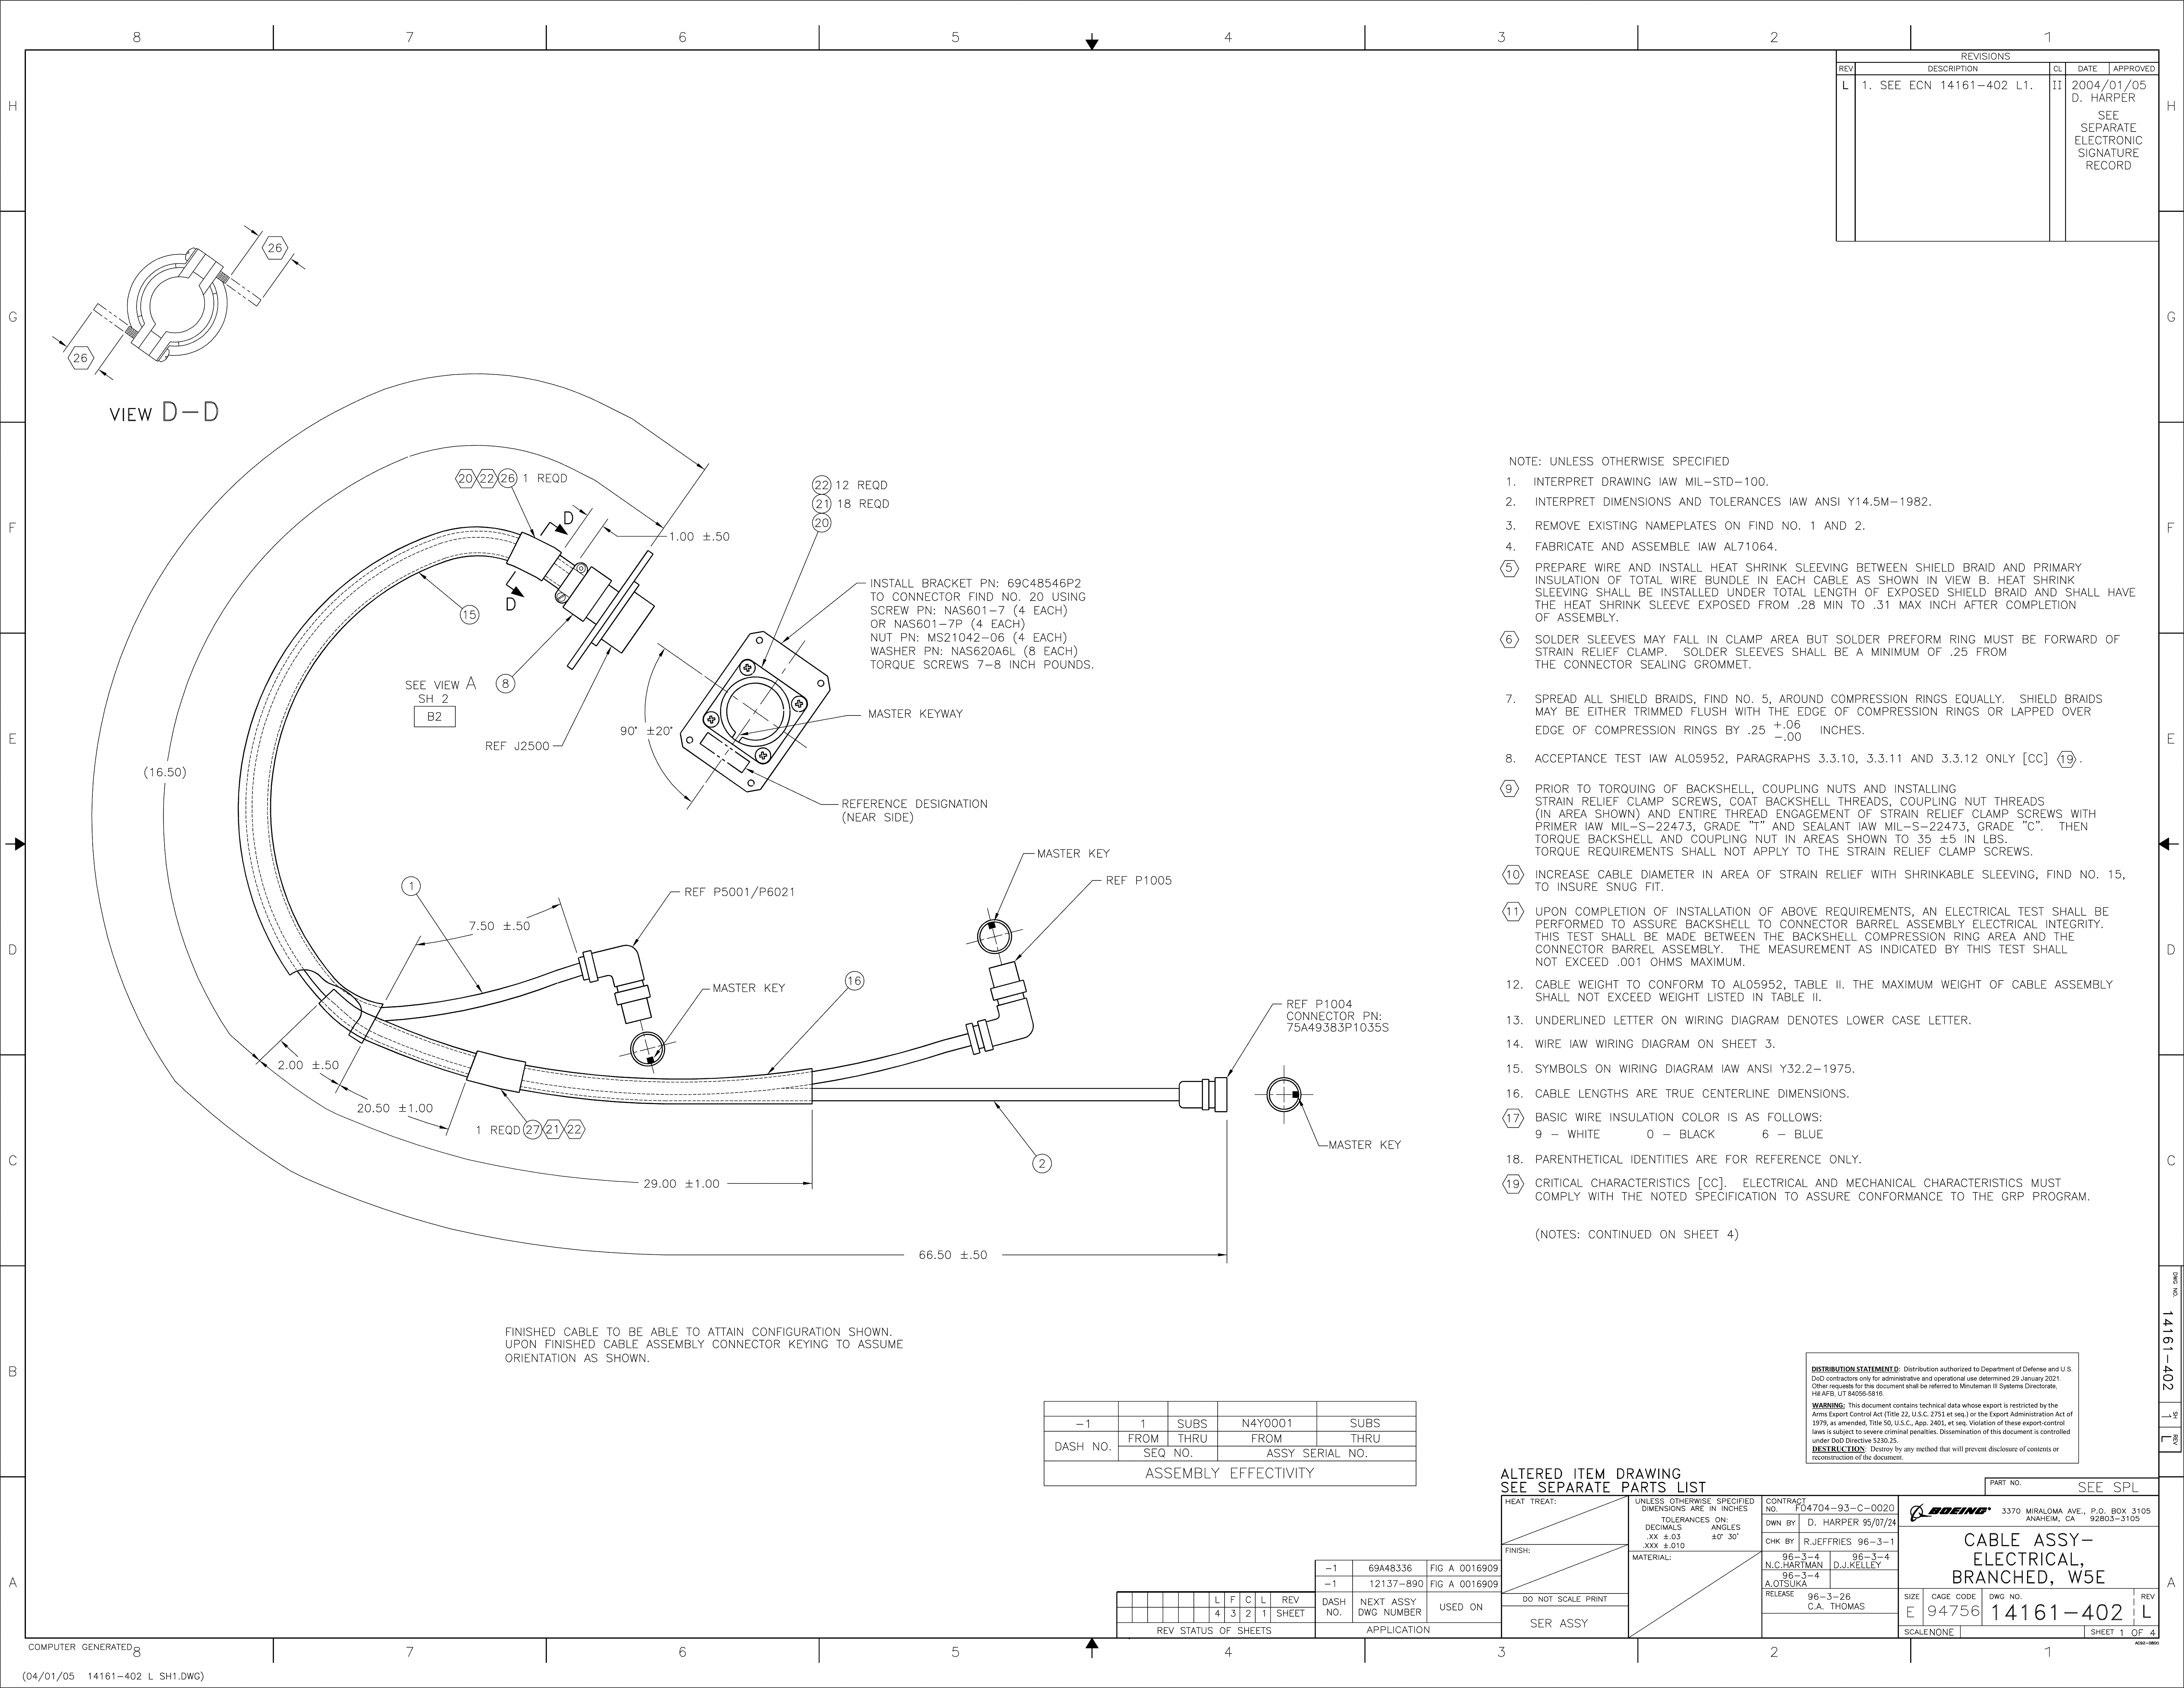

REVISIONS				
REV	DESCRIPTION	CL	DATE	APPROVED
L	1. SEE ECN 14161-402 L1.	II	2004/01/05	D. HARPER
				SEE SEPARATE ELECTRONIC SIGNATURE RECORD

- NOTE: UNLESS OTHERWISE SPECIFIED
- INTERPRET DRAWING IAW MIL-STD-100.
 - INTERPRET DIMENSIONS AND TOLERANCES IAW ANSI Y14.5M-1982.
 - REMOVE EXISTING NAMEPLATES ON FIND NO. 1 AND 2.
 - FABRICATE AND ASSEMBLE IAW AL71064.
 - PREPARE WIRE AND INSTALL HEAT SHRINK SLEEVING BETWEEN SHIELD BRAID AND PRIMARY INSULATION OF TOTAL WIRE BUNDLE IN EACH CABLE AS SHOWN IN VIEW B. HEAT SHRINK SLEEVING SHALL BE INSTALLED UNDER TOTAL LENGTH OF EXPOSED SHIELD BRAID AND SHALL HAVE THE HEAT SHRINK SLEEVE EXPOSED FROM .28 MIN TO .31 MAX INCH AFTER COMPLETION OF ASSEMBLY.
 - SOLDER SLEEVES MAY FALL IN CLAMP AREA BUT SOLDER PREFORM RING MUST BE FORWARD OF STRAIN RELIEF CLAMP. SOLDER SLEEVES SHALL BE A MINIMUM OF .25 FROM THE CONNECTOR SEALING GROMMET.
 - SPREAD ALL SHIELD BRAIDS, FIND NO. 5, AROUND COMPRESSION RINGS EQUALLY. SHIELD BRAIDS MAY BE EITHER TRIMMED FLUSH WITH THE EDGE OF COMPRESSION RINGS OR LAPPED OVER EDGE OF COMPRESSION RINGS BY .25 $\pm$.06 $\pm$.00 INCHES.
 - ACCEPTANCE TEST IAW AL05952, PARAGRAPHS 3.3.10, 3.3.11 AND 3.3.12 ONLY [CC] 19.
 - PRIOR TO TORQUING OF BACKSHELL, COUPLING NUTS AND INSTALLING STRAIN RELIEF CLAMP SCREWS, COAT BACKSHELL THREADS, COUPLING NUT THREADS (IN AREA SHOWN) AND ENTIRE THREAD ENGAGEMENT OF STRAIN RELIEF CLAMP SCREWS WITH PRIMER IAW MIL-S-22473, GRADE "T" AND SEALANT IAW MIL-S-22473, GRADE "C". THEN TORQUE BACKSHELL AND COUPLING NUT IN AREAS SHOWN TO 35 $\pm$ 5 IN LBS. TORQUE REQUIREMENTS SHALL NOT APPLY TO THE STRAIN RELIEF CLAMP SCREWS.
 - INCREASE CABLE DIAMETER IN AREA OF STRAIN RELIEF WITH SHRINKABLE SLEEVING, FIND NO. 15, TO INSURE SNUG FIT.
 - UPON COMPLETION OF INSTALLATION OF ABOVE REQUIREMENTS, AN ELECTRICAL TEST SHALL BE PERFORMED TO ASSURE BACKSHELL TO CONNECTOR BARREL ASSEMBLY ELECTRICAL INTEGRITY. THIS TEST SHALL BE MADE BETWEEN THE BACKSHELL COMPRESSION RING AREA AND THE CONNECTOR BARREL ASSEMBLY. THE MEASUREMENT AS INDICATED BY THIS TEST SHALL NOT EXCEED .001 OHMS MAXIMUM.
 - CABLE WEIGHT TO CONFORM TO AL05952, TABLE II. THE MAXIMUM WEIGHT OF CABLE ASSEMBLY SHALL NOT EXCEED WEIGHT LISTED IN TABLE II.
 - UNDERLINED LETTER ON WIRING DIAGRAM DENOTES LOWER CASE LETTER.
 - WIRE IAW WIRING DIAGRAM ON SHEET 3.
 - SYMBOLS ON WIRING DIAGRAM IAW ANSI Y32.2-1975.
 - CABLE LENGTHS ARE TRUE CENTERLINE DIMENSIONS.
 - BASIC WIRE INSULATION COLOR IS AS FOLLOWS:
9 - WHITE 0 - BLACK 6 - BLUE
 - PARENTHETICAL IDENTITIES ARE FOR REFERENCE ONLY.
 - CRITICAL CHARACTERISTICS [CC]. ELECTRICAL AND MECHANICAL CHARACTERISTICS MUST COMPLY WITH THE NOTED SPECIFICATION TO ASSURE CONFORMANCE TO THE GRP PROGRAM.

(NOTES: CONTINUED ON SHEET 4)

DISTRIBUTION STATEMENT: Distribution authorized to Department of Defense and U.S. DoD contractors only for administrative and operational use determined 29 January 2021. Other requests for this document shall be referred to Minuteman III Systems Directorate, HII AFB, UT 84056-8816.


WARNING: This document contains technical data whose export is restricted by the Arms Export Control Act (Title 22, U.S.C. 2751 et seq.) or the Export Administration Act of 1979, as amended, Title 50, U.S.C., App. 2401, et seq. Violation of these export-control laws is subject to severe criminal penalties. Dissemination of this document is controlled under DoD Directive 5230.25.


DESTRUCTION: Destroy by any method that will prevent disclosure of contents or reconstruction of the document.


-1	1	SUBS	N4Y0001	SUBS
DASH NO.	FROM	THRU	FROM	THRU
	SEQ NO.		ASSY SERIAL NO.	
ASSEMBLY EFFECTIVITY				

HEAT TREAT:		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON: DECIMALS ANGLES .XX $\pm$.03 $\pm$ 0' 30" .XXX $\pm$.010		CONTRACT NO. F04704-93-C-0020 DWN BY D. HARPER 95/07/24		3370 MIRALOMA AVE., P.O. BOX 3105 ANAHEIM, CA 92803-3105	
FINISH:		MATERIAL:		CHK BY R.JEFFRIES 96-3-1 N.C.HARTMAN D.J.KELLEY 96-3-4 A.OTSUKA RELEASE 96-3-26 C.A. THOMAS		CABLE ASSY- ELECTRICAL, BRANCHED, W5E	
DO NOT SCALE PRINT		SER ASSY		SIZE E CAGE CODE 94756 DWG NO. 14161-402		REV L	
SCALE NONE				SHEET 1 OF 4			

-1	69A48336	FIG A 0016909
-1	12137-890	FIG A 0016909
DASH NO.	NEXT ASSY DWG NUMBER	USED ON
APPLICATION		
REV STATUS OF SHEETS		

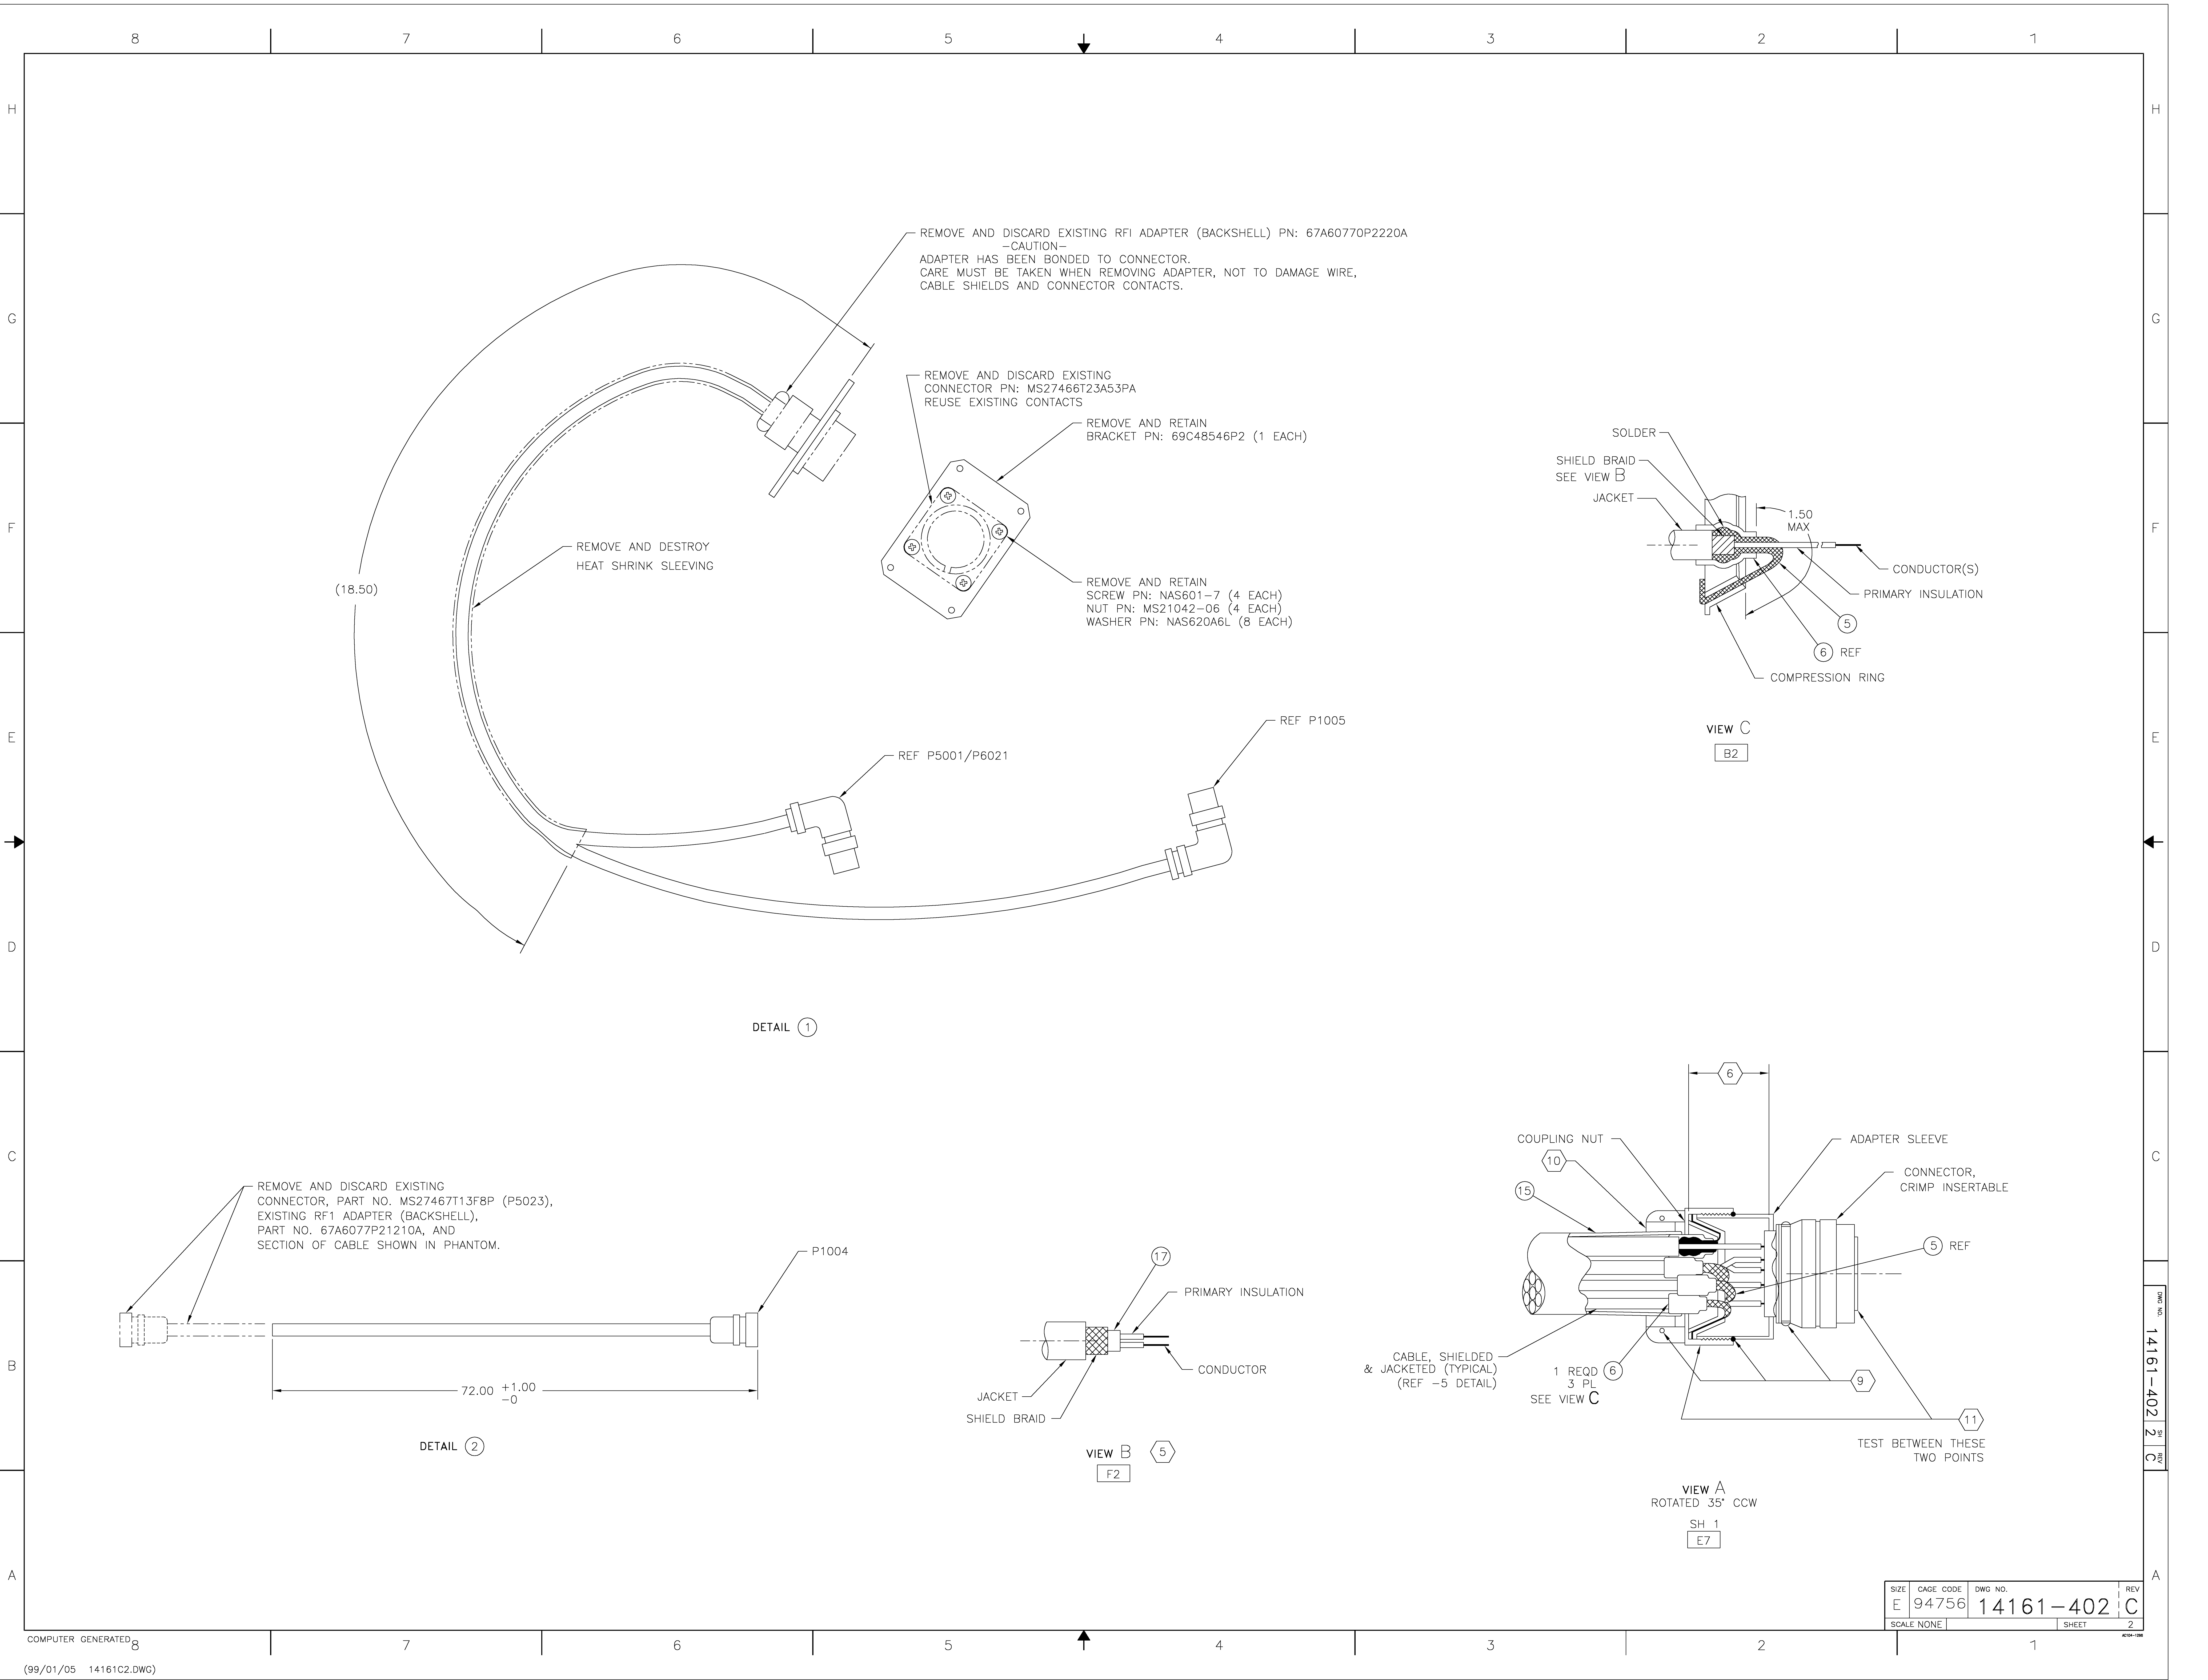

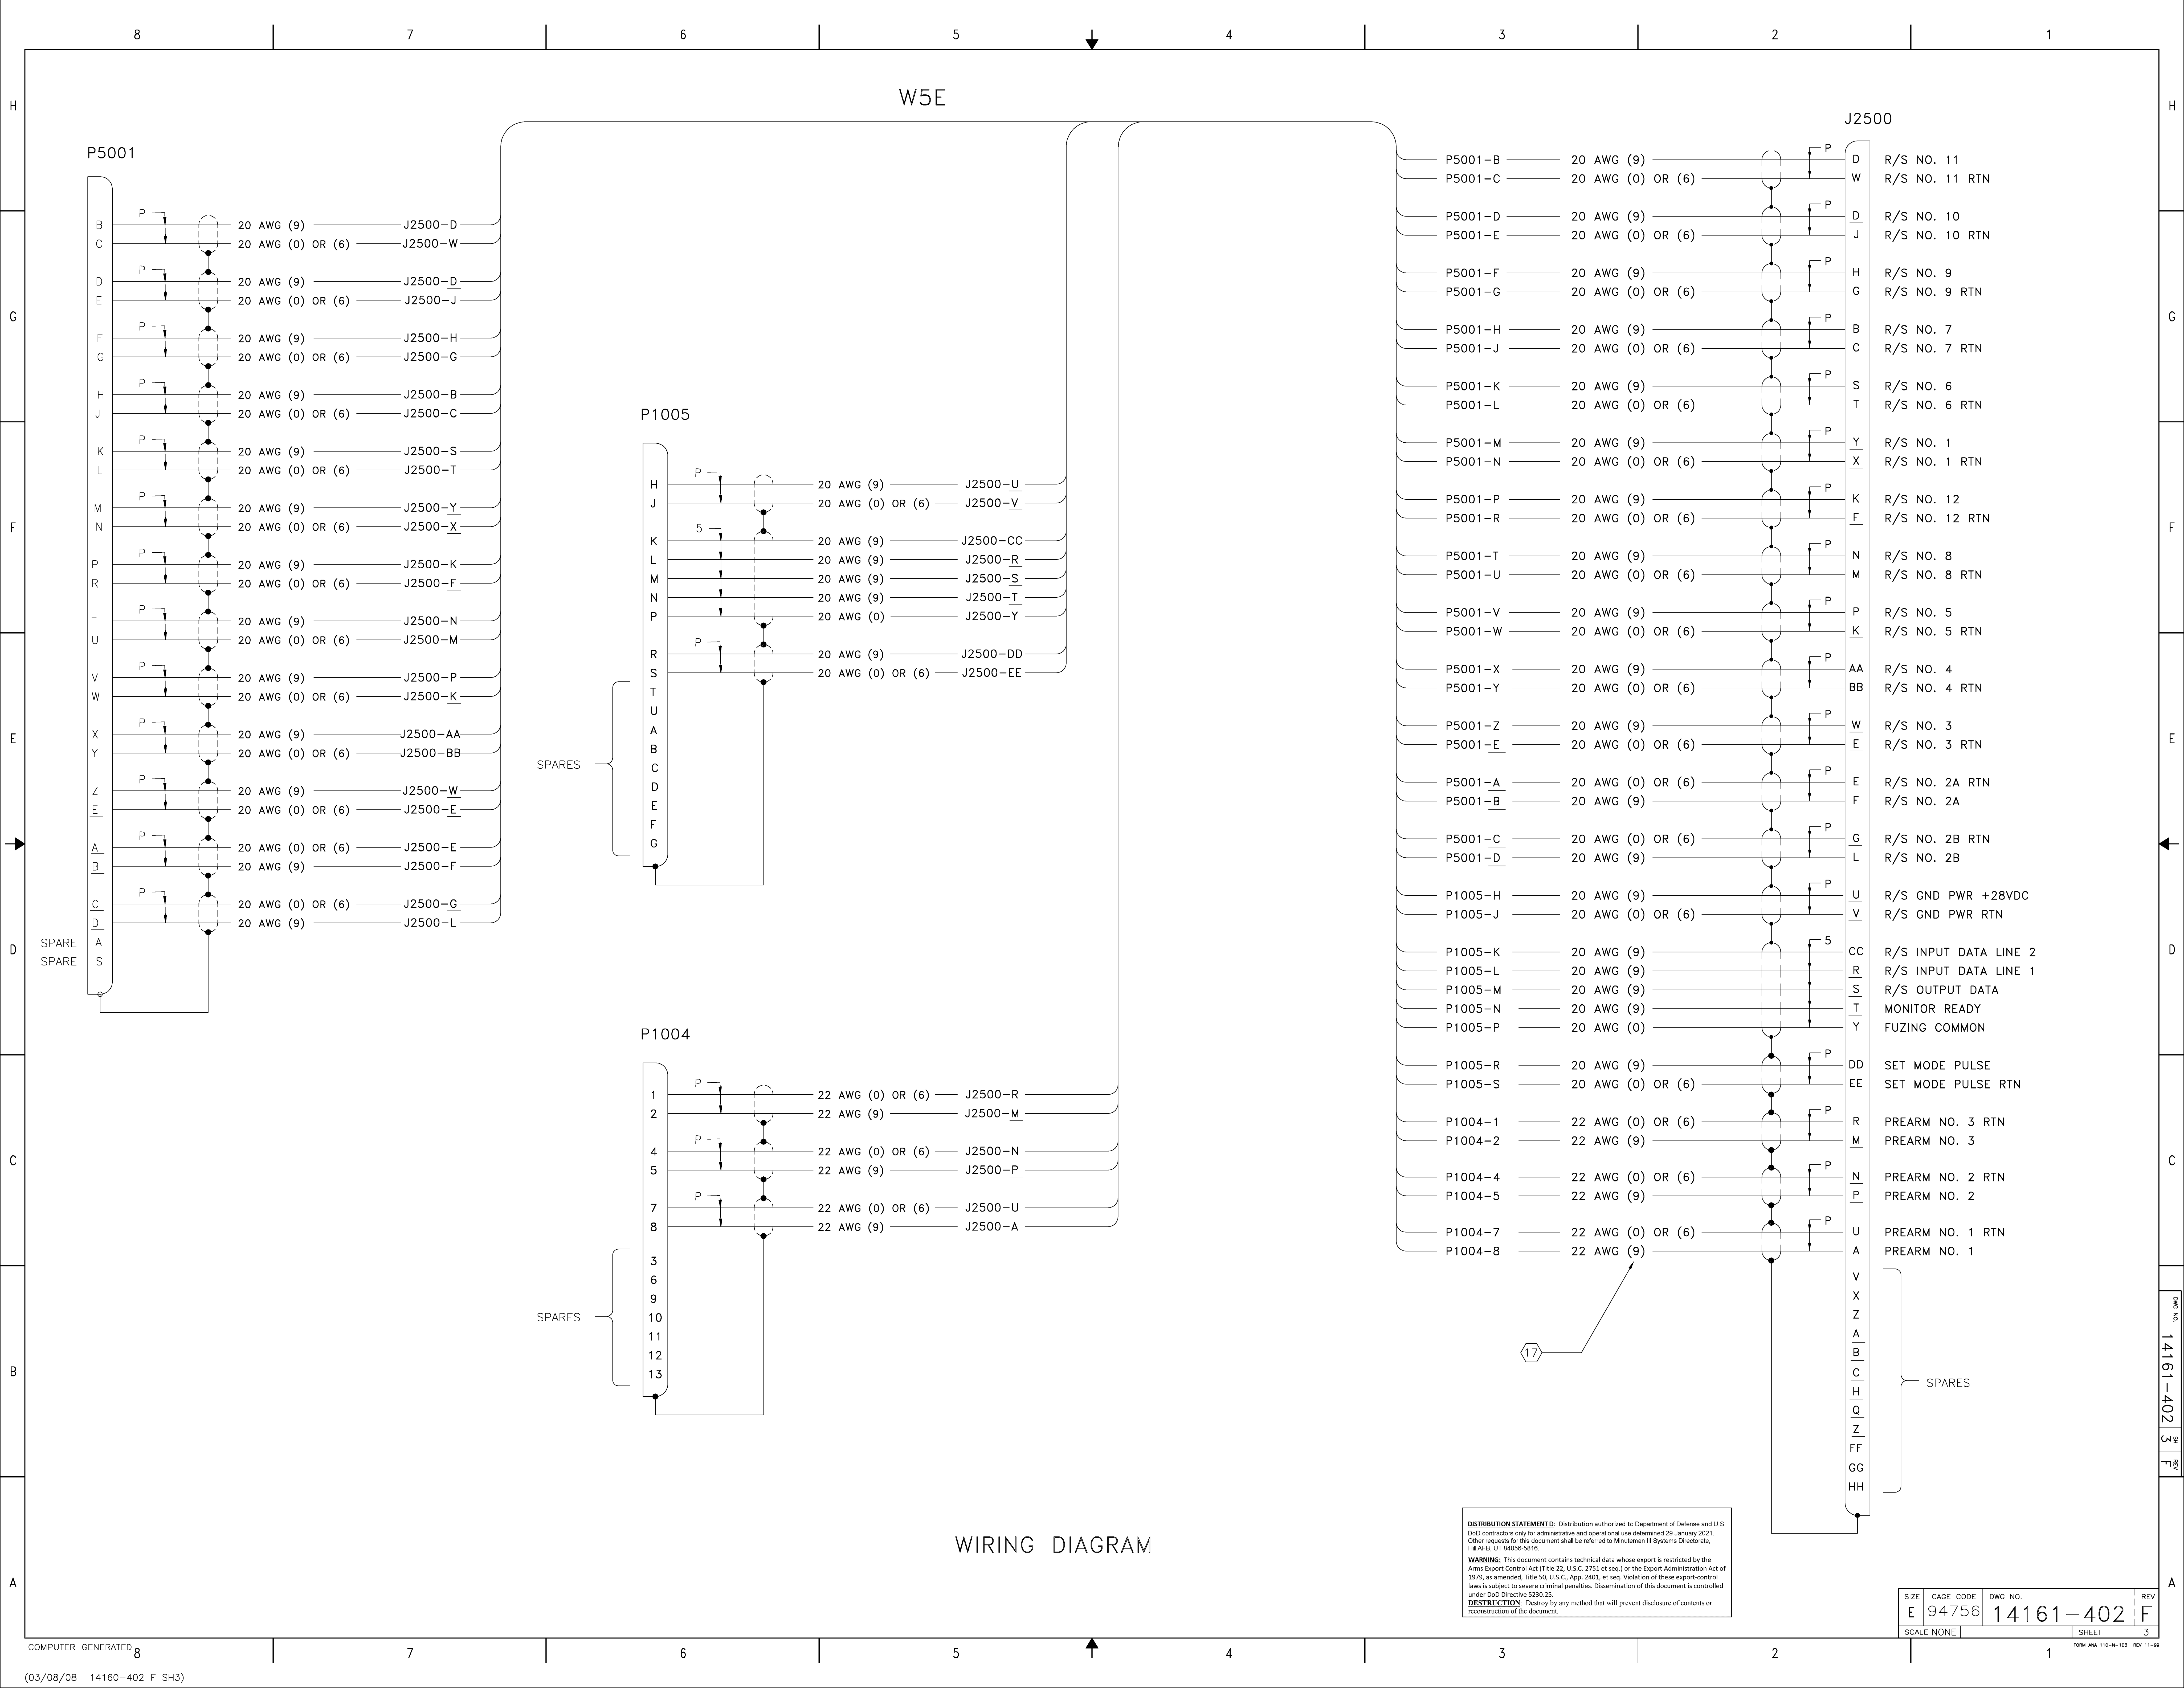

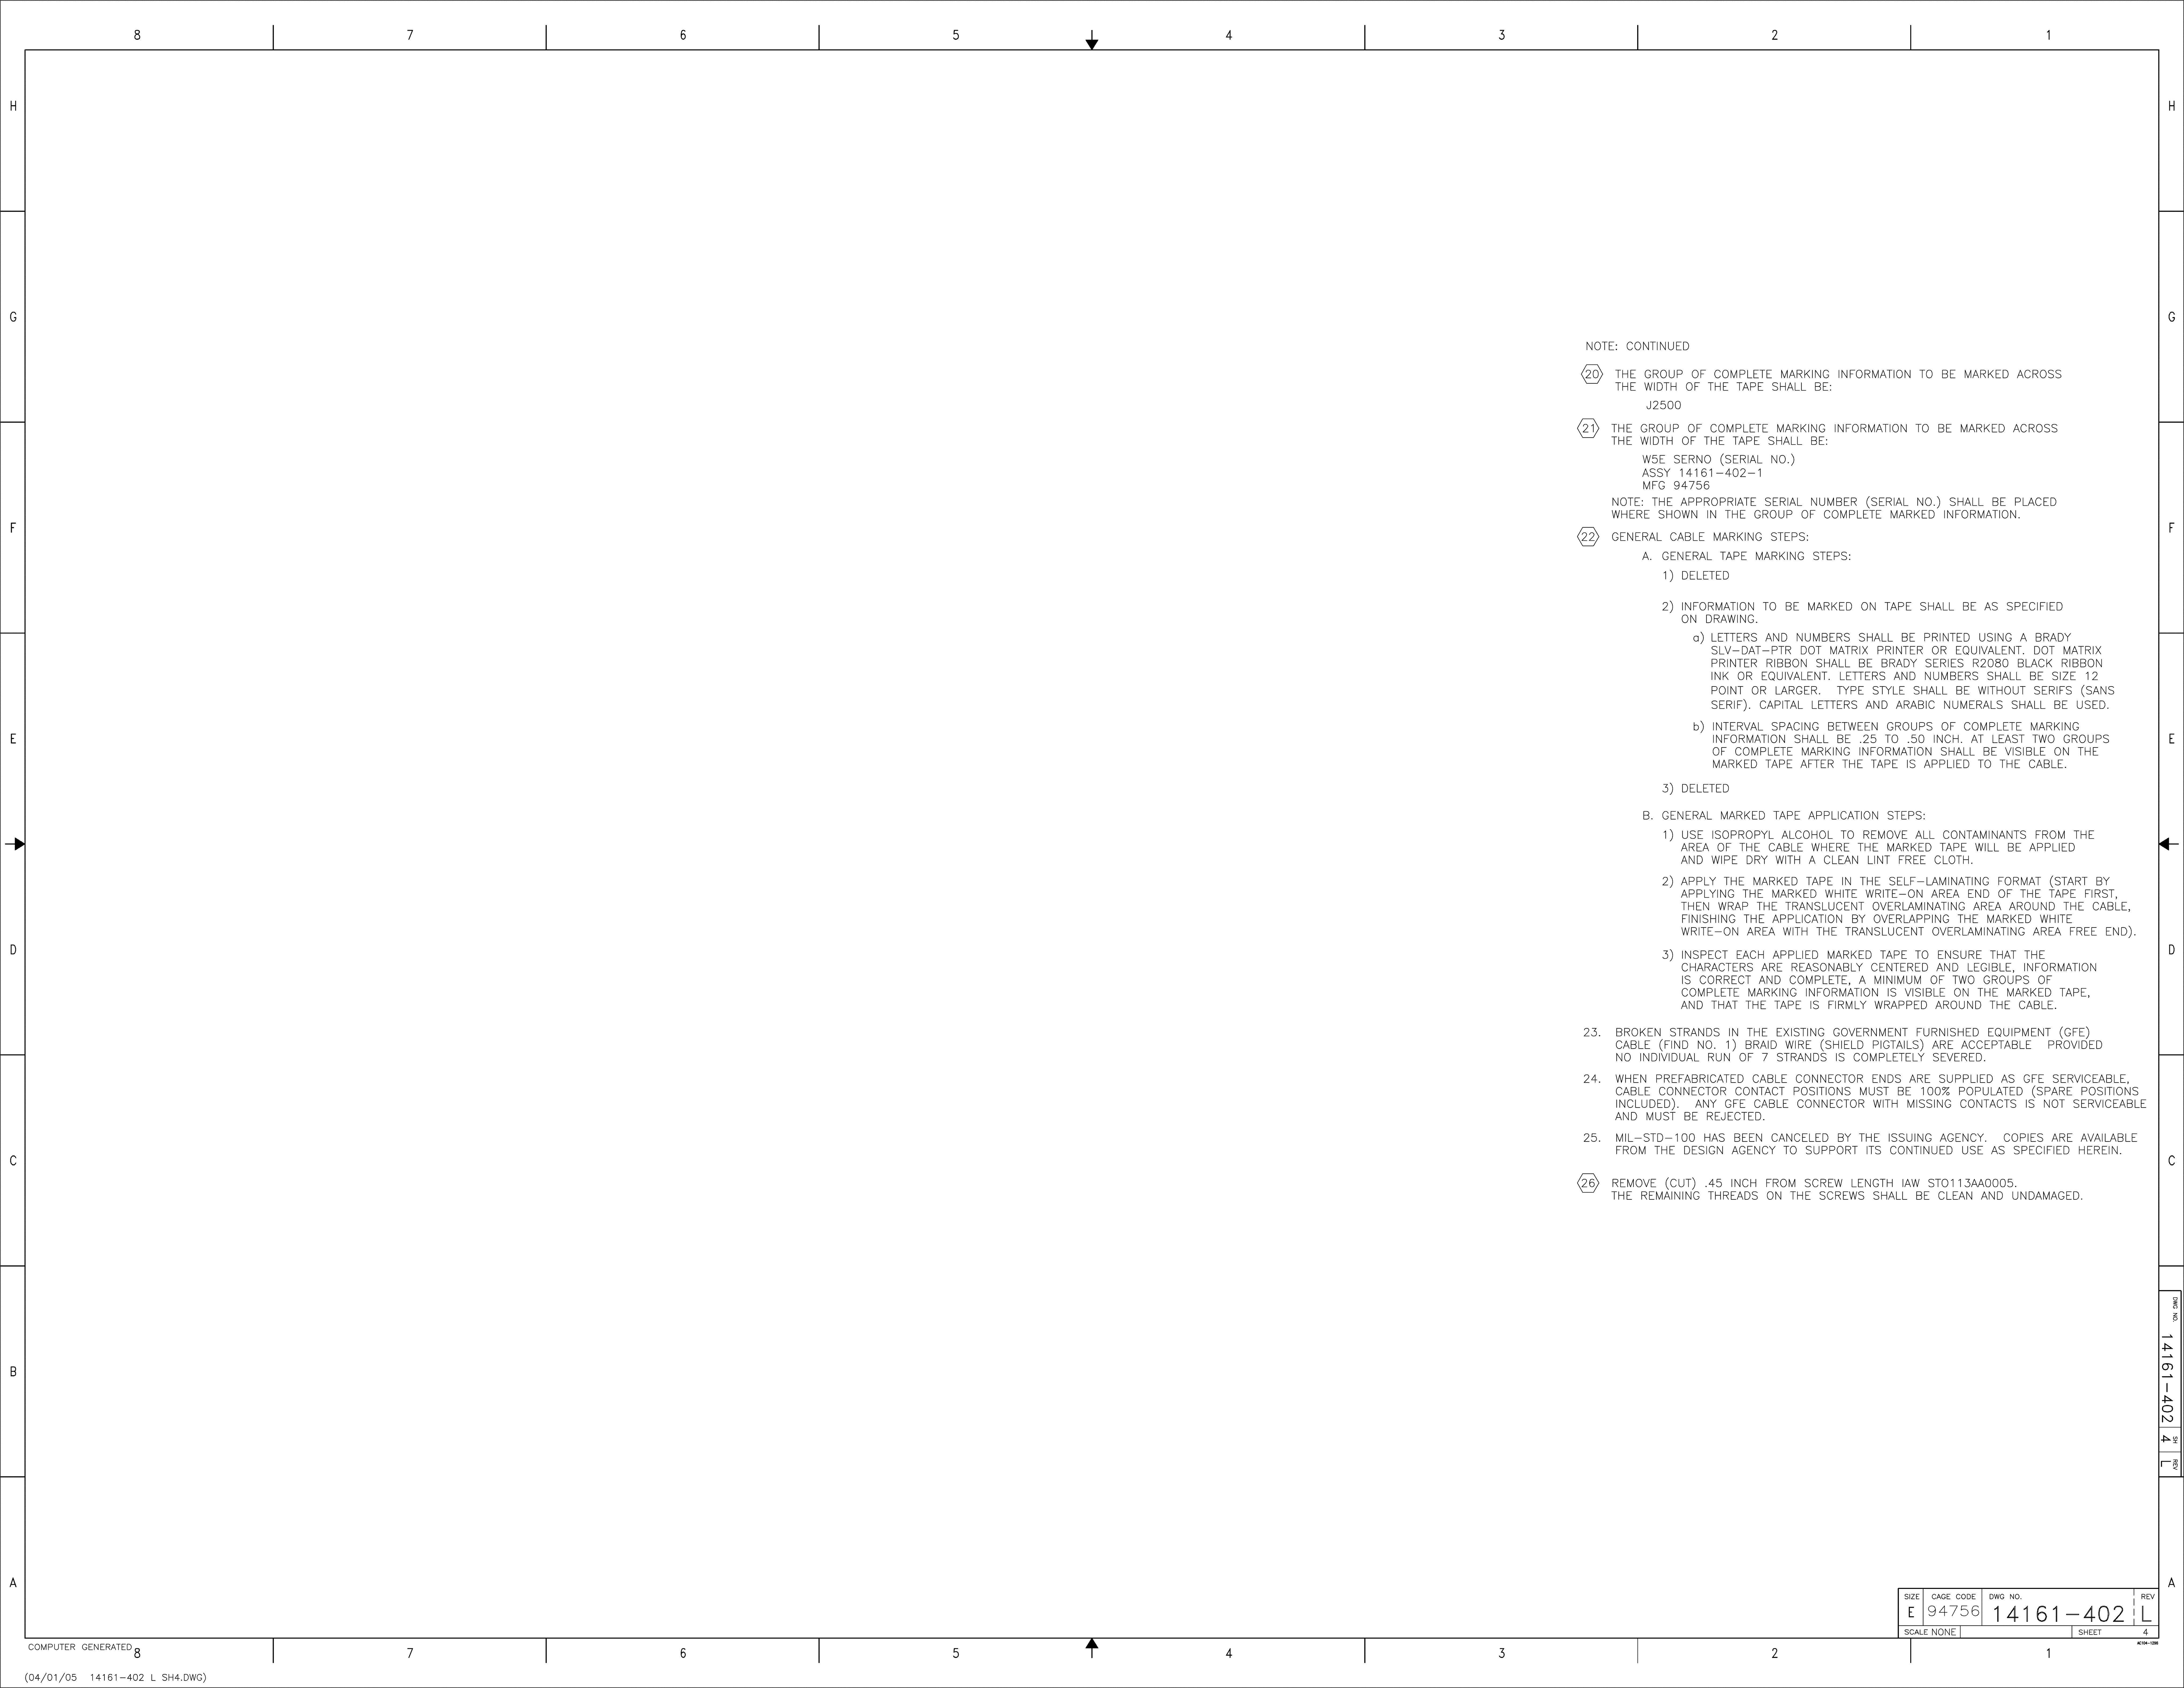

NOTE: CONTINUED

20 THE GROUP OF COMPLETE MARKING INFORMATION TO BE MARKED ACROSS THE WIDTH OF THE TAPE SHALL BE:
J2500

21 THE GROUP OF COMPLETE MARKING INFORMATION TO BE MARKED ACROSS THE WIDTH OF THE TAPE SHALL BE:
W5E SERNO (SERIAL NO.)
ASSY 14161-402-1
MFG 94756

NOTE: THE APPROPRIATE SERIAL NUMBER (SERIAL NO.) SHALL BE PLACED WHERE SHOWN IN THE GROUP OF COMPLETE MARKED INFORMATION.

- 22 GENERAL CABLE MARKING STEPS:
- A. GENERAL TAPE MARKING STEPS:
- 1) DELETED
- 2) INFORMATION TO BE MARKED ON TAPE SHALL BE AS SPECIFIED ON DRAWING.
- a) LETTERS AND NUMBERS SHALL BE PRINTED USING A BRADY SLV-DAT-PTR DOT MATRIX PRINTER OR EQUIVALENT. DOT MATRIX PRINTER RIBBON SHALL BE BRADY SERIES R2080 BLACK RIBBON INK OR EQUIVALENT. LETTERS AND NUMBERS SHALL BE SIZE 12 POINT OR LARGER. TYPE STYLE SHALL BE WITHOUT SERIFS (SANS SERIF). CAPITAL LETTERS AND ARABIC NUMERALS SHALL BE USED.
- b) INTERVAL SPACING BETWEEN GROUPS OF COMPLETE MARKING INFORMATION SHALL BE .25 TO .50 INCH. AT LEAST TWO GROUPS OF COMPLETE MARKING INFORMATION SHALL BE VISIBLE ON THE MARKED TAPE AFTER THE TAPE IS APPLIED TO THE CABLE.
- 3) DELETED

B. GENERAL MARKED TAPE APPLICATION STEPS:

- 1) USE ISOPROPYL ALCOHOL TO REMOVE ALL CONTAMINANTS FROM THE AREA OF THE CABLE WHERE THE MARKED TAPE WILL BE APPLIED AND WIPE DRY WITH A CLEAN LINT FREE CLOTH.
- 2) APPLY THE MARKED TAPE IN THE SELF-LAMINATING FORMAT (START BY APPLYING THE MARKED WHITE WRITE-ON AREA END OF THE TAPE FIRST, THEN WRAP THE TRANSLUCENT OVERLAMINATING AREA AROUND THE CABLE, FINISHING THE APPLICATION BY OVERLAPPING THE MARKED WHITE WRITE-ON AREA WITH THE TRANSLUCENT OVERLAMINATING AREA FREE END).
- 3) INSPECT EACH APPLIED MARKED TAPE TO ENSURE THAT THE CHARACTERS ARE REASONABLY CENTERED AND LEGIBLE, INFORMATION IS CORRECT AND COMPLETE, A MINIMUM OF TWO GROUPS OF COMPLETE MARKING INFORMATION IS VISIBLE ON THE MARKED TAPE, AND THAT THE TAPE IS FIRMLY WRAPPED AROUND THE CABLE.
23. BROKEN STRANDS IN THE EXISTING GOVERNMENT FURNISHED EQUIPMENT (GFE) CABLE (FIND NO. 1) BRAID WIRE (SHIELD PIGTAILS) ARE ACCEPTABLE PROVIDED NO INDIVIDUAL RUN OF 7 STRANDS IS COMPLETELY SEVERED.
24. WHEN PREFABRICATED CABLE CONNECTOR ENDS ARE SUPPLIED AS GFE SERVICEABLE, CABLE CONNECTOR CONTACT POSITIONS MUST BE 100% POPULATED (SPARE POSITIONS INCLUDED). ANY GFE CABLE CONNECTOR WITH MISSING CONTACTS IS NOT SERVICEABLE AND MUST BE REJECTED.
25. MIL-STD-100 HAS BEEN CANCELED BY THE ISSUING AGENCY. COPIES ARE AVAILABLE FROM THE DESIGN AGENCY TO SUPPORT ITS CONTINUED USE AS SPECIFIED HEREIN.

26 REMOVE (CUT) .45 INCH FROM SCREW LENGTH IAW ST0113AA0005. THE REMAINING THREADS ON THE SCREWS SHALL BE CLEAN AND UNDAMAGED.

SIZE	CAGE CODE	DWG NO.	REV
E	94756	14161-402	L
SCALE NONE		SHEET	4