

AIR MOBILITY COMMAND MUSEUM



1301 Heritage Road
Dover DE 19902
amcmuseum@us.af.mil
302-677-5938

MEMORANDUM FOR AMC/HO

29 December 2025

FROM: Air Mobility Command Museum

SUBJECT: C-124A 49-0258 Color Markings and Insignia (CMI) Approval Request

1. C-124A 49-0258 was received by the Air Mobility Command Museum in 2004. The aircraft currently has a standard MATS paint scheme applied. It is requested that the aircraft be repainted in its current all-silver paint job. Sherwin Williams Silver Brite or acceptable alternative will be used for the overall silver paint scheme. UV resistant, Direct to Metal (DTM) water based latex paint will be used for all other painted surfaces. Amarillo USAF font will be used for all alpha-numeric markings. Current markings, historic photos of the aircraft and TO 1-1-4, 1965 will be used as reference for paint and decal locations.
2. All insignia and markings will match what is currently applied to the aircraft. Verify sizes of insignia and markings prior to application.
3. The aircraft will be painted as follows: all fuselage, wings, engines, vertical and horizontal surfaces in silver (17178). Landing gear and wheel wells will be left unpainted.
4. Black (17038) to be applied as follows: Nose radome and glare shield; 18" call numbers "0-90258" on both sides of the vertical stabilizer; "MILITARY AIR TRANSPORT SERVICE" on both sides of the fuselage; Propellers; All four upper surface wing aft of nacelles and wing/ horizontal stabilizer walkways 2" wide; left side fuselage below flight deck windows; vertical stabilizer tail stripes, both sides; Data Plate information block in 1" letters on left side fuselage.
5. Blue (15044) to be applied as follows: "U.S. AIR FORCE" on left and right sides of forward fuselage with 30" letters; "USAF" to be applied to upper right and lower left-wing surfaces in 60" letters.
6. Red (11136) to be applied as follows: All propeller rotation stripes both sides of fuselage and #2 and #3 engine nacelles, 2" wide.
7. Yellow (13538) Propeller tips and cuffs; emergency exit edges; tail stripes.
8. Insignia will be applied as follows: National star insignia on left and right fuselage with 50" stars; upper left and lower right wings with 50" stars; 36" MATS insignia on both sides of fuselage; 30" tall US Flag on vertical stabilizer, both sides; white (17875) call number lozenge with black numbers "1258" and black border.

Colors to be used:

Silver	17178
Insignia White	17875
Insignia Red	11136
Insignia Blue	15044
Black	17038
Yellow	13538

John Taylor
Director, AMC Museum



Figure 1

C-124 AIRCRAFT MARKING SPECIFICATION (SEE FIGURE 3-21)

1. MARKING	2. LOCATION	3. SIZE	4. COLOR
A. U.S. Air Force	Both sides of fuselage	Letters 30 inches high	-Code 15044
B. Model Designation, Aircraft Serial Number and Fuel Requirement	Left side of fuselage	Letters and numbers (see paragraphs 3-30 thru 3-31)	-Code 17038
C. National Star	Both sides of fuselage	50-inch star	Background, Border -Code 15044. Star, Bars - Code 17875. Stripes - Code 509.
D. National Star	On under surface of right wing and top surface of left wing	50-inch star	Background, Border -Code 15044. Stars, Bars - Code 17875. Stripes - Code 509.
E. USAF	On top surface of right wing and under surface of left wing	Letters 60 inches high	-Code 15044
F. Call Numbers	Both sides of vertical stabilizer	Numbers 18 inches high	-Code 17038
G. Conspicuity/Arctic Markings	One inch clearance around large insignia and lettering		-Code 633
H. Anti-Glare	Top of fuselage in front of cockpit		-Code 37038
I. Propeller Caution Band	On fuselage and inboard engine cowling through same plane of propeller travel	3 inches wide	Band, Arrows, Danger - Code 509. Propeller - Code 17875
J. Propeller Tips	On both sides	6 inches from tip	-Code 633
K. Walkways		Border 2 inches wide	-Code 17038

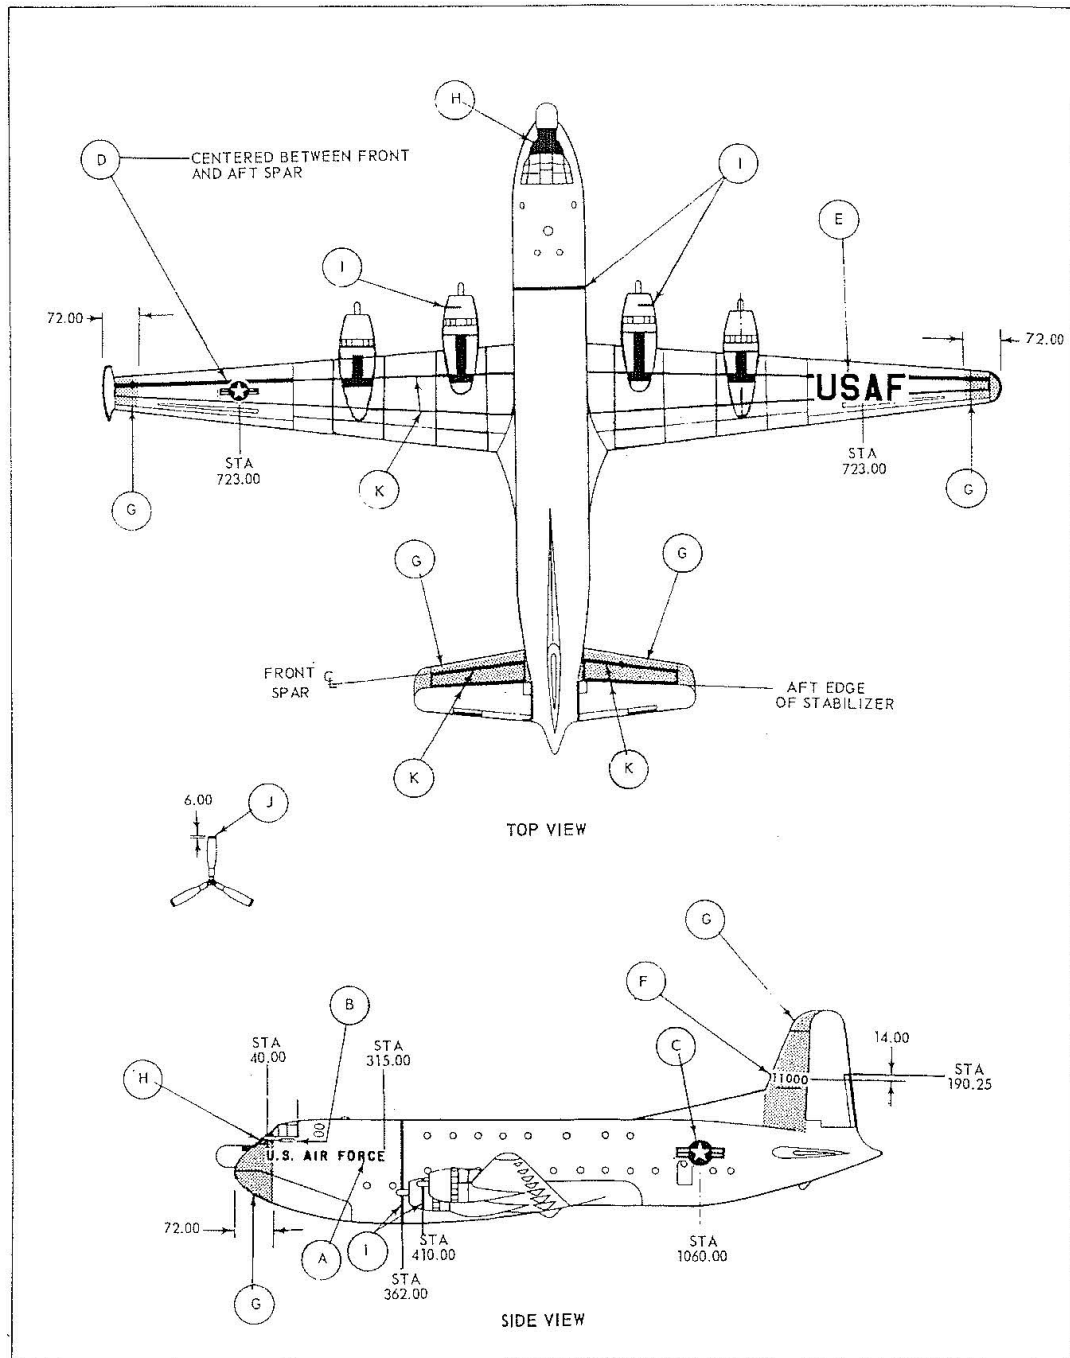


Figure 3