

SPECIAL PACKAGING INSTRUCTION			CODE ID 98747	SPI NO. (TPD) F01-052-8206 SHEET 1 OF 6
PART OR DRAWING NO. MULTIPLE PART NUMBERS	NATIONAL STOCK NO. 1377-01-052-8206 ES	CURRENT REV R	ILL. K. KNIGHTON P.S. S. DYLER CHK. D. HALE AUTH. J. BURLEIGH	
ITEM NOMENCLATURE CARTRIDGE, IMPULSE		ORIGINAL DATE 94035		

MILITARY PRESERVATION IAW MIL-STD-2073-1

SERVICEABLE METHOD: 41

UNSERVICEABLE METHOD: 41

QUP 001

ICQ 000

CLEANING & DRYING: IAW MIL-STD-2073-1

PRESERVATIVE: N/A

MARKING IAW MIL-STD-129

SPECIAL MARKINGS:

A) SPI NO. F01-052-8206
MARK THE SPI NUMBER ON THE IDENTIFICATION SIDE OF CONTAINER.

B) PROPER SHIPPING NAME: CARTRIDGES, POWER DEVICE UN0276

C) UN POP MARKING: 4G/Y5/S/**
USA/DOO/AF70

**THE LAST TWO DIGITS OF THE YEAR DURING WHICH THE PACKAGING WAS MANUFACTURED.

D) REUSABLE CONTAINER & DUNNAGE DO NOT DESTROY.

CLOSURE:

LEVEL A: IAW: ASTM D6251

LEVEL B: IAW: THIS INSTRUCTION

PACKING AS SPECIFIED BELOW AND BILL OF MATERIALS

LEVEL	SPEC	STYLE	TYPE	CL	VRTY	GR	TR
A	ASTM D6251	A	III	2			B
B	ASTM D5118	RSC				V3c	

	LEVEL A	LEVEL B
GROSS CU FT	SEE NOTICE 1	1.043
GROSS WT LBS	SEE NOTICE 1	10
DESIGN FRAGILITY G	80	80

	LENGTH	WIDTH	DEPTH
CNTR I.D.			
LEVEL A:	SEE NOTICE 1		
LEVEL B:	10	10	16

	LEVEL A:	LEVEL B:	
CNTR O.D.	SEE NOTICE 1		
LEVEL A:	10 3/8	10 3/8	16 3/4
LEVEL B:			

	ITEM DIM	VARIES
ITEM WT.	VARIES	

REVISIONS		
LTR	DESCRIPTION	DATE
M	ADDED DISTRIBUTION STATEMENT AND DESTRUCTIONS NOTICE AND UPDATED BOM	18165
N	UPDATED UN POP MARKING	19128
P	UPDATED POP MARKING	22243
R	ADDED CUI AND CLOSURE DRAWING, UPDATED LEVEL B CLOSURE AND PALLETIZATION	24347

CONTROLLED BY: 406 SCMS

CONTROLLED BY: GULAA-HILL AFB

CONTROLLED BY: CUI/SP-CTI

DISTRIBUTION/DISSEMINATION CONTROL: FEDCON

POC: 406SCMS.GULAA.CONTRACTSHILL@US.AF.MIL

DDDP/PHM/USA/DOO/AF70/TP18009

SPI NO. F01-052-8206

SPECIAL PACKAGING INSTRUCTION			CODE ID 98747	SPI NO. (TPO) F01-052-8206
ITEM NOMENCLATURE CARTRIDGE, IMPULSE			SHEET 2 OF 6	
-4	A/R	TAPE, PACKAGING	3 X AS REQUIRED	ASTM D5486 TYPE I OR V
-3	1	WRAP	AS REQUIRED	MIL-PRF-81705 TYPE III, CLASS 1
-2	1	BAG, BARRIER	AS REQUIRED	MIL-DTL-117 TYPE I, CLASS F, STYLE 1
-1	A/R	CUSHIONING	AS REQUIRED	A-A-1898 GRADE II
P/N	QTY REQD	NOMENCLATURE OR DESCRIPTION	SIZE: (INCHES UNLESS SPECIFIED) TOLERANCES ON FRAC. $\pm \frac{1}{8}$, DECIMAL $\pm .10$, ANGLES $\pm 1^\circ$	MATERIAL SPECIFICATION

SPECIAL PACKAGING INSTRUCTION	CODE ID 98747	SPI NO. (TPO) F01-052-8206
ITEM NOMENCLATURE CARTRIDGE, IMPULSE		SHEET 3 OF 6

MUNITION NOTICES

NOTICE 1: FOR LEVEL A PACKING REQUIREMENTS: THE LEVEL B PACKS SHALL BE OVERBOXED IN A LEVEL A SPECIFIED CONTAINER SHOWN ON PAGE 1 UNDER PACKAGING LEVEL A. MARK THE OUTSIDE OF THE OVERBOX "OVERPACK." THE SIZE AND WEIGHT OF THE OVERBOX WILL VARY DEPENDING ON THE NUMBER OF ITEMS BEING SHIPPED. USE FILLER PAD OF ASTM D4727, CF, DOM, GR 275 (OR EQUAL) TO ENSURE A TIGHT FIT IN THE OVERBOX.

NOTICE 2: LEVEL A PROTECTION REQUIRED TO MEET THE MOST SEVERE WORLDWIDE SHIPMENT, HANDLING, AND STORAGE CONDITIONS. EXAMPLES OF SITUATIONS ARE: WAR RESERVE MATERIAL, MOBILIZATION, STRATEGIC AND THEATER DEPLOYMENT, OPEN STORAGE AND DECK LOADING. SECURITY ASSISTANCE ITEMS, INCLUDING FMS, ARE ESPECIALLY SUSCEPTIBLE TO DAMAGE DUE TO UNKNOWN AND UNFAVORABLE TRANSPORTATION, CLIMATIC, AND STORAGE CONDITIONS. PROVIDE LEVEL B PACKING UNLESS OTHERWISE DIRECTED BY THE PROCURING COUNTRY.

NOTICE 3: ASSETS PACKAGED IN ACCORDANCE WITH THE PREVIOUS EDITION OF THIS SPI DO NOT REQUIRE REPACKAGING IF THE INTEGRITY OF THE SPI IS MAINTAINED.

NOTICE 4: SEE SPIRES FOR A COMPLETE LISTING OF NSN's ASSIGNED TO THIS SPI.

NOTICE 5: THIS SPI IS NOT AUTHORIZED FOR USE WITHOUT PROPER HAZARD CLASSIFICATION. UNLESS A FINAL HAZARD CLASSIFICATION HAS BEEN ISSUED, A COPY OF THE VALID INTERIM HAZARD CLASSIFICATION LETTER ALONG WITH DOT SP 15448 MUST ACCOMPANY EACH SHIPMENT.

INTERNATIONAL STANDARDS FOR PHYTOSANITARY MEASURES***REVISION OF ISPM NO. 15******REVISION OF WOOD PACKAGING MATERIAL FOR INTERNATIONAL TRADE***

THE FOLLOWING STATEMENT IS IN COMPLIANCE WITH THE UNITED NATIONS-IMPLEMENTED RESTRICTIONS ON WOOD PACKAGING MATERIAL (WPM). THIS REQUIREMENT IS SPECIFICALLY CONCERNED WITH INVASIVE SPECIES SUCH AS THE PINEWOOD NEMATODE. WPM IS DEFINED AS WOOD PALLETS, SKIDS, LOAD BOARDS, PALLET COLLARS, WOODEN BOXES, REELS, DUNNAGE, CRATES, FRAMES, AND CLEATS. THE STATEMENT BELOW CITES THE REQUIREMENTS IN DETAIL AND COVERS LUMBER FOR BUILDING CONTAINERS AND PALLETS USED FOR DELIVERIES, RESULTING IN SHIPMENTS WORLDWIDE (DIRECT, OR THROUGH AIR LOGISTICS CENTERS (ALC), CONTAINER CONSOLIDATION POINTS (CCP), OR OTHER BASES).

WOODEN LUMBER, WOODEN PALLET AND PACKAGING/CONTAINER STATEMENT:

ALL WOODEN LUMBER, WOODEN PALLETS, AND WOODEN CONTAINERS PRODUCED ENTIRELY OR IN PART OF WOOD PACKAGING MATERIAL (WPM) SHALL BE CONSTRUCTED FROM DEBARKED WOOD IN ADDITION TO THE APPLICATION OF HEAT-TREATED (HT) MATERIAL (HT TO 56 DEGREES CENTIGRADE OR 133 DEGREES FAHRENHEIT FOR 30 MINUTES). CERTIFICATION/MARKING IS REQUIRED BY AN ACCREDITED AGENCY RECOGNIZED BY THE AMERICAN LUMBER STANDARDS COMMITTEE (ALSC). FOR REFERENCE DOCUMENTATION, SEE LATEST REVISION OF "INTERNATIONAL STANDARDS FOR PHYTOSANITARY MEASURES (ISPM NO. 15), "REGULATION OF WOOD PACKAGING MATERIAL IN INTERNATIONAL TRADE."

NOTES


1. MAY PLACE UP TO 70 ITEMS IN SHIPPING CONTAINER.

2. WRAP WITH REF.-3, PLACE IN BAG REF.-2 REMOVE AIR AND SEAL. USE REF.-1 TO PREVENT ITEMS FROM TOUCHING SIDES OF CONTAINER AND PREVENT MOVEMENT.

SPECIAL PACKAGING INSTRUCTION

CODE ID
98747SPI NO. (TPO)
F01-052-8206ITEM NOMENCLATURE
CARTRIDGE, IMPULSE


SHEET 4 OF 6

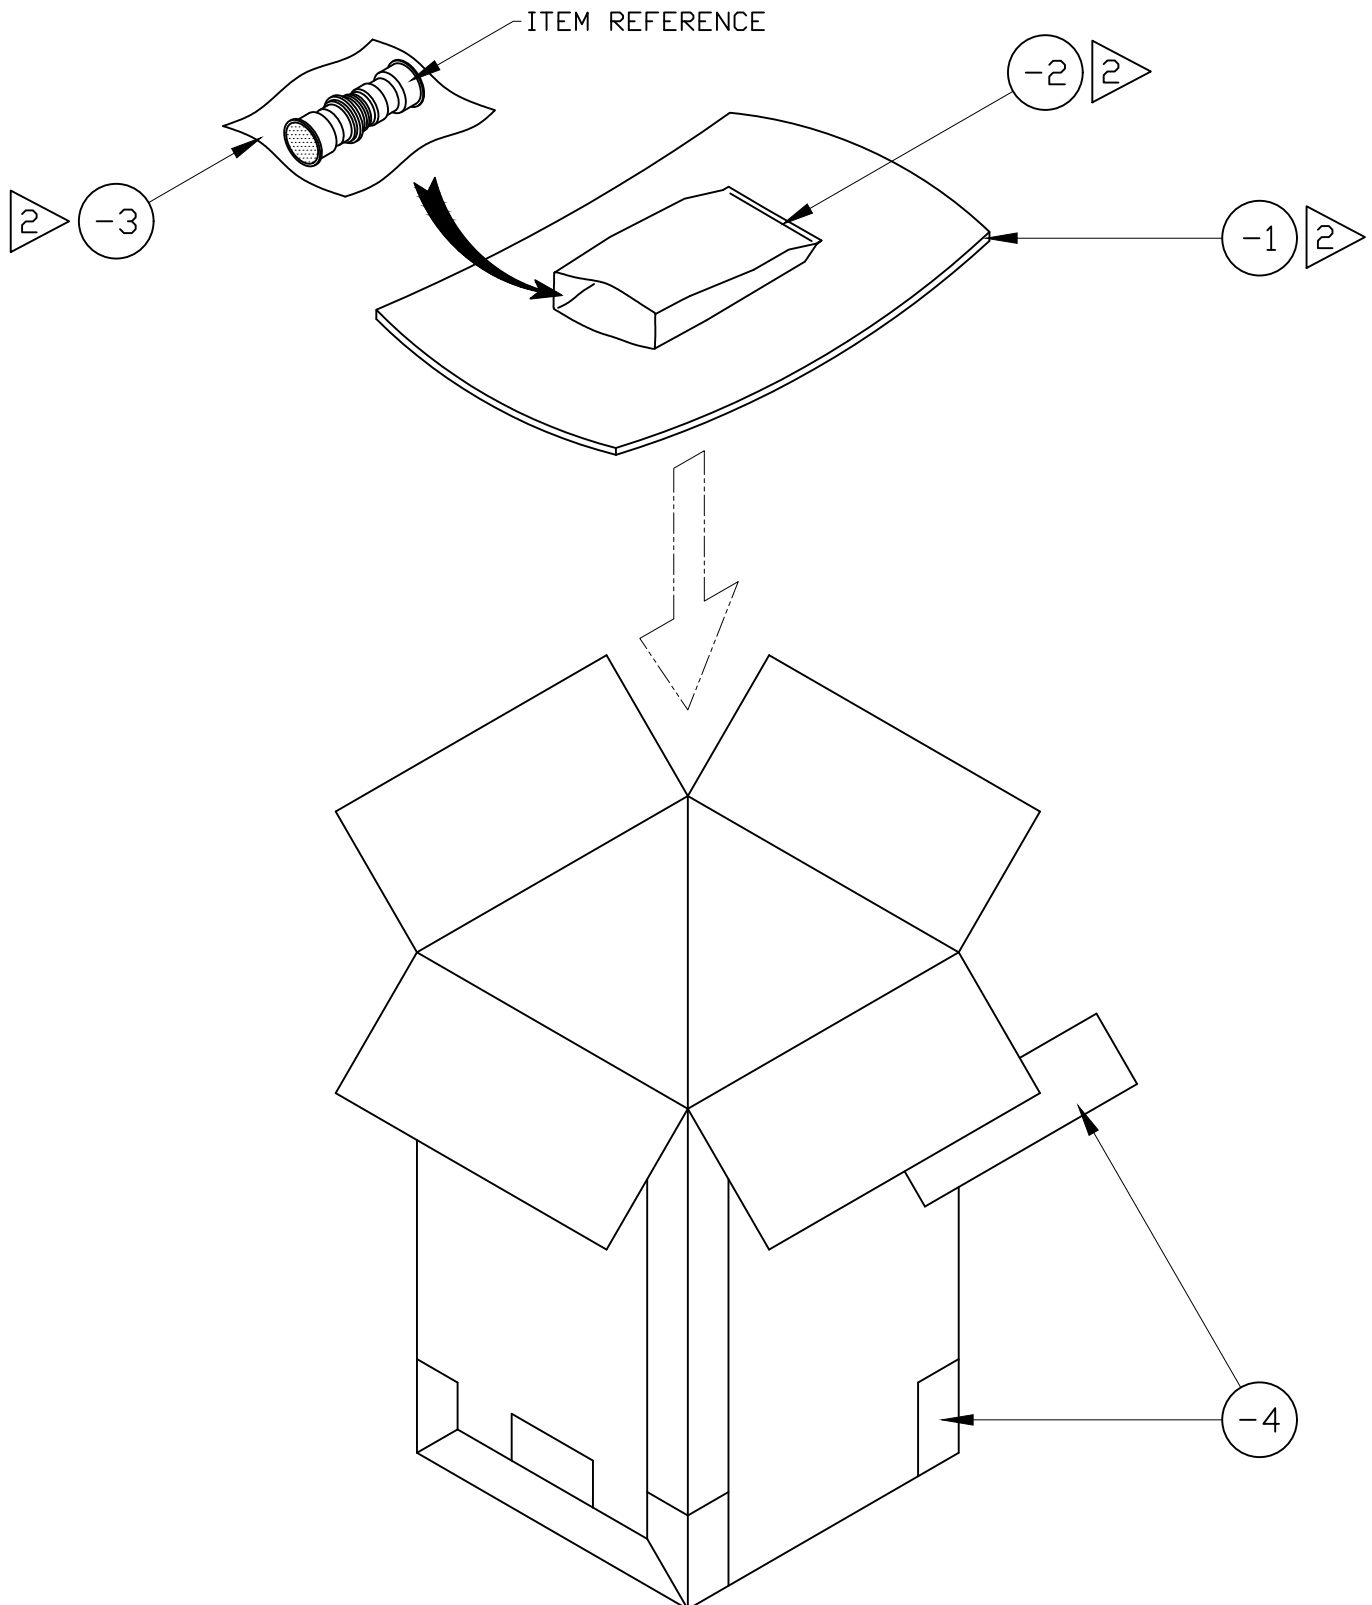

SPECIAL PACKAGING INSTRUCTION

CODE ID
98747SPI NO. (TPO)
F01-052-8206ITEM NOMENCLATURE
CARTRIDGE, IMPULSE


SHEET 5 OF 6

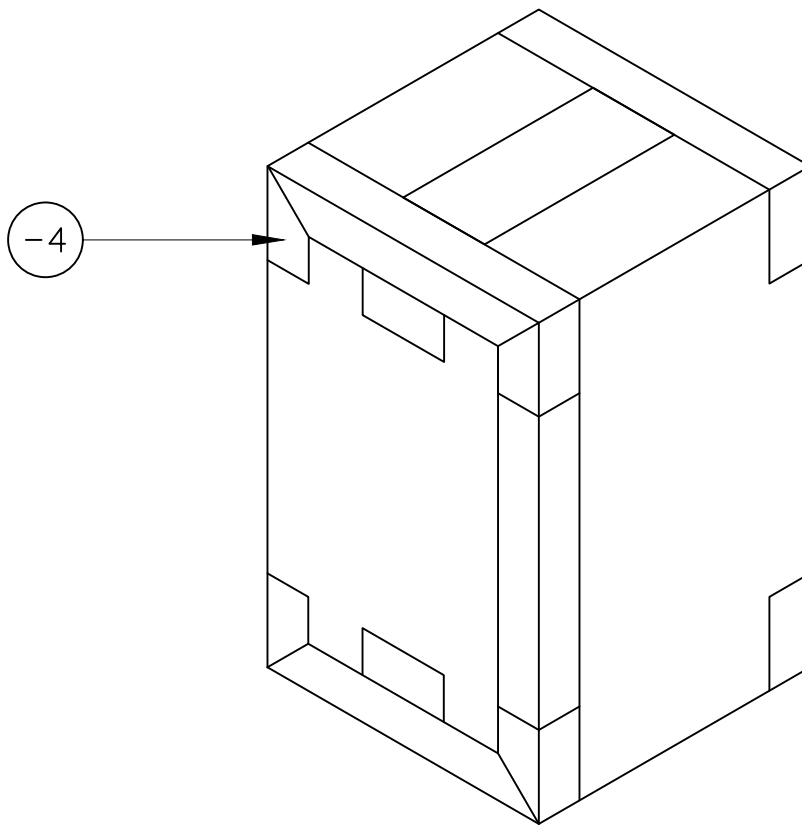

CLOSURE

SPECIAL PACKAGING INSTRUCTION	CODE ID 98747	SPI NO. (TPO) F01-052-8206
ITEM NOMENCLATURE CARTRIDGE, IMPULSE		SHEET 6 OF 6

PALLETIZATION PROCEDURE FOR LEVEL B PACK

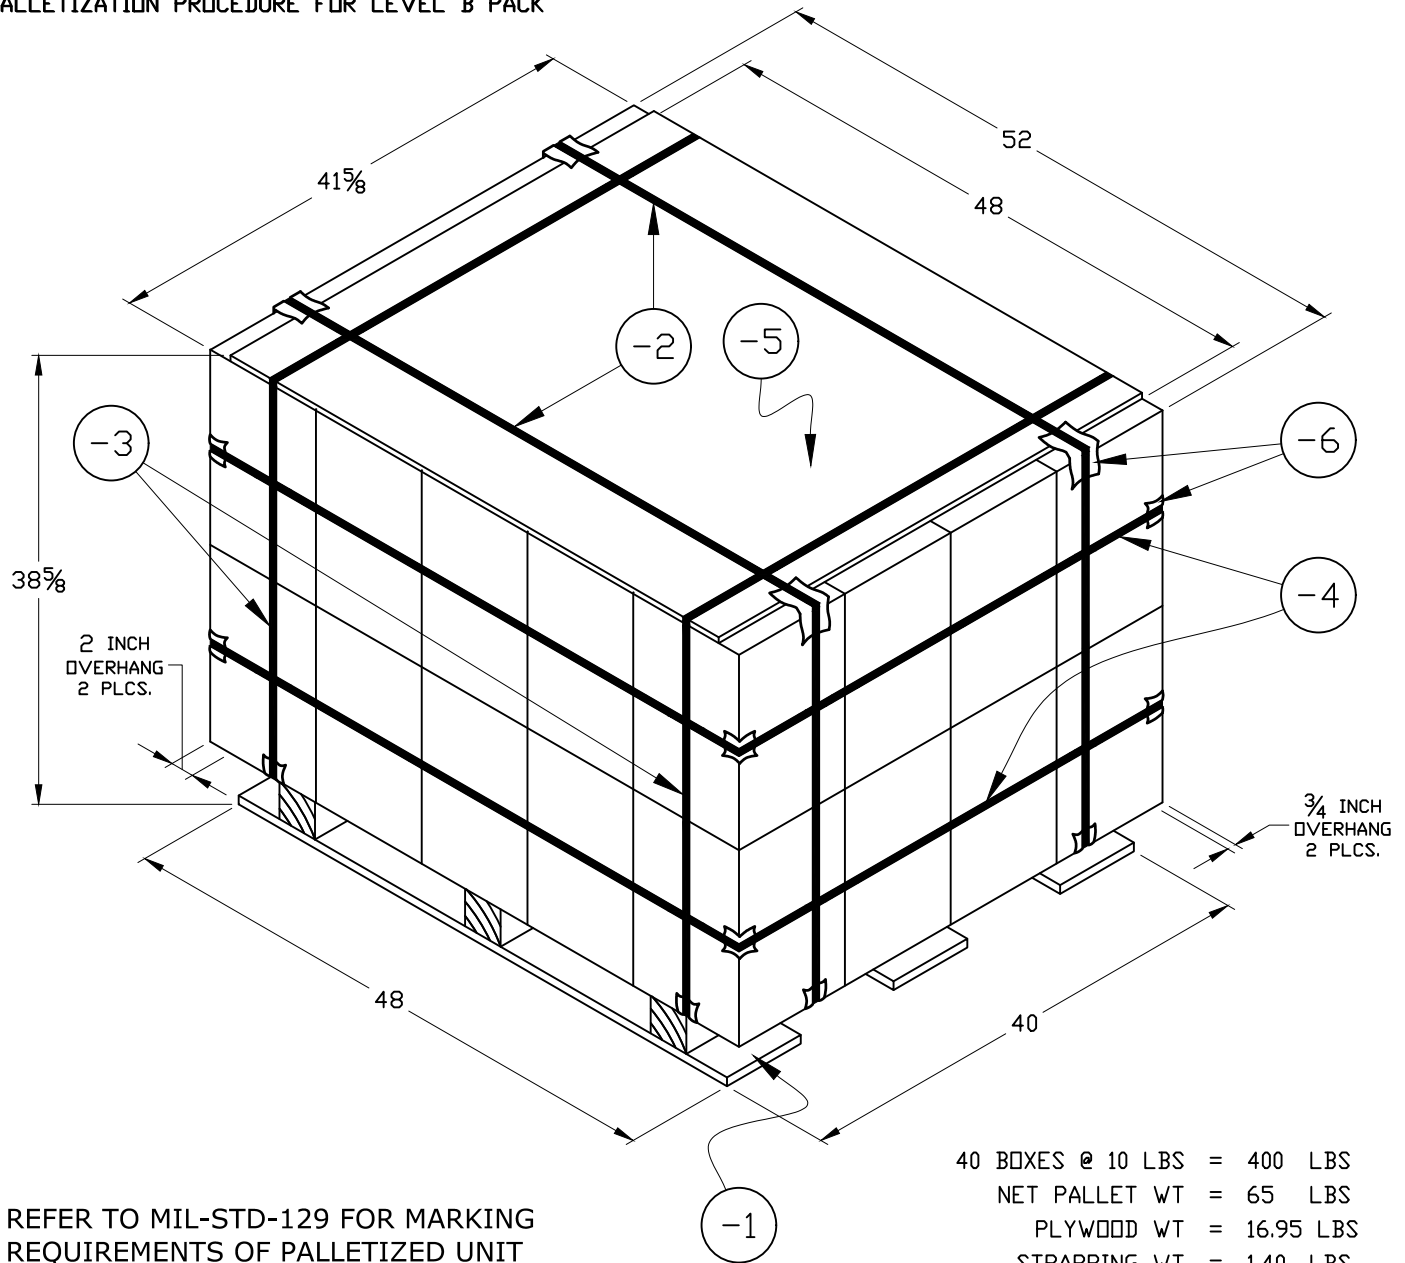

REFER TO MIL-STD-129 FOR MARKING REQUIREMENTS OF PALLETIZED UNIT LOADS OF AMMUNITION.

40 BOXES @ 10 LBS = 400 LBS
 NET PALLET WT = 65 LBS
 PLYWOOD WT = 16.95 LBS
 STRAPPING WT = 1.40 LBS
 483.35 LBS

CUBE OF PALETIZED LOAD = 48.4

-6	20	EDGE PROTECTOR	AS MANUFACTURED	NSN 8135-00-145-0070 (OR EQUAL)
-5	1	PLYWOOD	48 X 41 5/8 X 3/8	A-A-55057 TYPE A
-4	2	STRAPPING, STEEL	3/4 X .015 (MIN) X AS REQD	ASTM D3953 TYPE 1, REG DUTY, FIN B, GRADE 2
-3	2	STRAPPING, STEEL	3/4 X .015 (MIN) X AS REQD	ASTM D3953 TYPE 1, REG DUTY, FIN B, GRADE 2
-2	2	STRAPPING, STEEL	3/4 X .015 (MIN) X AS REQD	ASTM D3953 TYPE 1, REG DUTY, FIN B, GRADE 2
-1	1	PALLET, 4-WAY ENTRY	40 X 48	MIL-DTL-15011 TYPE I, CLASS 1, STYLE 1
P/N	QTY REQD	NOMENCLATURE OR DESCRIPTION	SIZE: (INCHES UNLESS SPECIFIED) TOLERANCES ON FRAC. ± 1/8, DECIMAL ± .10, ANGLES ± 1°	MATERIAL SPECIFICATION