

SPECIAL PACKAGING INSTRUCTION

CODE ID

98747

SPI NO. (TPD)

F01-271-7161

SHEET 1 OF 6

PART OR DRAWING NO.
MULTIPLE PART NUMBERSNATIONAL STOCK NO.
1377-01-271-7161 ESCURRENT
REV
B

ILL. K. KNIGHTON

P.S. S. DYLER

CHK. D. HALE

AUTH. J. BURLEIGH

ITEM NOMENCLATURE
INITIATOR, PROPELLANT ACTUATEDORIGINAL
DATE
14233

MILITARY PRESERVATION IAW MIL-STD-2073-1

SERVICEABLE METHOD: 41

UNSERVICEABLE METHOD: 41

QUP 001 
ICQ 000

CLEANING & DRYING: IAW MIL-STD-2073-1

PRESERVATIVE: N/A

PACKING AS SPECIFIED BELOW AND BILL OF MATERIALS

LEVEL	SPEC	STYLE	TYPE	CL	VRTY	GR	TR
A	ASTM D6251	A	III	2			B
B	ASTM D5118	RSC				V3c	

LEVEL A LEVEL B

GROSS CU FT SEE NOTICE 1 1.043

GROSS WT LBS SEE NOTICE 1 25

DESIGN FRAGILITY G 60 60

MARKING IAW MIL-STD-129

SPECIAL MARKINGS:

A) SPI NO. F01-271-7161

MARK THE SPI NUMBER ON THE IDENTIFICATION SIDE OF CONTAINER.

B) PROPER SHIPPING NAME: CARTRIDGES, POWER DEVICE
UN0276C) UN POP MARKING:  4G/Y15/S/**
USA/DOO/AF70**THE LAST TWO DIGITS OF THE YEAR DURING WHICH THE
PACKAGING WAS MANUFACTURED.

D) REUSABLE CONTAINER & DUNNAGE DO NOT DESTROY.

LENGTH WIDTH DEPTH

CNTR I.D.

LEVEL A: SEE NOTICE 1

LEVEL B: 10 10 16

CNTR O.D.

LEVEL A: SEE NOTICE 1

LEVEL B: 10 3/8 10 3/8 16 3/4

ITEM DIM

VARIES

ITEM WT.

VARIES

**NOTE: THE ABOVE POP MARKINGS
ARE FOR DOD USE ONLY.**

CLOSURE:

LEVEL A: IAW: ASTM D6251

LEVEL B: IAW: THIS INSTRUCTION

REVISIONS

LTR	DESCRIPTION	DATE
A	REMOVED SHIPPING CONTAINER FROM BOM, ADDED DISTRIBUTION STATEMENT	17354
B	DECREASED POP TESTED WEIGHT, ADDED CUI AND FINAL CONTAINER DRAWING, UPDATED LEVEL B CLOSURE, NOTICES AND PALLETIZATION	24337

CONTROLLED BY: 406 SCMS

CONTROLLED BY: GULAA-HILL AFB

CONTROLLED BY: CUI/SP-CTI

DISTRIBUTION/DISSEMINATION CONTROL: FEDCON

POC: 406SCMS.GULAA.CONTRACTSHILL@US.AF.MIL

DDDP/PHM/USA/DOO/AF70/TR14002

SPI NO. F01-271-7161

SPECIAL PACKAGING INSTRUCTION				CODE ID 98747	SPI NO. (TPO) F01-271-7161
ITEM NOMENCLATURE INITIATOR, PROPELLANT ACTUATED					SHEET 2 OF 6
-4	A/R	TAPE, PACKAGING	3 X AS REQUIRED	ASTM D5486 TYPE I OR V	
-3	1	WRAP	AS REQUIRED	MIL-PRF-81705 TYPE I, CL. 1	1>
-2	1	BARRIER BAG	AS REQUIRED	MIL-DTL-117 TYPE I, CL. F, STYLE 1	1>
-1	A/R	CUSHIONING	AS REQUIRED	A-A-1898 GRADE II	2>
P/N	QTY REQD	NOMENCLATURE OR DESCRIPTION	SIZE: (INCHES UNLESS SPECIFIED) TOLERANCES ON FRAC. $\pm \frac{1}{8}$, DECIMAL $\pm .10$, ANGLES $\pm 1^\circ$	MATERIAL SPECIFICATION	

SPECIAL PACKAGING INSTRUCTION	CODE ID 98747	SPI NO. (TPO) F01-271-7161
ITEM NOMENCLATURE INITIATOR, PROPELLANT ACTUATED		SHEET 3 OF 6

MUNITION NOTICES

NOTICE 1: FOR LEVEL A PACKING REQUIREMENTS: THE LEVEL B PACKS SHALL BE OVERBOXED IN A LEVEL A SPECIFIED CONTAINER SHOWN ON PAGE 1 UNDER PACKAGING LEVEL A. MARK THE OUTSIDE OF THE OVERBOX "OVERPACK." THE SIZE AND WEIGHT OF THE OVERBOX WILL VARY DEPENDING ON THE NUMBER OF ITEMS BEING SHIPPED. USE FILLER PAD OF ASTM D4727, CF, DOM, GR 275 (OR EQUAL) TO ENSURE A TIGHT FIT IN THE OVERBOX.

NOTICE 2: LEVEL A PROTECTION REQUIRED TO MEET THE MOST SEVERE WORLDWIDE SHIPMENT, HANDLING, AND STORAGE CONDITIONS. EXAMPLES OF SITUATIONS ARE: WAR RESERVE MATERIAL, MOBILIZATION, STRATEGIC AND THEATER DEPLOYMENT, OPEN STORAGE AND DECK LOADING. SECURITY ASSISTANCE ITEMS, INCLUDING FMS, ARE ESPECIALLY SUSCEPTIBLE TO DAMAGE DUE TO UNKNOWN AND UNFAVORABLE TRANSPORTATION, CLIMATIC, AND STORAGE CONDITIONS. PROVIDE LEVEL B PACKING UNLESS OTHERWISE DIRECTED BY THE PROCURING COUNTRY.

NOTICE 3: ASSETS PACKAGED IN ACCORDANCE WITH THE PREVIOUS EDITION OF THIS SPI DO NOT REQUIRE REPACKAGING IF THE INTEGRITY OF THE SPI IS MAINTAINED.

NOTICE 4: SEE SPIRES FOR A COMPLETE LISTING OF NSN's ASSIGNED TO THIS SPI.

NOTICE 5: THIS SPI IS NOT AUTHORIZED FOR USE WITHOUT PROPER HAZARD CLASSIFICATION. UNLESS A FINAL HAZARD CLASSIFICATION HAS BEEN ISSUED, A COPY OF THE VALID INTERIM HAZARD CLASSIFICATION LETTER ALONG WITH DOT SP 15448 MUST ACCOMPANY EACH SHIPMENT.

INTERNATIONAL STANDARDS FOR PHYTOSANITARY MEASURES***REVISION OF ISPM NO. 15******REVISION OF WOOD PACKAGING MATERIAL FOR INTERNATIONAL TRADE***

THE FOLLOWING STATEMENT IS IN COMPLIANCE WITH THE UNITED NATIONS-IMPLEMENTED RESTRICTIONS ON WOOD PACKAGING MATERIAL (WPM). THIS REQUIREMENT IS SPECIFICALLY CONCERNED WITH INVASIVE SPECIES SUCH AS THE PINEWOOD NEMATODE. WPM IS DEFINED AS WOOD PALLETS, SKIDS, LOAD BOARDS, PALLET COLLARS, WOODEN BOXES, REELS, DUNNAGE, CRATES, FRAMES, AND CLEATS. THE STATEMENT BELOW CITES THE REQUIREMENTS IN DETAIL AND COVERS LUMBER FOR BUILDING CONTAINERS AND PALLETS USED FOR DELIVERIES, RESULTING IN SHIPMENTS WORLDWIDE (DIRECT, OR THROUGH AIR LOGISTICS CENTERS (ALC), CONTAINER CONSOLIDATION POINTS (CCP), OR OTHER BASES).

WOODEN LUMBER, WOODEN PALLET AND PACKAGING/CONTAINER STATEMENT:

ALL WOODEN LUMBER, WOODEN PALLETS, AND WOODEN CONTAINERS PRODUCED ENTIRELY OR IN PART OF WOOD PACKAGING MATERIAL (WPM) SHALL BE CONSTRUCTED FROM DEBARKED WOOD IN ADDITION TO THE APPLICATION OF HEAT-TREATED (HT) MATERIAL (HT TO 56 DEGREES CENTIGRADE OR 133 DEGREES FAHRENHEIT FOR 30 MINUTES). CERTIFICATION/MARKING IS REQUIRED BY AN ACCREDITED AGENCY RECOGNIZED BY THE AMERICAN LUMBER STANDARDS COMMITTEE (ALSC). FOR REFERENCE DOCUMENTATION, SEE LATEST REVISION OF "INTERNATIONAL STANDARDS FOR PHYTOSANITARY MEASURES (ISPM NO. 15), "REGULATION OF WOOD PACKAGING MATERIAL IN INTERNATIONAL TRADE."


NOTES

1. WRAP ITEM IN REF.-3 AND PLACE IN BARRIER BAG, REF.-2. REMOVE AIR AND SEAL.
2. CUSHION BAG WITH REF.-1 TO PREVENT BAGGED ITEM FROM CONTACTING BOX AND PREVENT MOVEMENT.
3. MAY PLACE UP TO 20 BAGGED ITEMS IN SHIPPING CONTAINER.


SPECIAL PACKAGING INSTRUCTION

CODE ID
98747SPI NO. (TPO)
F01-271-7161ITEM NOMENCLATURE
INITIATOR, PROPELLANT ACTUATED

SHEET 4 OF 6

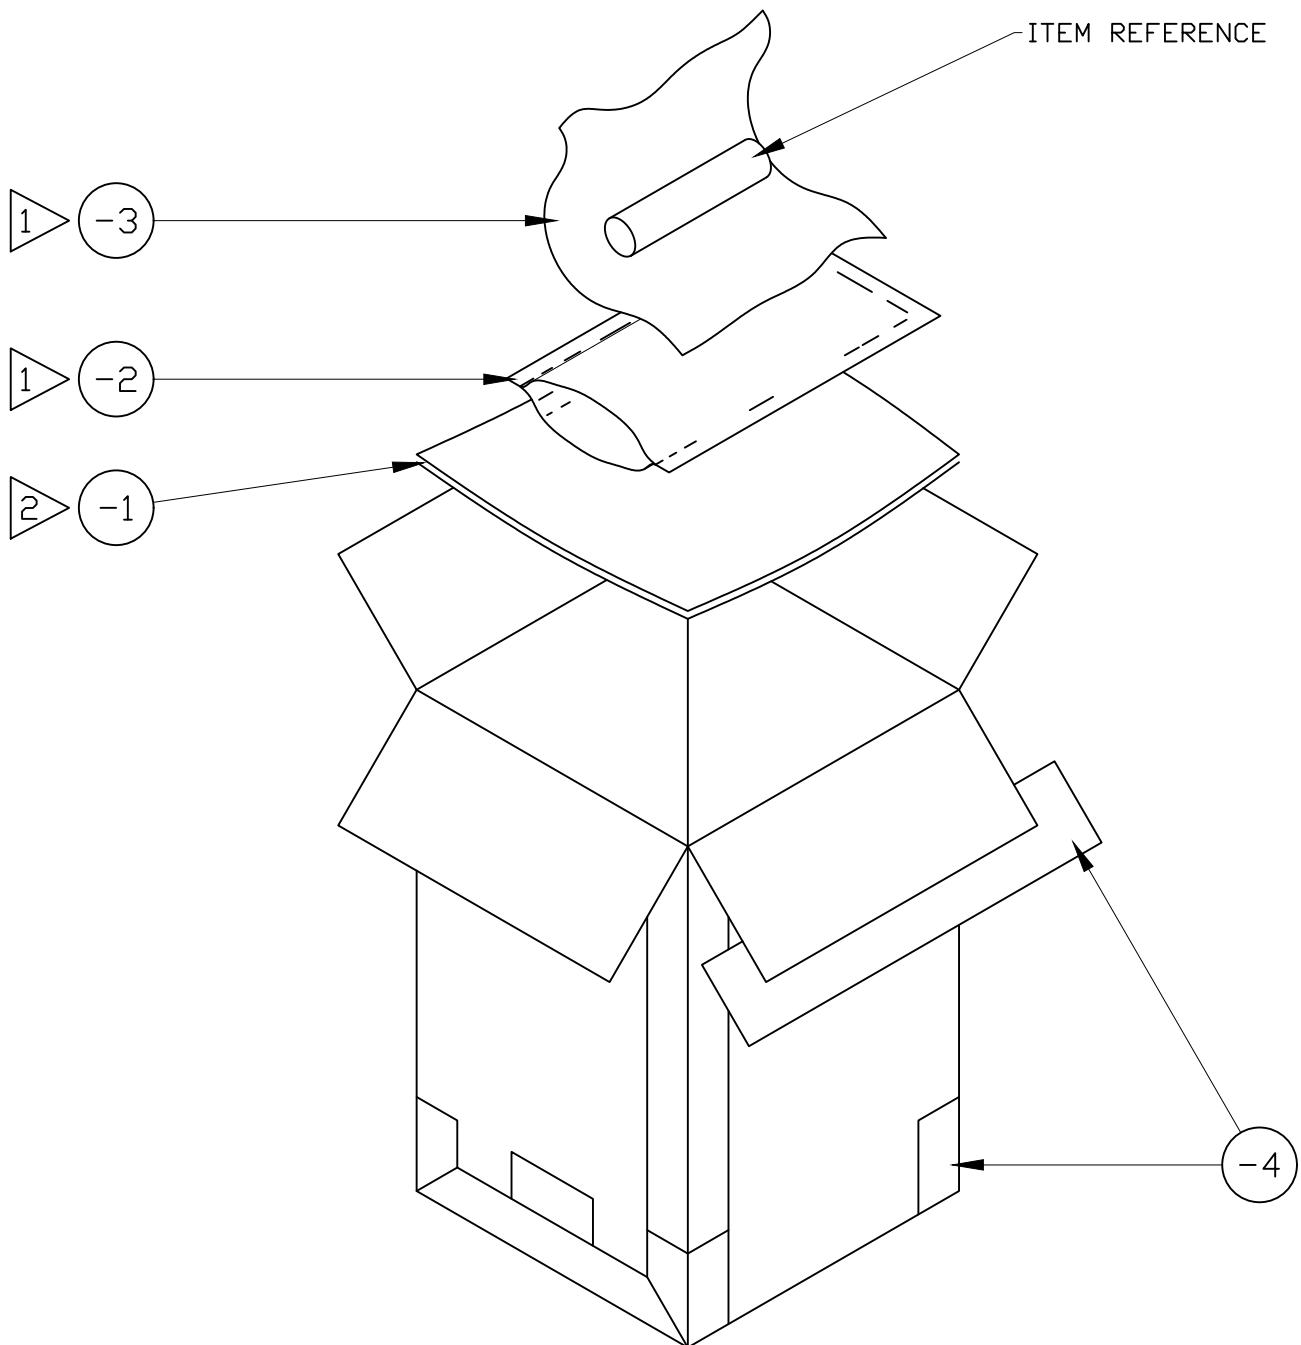

SPECIAL PACKAGING INSTRUCTION	CODE ID 98747	SPI NO. (TPO) F01-271-7161
ITEM NOMENCLATURE INITIATOR, PROPELLANT ACTUATED		SHEET 5 OF 6

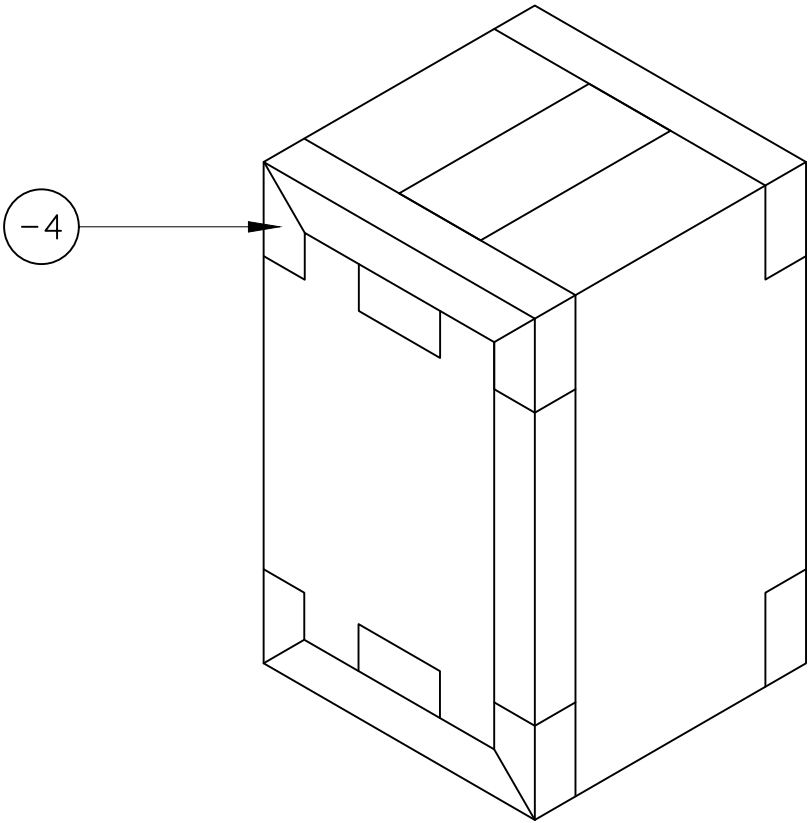


CLOSURE

SPECIAL PACKAGING INSTRUCTION

CODE ID
98747SPI NO. (TPO)
F01-271-7161ITEM NOMENCLATURE
INITIATOR, PROPELLANT ACTUATED

SHEET 6 OF 6

PALLETIZATION PROCEDURE FOR LEVEL B PACK

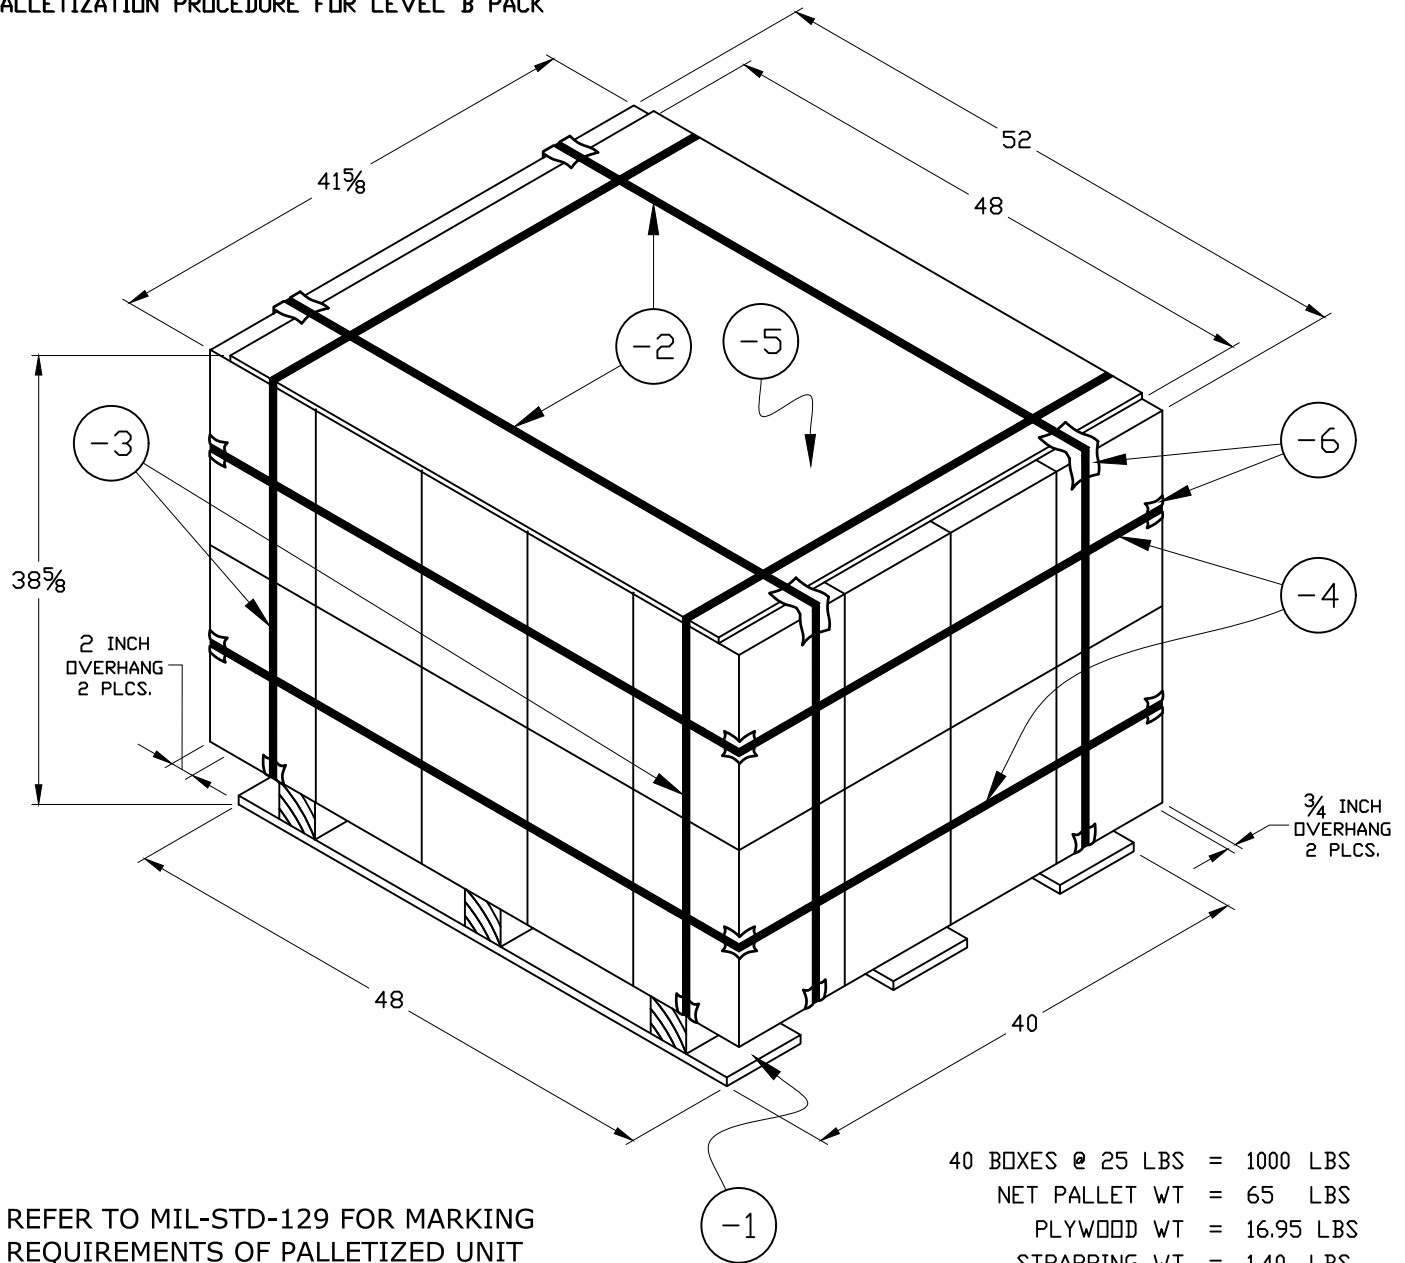

REFER TO MIL-STD-129 FOR MARKING
REQUIREMENTS OF PALLETIZED UNIT
LOADS OF AMMUNITION.

40 BOXES @ 25 LBS = 1000 LBS
NET PALLET WT = 65 LBS
PLYWOOD WT = 16.95 LBS
STRAPPING WT = 1.40 LBS

1083.35 LBS

CUBE OF PALETIZED LOAD = 48.4

-6	20	EDGE PROTECTORS	AS MANUFACTURED	NSN 8135-00-145-0070 (OR EQUAL)
-5	1	PLYWOOD	48 X 41 5/8 X 3/8	A-A-55057 TYPE A
-4	2	STRAPPING, STEEL	3/4 X .015 (MIN) X AS REQD.	ASTM D3953 TYPE 1, REG DUTY, FIN B, GRADE 2
-3	2	STRAPPING, STEEL	3/4 X .015 (MIN) X AS REQD.	ASTM D3953 TYPE 1, REG DUTY, FIN B, GRADE 2
-2	2	STRAPPING, STEEL	3/4 X .015 (MIN) X AS REQD.	ASTM D3953 TYPE 1, REG DUTY, FIN B, GRADE 2
-1	1	PALLET, 4-WAY ENTRY	40 X 48	MIL-DTL-15011 TYPE I, CLASS 1, STYLE 1
P/N	QTY REQD	NOMENCLATURE OR DESCRIPTION	SIZE: (INCHES UNLESS SPECIFIED) TOLERANCES ON FRAC. $\pm \frac{1}{8}$, DECIMAL $\pm .10$, ANGLES $\pm 1^\circ$	MATERIAL SPECIFICATION