




NEW

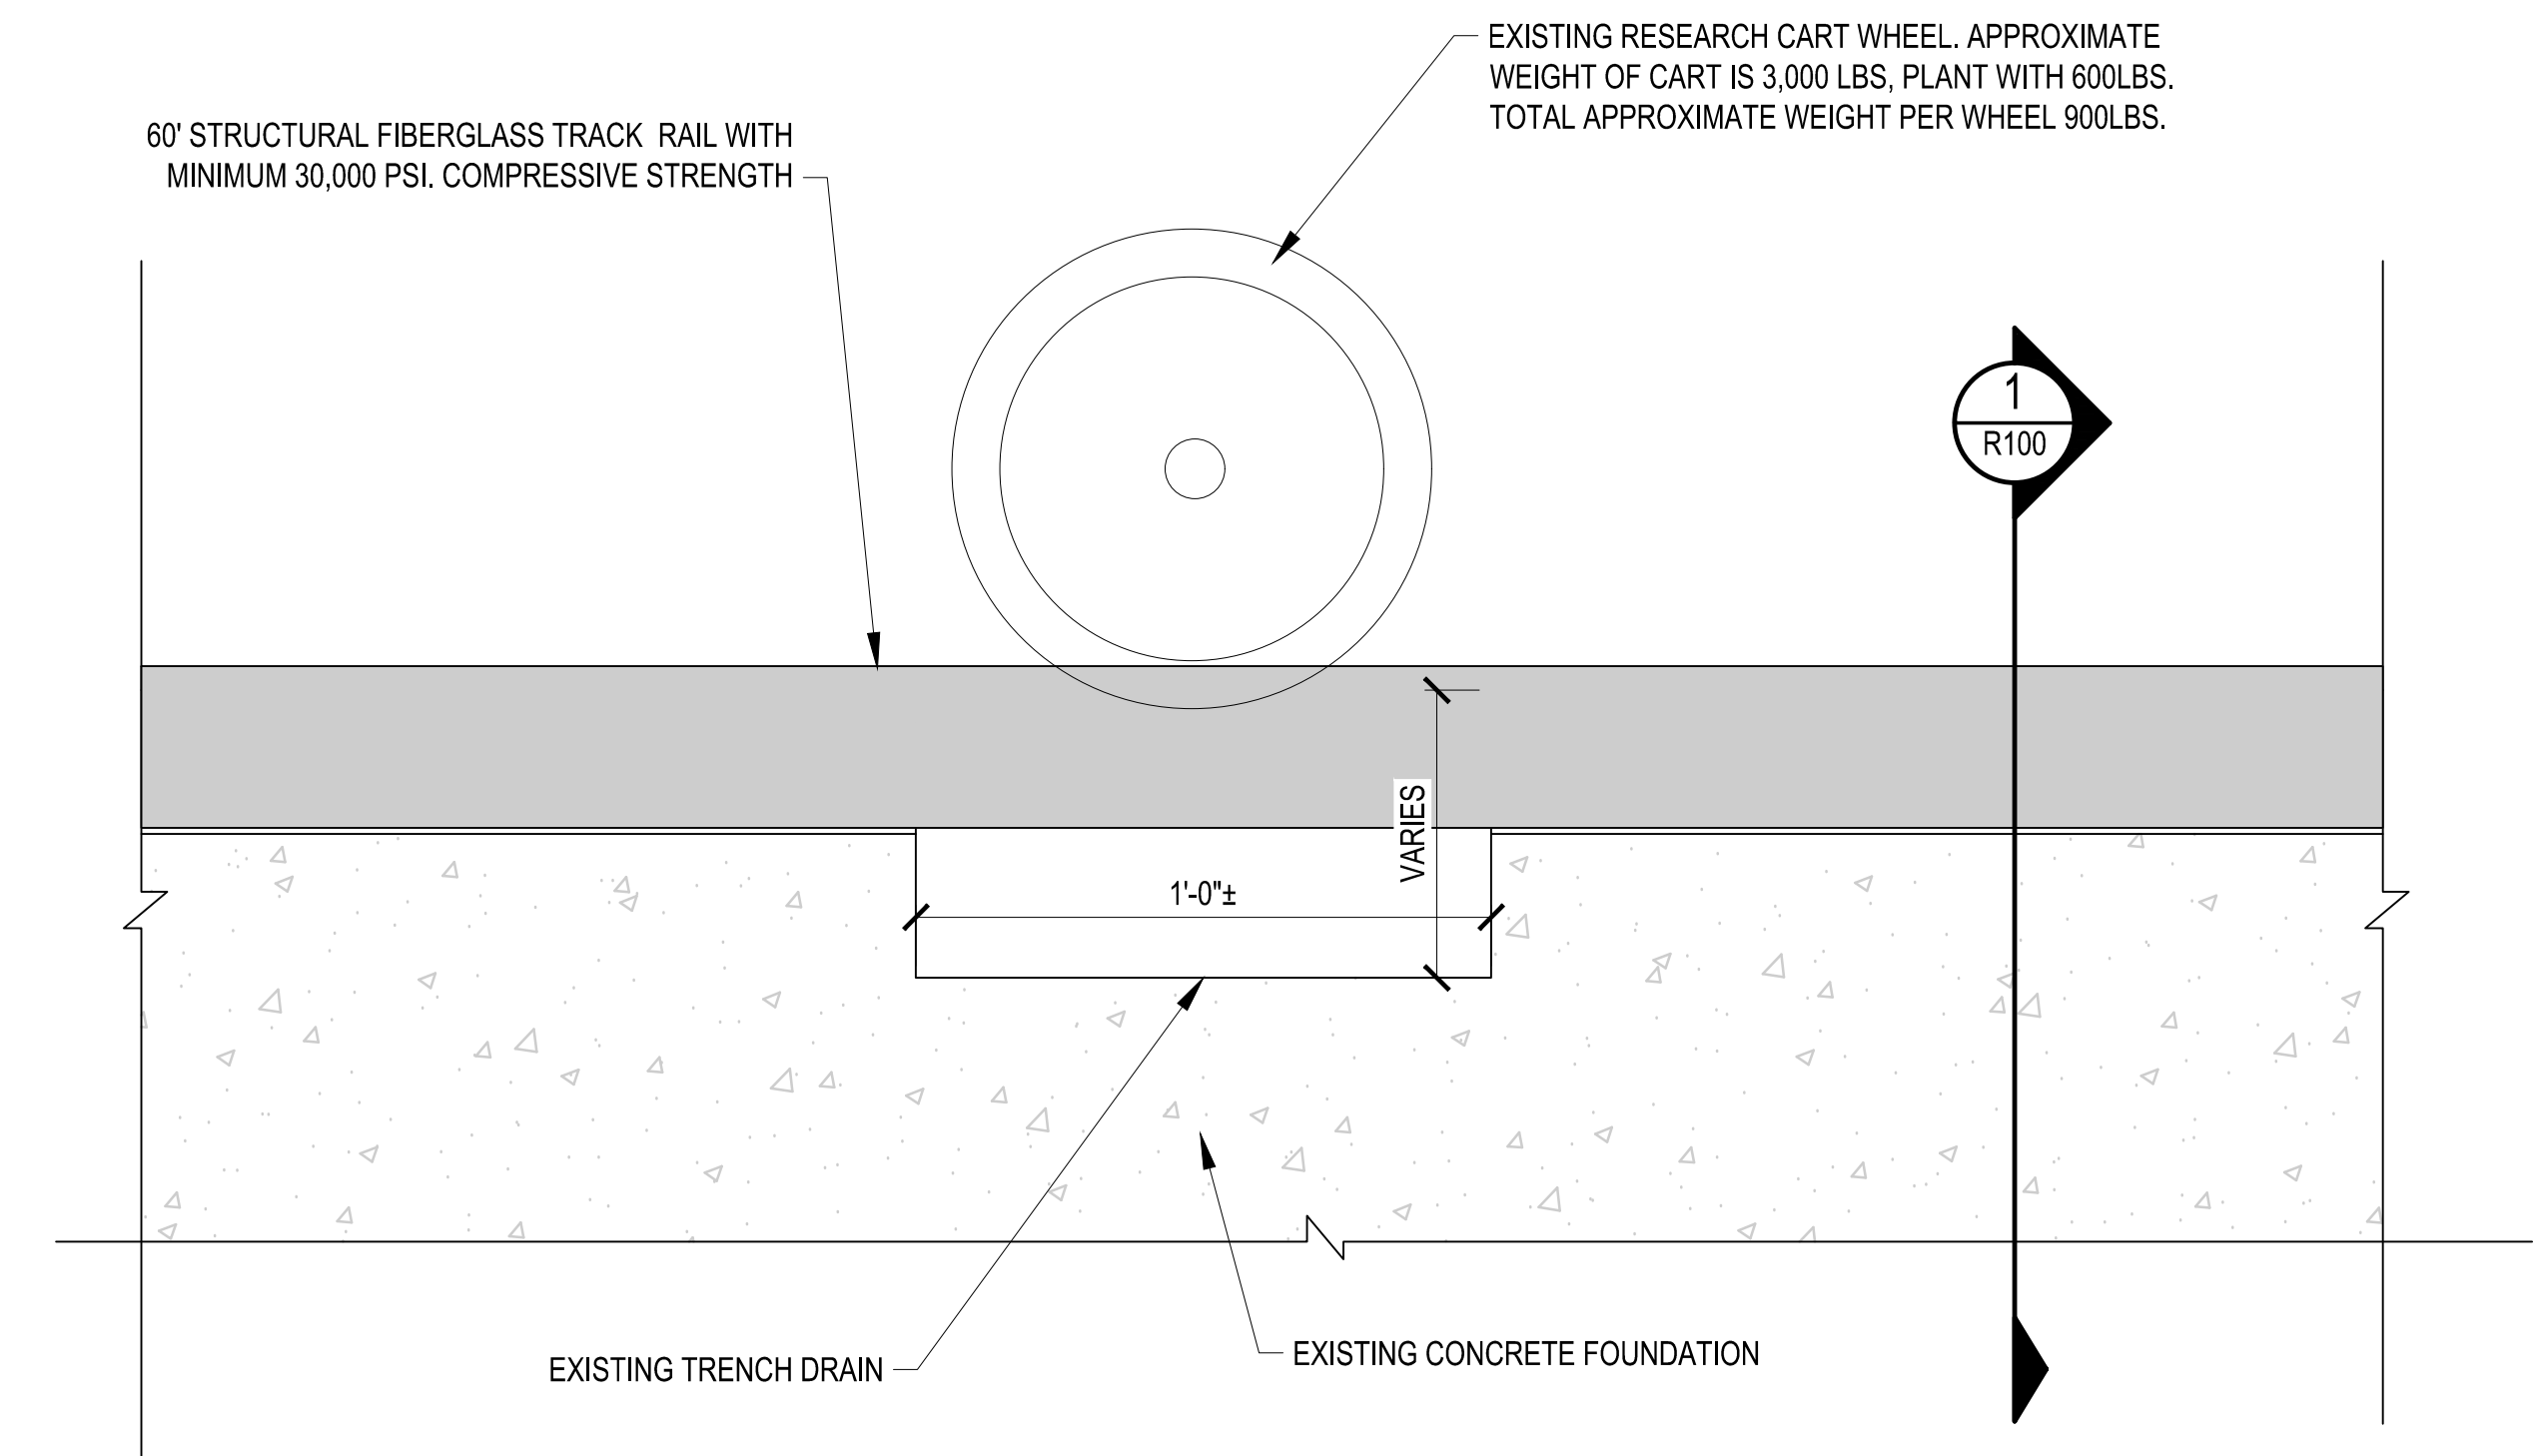

3.1 EXAMINATION AND PREPARATION

- A. VERIFY CONCRETE TROUGH DIMENSIONS, CLEANLINESS, DRYNESS, AND SOUNDNESS PRIOR TO INSTALLATION.
- B. REMOVE LAITANCE, DUST, CURING COMPOUNDS, LOOSE MATERIAL, OILS, AND CONTAMINANTS THAT WOULD IMPAIR BOND.
- C. CONFIRM THE FIBERGLASS/COMPOSITE RAIL MANUFACTURER PERMITS THE PROPOSED GROUT TYPE. USE ELASTOMERIC GROUT

3.2 INSTALLATION

- A. SET RAIL TO REQUIRED ELEVATION, ALIGNMENT, AND GAUGE USING TEMPORARY SUPPORTS AND CONTROL POINTS.
- B. PLACE GROUT CONTINUOUSLY BENEATH AND AROUND RAIL IN ACCORDANCE WITH GROUT MANUFACTURER'S INSTRUCTIONS TO ACHIEVE FULL BEARING WITH NO VOIDS.
- C. DO NOT USE SEALANT AS THE PRIMARY ATTACHMENT MEDIUM. PRIMARY RAIL SUPPORT AND ATTACHMENT SHALL BE BY THE SPECIFIED GROUT BEDDING SYSTEM.
- D. AFTER GROUT CURE, CLEAN AND SEAL EXPOSED TOP JOINT, IF REQUIRED, WITH POLYURETHANE SEALANT. TOOL SEALANT TO PROVIDE A NEAT, WATERTIGHT JOINT PROFILE.

3.3 FIELD QUALITY CONTROL

- A. VERIFY FINAL RAIL ALIGNMENT, BEARING SUPPORT, AND JOINT CONDITION.
- B. REPLACE OR REPAIR RAILS EXHIBITING MISALIGNMENT, VOIDED GROUT SUPPORT, OR SEALANT FAILURE.
- C. PROTECT INSTALLED WORK FROM LOADING AND TRAFFIC UNTIL GROUT AND SEALANT ACHIEVE MANUFACTURER-REQUIRED CURE.

2.1 GROUT BEDDING MATERIALS
A. FLEXIBLE GROUT OPTION: PROVIDE ELASTOMERIC RAIL GROUT DESIGNED FOR ADHESION TO RAIL AND CONCRETE WHILE MAINTAINING LINE AND GRADE, WITH VIBRATION-DAMPENING CHARACTERISTICS; BASIS OF DESIGN: STONHARD ELASTOMERIC GROUT OR APPROVED EQUAL.

2.2 JOINT SEALANT
PROVIDE ONE-COMPONENT OR APPROVED EQUIVALENT POLYURETHANE ELASTOMERIC SEALANT FOR SEALING EXPOSED TOP JOINTS AFTER GROUT CURE; BASIS OF DESIGN: SIKAFLEX NP 1 FOR NON-SAG JOINTS OR SIKAFLEX SL 1 FOR SELF-LEVELING HORIZONTAL JOINTS, AS APPLICABLE.

2.3 ACCESSORIES
PROVIDE SHIMS, TEMPORARY SUPPORTS, ALIGNMENT FIXTURES, BOND-BREAKERS, BACKER ROD WHERE NEEDED, PRIMERS IF REQUIRED BY SEALANT MANUFACTURER, AND ALL MISCELLANEOUS ITEMS NECESSARY FOR A COMPLETE INSTALLATION IN ACCORDANCE WITH THE RAIL AND GROUT MANUFACTURER'S WRITTEN INSTRUCTIONS. MANUFACTURER COMPATIBILITY REQUIREMENTS SHALL GOVERN FINAL PRODUCT SELECTION.

 JMA Inc Johnson M Adams		REV 1/92				
P.O. BOX 600 • HOUMA, LOUISIANA 70306 P.O. BOX 40 • GREENWOOD, MISSISSIPPI 39240-0040						
			NO.	DATE	BY	DESCRIPTION
			REVISIONS			
U S D A  Agricultural Research Service USDA AGRICULTURAL RESEARCH SERVICE SUGARCANE RESEARCH LABORATORY HOUMA, LOUISIANA PHOTOMETRIC BLDG RAIL REPAIR						
A-E FIRM		USDA	PROJECT NO.		SHEET	
PROJECT MANAGER	EFPM	WN	XXX		R100	
REH	WM					
DESIGNER	PPM	XXX	DATE		X OF X	
JLF	XXX		03/18/2026			
CHECKED BY	SAFETY & HEALTH					
DRL	CM					
JOB #	REAL PROPERTY					
XXXX	JS					