




# OPTRON C2BR5V50IR HD VARI-FOCAL ZOOM CAMERA



## KEY FEATURES

- 1/2.8" Progressive Scan CMOS
- HD 1080p (1920x1080) @ 30fps
- HD-TVI Output (CVBS Secondary)
- Vari-focal DC Iris Lens
- Mechanical Day/Night Function
- Integrated LED Illuminator
- Image Processing Functions
- UTC Function Support For OSD Control
- Compact Package Size & Weight
- IP66 Rated

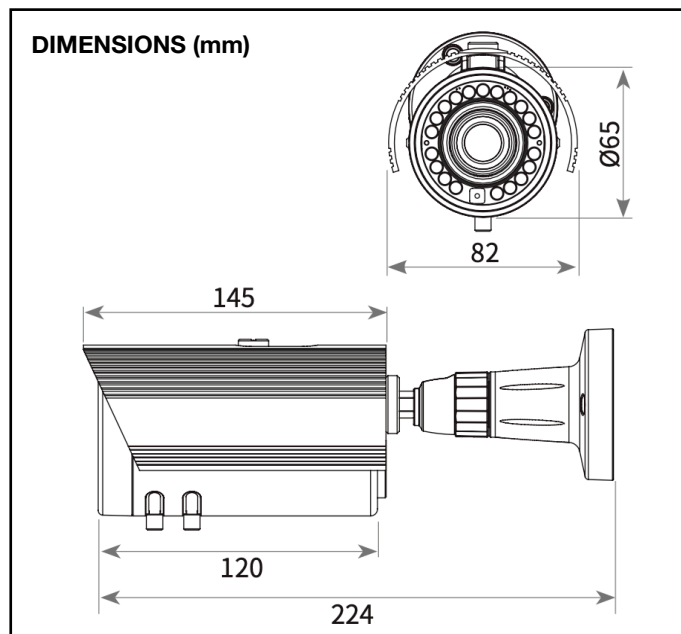

*Due to the ongoing updates and improvements, specifications are subject to change without notice. Made in Korea*

| DESCRIPTION                   | SPECIFICATIONS                                                                              |
|-------------------------------|---------------------------------------------------------------------------------------------|
| Sensor Device                 | 2.1MP CMOS, 1/2.8" format, progressive scan                                                 |
| Effective Pixels              | 1984(H) X 1105(V), 2.19 MP                                                                  |
| Pixel/Cell Size               | 2.8µm (H) x 2.9µm (V)                                                                       |
| Video Output Format           | TVI 1080p @ 30fps (25fps)<br>720p @ 60fps (50fps)<br>CVBS (NTSC/PAL), 1Vp-p composite, 75 Ω |
| Transmission Distance (RG59)  | HD-TVI: 300m (colour)<br>500m (monochrome)                                                  |
| Lens                          | Vari-focal, 5.0mm - 50mm, manual adjustment                                                 |
| Lens Iris                     | DC iris, ICR                                                                                |
| Illumination                  | IR LED, 850nm, 20 pieces                                                                    |
| Min. Illumination             | 0 Lux (w/ IR LED On)                                                                        |
| Illumination Distance         | Up to 60m (197ft)                                                                           |
| Day & Night                   | AUTO / COLOR / B&W                                                                          |
| Shutter Speed                 | AUTO / MANUAL<br>(1/30~1/30,000) / DSS (off ~ x16)                                          |
| On Screen Display (OSD)       | Integrated, UTC<br>("up the coax" for coaxial configurations)                               |
| WDR/BLC                       | Off / WDR / BLC selectable                                                                  |
| Auto Gain Control (AGC)       | OFF, 0 ~ 42dB                                                                               |
| 3DNR                          | Off / Low / Middle / High / Auto                                                            |
| White Balance                 | Auto / Push Lock / Manual                                                                   |
| Image Processing Features     | Sharpness / Gamma / Image Flip / Noise Reduction (DNR) / Defog / Shading /                  |
| Digital Zoom                  | 1.0x - 8.0x                                                                                 |
| Operating Power / Consumption | DC12V (±10%) / 330mA                                                                        |
| Operating Temperature         | -10°C ~ +50°C (14°F ~ 122°F)<br>0% ~ 90% relative humidity                                  |
| Storage Temperature           | -20°C ~ +60°C (-4°F ~ 140°F)<br>0% ~ 90% relative humidity                                  |
| Dimensions                    | Ø65mm x 120mm                                                                               |
| Weight                        | ~ 900g (1.98 lbs)                                                                           |
| IP Rating                     | IP66                                                                                        |