

SPECIAL PACKAGING INSTRUCTION			CODE ID 98747	SPI NO. (TPD) F01-077-2764	
			SHEET 1 OF 5		
PART OR DRAWING NO. 2113570-001	NATIONAL STOCK NO. 6625-01-077-2764 WF	CURRENT REV D	ILL. D. NAY P.S. K. RESTORFF CHK. S. PEELER AUTH. N. CORDONADO		
ITEM NOMENCLATURE MULTIMETER		ORIGINAL DATE 80268			
MILITARY PRESERVATION IAW MIL-STD-2073			PACKING AS SPECIFIED BELOW AND BILL OF MATERIALS		
SERVICEABLE METHOD: 52			LEVEL	SPEC	STYLE TYPE CL VRTY GR TR
UNSERVICEABLE METHOD: 52			A	ASTM D6251	A III 2 B
QUP 001			B	ASTM D5118	RSC V3c
ICQ 000			LEVEL A LEVEL B		
CLEANING & DRYING: IAW MIL-STD-2073			GROSS CU FT	10.432	7.629
PRESERVATIVE: N/A			GROSS WT LBS	86	31
			DESIGN FRAGILITY G	80	80
MARKING IAW MIL-STD-129			LENGTH WIDTH DEPTH		
SPECIAL MARKINGS:			CNTR I.D.		
A) SPI NO. F01-077-2764			LEVEL A:	41 1/4	27 1/4
MARK THE SPI NUMBER ON THE IDENTIFICATION SIDE OF CONTAINER.			LEVEL B:	40 1/2	26 1/2
B) REUSABLE CONTAINER & DUNNAGE DO NOT DESTROY.					
C) METHOD 50 LABELS			CNTR O.D.		
D) DO NOT OPEN UNTIL READY FOR USE/INSPECTION			LEVEL A:	43 1/4	29 1/4
			LEVEL B:	40 7/8	26 7/8
CLOSURE			ITEM DIM	32 1/4	19
LEVEL A: IAW: ASTM D6251			ITEM WT.	21 LBS	3 1/2
LEVEL B: IAW: ASTM D1974					
REVISIONS					
LTR	DESCRIPTION				DATE
D	ADD DISTRIBUTION STATEMENT AND DESTRUCTION NOTICE, UPDATED DIMENSIONS AND WEIGHT				18057
DISTRIBUTION STATEMENT D: DISTRIBUTION AUTHORIZED TO DEPARTMENT OF DEFENSE AND U.S. DOD CONTRACTORS ONLY, ADMINISTRATIVE OR OPERATIONAL USE, 22 FEBRUARY 2018. OTHER REQUESTS FOR THIS DOCUMENT SHALL BE REFERRED TO 406 SCMS/GULAA, (PACKAGING DIVISION), HILL AFB, UTAH 84056.					
DESTRUCTION NOTICE: FOLLOW THE PROCEDURES IN DOD 5220.22-M, NATIONAL INDUSTRIAL SECURITY PROGRAM OPERATING MANUAL (NISPO), SECTION 5-705, OR DOD 5200.1-R, INFORMATION SECURITY PROGRAM, CHAPTER VI. FOR UNCLASSIFIED, LIMITED DOCUMENTS, DESTROY BY ANY METHOD THAT WILL PREVENT DISCLOSURE OF CONTENTS OR RECONSTRUCTION OF THE DOCUMENT.					

SPI NO. F01-077-2764

SPECIAL PACKAGING INSTRUCTION				CODE ID 98747	SPI NO. (TPD) F01-077-2764
ITEM NOMENCLATURE MULTIMETER					SHEET 2 OF 5
-13	A/R	TAPE, PACKAGING	3 X AS REQUIRED	ASTM D5486 TYPE I OR V	
-12	A/R	TAPE, MASKING	3/4 X AS REQUIRED	ASTM D6123 TYPE I OR II	
-11	A/R	CUSHIONING	AS REQUIRED	PPP-C-1797 TYPE I	4
-10	1	WRAP	47 X 38	A-A-3174 TYPE I, CLASS 1, GRADE A, FIN. 1	1
-9	1	HUMIDITY INDICATOR	THREE SPOT	MS20003	2
-8	40	DESICCANT	UNITS	MIL-D-3464 TYPE I	2
-7	2	PAD, SIDE	30 3/4 X 3 1/2 X 1	ASTM D4727 CF, DDM, DW, GRADE 275	2 3 B
-6	2	PAD, FRONT	3 1/2 X 2 X 1	ASTM D4727 CF, DDM, DW, GRADE 275	2 3 A
-5	1	INTERIOR CONTAINER	33 X 19 X 4 (ID)	ASTM D5118 RSC, CF, DDM, SW, GRADE 200	
-4	1	BARRIER BAG	54 X 44 (ID)	MIL-DTL-117 TYPE I, CLASS E, STYLE 1	
-3	2	CUSHION, END	20 1/2 X 5 1/4 X 3	MIL-PRF-26514 TYPE I, CLASS 2, GRADE B	
-2	2	CUSHION, SIDE	40 1/2 X 5 1/4 X 3	MIL-PRF-26514 TYPE I, CLASS 2, GRADE B	
-1	2	CUSHION, TOP & BOTTOM	40 1/2 X 26 1/2 X 3	MIL-PRF-26514 TYPE I, CLASS 2, GRADE B	
P/N	QTY REQD	NOMENCLATURE OR DESCRIPTION	SIZE: (INCHES UNLESS SPECIFIED) TOLERANCES ON FRAC. ± 1/8, DECIMAL ± .10, ANGLES ± 1°	MATERIAL SPECIFICATION	

SPECIAL PACKAGING INSTRUCTION		CODE ID 98747	SPI NO. (TPD) F01-077-2764
ITEM NOMENCLATURE MULTIMETER		SHEET 3 OF 5	

CAUTION NOTICES

NOTICE 1: ASSETS PACKAGED IN ACCORDANCE WITH PREVIOUS EDITIONS OF THIS SPI DO NOT REQUIRE REPACKAGING IF THE INTEGRITY OF THE SPI IS MAINTAINED.

NOTICE 2: SEE SPIRES FOR A COMPLETE LISTING OF NSN's ASSIGNED TO THIS SPI.

NOTICE 3: PACKAGING MATERIAL MAY BE SUBSTITUTED IF IT MEETS THE REQUIREMENTS OF MIL-STD-2073, PROVIDES EQUAL OR BETTER PROTECTION AND THERE IS NO INCREASED COST TO THE GOVERNMENT.

NOTICE 4: FOR LEVEL A PACKAGING REQUIREMENTS, LEVEL B PACKS SHALL BE OVERBOXED IN A LEVEL A SPECIFIED CONTAINER SHOWN ON PAGE 1 UNDER PACKAGING LEVEL A.

NOTICE 5: OVERSEAS AND FMS PACKAGING MUST MEET THE REQUIREMENTS OF LEVEL A PACKAGING.

*INTERNATIONAL STANDARDS FOR PHYTOSANITARY MEASURES
REVISION OF ISPM NO. 15
REVISION OF WOOD PACKAGING MATERIAL FOR INTERNATIONAL TRADE*

THE FOLLOWING STATEMENT IS IN COMPLIANCE WITH THE UNITED NATIONS-IMPLEMENTED RESTRICTIONS ON WOOD PACKAGING MATERIAL (WPM). THIS REQUIREMENT IS SPECIFICALLY CONCERNED WITH INVASIVE SPECIES SUCH AS THE PINEWOOD NEMATODE. WPM IS DEFINED AS WOOD PALLETS, SKIDS, LOAD BOARDS, PALLET COLLARS, WOODEN BOXES, REELS, DUNNAGE, CRATES, FRAMES, AND CLEATS. THE STATEMENT BELOW CITES THE REQUIREMENTS IN DETAIL AND COVERS LUMBER FOR BUILDING CONTAINERS AND PALLETS USED FOR DELIVERIES, RESULTING IN SHIPMENTS WORLDWIDE (DIRECT, OR THROUGH AIR LOGISTICS CENTERS (ALC), CONTAINER CONSOLIDATION POINTS (CCP), OR OTHER BASES).

WOODEN LUMBER, WOODEN PALLET AND PACKAGING/CONTAINER STATEMENT:

ALL WOODEN LUMBER, WOODEN PALLETS, AND WOODEN CONTAINERS PRODUCED ENTIRELY OR IN PART OF WOOD PACKAGING MATERIAL (WPM) SHALL BE CONSTRUCTED FROM DEBARKED WOOD IN ADDITION TO THE APPLICATION OF HEAT-TREATED (HT) MATERIAL (HT TO 56 DEGREES CENTIGRADE OR 133 DEGREES FAHRENHEIT FOR 30 MINUTES). CERTIFICATION/MARKING IS REQUIRED BY AN ACCREDITED AGENCY RECOGNIZED BY THE AMERICAN LUMBER STANDARDS COMMITTEE (ALSC). FOR REFERENCE DOCUMENTATION, SEE LATEST REVISION OF "INTERNATIONAL STANDARDS FOR PHYTOSANITARY MEASURES (ISPM NO. 15), "REGULATION OF WOOD PACKAGING MATERIAL IN INTERNATIONAL TRADE."

NOTES

1. WRAP BARE UNIT IN REF.-10 OR EQUAL AND TAPE USING REF.-12.
2. PLACE PAD, REF.-6, IN FRONT OF UNIT AT EACH END OF FRONT PANEL TO PROTECT KNOBS. PLACE REF.-7 ON EACH SIDE OF WRAPPED UNIT AND PLACE IN INTERIOR CONTAINER WITH DESICCANT, REF.-8, HUMIDITY INDICATOR, REF.-9, THEN CLOSE CONTAINER.
3. IF NEEDED LAMINATE PADS, REF.-6 AND -7, WITH ADHESIVE, A-A-59692 TYPE II OR EQUIVALENT TO ACQUIRE REQUIRED THICKNESS.
4. FILL ANY VOIDS WITH ADDITIONAL CUSHIONING, REF.-11.


SPECIAL PACKAGING INSTRUCTION

CODE ID
98747

SPI NO. (TPD)
F01-077-2764

ITEM NOMENCLATURE
MULTIMETER

SHEET 4 OF 5

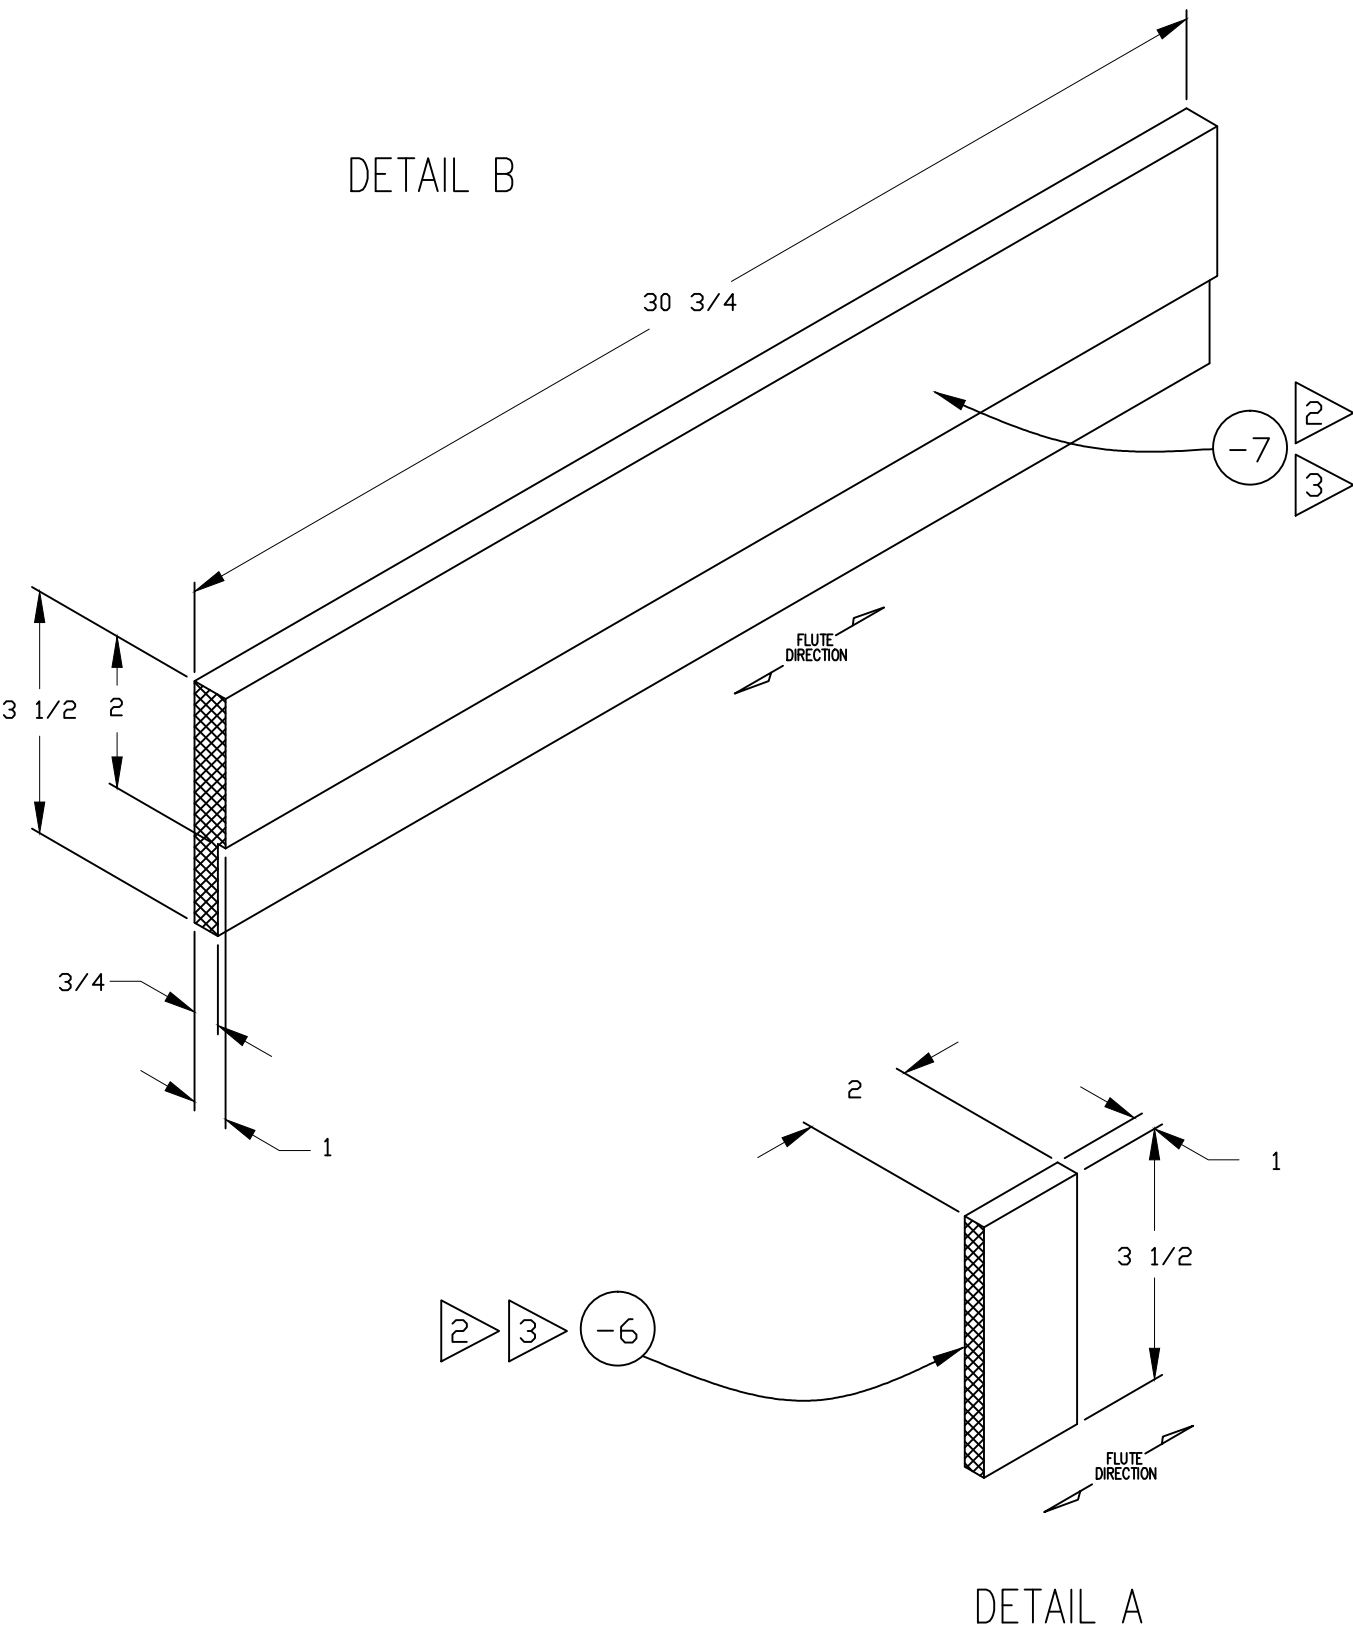

SPECIAL PACKAGING INSTRUCTION

CODE ID
98747

SPI NO. (TPO)
F01-077-2764

ITEM NOMENCLATURE
MULTIMETER

SHEET 5 OF 5

