

SPECIAL PACKAGING INSTRUCTION			CODE ID 98747	SPI NO. (TPD) F01-009-8475	
					SHEET 1 OF 5
PART OR DRAWING NO. 9560569-2	NATIONAL STOCK NO. 1630-01-009-8475	CURRENT REV D	ILL. D. NAY P.S. W. MONSON CHK. K. RESTORFF AUTH. N. CORONADO		
ITEM NOMENCLATURE BRAKE, MULTIPLE DISK		ORIGINAL DATE 82099			
MILITARY PRESERVATION IAW MIL-STD-2073			PACKING AS SPECIFIED BELOW AND BILL OF MATERIALS		
SERVICEABLE METHOD: 20			LEVEL	SPEC	STYLE TYPE CL VRTY GR TR
UNSERVICEABLE METHOD: 20			A	ASTM D6251	A III 2 B
QUP 001			B	ASTM D6251	A III 2 A
ICQ 000			LEVEL A LEVEL B		
CLEANING & DRYING: IAW MIL-STD-2073			GROSS CU FT	4.201	4.201
PRESERVATIVE: MIL-PRF-16173, CODE 2 AND			GROSS WT LBS	270	270
MIL-C-11796, CODE 6 AS SPECIFIED			DESIGN FRAGILITY G	110	110
IN MIL-W-5013 ▶			CNTR I.D.	LENGTH	WIDTH DEPTH
MARKING IAW MIL-STD-129			LEVEL A:	20	20 9 1/2
SPECIAL MARKINGS:			LEVEL B:	20	20 9 1/2
A) SPI NO. F01-009-8475			CNTR O.D.		
MARK THE SPI NUMBER ON THE IDENTIFICATION SIDE OF CONTAINER.			LEVEL A:	22	22 15
B) REUSABLE CONTAINER & DUNNAGE DO NOT DESTROY.			LEVEL B:	22	22 15
CLOSURE			ITEM DIM	17 1/2	17 1/2 7 1/4
LEVEL A: IAW: ASTM D6251			ITEM WT.	225 LBS	
LEVEL B: IAW: ASTM D6251					
REVISIONS					
LTR	DESCRIPTION				DATE
D	ADDED DISTRIBUTION STATEMENT AND DESTRUCTION NOTICE, UPDATED FORMAT				18235
DISTRIBUTION STATEMENT D: DISTRIBUTION AUTHORIZED TO DEPARTMENT OF DEFENSE AND U.S. DOD CONTRACTORS ONLY, ADMINISTRATIVE OR OPERATIONAL USE, 22 AUGUST 2018. OTHER REQUESTS FOR THIS DOCUMENT SHALL BE REFERRED TO 406 SCMS/GULAA, (PACKAGING DIVISION), HILL AFB, UTAH 84056.					
DESTRUCTION NOTICE: FOLLOW THE PROCEDURES IN DOD 5220.22-M, NATIONAL INDUSTRIAL SECURITY PROGRAM OPERATING MANUAL (NISPOM), SECTION 5-705, OR DOD 5200.1-R, INFORMATION SECURITY PROGRAM, CHAPTER VI. FOR UNCLASSIFIED, LIMITED DOCUMENTS, DESTROY BY ANY METHOD THAT WILL PREVENT DISCLOSURE OF CONTENTS OR RECONSTRUCTION OF THE DOCUMENT.					

SPI NO. F01-009-8475

SPECIAL PACKAGING INSTRUCTION				CODE ID 98747	SPI NO. (TPD) F01-009-8475
ITEM NOMENCLATURE BRAKE, MULTIPLE DISK					SHEET 2 OF 5
-8	1	PAD, TOP	20 X 20 X 3/4	ASTM D4727 CF, DOM, GRADE 200	
-7	1	PAD	20 X 20 X 1	ASTM D4727 CF, DOM, GRADE 200	C
-6	1	PAD	20 X 20 X 1 1/4	ASTM D4727 CF, DOM, GRADE 200	B
-5	A/R	TAPE, MASKING	1 X AS REQUIRED	ASTM D6123 TYPE I OR II	
-4	A/R	WRAP	AS REQUIRED	MIL-PRF-121 TYPE I	
-3	1	PAD	20 X 20 X 3	ASTM D4727 CF, DOM, GRADE 200	A
-2	1	PAD, BOTTOM	20 X 20 X 1/2	ASTM D4727 CF, DOM, GRADE 200	
-1	2	SKID	4 X 4 (NOM) X 22	ASTM D6199 CLASS 2	
P/N	QTY REQD	NOMENCLATURE DESCRIPTION	SIZE: (INCHES UNLESS SPECIFIED) TOLERANCES ON FRAC. ± 1/8, DECIMAL ± .01, ANGLES ± 1°	MATERIAL SPECIFICATION	

SPECIAL PACKAGING INSTRUCTION	CODE ID 98747	SPI NO. (TPD) F01-009-8475
ITEM NOMENCLATURE BRAKE, MULTIPLE DISK		SHEET 3 OF 5

CAUTION NOTICES

NOTICE 1: ASSETS PACKAGED IN ACCORDANCE WITH PREVIOUS EDITIONS OF THIS SPI DO NOT REQUIRE REPACKAGING IF THE INTEGRITY OF THE SPI IS MAINTAINED.

NOTICE 2: SEE SPIRES FOR A COMPLETE LISTING OF NSN's ASSIGNED TO THIS SPI.

NOTICE 3: PACKAGING MATERIAL MAY BE SUBSTITUTED IF IT MEETS THE REQUIREMENTS OF MIL-STD-2073, PROVIDES EQUAL OR BETTER PROTECTION AND THERE IS NO INCREASED COST TO THE GOVERNMENT.

PAGE 1 UNDER PACKAGING LEVEL A.

NOTICE 4: OVERSEAS AND FMS PACKAGING MUST MEET THE REQUIREMENTS OF LEVEL A PACKAGING.

INTERNATIONAL STANDARDS FOR PHYTOSANITARY MEASURES (ISPM No. 15) REQUIREMENTS

THE FOLLOWING STATEMENT IS IN COMPLIANCE WITH THE UNITED NATIONS-IMPLEMENTED RESTRICTIONS ON SOLID WOOD PACKING MATERIAL (SWPM). THIS REQUIREMENT IS SPECIFICALLY CONCERNED WITH INVASIVE SPECIES SUCH AS THE PINEWOOD NEMATODE. THE STATEMENT BELOW CITES THE REQUIREMENTS IN DETAIL AND COVERS LUMBER FOR BUILDING CONTAINERS AND PALLETS USED FOR DELIVERIES RESULTING IN SHIPMENTS WORLDWIDE (DIRECT, OR THROUGH AIR LOGISTICS CENTERS (ALC), CONTAINER CONSOLIDATION POINTS (CCP), OR OTHER BASES).

WOODEN LUMBER, WOODEN PALLET AND PACKAGING/CONTAINER STATEMENT:

ALL WOODEN LUMBER, WOODEN PALLETS, AND WOODEN CONTAINERS PRODUCED ENTIRELY OR IN PART OF SOLID WOOD PACKING MATERIAL (SWPM) SHALL BE CONSTRUCTED FROM HEAT-TREATED (HT) MATERIAL (HT 56 DEGREES CENTIGRADE OR 133 DEGREES FAHRENHEIT FOR 30 MINUTES). CERTIFICATION/MARKING IS REQUIRED BY AN ACCREDITED AGENCY RECOGNIZED BY THE AMERICAN LUMBER STANDARDS COMMITTEE (ALSC). FOR REFERENCE DOCUMENTATION, SEE "INTERNATIONAL STANDARDS FOR PHYTOSANITARY MEASURES (ISPM) No. 15." THIS DOCUMENT CAN BE FOUND AT www.ippc.int.

NOTES:

1. USE PRESERVATIVE ON ALL EXTERNAL METAL SURFACES WHICH ARE SUSCEPTIBLE TO CORROSIVE DETERIORATION. PREVENT PRESERVATIVE FROM COMING INTO CONTACT WITH THE BRAKING SURFACES.
2. WRAP PRESERVED ITEM IN REF -4 OR EQUIVALENT AND SECURE WITH REF -5.
3. BOND PADS, REF -2, -3, -6, -7 AND -8, USING ADHESIVE A-A-59692 TYPE II OR EQUAL, TO OBTAIN PROPER THICKNESS.


SPECIAL PACKAGING INSTRUCTION

CODE ID
98747


SPI NO. (TPD)
F01-009-8475

ITEM NOMENCLATURE
BRAKE, MULTIPLE DISK


SHEET 4 OF 5

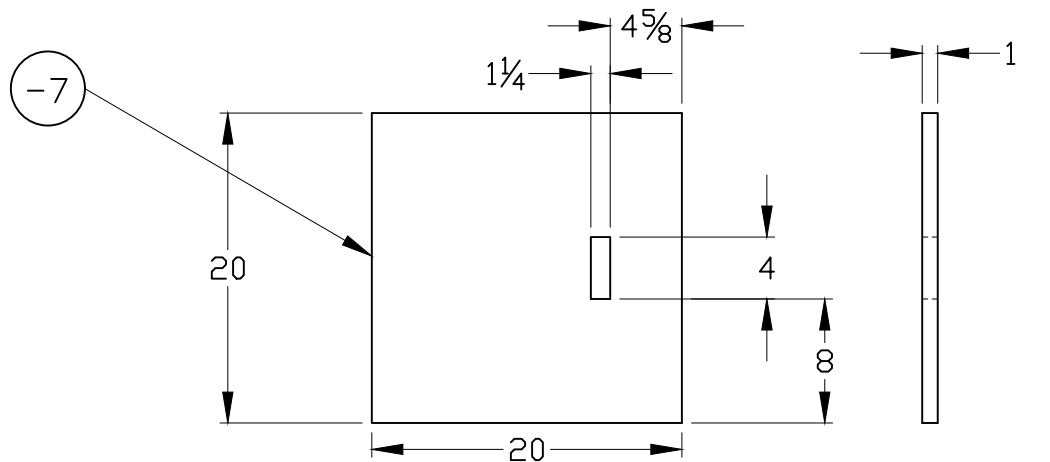

DETAIL C

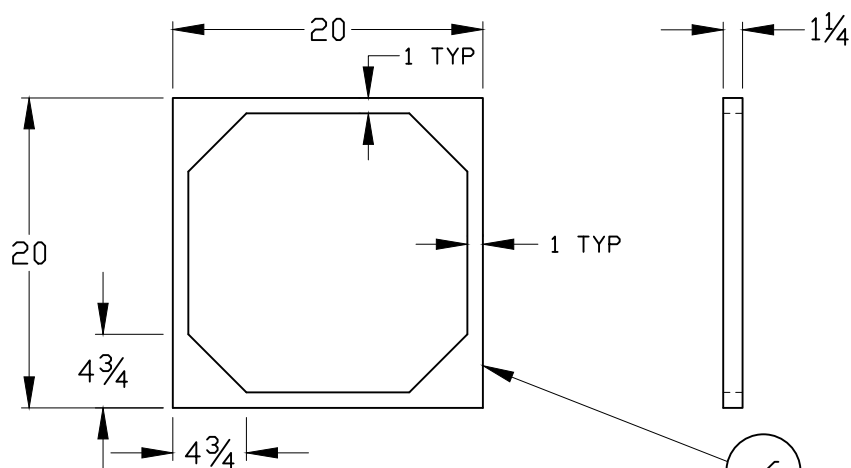

DETAIL B

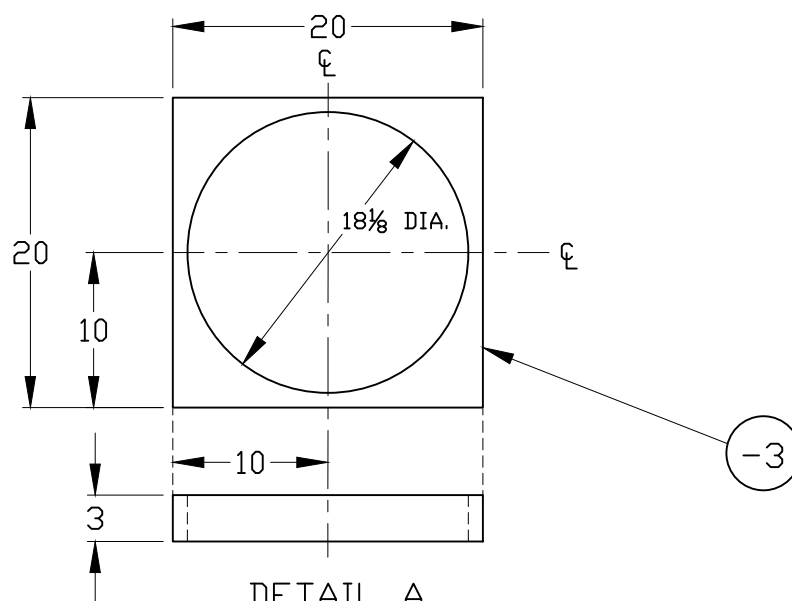

DETAIL A

SPECIAL PACKAGING INSTRUCTION

CODE ID
98747

SPI NO. (TPD)
F01-009-8475

ITEM NOMENCLATURE
BRAKE, MULTIPLE DISK

SHEET 5 OF 5

