

SPECIAL PACKAGING INSTRUCTION	CODE ID 98747	SPI NO. (TPD) F00-677-6681
ITEM NOMENCLATURE BALLSCREW ASSEMBLY		SHEET 2 OF 4

CAUTION NOTICES

NOTICE 1: ASSETS PACKAGED IN ACCORDANCE WITH PREVIOUS EDITIONS OF THIS SPI DO NOT REQUIRE REPACKAGING IF THE INTEGRITY OF THE SPI IS MAINTAINED.

NOTICE 2: SEE SPIRES FOR A COMPLETE LISTING OF NSN's ASSIGNED TO THIS SPI.

NOTICE 3: PACKAGING MATERIAL MAY BE SUBSTITUTED IF IT MEETS THE REQUIREMENTS OF MIL-STD-2073, PROVIDES EQUAL OR BETTER PROTECTION AND THERE IS NO INCREASED COST TO THE GOVERNMENT.

NOTICE 4: OVERSEAS AND FMS PACKAGING MUST MEET THE REQUIREMENTS OF LEVEL A PACKAGING.

INTERNATIONAL STANDARDS FOR PHYTOSANITARY MEASURES REVISION OF ISPM NO. 15 REVISION OF WOOD PACKAGING MATERIAL FOR INTERNATIONAL TRADE

THE FOLLOWING STATEMENT IS IN COMPLIANCE WITH THE UNITED NATIONS-IMPLEMENTED RESTRICTIONS ON WOOD PACKAGING MATERIAL (WPM). THIS REQUIREMENT IS SPECIFICALLY CONCERNED WITH INVASIVE SPECIES SUCH AS THE PINEWOOD NEMATODE. WPM IS DEFINED AS WOOD PALLETS, SKIDS, LOAD BOARDS, PALLET COLLARS, WOODEN BOXES, REELS, DUNNAGE, CRATES, FRAMES, AND CLEATS. THE STATEMENT BELOW CITES THE REQUIREMENTS IN DETAIL AND COVERS LUMBER FOR BUILDING CONTAINERS AND PALLETS USED FOR DELIVERIES, RESULTING IN SHIPMENTS WORLDWIDE (DIRECT, OR THROUGH AIR LOGISTICS CENTERS (ALC), CONTAINER CONSOLIDATION POINTS (CCP), OR OTHER BASES).

WOODEN LUMBER, WOODEN PALLET AND PACKAGING/CONTAINER STATEMENT:

ALL WOODEN LUMBER, WOODEN PALLETS, AND WOODEN CONTAINERS PRODUCED ENTIRELY OR IN PART OF WOOD PACKAGING MATERIAL (WPM) SHALL BE CONSTRUCTED FROM DEBARKED WOOD IN ADDITION TO THE APPLICATION OF HEAT-TREATED (HT) MATERIAL (HT TO 56 DEGREES CENTIGRADE OR 133 DEGREES FAHRENHEIT FOR 30 MINUTES). CERTIFICATION/MARKING IS REQUIRED BY AN ACCREDITED AGENCY RECOGNIZED BY THE AMERICAN LUMBER STANDARDS COMMITTEE (ALSC). FOR REFERENCE DOCUMENTATION, SEE LATEST REVISION OF "INTERNATIONAL STANDARDS FOR PHYTOSANITARY MEASURES (ISPM NO. 15), "REGULATION OF WOOD PACKAGING MATERIAL IN INTERNATIONAL TRADE."

NOTES

1. PRESERVE ALL CRITICAL SURFACES WITH MIL-PRF-23827. WRAP WITH REF.-2 AND SECURE WITH REF.-3, TAPE.
2. PLACE REF.-4 SADDLES APPROXIMATELY 18 INCHES FROM THE INSIDE EDGE OF REF.-5 SADDLES.
3. TAKE UP ANY SLACK OR END PLAY WITH SUITABLE PACKAGING MATERIAL NEXT TO THE CONTAINER END. SUCH MATERIAL MAY BE ASTM D4727 FIBERBOARD AS REQUIRED.

-6	2	CUSHION	5 1/2 X 5 1/2 X 2	A-A-59136 CLASS 1, GRADE A	
-5	2	SADDLE	5 1/2 X 5 1/2 X 2	A-A-59136 CLASS 1, GRADE A	2 B
-4	2	SADDLE	5 1/2 X 5 1/2 X 4	A-A-59136 CLASS 1, GRADE A	2 A
-3	A/R	TAPE, MASKING	1 X AS REQUIRED	ASTM D6123 TYPE I OR II	1
-2	1	WRAP	17 X 78 3/4	MIL-PRF-121 TYPE I	1
-1	2	TOP & BOTTOM	80 X 7 X 3/8	A-A-55057 TYPE A	
P/N	QTY REQD	NOMENCLATURE OR DESCRIPTION	SIZE: (INCHES UNLESS SPECIFIED) TOLERANCES ON FRAC. ± 1/8, DECIMAL ± .10, ANGLES ± 1°	MATERIAL SPECIFICATION	



SPECIAL PACKAGING INSTRUCTION

CODE ID
98747

SPI NO. (TPD)
F00-677-6681

ITEM NOMENCLATURE
BALLSCREW ASSEMBLY

SHEET 3 OF 4

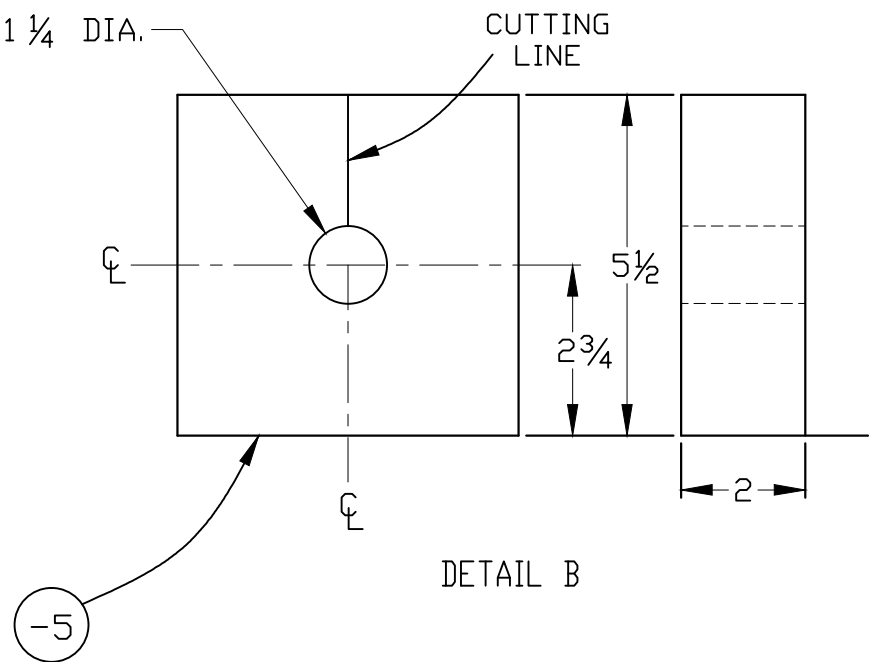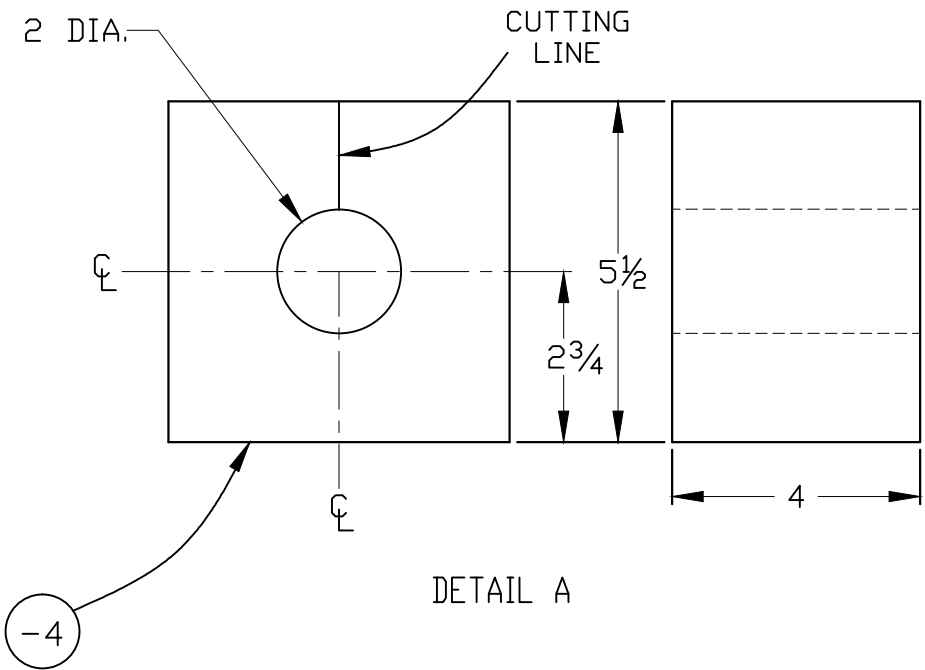

SPECIAL PACKAGING INSTRUCTION

CODE ID
98747

SPI NO. (TPD)
F00-677-6681

ITEM NOMENCLATURE
BALLSCREW ASSEMBLY

SHEET 4 OF 4

