

ALTERNATE PACKAGING INSTRUCTION

NAVSUP WEAPON
SYSTEMS SUPPORT

DESCRIPTION (Include Container NSN):

Alternate Packaging for MH-60 Rotor Blade Container 6KH 8145-01-142-8789

Preservation and packaging shall be accomplished in accordance with the requirements of MIL-STD-2073-1. Marking shall be in accordance with MIL-STD-129.

1. PART OR DRAWING NO.			2. CAGE		
3. COMPONENT NIIN: 01-158-9679			4. DATE 12/3/19		
5. QUP 001	6. ICQ 000	7. UNIT PACK WT. (LBS)	8. UNIT PACK CUBE (CUBIC FEET) 103.44	9. UNIT PACK SIZE (INCHES) 294 x 38 x 16	
10. MILITARY PRESERVATION 20			21. WPM Requirements (If applicable): To satisfy wood packaging material (WPM) requirements all non-exempt wood packaging material used shall be treated and marked using the International Plant Protection Convention (IPPC) stamp per ALSC and ISPM 15 requirements. According to ISPM 15 requirements, for visibility, the box shall be marked with IPPC 15 stamp on at least two opposite sides.		
11. CLEANING/DRYING 1					
12. PRESERVATIVE MATERIAL ZZ					
13. WRAPPING MATERIAL ZZ					
14. CUSHIONING/DUNNAGE MATERIAL ZZ					
15. CUSHIONING THICKNESS Z					
16. UNIT CONTAINER ZZ					
17. LEVEL OF PROTECTION A					
18. INTERMEDIATE CONTAINER 00					
19. UNIT CONTAINER LEVEL A					
20. SPECIAL MARKING 00					

22. INSTRUCTIONS/DRAWING:

(1) Packaging should be in accordance with MIL-STD-2073-1, Method 20 & attached drawing.

(2) Preservatives:

P-6, MIL-C-11796, Class 3 applied by brushing or wiping on all corrosion-susceptible surfaces. The abrasion strip (metal leading edge) shall be wiped with the P-6 preservative, applied cold, to leave a thin but perceptible film on the surface.

(3) Wraps:

MIL-PRF-121, around areas with contact preservatives and where blade makes contact with cushion inserts. The wrap shall have seams, at the underside of the blade securely sealed with waterproof tape.

Drawn by: Robert M. Steel

Approved by:

Joseph V. Devlin


Page 1 of 9

Base Runners & Shoes are attached using $\frac{3}{8}$ " Lag Bolts (SPAX Powerlags)
 Long Sides are attached to 4x4 Runners using $\frac{3}{8}$ " Lag Bolts
 Top is 1 final assembly fastened with $5\frac{1}{2}$ x $\frac{3}{8}$ " Hex Bolts
 & nuts with washers top & bottom

Special Interior Additives

- (5) Locking Crackle Assembly
 Foam Supports on Top & Bottom
 Top $3\frac{1}{4}$ " - 0.9" Grey Sencflex
 Bottom 2 " - 0.9" Grey Sencflex
- (2) End Foam 22 " x 11 " x 2 " 0.9" Grey Sencflex on Each End
- $1\frac{1}{2}$ " PVC Foam Weather Stripping Tape on Base Top Edge (ASTM-D5486 Type I)
- Cushions MIL-STD-2073-1
 $G\&M = A-A-S9136, Type I$
 Grade A polyethylene closed cell foam plank material

Stenciling "DO NOT PUSH HERE"
 (2 Ends) "DO NOT PUSH HERE"
 Crate Weight # (on Ends)
 MIL SPEC # 6851 (on Long Sides)

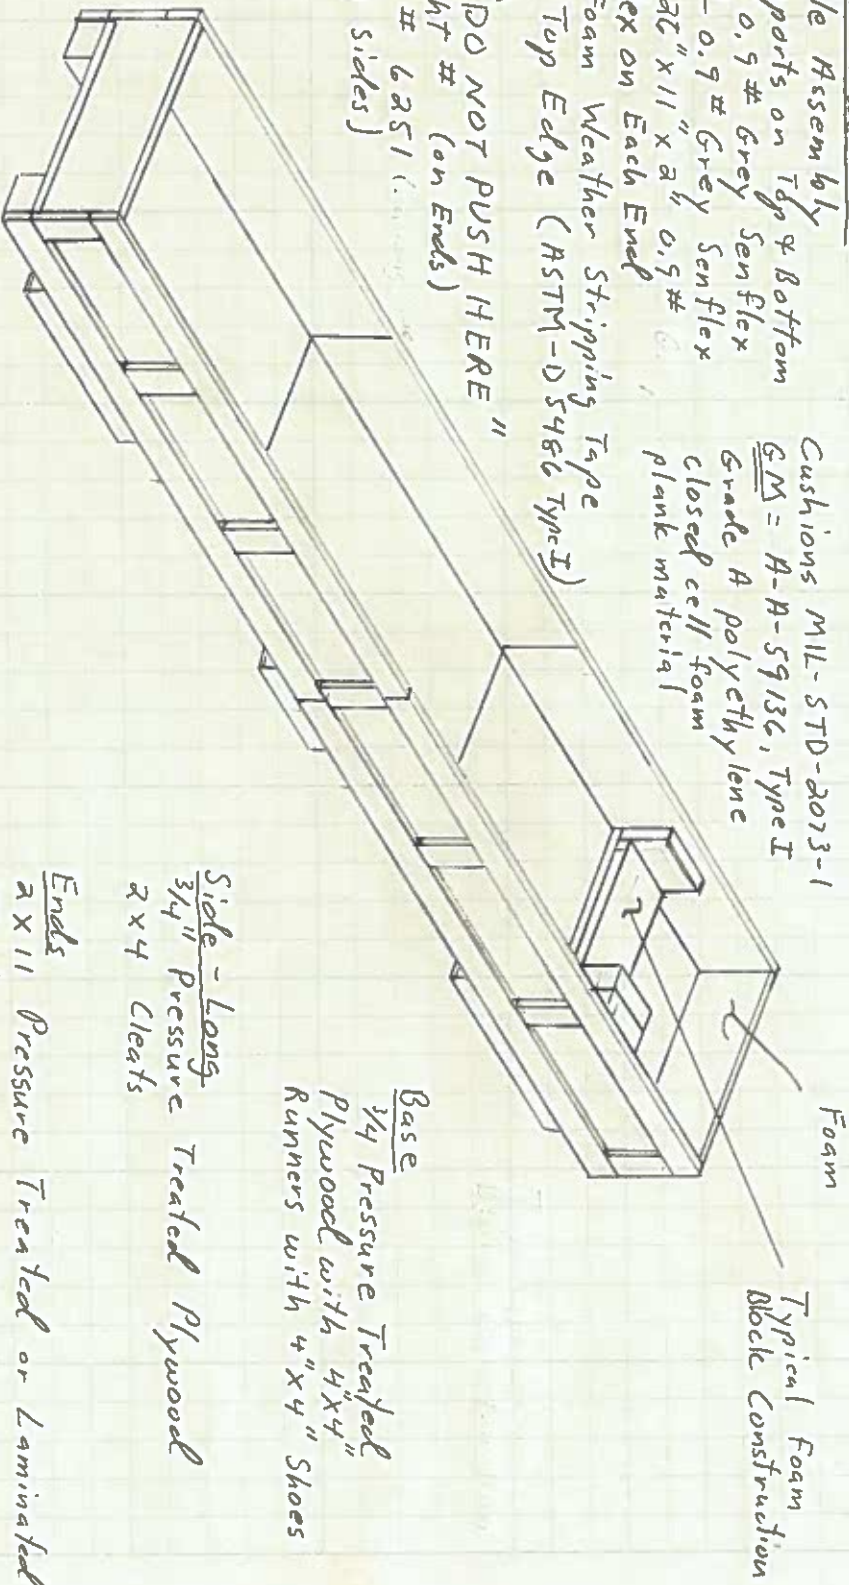

Base
 $\frac{3}{4}$ " Pressure Treated Plywood with 4"x4" Runners with 4"x4" Shoes

Side - Long
 $\frac{3}{4}$ " Pressure Treated Plywood
 2x4 Cleats

Ends
 2x11 Pressure Treated or Laminated Plank


Top
 $\frac{3}{4}$ " Pressure Treated Plywood
 1x6 Cleats


"Lift Here" on each side of center runner (2 sides)
 (8) 6" Steel "L" Braces on Base (2 per corner)
 Complete Exterior Paint Gray, including bottom

 Indicates Steel Splice Plate
| Indicates Lag Bolt Position

Runners 4x4 Heat Treated
Wood Maple
4 pcs 4"x4"x40"
2 pcs 4"x4"x214"


Shoes 4x4 Heat Treated
Wood Maple
4 pcs 4"x4"x48"
2 pcs 4"x4"x22"

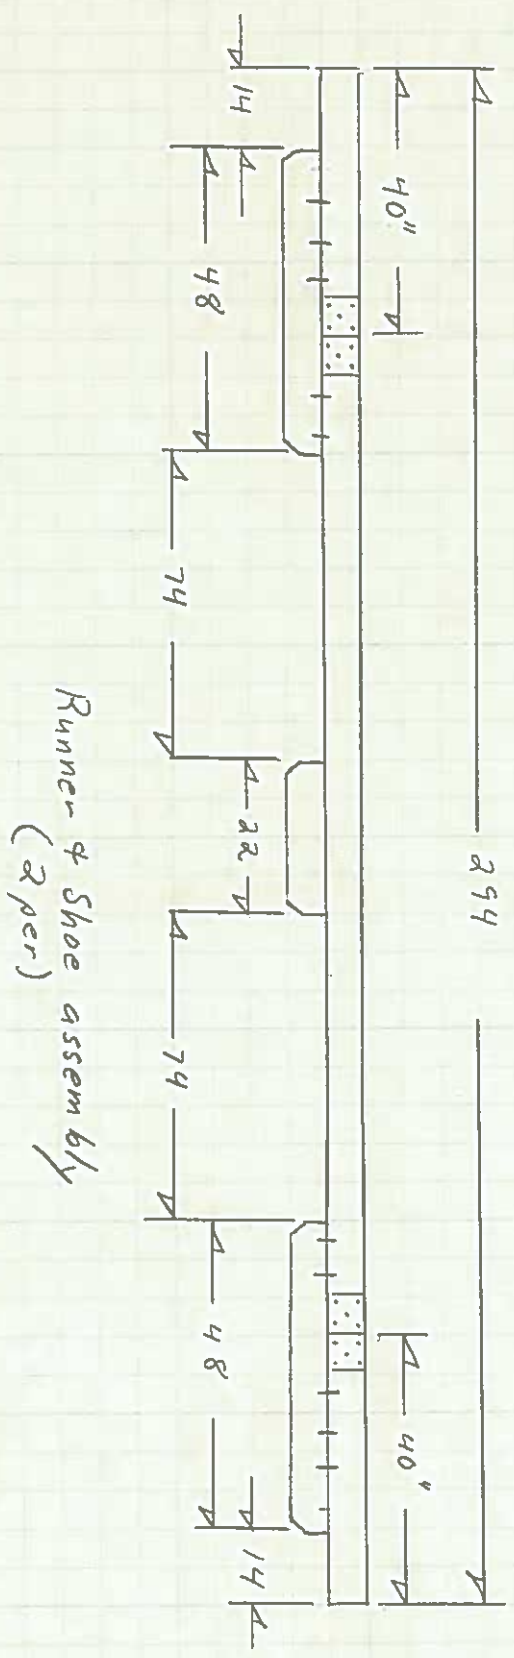

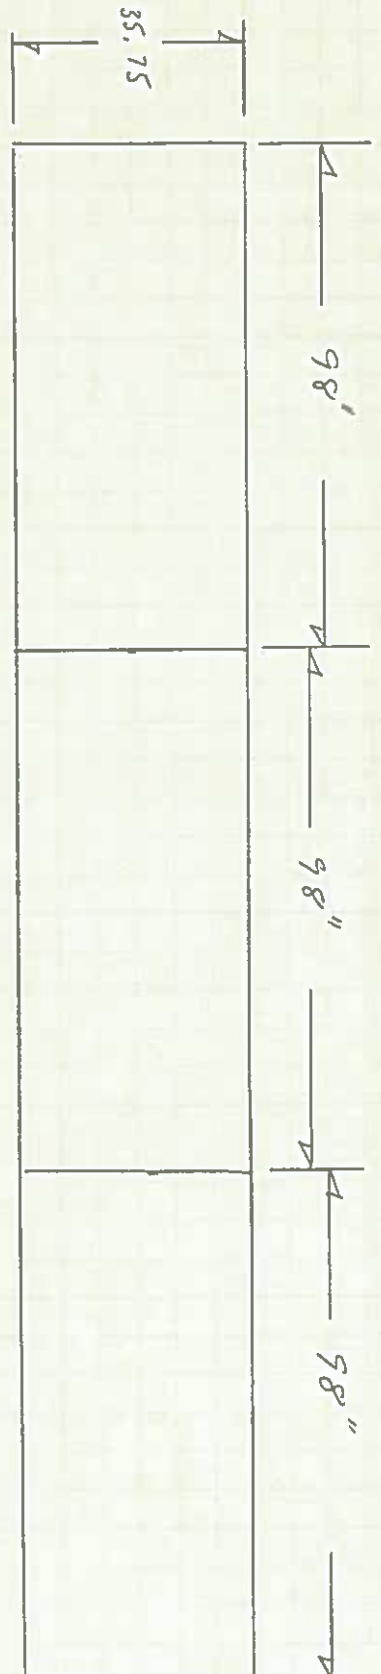

Base Platform

Base 3 pcs $\frac{3}{4}$ " x $35\frac{3}{4}$ " x 98"
Exterior plywood

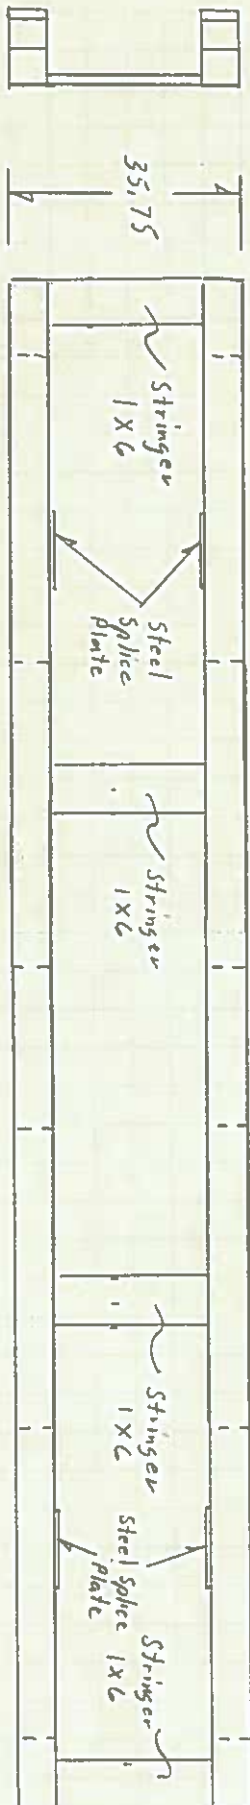


Side View


Top View
Runner, Shoes, Stringer Assy.

Stringer 4 pcs 1x6 x $27\frac{3}{4}$ maple

3 pcs $\frac{3}{8}$ " x 16" x 98" plywood
 Frame parts 1" x 4"

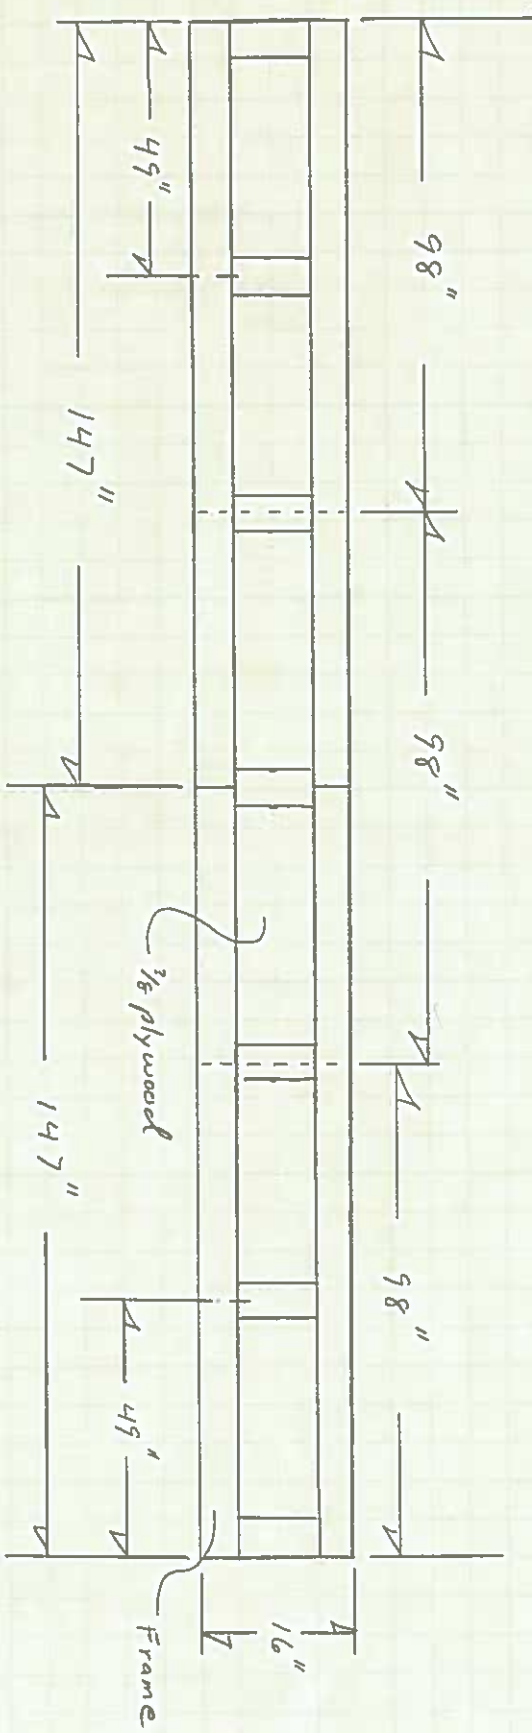

Side Wall (2 per)

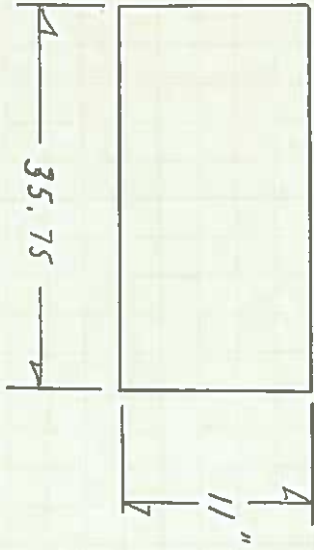

End Walls
(2 per)
Cut from 2" x 12"
Pressure Treated


22-141 50 SHEETS
22-142 100 SHEETS
22-144 200 SHEETS




Lid Outside View

2 pcs 1" x 6" x 38"
3/8" x 38" x 96" plywood


1 x 6

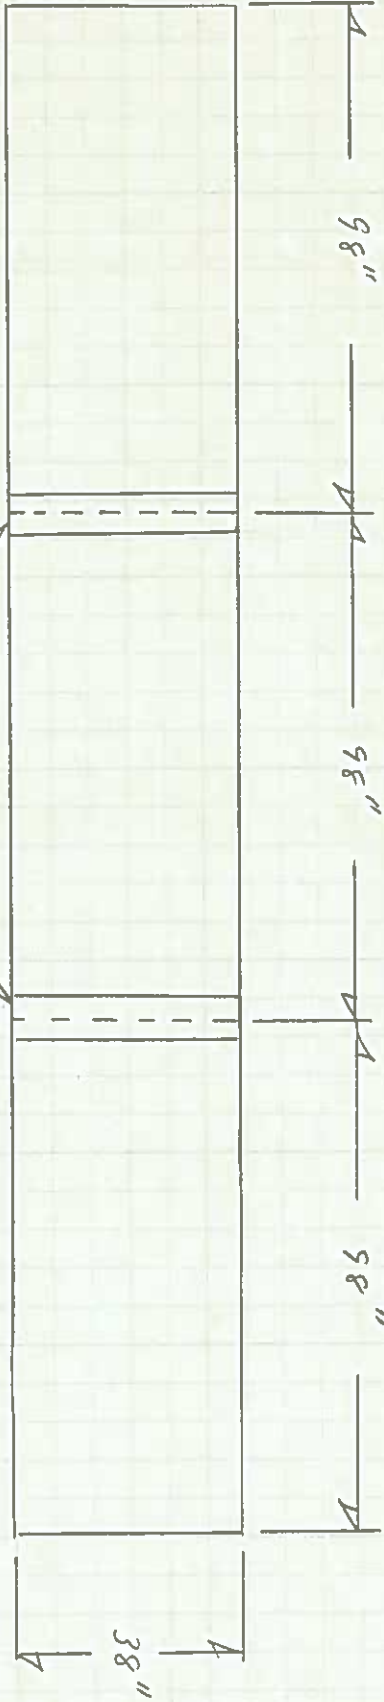

No Cushioning shall contact
Blade Flap on Trailing edge

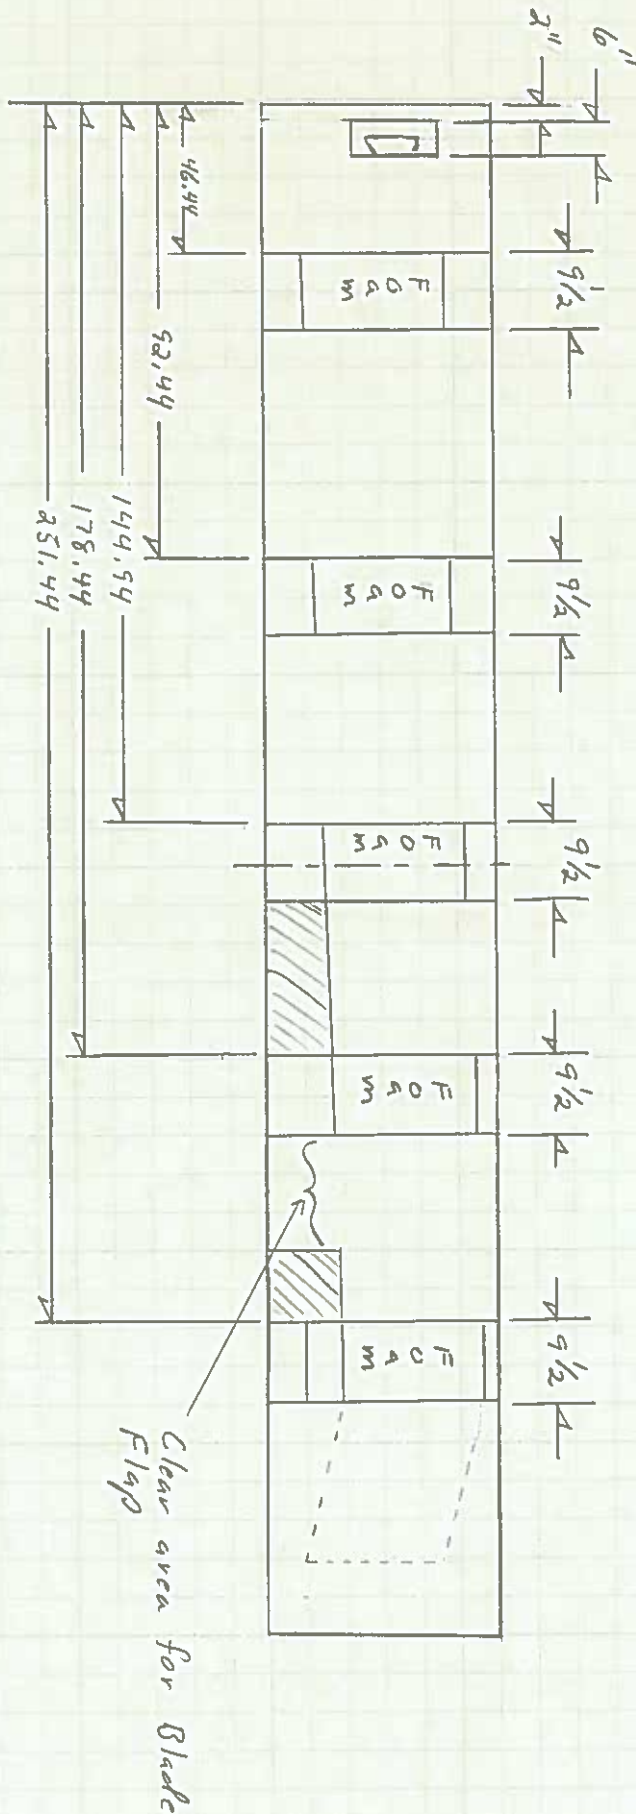

Inside View - Base Cushion Cradles

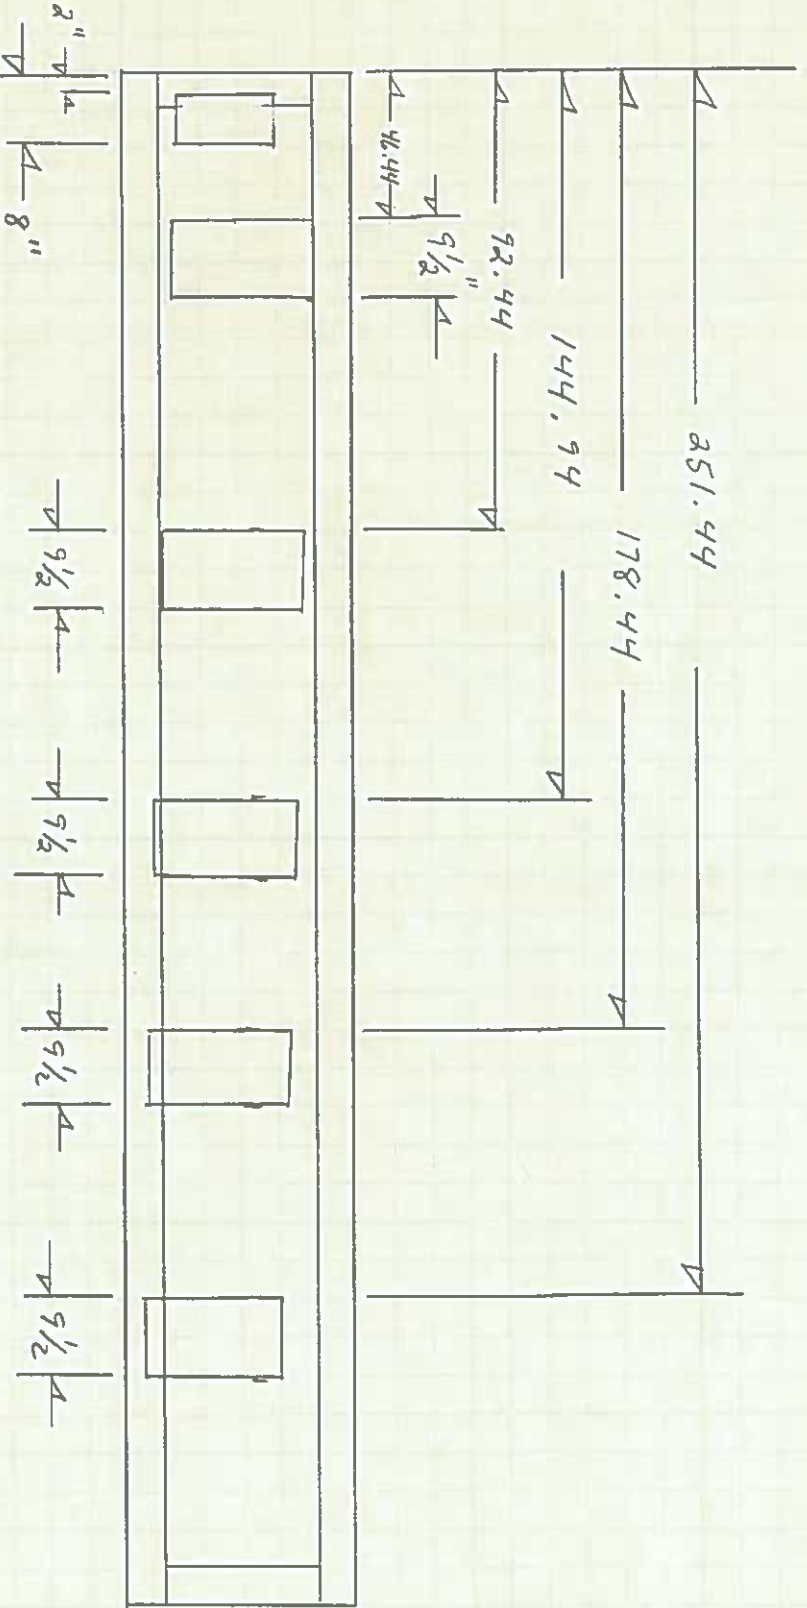

Lid
Underside View

Foam Blocks Nest between
Base Cushions