

8 THIS DOCUMENT HAS BEEN PURCHASED BY THE GOVERNMENT AND MAY BE REPRODUCED AND USED IN CONNECTION WITH ANY GOVERNMENT PROCUREMENT OR MAINTENANCE OPERATION.

7 NOTE: DATA MARKED WITH AN ASTERISK(*) IS REGULAR TO A PRIOR MANUFACTURE. IT DOES NOT TAKE PRECEDENCE OVER ANY OTHER DATA ON THIS DRAWING, AND IS NOT CONTRACTUALLY BINDING ON EITHER THE CONTRACTOR OR THE GOVERNMENT.

NOTES:





1. MAXIMUM ALLOWABLE FLASH, PARTING LINE, OR OTHER EXTERNAL PROTRUSION IS 0.25. BREAK ALL EDGES AND CORNERS ON FLASH, PARTING LINE, AND OTHER EXTERNAL PROTRUSIONS TO 0.25R.
2. CAST SURFACES 3.2/ UNLESS OTHERWISE SPECIFIED.
3. CORRELATED DATUMS INDICATED BY $\boxed{-X-}$ $\boxed{-Y-}$ AND $\boxed{-Z-}$.
4. $\oplus$ SYMBOL INDICATES DATUM TARGETS.
5. CASTING TO BE USED IN A PRESSURE TIGHT APPLICATION.
6. IMPREGNATION ALLOWED PER MIL-STD-276, METHOD B.
7. CASTINGS SHALL CONFORM TO CLASS 4, GRADE C, PER MIL-C-5021.
8. PARTING LINE AND EJECTOR PIN LOCATIONS SHALL BE APPROVED BY THE CONTRACTOR.
9. DRAFT ANGLE 1° MAXIMUM MAY BE USED WITH DRAWING DIMENSIONS TO INCREASE STOCK UNLESS OTHERWISE NOTED. MATCH DRAFT WHERE NECESSARY.
10. UNLESS OTHERWISE SPECIFIED:
FILLET RADIUS 1.5 R MAX
EDGE RADIUS 1.5 R MAX
SHARP EDGE 0.50 R MAX
DIE SHIFT 0.25 MAX
11. THE AREA INDICATED SHALL BE FREE OF FLASH, PARTING LINE, AND OTHER EXTERNAL PROTRUSIONS.
12. SURFACES INDICATED HAVE STOCK ALLOWED AND ARE TO BE SUBSEQUENTLY MACHINED.
13. B0063-A3018174-1 MFR-(INSERT CASTING MFR FSCM NO.), REV. TO BE RAISED GOTHIC STYLE CHARACTERS 3.2 HIGH X 0.38-0.60 WIDE X 0.38 HEIGHT ABOVE SURFACE, LOCATED APPROXIMATELY AS SHOWN.
14. DIMENSIONING AND TOLERANCING IN ACCORDANCE WITH ANSI Y14.5-1973.
15. METRIC DIMENSIONS AND TOLERANCES NOT IN ACCORDANCE WITH ANSI Y14.5-1973, PARADIGM B-7.4.1.
16. RAISED CHARACTERS TO BE 3.2 HIGH, GOTHIC STYLE, 0.38-0.60 WIDE X 0.38 HEIGHT ABOVE SURFACE, LOCATED APPROXIMATELY AS SHOWN.
17. DRAFT ANGLE 1°30' MAX MAY BE USED ON INTERNAL SURFACES.
18. CAST PART SHALL MEET THE REQUIREMENTS OF SPECIFICATION B15937B.

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
0	REVISED AND REDRAWN. REPLACES REV P WITH CHANGE PER ECP E4GK503- 181 NGH-010 AND EC 180440.	9/12/91	<i>[Signature]</i> E4GK503-181 (10)

-1 AS SHOWN

QTY REQD	QTY FND	QTY FSCM	QTY FSCM	PART NO OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	SPECIFICATION	NOTE
				PARTS LIST			
MATERIAL:				U.S. ARMY COMMUNICATIONS- ELECTRONIC COMMAND FORT MONMOUTH, NEW JERSEY 07033			
AL ALY 380 PER Q3-A-591				FSCM NO. 31880 Q3-A-591			
FINISH:				ENGINEERED SURFACE FINISH			
TOLERANCES IN MILLIMETERS				DECIMAL DIMENSIONS ANGULAR DIMENSIONS			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES - DO NOT SCALE DRAWING				A301822B PL A3018229-1			
NEXT ASSY USED ON				APPLICATION			
REVISION G F E D C B A				SHEET REVISION RECORD			
SHEET 123				SHEET 123			
DATE 9/03/91				SCALE 1/1			
APPROVED <i>[Signature]</i>				DRAWN BY <i>[Signature]</i>			
DATE 9/03/91				SCALE 1/1			
SHEET 123				SHEET 123			

REVISIONS			
LT#	DESCRIPTION	DATE	APPROVED
P	THIS SHEET ADDED PER EC-108590	10/04/10	Y. [Signature]
			EC-C-953

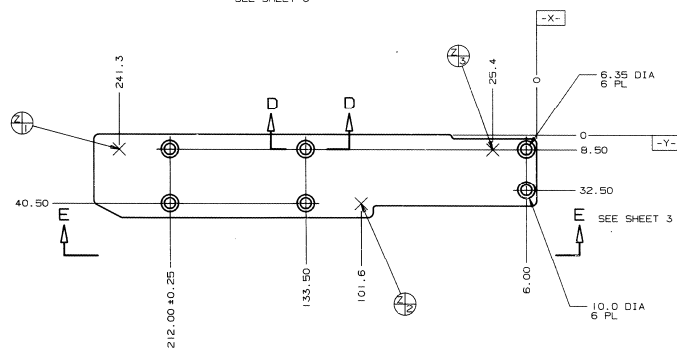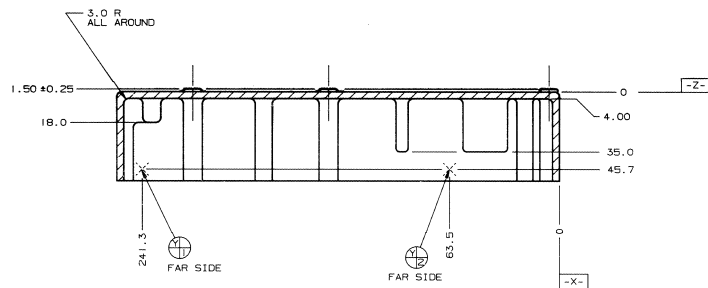

SIZE	FIGURE NO.	DWG NO.
D	80063	A3018174
SCALE	1/1	SHEET 2

