




NOTES:

1. CONCRETE SHALL HAVE A MIN COMPRESSIVE STRENGTH OF 3000 PSI.
2. ALL WELDING PROCEDURES AND WELD QUALITY SHALL BE IN ACCORDANCE WITH THE REQUIREMENTS OF AWS D1.2.
3. ROUND BAR USED FOR MOORING LIFTING EYE SHALL BE 1" DIA ASTM A36.
4. REMOVE BURR AND SHARP EDGES. SMOOTH ALL JOINTS AND ROUND ALL SHARP CORNERS. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED.

REV.	A	10/25	LEC	APPL	INITIAL	ISSUE	DESCRIPTION	MOD.	BY
DESIGNED:					U.S. COAST GUARD		SILC		
DRAWN:					WATERWAYS OPERATIONS		PRODUCT LINE		
TRACED:							CONCRETE SINKERS		
CHECKED:							(1,000 LB, 1,500 LB, & 2,000 LB)		
PROJECT ENGINEER:									
DESIGNED BY:									
TRACED BY:									
CHECKED BY:									
ASSIST. LINE MANAGER									
APPROVED:					L.E. COSTELLO		DATE 10/31/25		
DEPUTY S.W.									
ALL DIMENSIONS SPECIFIED:									
ALL DIMENSIONS ARE IN INCHES.									
TOLERANCES: DIM.									
ANG.									
							DRAWING NUMBER		REV.
							121207		A
							SCALE:		SHEET 1 OF 3

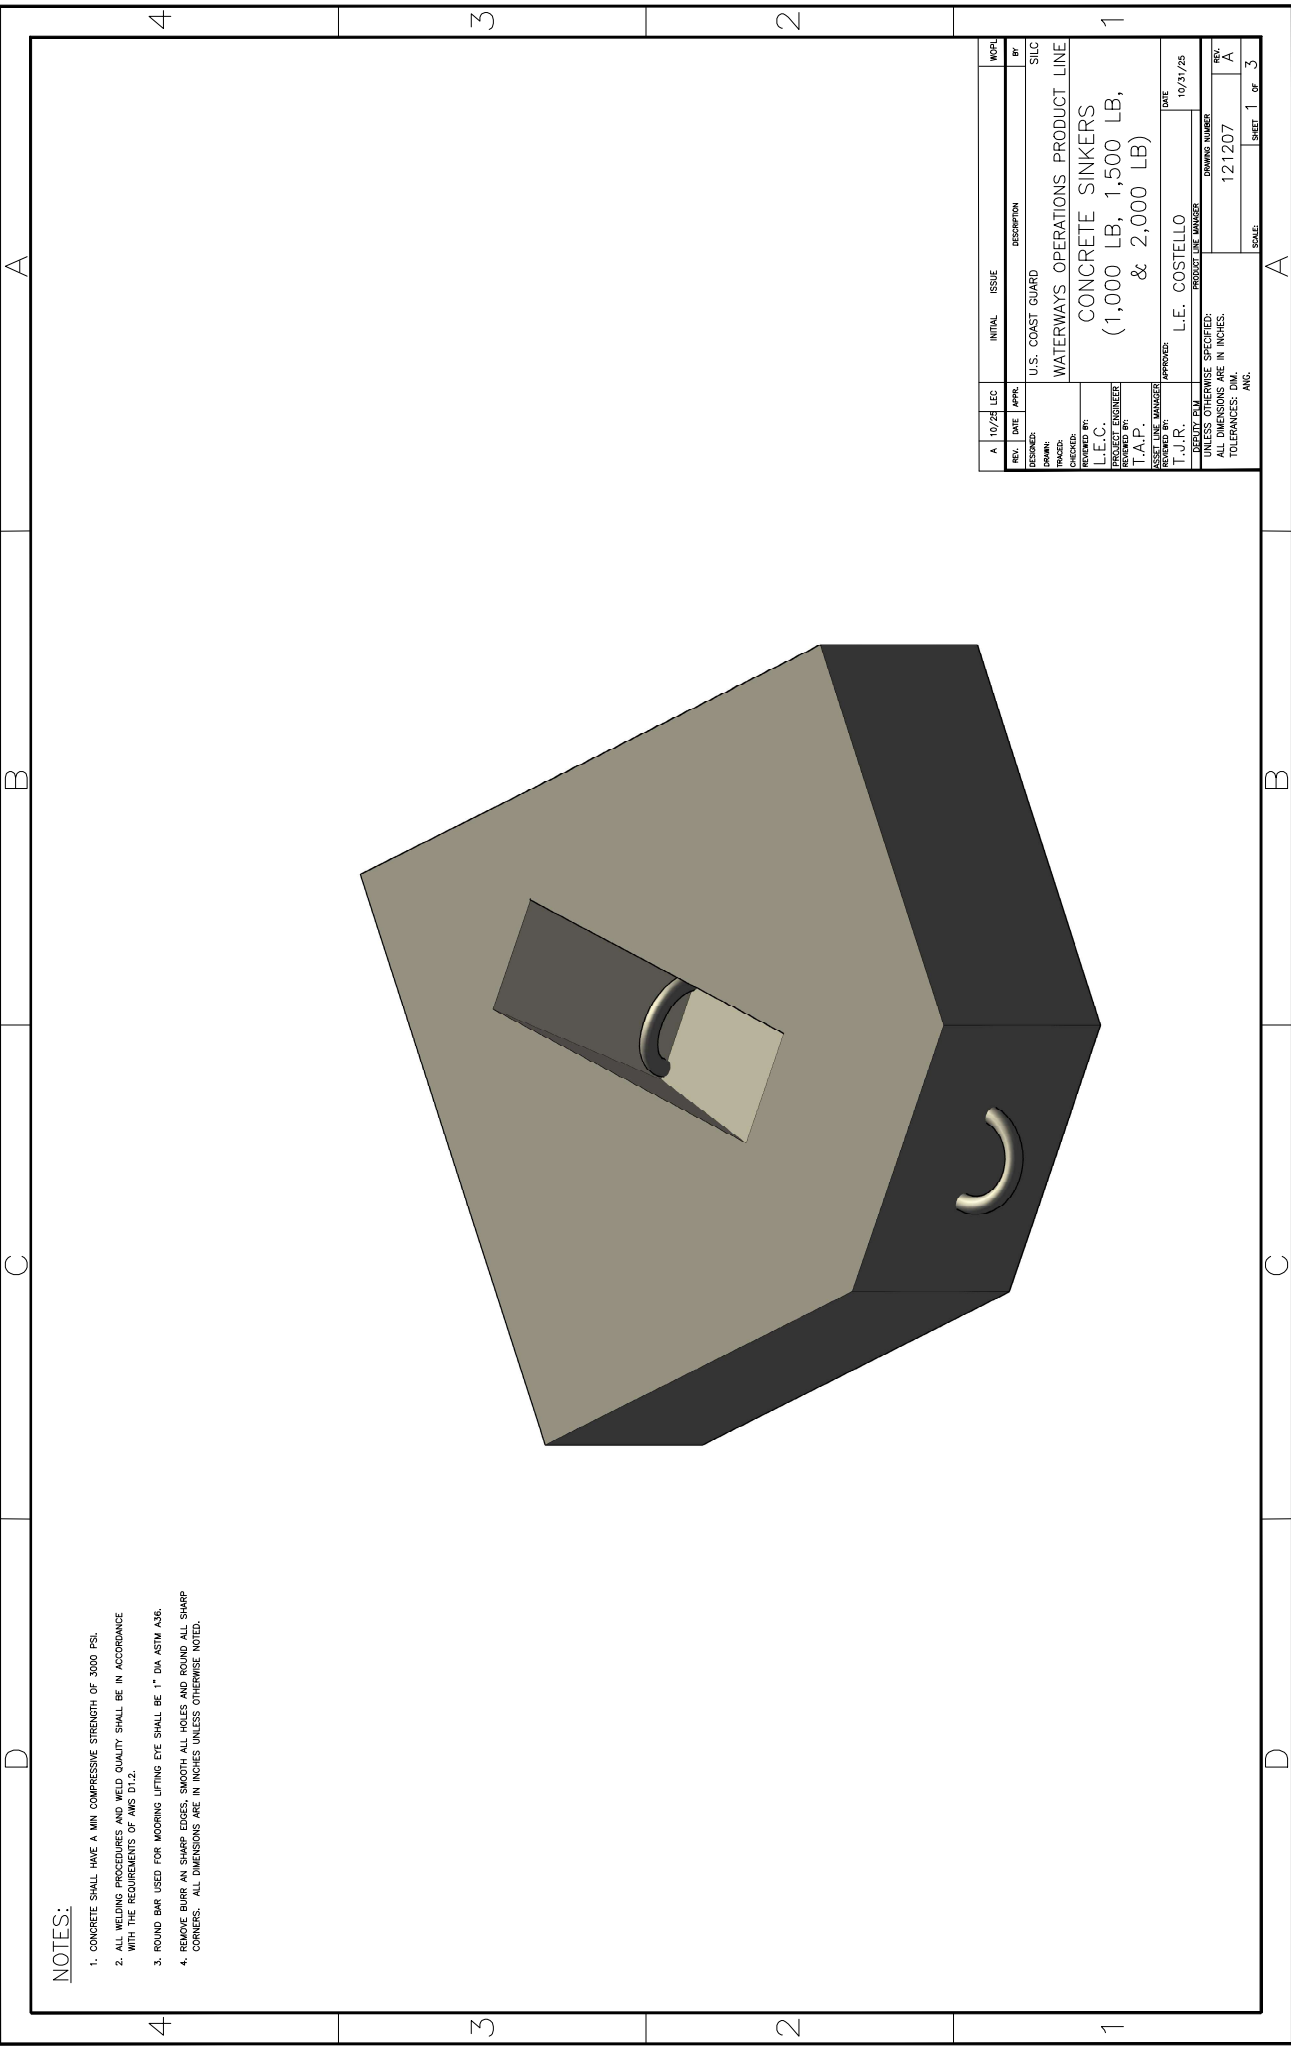