OnLine POWER

POWER WAVE

ELEVATE

UL924 ELEVATOR BACKUP SYSTEM

THE ALL-IN-ONE ELEVATOR BACKUP SOLUTION

Designed to adhere to strict regulations, the Power Wave Elevate safeguards against downtime during emergencies. Complying with IBC 1009, IFC, NEC 700 & NEC 701 guidelines, it ensures 2 hours of uninterrupted elevator functionality during emergencies and can support non-regen and regen elevators. Specifically tailored for elevator systems, its versatile design and exceptional reliability make it the ultimate solution to meet all emergency backup needs. Additionally, it's designed to help building owners meet ICC 1009.2.1 requirements.

Scan QR Code

For the latest product news, technical specs, drawings, guides and manuals.

BENEFITS OF POWER WAVE ELEVATE

- ☑ **Designed to meet IBC 1009 and IFC Compliance**
- ☑ **Keep Elevators Functioning During Emergencies**
- ☑ **Use Elevator Regenerative Power to Recharge Backup Power and Extend Backup**
- ☑ **Standard 2 Hours of Backup Power for Elevators**
- ☑ **Can be Combined with Emergency Lighting (optional) for Cost & Space Savings**
- ☑ **No ATS Switch Needed**
- ☑ **Resistor Bank Not Required**
- ☑ **Compatible with Regenerative, Non-Regenerative and Hydraulic Elevators**
- ☑ **Local Accessible Event Logger with Unit Audible Alarm (Standard)**
- ☑ **GMS2: Remote Monitoring Through Local Area Network (optional)**
- ☑ **Automatic Self-Testing with Report Logs**
- ☑ **Battery Health Monitoring**
- ☑ **Normally Closed Dry Contacts Standard for Elevator Communication**

Normal Power / Regen Mode

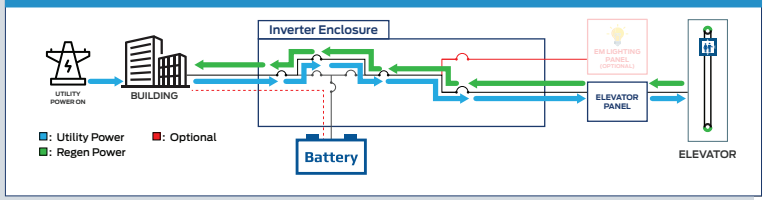

Emergency Power / Regen Mode

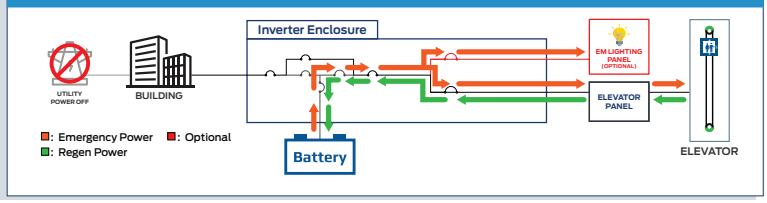

MEET IBC 1009 & IFC COMPLIANCE

COMPATIBLE W/ VARIOUS ELEVATOR TYPES:

- REGENERATIVE
- NON-REGENERATIVE
- HYDRAULIC

UP TO **240KW** THREE PHASE

REGEN MANAGER

Efficiently directs regenerative power to building or battery charging, depending on utility status, eliminating the need for a resistor bank.

ISO9001 Certified Since 1996

OnLine Power, Inc. | Los Angeles, CA | Tel. 1-800-227-8899 | sales@onlinepower.com | www.onlinepower.com

© Copyright OnLine Power, Inc. All rights reserved. Specifications subject to change without prior notification.

120-E-DS-04-25

NFPA CODES & STANDARDS COMPLIANT

MADE IN USA

SPECIFICATIONS

Power Wave Elevate

Elevator Backup System

Three Phase,
up to 240kW / 300kVA

SAFETY STANDARDS
UL924, UL1778, NFPA101, NFPA70, NEC 700, NEC 701
Listed to UL924 and UL1778 Standards

INPUT
AC Voltage: ±15%
Frequency: 50/60Hz ±7

OUTPUT
AC Voltage Regulation: 1-3% typically
Wave Form: Sinusoidal
Harmonic Distortion: Less than 2% THD
Frequency Tolerance: ±0.1 Hz

PROTECTION
Overload: Less than 110% Load: Continuous, 125-150%: 5 min, Higher than 150%: 30 sec

BATTERY
Battery: Sealed, Maintenance-free, Lead-Acid, VRLA (Standard) 10 years. Long Life 20 years (optional)
Recharge Time: Varies per kVA, conforms to UL924

NOISE ISOLATION
Isolation: True Galvanic Isolated

ENVIRONMENT (Electronics)
Operating Temperature: 0° to 40°C (32° - 104°F)
Storage Temperature: -20° to 70°C (-4° - 158°F)
Humidity: 0% to 90% (non-condensation)
Altitude: Up to 5,000 ft
Audible Noise: Less than 65dBA at 1 meter/39.4 in.

Cabinet Dimensions

(Inches) Width x Height x Depth

Cabinet I
34"W x 75"H x 31.5"D

Cabinet II
55.5"W x 75"H x 31.5"D

Battery Cabinet
51"W x 70"H x 30.5"D

Each model comes with both inverter and battery cabinets. Larger capacity will require additional battery cabinets. Size and weight will vary depending on capacity. For units requiring larger capacities, please consult the factory.

CABINET I

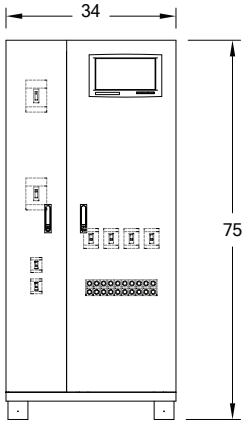

24KW - 50KW
INVERTER
CABINET

CABINET II

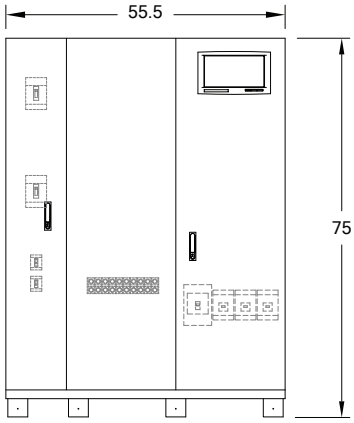

64KW - 128KW
INVERTER
CABINET

BATTERY CABINET

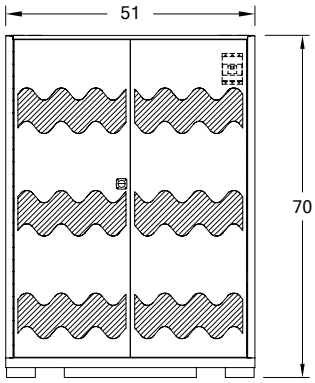

Model Numbers

Unit Name	Capacity kVA/kW	Input (VOLTS)	Output (VOLTS)
PW Power Wave Elevate	**030** 30/24	**B** 208Y/120	**05ELT3** 208Y/120
	040 40/32	**H** 480Y/277	**09ELT3** 480Y/277
	050 50/40		
	060 60/50		
	080 80/64		
	100 100/80		
	120 120/96		
	160 160/128		
	200 200/160		
	240 240/192		
	300 300/240		

kW equates to real power.

BTU / Weight

			STANDARD					
Capacity	BTU/HR		*Cabinets - 120MIN (LBS) (# OF CABINETS)			*Cabinets - 90MIN (LBS) (# OF CABINETS)		
kVA/kW	STANDARD	GREEN	INVERTER	TOP	FRONT	INVERTER	TOP	FRONT
30/24	10120	4310	1260 (1)	4535 (1)	5034 (1)	1260 (1)	4361 (1)	4135 (1)
40/32	12131	5747	1414 (1)	3416 (2)	3990 (2)	1414 (1)	3213 (2)	5034 (1)
50/40	15164	5687	1525 (1)	3867 (2)	4153 (2)	1525 (1)	3427 (2)	3990 (2)
60/50	18197	6824	1724 (1)	4923 (2)	5034 (2)	1724 (1)	3867 (2)	4135 (2)
80/64	24263	9099	2276 (1)	3707 (1) 4729 (2)	5034 (3)	2276 (1)	4615 (2)	5034 (2)
100/80	30329	11373	2984 (1)	3416 (2) 4923 (2)	5034 (3)	2984 (1)	3707 (1) 4729 (2)	5034 (3)
120/96	32395	10130	3138 (1)	4923 (4)	5034 (4)	3138 (1)	3416 (2) 4923 (2)	5034 (3)
160/128	43193	13507	3868 (1)	* *	5060 (5)	3868 (1)	* *	5060 (4)
200/160	53992	16884	5746 (1)	* *	5060 (6)	5746 (1)	* *	5060 (5)
240/192	64790	20206	6229 (1)	* *	*	6229 (1)	* *	5060 (6)
300/240	80988	25326	7293 (1)	* *	*	7293 (1)	* *	*

The approximation is worst case BTU output, measured during recharge following a discharge.

* To accommodate system inrush current, the electronics cabinet unit must be properly sized, and the battery cabinet should ensure backup time for steady-state current.

Warranty

Standard warranty is eighteen (18) months from ship date or twelve (12) months from start up, whichever occurs first. Optional second year warranty with factory performed preventative maintenance available.

ISO9001 Certified Since 1996

NFPA CODES & STANDARDS COMPLIANT

MADE IN USA

OnLine Power, Inc. | Los Angeles, CA | Tel. 1-800-227-8899 | Fax: 1-323-721-3929 | sales@onlinepower.com | www.onlinepower.com
© Copyright OnLine Power, Inc. All rights reserved. Specifications subject to change without prior notification.

ORDERING GUIDE

PROJECT NAME :

REP / DISTRIBUTOR :

ORDER NUMBER **DOES NOT** REFLECT MODEL NUMBER. PLEASE CONSULT FACTORY.

Power Wave Elevate

Example: PW-EL-R-50-B05-S120-SFB1(20)-FC-GMS LAN-PM2

ELECTRICAL DESIGNER / ENGINEER :

DATE :

PW-EL-

PW-EL — MODEL SERIES

PW-EL: Power Wave Elevate

R — ELEVATOR TYPE

R: Regen Elevator
NR: Non-Regen Elevator
H: Hydraulic Elevator

50 — CAPACITY KW

24: 24 KW
32: 32 KW
40: 40 KW
50: 50 KW
64: 64 KW
80: 80 KW
96: 96 KW
128: 128 KW
160: 160 KW
192: 192 KW
240: 240 KW

B05 — VOLTAGE INPUT/OUTPUT

INPUT	OUTPUT
B - 208Y/120	**05** - 208Y/120
H - 480Y/277	**09** - 480Y/277

*Input 'B' not compatible with Output '09'

S120 — BATTERY TYPE

S120: Standard @ 120min
* **L120:** Long Life @ 120 min
H120: Hi Temp @ 120 min
U120: USA @ 120 min
(required for BAA and BABA compliance)

S90: Standard @ 90min
* **L90:** Long Life @ 90 min
H90: Hi Temp @ 90 min
U90: USA @ 90 min
(required for BAA and BABA compliance)

*Long Life 20 Yr. Pro Rata Battery.

SFB1(20) — 2 SUB MAIN OUTPUT BREAKERS

SFB1(#): Sub Feed Breaker 1 (#): Desired Amps
SFB2(#): Sub Feed Breaker 2 (#): Desired Amps

FC + GMS LAN — OPTIONS

PICK ANY:
X: Seismic Mounting
LCR20B(#): Load Control Relay, Single Flex Stud Mounting (#): Qty
LCR20(#): Load Control Relay, No Flex (#): Qty
TVSS: Input Transient Voltage Surge Suppressor (Class C)
SCCR: 65 KAIC Total System Short Circuit Current Rating
DS: Drip Shield Hood
CL: Corbin Lock

BATTERY OPTIONS
FC: Fast Charge (12 hrs or less)
TR: Thermal Runaway Control (IFC 1206.2)

MONITORING OPTIONS
DC: Dry Contacts Closed Signal
A: Local Audible Alarm with Silencer Switch
CP: RS 232 Connecting Port
P: Remote Status Panel (Hard Wired with Extended Cable)

SYSTEM TRANSFER
TD(U): User Selectable Time Delay Back to Utility During Power Restoration for Facility Inrush

REGEN POWER OPTIONS
RGN: Regen Manager (for regenerative elevators)

BATTERY MONITORING SYSTEM (BMS) PICK ONE:
SM: String Monitoring
BM: Battery Monitoring
BM-TS: Temperature Sensor

GLOBAL MONITORING SYSTEM (GMS) PICK ONE:
GMS LAN: SNMP for communication use for Event Log and LAN.

PM2 — WARRANTY & SERVICES

PICK ANY:
Blank: Standard Onsite Startup and Warranty

ADDITIONAL:
EXT: Additional One Year Extended Warranty (Includes First Year Preventative Maintenance)
PM (2-3): Onsite Preventative Maintenance (Once Per Year, up to 3 Years)
T1: Additional 4 Hour Training at Time of Start Up
T2: Additional Training day up to 8 hours

OnLine Power, Inc. | Los Angeles, CA | Tel. 1-800-227-8899 | Fax: 1-323-721-3929 | sales@onlinepower.com | www.onlinepower.com
© Copyright OnLine Power, Inc. All rights reserved. Specifications subject to change without prior notification.