



UNIVERSIDAD TECNICA
FEDERICO SANTA MARIA

Universidad Técnica Federico Santa María, Departamento de Informática

Homework 4: Diffractive Optical Elements and Deconvolution

Profesor Dr. Nelson Diaz, nelson.diazd@usm.cl, F-311

1 de octubre de 2026

The assignment report is due on 7 October, 2026. In it, you must solve the exercises presented in the guide in report format, and attach the files you generate, such as .py, ipynb, .mat, .m, .fig, etc. The report should briefly describe the experiments performed, including the following sections: summary, description of experiments, and conclusions. It is suggested that you prepare the report in LaTeX to facilitate writing equations. Send a compressed folder with the files to the Aula submission corresponding unit: , with the subject line: **Homework4_FotografiaComputacional** and the compressed folder's name **homework4_nameSurname.zip**, where Name is your first name and Surname is your last name. Caution: any attempt at copying or fraud will invalidate the lab and result in a zero on the lab grade.

1. Learning Goals

To identify the components of a compressive color diffractive system and solving the deconvolution task. Once the homework will be completed the student will be able to simulate a diffractive color optical system and solve the deconvolution task.

2. Introduction

Computational photography involves to study optical system that exploits diffractive optical elements (DOE) to encodes the incident field.

2.1. Forward Model

The compressive diffractive color measurement can be represented as:

$$\mathbf{y} = \text{Sensor}(\mathbf{h}_l * \mathbf{f}_l)_{\text{Bayer}} \quad (1)$$

where $\mathbf{y} \in \mathbf{R}^{N \times N}$. $\mathbf{f}_l \in \mathbf{R}^{N \times N}$ denotes the l^{th} incident field, $\mathbf{h}_l \in \mathbf{R}^{N \times N}$ denotes the point spread function (PSF), and $*$ is the convolution operation.

2.2. Deconvolution: Wiener Filter

The deconvolution process involves solving the following regularization problem

$$\min_{\tilde{\mathbf{f}}} \{ \|\mathbf{y} - \text{Sensor}(\tilde{\mathbf{f}}_l * \mathbf{h}_l)_{\text{Bayer}}\|_2^2 + \tau \|\tilde{\mathbf{f}}_l\|_2^2 \} \quad (2)$$

τ is a regularization parameter.

$$\hat{\mathbf{y}}_l = \mathcal{F}^{-1} \left\{ \frac{\mathbf{H}_l^*}{\mathbf{H}_l^2 + \tau} \mathbf{Y} \right\} \quad (3)$$

where $\mathbf{y}$ correspond to the measurement in the Fourier domain, $\mathbf{H}_l^*$ is the complex conjugate of the optical transfer function $\mathbf{H}_l$.

$$\tau = \frac{S_\omega}{S_f} \quad (4)$$

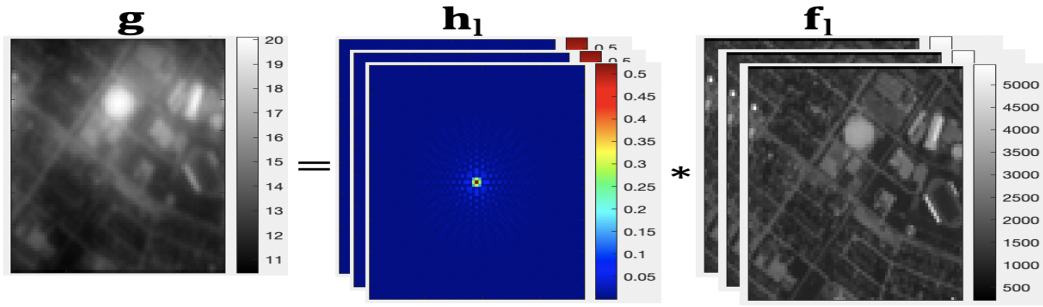


Figure 1: Sensing model

where $|\mathbf{H}_l|^2 = \mathbf{H}_l^* \mathbf{H}_l$ is the magnitude squared, S_ω is the power spectrum of the noise, and S_f is the power spectrum of the signal. The complex conjugate of complex number is $C^* = R - iI$.

3. Exercises

- To start check the following github repository, the task is to implement the matlab code in python MSFA-DOE.
- To implement a color computational photography system in python using diffractive elements and Bayer filter. To model the diffractive optical element use the cubic phase cubic phase, and also a set of the Zernike modes. Zernikes
- For the homework 4 use the Mc master dataset with 18 RGB images, Mc master dataset, ver Figura 2.
- To implement from scratch both the Wiener Filter and the Richardson-Lucy algorithm and compare it with the python implementation that use the skimage.restoration library.
- To evaluate spatial image quality using Peak-Signal-to-Noise Ratio (PSNR), Structural Similarity Index (SSIM) and spectral accuracy with Spectral Angle Mapper (SAM).
- To plot the spatial and spectral image quality metrics for the whole Mc master dataset.

The Peak Signal-to-Noise Ratio (PSNR) in decibels (dB) is given by:

$$\text{PSNR} = 10 \cdot \log_{10} \left(\frac{\text{MAX}_I^2}{\text{MSE}} \right), \quad (5)$$

