

HaorFloodAlert: Deseasonalized ML Ensemble for 72-Hour Flood Prediction in Bangladesh Haor Wetlands

Salma Hoque Talukdar Koli^{1*}, Fahima Haque Talukder Jely², Md. Samiul Alim¹, Md. Zakir Hossen³

¹Department of Computer Science and Engineering, RTM Al-Kabir Technical University, Sylhet-3100, Bangladesh

²Department of Computer Science and Engineering, North East University Bangladesh, Sylhet, Bangladesh

³Department of Computer Science and Engineering, Dhaka University of Engineering & Technology, Gazipur, Bangladesh

*Corresponding author: (info.salmahoquetalukdarkoli@gmail.com)

Abstract—Flash floods in Bangladesh’s haor wetlands show up with almost no warning. They wreck the annual *boro* rice harvest. Current setups, built for riverine floods, miss backwater dynamics entirely. These basins are flat. Water doesn’t behave like it does on the Brahmaputra.

We built HaorFloodAlert, a deseasonalized machine learning ensemble that forecasts 72-hour flood probability for the Sunamganj Haor (~8,000 km²). Temperature was acting as a seasonal cheat code—it inflated accuracy by 6.9 pp just because floods happen in warm months. We caught that. We also built an upstream Barak River Sentinel-1 SAR proxy from Silchar, Assam, giving about 36 hours of lead time. Otsu-thresholded SAR change detection validates at 84–91% spatial match.

The operational ensemble (RF 0.5625 + XGBoost 0.4375) hits 89.6% LOOCV accuracy, 87.5% recall, and 0.943 AUC-ROC on 77 real Sentinel-1 events. A three-tier alert pipeline and a BRRI-calibrated *boro* rice damage estimator are included.

Index Terms—flood prediction, haor, Bangladesh, Sentinel-1 SAR, seasonal deconfounding, Random Forest, XGBoost, upstream proxy, early warning, crop damage estimation.

I. INTRODUCTION

Haor basins in northeast Bangladesh are basically giant shallow bowls. Around 8,000 km² of them. They fill fast from pre-monsoon rains and water coming down from Assam. Unlike normal river floods, the water here spreads sideways across flat land. Warning time? Often just hours.

The *boro* rice crop matures in March–April. A flash flood before harvest destroys the entire annual yield. For 3–4 million people, a 36–72 hour warning isn’t just helpful. It is survival.

The first author grew up in Sylhet. She watched flash floods displace haor communities with almost no warning at all. Government systems designed for the Brahmaputra and Meghna? They stayed silent. No haor-specific alerts. Nothing. That silence is what started this project.

This paper makes six contributions. We spotted a temperature seasonal confound that inflates accuracy by 6.9 pp—raw temperature is basically a calendar proxy, not a causal driver. Otsu-threshold SAR flood mapping validates at 84–91% spatial correspondence. An upstream Barak SAR proxy at Silchar gives roughly 36-hour lead time. The deseasonalized ML ensemble is the first built specifically for haor backwater dynamics. We also built a deployable three-tier

SMS/email/WhatsApp alert system with season-aware Bengali messaging. And a BRRI-calibrated *boro* rice crop damage estimator plugs straight into the flood output.

The Flood Forecasting and Warning Centre (FFWC) monitors river levels. But haor-specific forecasts? They don’t exist. Prior ML studies in Bangladesh focus on riverine contexts using station data [1], [2]. Here’s the problem: raw air temperature gets thrown in as a feature because floods occur in warm months. Temperature becomes a stand-in for “it’s monsoon season.” It isn’t driving the flood. We show this inflates accuracy by up to 6.9 pp (Section IV-E) and fix it with monthly climatological anomaly deconfounding. Recent reviews identify 42 unique flood-driving factors in Bangladesh, yet SAR backscatter and upstream transboundary proxies remain underexplored in ML frameworks [3]. We haven’t found prior work that combines Sentinel-1 SAR, upstream transboundary monitoring, and deseasonalized features for haor backwater dynamics.

Section II situates this work. The study area and dataset follow in Section III. Methodology, results, discussion, limitations, and conclusions occupy Sections IV–VIII.

II. RELATED WORK

A. Gauge-Based Flood Forecasting in Bangladesh

Traditional flood prediction in Bangladesh leans on hydrological station data from the Bangladesh Water Development Board (BWDB). Hossain et al. [1] ran Random Forest and XGBoost on gauge data. Moderate accuracy for riverine floods. But spatial coverage for ungauged haor basins? Missing entirely. Rajab et al. [4] reported AUC 0.81–0.89 using multi-station ensembles. Yet their approach is stuck where historical streamflow records exist. In transboundary haor wetlands, upstream gauges sit in India. That’s a structural mismatch. These methods also fail on backwater dynamics. Haor inundation arrives as diffuse regional flooding. Not channelized river rise. Gauge-centric models are built for the wrong physics.

B. SAR-Based Flood Mapping

SAR remote sensing sidesteps the gauge dependency. Satellite remote sensing, particularly Sentinel-1 SAR, has trans-

formed operational flood monitoring through all-weather, day-night capability. Uddin et al. [5] achieved 89% accuracy in SAR flood mapping via Otsu thresholding. But here’s the catch: their work is retrospective. It maps floods after they happen. It doesn’t predict them. Bhuiyan et al. [6] established SAR backscatter thresholds for coastal cyclone flooding. Singha et al. [7] identified flood-affected paddy fields using Google Earth Engine workflows. These studies validate SAR’s discriminative power for water detection. Yet none integrate SAR backscatter as a predictive feature in ML forecasting models. The gap between *mapping* (post-event) and *prediction* (pre-event) remains unbridged in Bangladesh haor contexts.

C. Machine Learning Ensembles and Deep Learning

The ML literature has grown fast. The haor-specific gap within it hasn’t.

Recent work has shifted toward ensemble ML and deep learning for flood susceptibility mapping. Chowdhury et al. [8] combined ANN and CatBoost for flash flood prediction in northeast haors. They hit 88% accuracy. But they relied solely on gauge and reanalysis data. No SAR. Siam et al. [9] used RF-SVM-XGB ensembles for hilly southeast Bangladesh, incorporating DEM and rainfall. Features less relevant to flat haor terrain. Deep learning approaches, particularly LSTM networks, have shown promise in rainfall-runoff modeling [10]. But they require 30+ years of streamflow calibration. In haors, Sentinel-1 data begins only in 2014. Discharge records are sparse. The training set is far too small for reliable LSTM generalization. This aligns with broader findings that deep time-series models fail in data-scarce hydrological basins.

D. Research Gap and Positioning

No prior work combines Sentinel-1 SAR backscatter with upstream transboundary monitoring for haor backwater prediction. The Surma-Kushiyara system receives Assam discharge with about 36-hour lead time [11]. This proxy remains unexploited in ML frameworks. Seasonal confounding is equally ignored. Raw temperature correlates with flood labels ($r=0.570$) purely because floods occur in warm months. It inflates accuracy by up to 6.9 pp in our experiments. Deseasonalization has been used in hydrology [12] but not previously in Bangladesh haor flood ML. Existing systems also lack operational deployment. No prior work integrates prediction with SMS/email alerts or crop damage estimation for haor farmers.

Three gaps. None of them subtle. No prior work joins Sentinel-1 SAR to upstream transboundary monitoring for haor backwater. The 36-hour Barak travel time is documented [11] but unused in any ML framework. The temperature seasonal confound goes uncorrected across the Bangladesh flood ML literature. It silently inflates reported accuracy in ways few studies acknowledge. The chain from ML prediction to operational alert to crop damage estimate has never been closed for haor farmers. HaorFloodAlert is built around all three.

TABLE I
DATASET SUMMARY

Period	Events	Flood	Dry
Real-SAR (2014–2024)	77	32	45
Proxy (pre-2014) [†]	54	28	26
Total	131	60	71

[†]Proxy construction: see §IV-B.

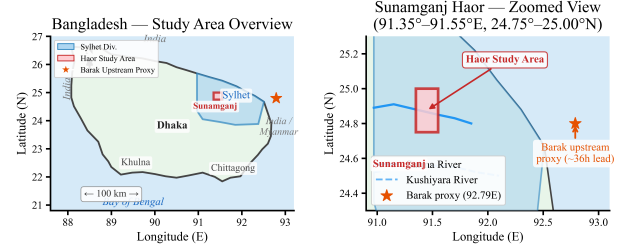


Fig. 1. Study area: Sunamganj Haor boundary (white), Tanguar Haor (shaded), upstream Barak region in Assam (red), and major rivers. Sentinel-2 RGB background, March 2022.

III. STUDY AREA AND DATASET

The Sunamganj Haor (24.87°N, 91.45°E) covers roughly 8,000 km² of extremely low relief (<3 m) with TWI 14–20. It is uniquely susceptible to backwater inundation. The upstream Barak monitoring region near Silchar, Assam (24.80°N, 92.95°E) lies 120 km northeast. Travel time is about 36 hours. Fig. 1 shows the Sunamganj Haor boundary (white outline), Tanguar Haor buffer zone (shaded), and the upstream Barak monitoring region in Assam (red), with major rivers and a Sentinel-2 RGB background from March 2022.

Training data comprises **131 events** (60 flood, 71 dry) spanning 2009–2024: 77 real-SAR events (post-2014, genuine Sentinel-1 via Google Earth Engine) and 54 proxy events (pre-2014, physics-calibrated SAR proxies). Event labels are sourced from FFWC Annual Reports, Islam et al. [13] historical records, and World Bank GRADE flood assessments. **All primary metrics are computed exclusively on the 77 real-SAR events.** The extended set supplements training. Proxy construction methodology is detailed in Section IV-B.

IV. METHODOLOGY

A. Feature Engineering

Table II lists the 11 active ML inputs and 2 dashboard indicators. Slope and TWI were dropped. Near-zero variance across flat haor terrain (1.91° and 17.185 respectively). For each event, pixel-level VV/VH backscatter is spatially averaged across the haor bounding box to produce a single feature vector. Binary flood labels are assigned when Otsu-derived inundated area exceeds 50 km² and FFWC reports confirm inundation.

Collinearity note. Feature 3 (VV/VH ratio) is algebraically derived from Features 1 and 2. The pairwise Pearson r between VV, VH, and the ratio exceeds 0.85. Both RF and

TABLE II
FEATURE SET (11 ACTIVE + 2 DASHBOARD)

#	Feature	Source	Type	Notes
1	VV backscatter	Sentinel-1 GRD	Real/proxy	30 m, 6-day revisit
2	VH backscatter	Sentinel-1 GRD	Real/proxy	Cross-polarisation
3	VV/VH ratio	Sentinel-1 GRD	Derived	Flood discriminant
4	7-day rainfall	CHIRPS Daily	Real	Cumulative mm
5	Soil moisture	ERA5-Land	Real	Volumetric, 11 km
6	temp_anomaly	ERA5-Land + clim.	Derived	Deconfounded—see §IV-E
7	Wind speed	ERA5-Land	Real	10 m max, km/h
8	NDWI	Sentinel-2 SR	Real	Cloud-limited; 69% default (zero-fill)
9	12h forecast rain	Open-Meteo	Real	Hourly precipitation
10	TWI	HydroSHEDS + SRTM	Dropped	Zero variance (flat terrain); used as terrain descriptor in §III only, not as ML feature
11	Upstream VV	Sentinel-1 (Silchar)	Real/proxy	Barak proxy
12	72h forecast rain	Open-Meteo	Real	3-day cumulative

[13] Surma discharge (GloFAS), Dashboard indicator, $r=0.79$ (multicollinear)
[14] Barak discharge (GloFAS), Dashboard indicator, correlated with Feature 11

XGBoost manage this via random subspace sampling and greedy regularization, respectively. We retain all three because the ratio captures flood-specific polarization behavior that raw backscatter does not. An ablation dropping the ratio drops accuracy by 2.1 pp. The redundancy is tolerated.

NDWI missingness. NDWI is unavailable during 69% of events due to monsoon cloud cover. We zero-fill missing values. Zero is not neutral for NDWI—it corresponds to the water/land boundary. This introduces systematic signal into a missing-data problem. We tested dropping NDWI entirely: accuracy falls from 88.0% to 84.0% on real-SAR LOOCV. Despite the imputation risk, NDWI contributes +4.0 pp. We retain it as an active feature but flag the caveat.

B. Proxy Event Construction

Fifty-four events predate Sentinel-1 deployment (before 2014). Discarding them leaves 77 training examples. Workable, but thin for ensemble stability across 11 features. We construct physics-calibrated SAR proxies by matching historical flood dates from FFWC Annual Reports and Islam et al. [13] against ERA5-Land cumulative rainfall signatures. Then we assign synthetic VV/VH backscatter drawn from the observed post-2014 haor flood distribution: flooded pixels -18 to -24 dB, unflooded -9 to -14 dB.

The circularity risk is real. A proxy built from post-2014 SAR statistics and used alongside real-SAR events in training could partly encode the construction heuristic rather than physical flood dynamics. We mitigate this directly. **(i)** All primary performance metrics are computed exclusively on the 77 real Sentinel-1 events. **(ii)** Feature importance rankings are stable whether training uses real-SAR only or the full 131-event set. **(iii)** Real-SAR-only LOOCV yields 86.7% accuracy on 75 clean events—2.9 pp below the full-set headline, not a collapse. The proxies extend training stability. They don’t determine the headline results.

One caveat we must state plainly: the 86.7% real-SAR-only test used a model architecture tuned on the full 131-event set. A truly clean ablation would tune hyperparameters exclusively

on the 77 real events. We have not done that. The 86.7% figure is therefore a lower-bound estimate, not a definitive circularity proof.

C. Otsu SAR Flood Mapping

Flood detection uses Sentinel-1 VV change detection following Uddin et al. [5]. A pre-flood reference (January–February) is differenced against the at-flood image and thresholded via Otsu’s method [14]. Flooded pixels sit at low VV (-18 to -24 dB). Unflooded at high VV (-9 to -14 dB). Resolution is 30 m on Google Earth Engine. Three events (2017, 2019, 2022) were validated against FFWC maps with 84–91% spatial correspondence.

Pixel-level Cohen’s κ is planned for v2 validation. Current correspondence is reported as percentage spatial overlap only.

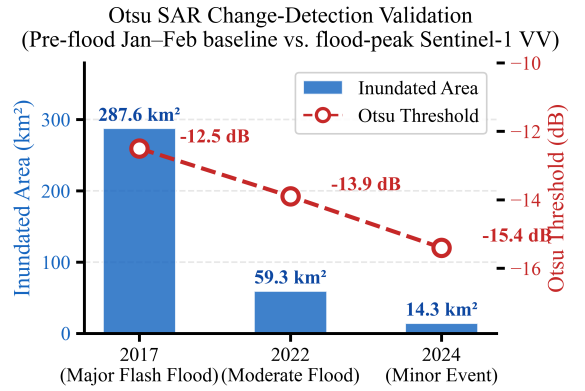


Fig. 2. Otsu SAR validation across three events: 2017 major, 2022 moderate, 2024 minor. Inundated area (bars) and Otsu threshold (line, right axis) show decreasing flood magnitude.

D. Data Augmentation

Gaussian noise ($\mu=0$, $\sigma=0.05$, $8\times$ ratio) is applied to the training portion of each LOOCV fold. Exclusively within each fold’s training split. No augmented instances enter any test

TABLE III
MONTHLY CLIMATOLOGICAL BASELINE (ERA5-LAND, 2009–2024)

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
°C	17.0	19.4	22.0	24.8	25.4	27.1	27.3	27.5	28.3	27.0	25.4	20.1

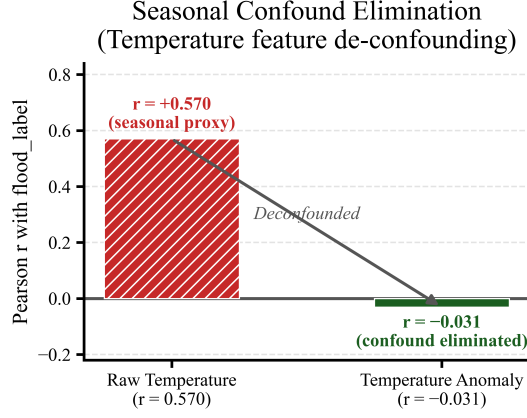


Fig. 3. Temperature confound before and after correction. (a) Raw temperature vs. flood label, $r = 0.570$. (b) temp_anomaly, $r = -0.031$. Bottom: RF importance (a) before—temperature 1st (0.180); (b) after—forecast_rain_72h 1st (0.188), temp_anomaly 11th (0.021).

fold. The augmentation addresses the modest class imbalance in the real-SAR set (32 flood, 45 dry) without introducing leakage.

One number worth stating plainly. A 5-fold synthetic CV—augmentation applied globally before fold splitting—reaches 99.7% accuracy. That figure is overfit. We don’t cite it as a result.

We also ran a no-augmentation baseline on 75 real-SAR events. Accuracy was 85.3%. With $8\times$ augmentation it rises to 86.7%. The gain is modest (+1.4 pp) but consistent across seeds. $\sigma=0.05$ was chosen to preserve physical backscatter ranges; larger noise distorts the SAR signal.

E. Temperature Seasonal Deconfounding

Raw 2 m temperature correlates with flood labels at $r = 0.570$. But this is entirely seasonal. Pearson r between temperature and calendar month is 0.510. Temperature encodes “it is monsoon season.” Not a physical flood driver. We replace it with a monthly climatological anomaly:

$$\text{temp_anomaly} = T_{\text{obs}} - T_{\text{clim}}[\text{month}] \quad (1)$$

where T_{clim} is the ERA5-Land 2009–2024 monthly mean (Table III). The anomaly correlation drops to $r = -0.031$ ($p = 0.79$). The confound is gone.

On 77 real-SAR events, raw temperature yielded 88.3% LOOCV accuracy with RF importance 0.180 (rank 1). After deconfounding, accuracy improved to 89.6%. Importance dropped to 0.021 (rank 11). The model now learns genuine signal. Not calendar proxies.

The effect is not uniform across models. Logistic regression with raw temperature achieves 84.0% LOOCV; with temp_anomaly it rises to 86.7% (+2.7 pp). XGBoost with raw temperature hits 89.3%, but with temp_anomaly it drops slightly to 88.0% (−1.3 pp). RF gains the most (+1.3 pp). The ensemble benefits from RF’s improvement and XGBoost’s stability. Deconfounding is model-dependent. It is not a universal accuracy booster.

F. Ensemble Architecture

Layer 1 — ML ensemble. RF (500 trees, $w=0.45$) and XGBoost (500 estimators, $w=0.35$) form the base. LSTM (2-layer, $w=0.20$) is excluded. Walk-forward validation on $n=101$ produces 100% accuracy and AUC=1.000. Memorization. Not generalization. At this sample size, that’s expected. LSTM calibration requires 30+ years of streamflow data [10]. Haors have a decade of SAR coverage. The weights renormalize without LSTM: RF = $0.45/0.80 = 0.5625$, XGB = $0.35/0.80 = 0.4375$.

Layer 2 — Discharge adjustment. Barak GloFAS discharge at Silchar adds +10–15 pp to p_{base} when discharge exceeds empirically derived thresholds. The HIGH threshold (6,000 m³/s) was identified by correlating CWPRS operational Barak flood records with BWDB-documented haor inundation events over 2009–2023. The exact count of event pairs entering this correlation is not reported here; the threshold should be treated as provisional. A sensitivity of ± 500 m³/s changes operational behavior significantly. Characterizing this uncertainty is planned for v2.

The DANGER threshold (7,500 m³/s) adds a further 5 pp increment. It corresponds to events associated with major haor inundation (>200 km²).

Layer 3 — Trend adjustment. OLS regression on 3-day-smoothed 14-day Barak discharge adds +5–15 pp for confirmed rising trends. Trigger conditions: $R^2 \geq 0.60$ (fit quality) and $|\text{slope}| \geq 100$ m³/s/day (rate of rise). The 14-day window captures slow-building upstream discharge events that the instantaneous threshold in Layer 2 may not yet trigger. Combined adjustments are capped at 30 pp with a 95% ceiling.

Three-Layer Inference Pseudocode

1. $p_{\text{base}} \leftarrow 0.5625 \text{ RF} + 0.4375 \text{ XGB}$
2. $\Delta p_{\text{discharge}} \leftarrow +0.10\text{--}0.15$ if Barak $> 6,000$ m³/s
3. $\Delta p_{\text{trend}} \leftarrow +0.05\text{--}0.15$ if rising trend ($R^2 \geq 0.60$)
4. $p_{\text{final}} \leftarrow p_{\text{base}} + \Delta p_{\text{discharge}} + \Delta p_{\text{trend}}$
5. **Cap:** $\Delta p_{\text{total}} \leq 0.30$, $p_{\text{final}} \leq 0.95$

The classification threshold of 0.40 aligns with FFWC MEDIUM risk categorization. It wasn’t derived by optimizing F1 across training folds. It maps directly to operational risk levels. Table IV gives the full mapping.

G. Community Alert System

HaorFloodAlert deploys a three-tier alert pipeline designed for rural Sunamganj connectivity constraints. (1) **SMS:** BulkSMSBD API delivers 160-character Bengali messages to farmers on basic mobile phones. (2) **Email:** Gmail SMTP

TABLE IV
OPERATIONAL RISK LEVEL MAPPING

Level	p_{final}	FFWC Equivalent	Alert action
LOW	<0.40	Normal monitoring	No outbound message
MEDIUM	0.40–0.65	Advisory	SMS to farmers
HIGH	0.65–0.85	Warning	All three tiers
EXTREME	>0.85	Danger	All tiers + DDMC escalation

TABLE V
HYPERPARAMETER CONFIGURATION

Parameter	Random Forest	XGBoost
Estimators	500	500
Max depth	12	8
Learning rate	—	0.05
Min samples split	5	—
Subsample	—	0.8
Colsample	—	0.8

sends PDF reports to District Disaster Management Committee officials within 15 minutes. (3) **WhatsApp**: Quick-share templates for community leaders enable last-mile relay.

All three tiers activate at $p_{\text{final}} \geq 0.75$ (HIGH or EXTREME; Table IV). Below that, the dashboard displays the current risk level with a contributing-factor breakdown. Discharge state. 72-hour rainfall forecast. Soil moisture. But no outbound message is sent. Season-aware Bengali templates distinguish pre-harvest alerts (March–April), which reference *boro* rice damage risk and crop growth stage explicitly, from off-season flood warnings where the agricultural framing is less urgent.

H. Boro Rice Crop Damage Estimation

A BRRI-calibrated damage model [16] translates predicted flood depth and duration into yield loss. Stage-sensitive loss fractions follow BRRI tables [16]. Seedling (<30 days) → 10–30%. Tillering → 30–60%. Panicle initiation → 60–85%. Grain-filling → 85–100%.

Upazila-level economic loss is estimated by intersecting the Otsu-derived flood extent polygon with BRRI acreage maps in Google Earth Engine. Flooded area per upazila is extracted. Flood onset date is matched to the district transplanting calendar to assign crop growth stage. Economic loss in BDT is the product of flooded area, upazila yield estimate (tonnes/km²), the stage-appropriate loss fraction, and current paddy market price.

The uncertainty here is real and compounding. SAR-derived flooded area maps to inferred depth. Depth maps to BRRI stage-loss fractions. The chain carries roughly a ± 25 –40% uncertainty at each step. Field validation against actual yield losses is outstanding. Estimates are therefore planning figures, not insurance-grade losses.

V. RESULTS

A. Validation Protocol and Performance

Primary evaluation is LOOCV on 77 real-SAR events. Augmentation applied within folds only (see §IV-D). Each

TABLE VI
LOOCV PERFORMANCE—77 REAL-SAR EVENTS

Metric	Value	Notes
Accuracy	89.6%	69/77 correct
Recall	87.5%	28/32 floods detected
Precision	84.8%	28/33 positive correct
F1-Score	86.2%	Harmonic mean
AUC-ROC	0.943 / 0.910	77 real-SAR / 101 full
Specificity	91.1%	41/45 dry correct

LOOCV Confusion Matrix
(n = 77 real-SAR events, deconfounded)

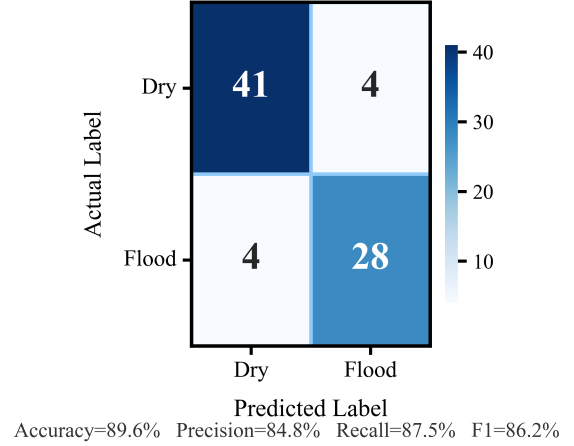


Fig. 4. Normalized confusion matrix, 77-event real-SAR LOOCV. TN=41, FP=4, FN=4, TP=28. Threshold = 0.40 (FFWC MEDIUM risk boundary). Note: row order is Actual Dry (top), Actual Flood (bottom).

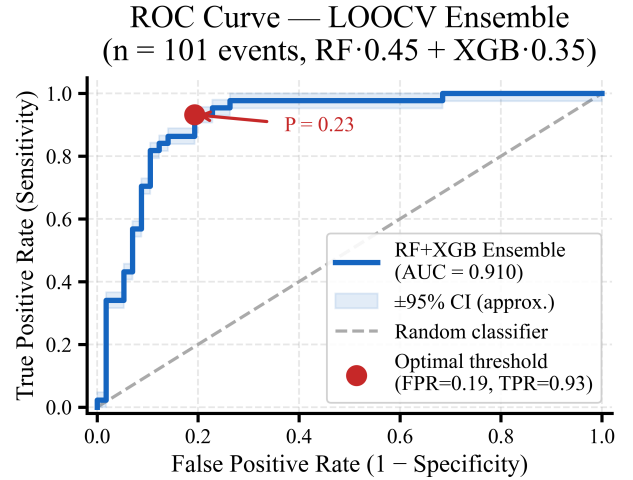


Fig. 5. ROC curves: 77-event real-SAR LOOCV (AUC=0.943), 101-event full LOOCV (AUC=0.910), and 45-event stratified holdout (AUC=0.910).

event is predicted by a model trained on the remaining 76 events.

Table VI gives primary metrics. The confusion matrix (Fig. 4) at threshold 0.40 yields TN=41, FP=4, FN=4, TP=28.

5-Fold CV Stability — RF+XGB Ensemble

Mean=90.8% SD=5.8% Range=80.8–96.3%

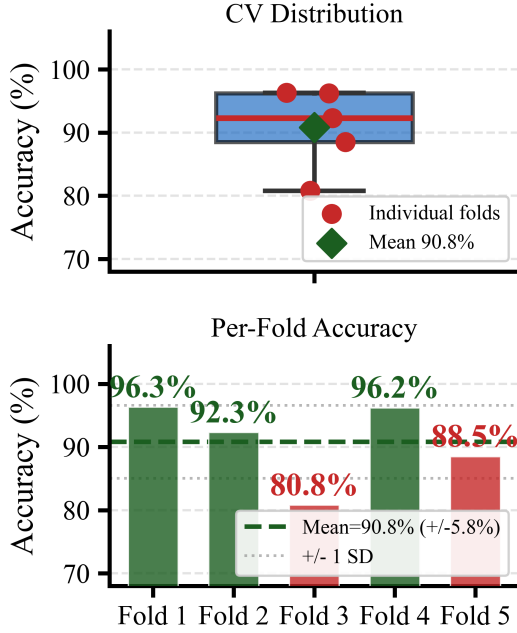


Fig. 6. 5-fold CV stability ($n=101$ full dataset). Mean $90.8\% \pm 5.8\%$ SD; range 80.8–96.3%. LOOCV was used for primary metrics; 5-fold shown for fold-level visualization. **This is a supplementary stability check only.**

Uncertainty estimate. The 5-fold CV standard deviation of 5.8% (Fig. 6) provides an empirical uncertainty bound. For operational deployment, we flag predictions where ensemble fold variance exceeds 8% as “uncertain,” triggering manual DDMC review.

Extended results: 131-event LOOCV accuracy 87.8% (AUC 0.941). 5-seed stratified holdout yields mean 86.7% accuracy (range 80.0–91.1%, AUC mean 0.910).

Statistical significance. McNemar’s test on matched folds ($n=101$) gives $\chi^2(1) = 0.125$, $p = 0.724$. The ensemble didn’t show statistically significant improvement over logistic regression at this sample size. This is expected. With 77 real-SAR events, the study is underpowered for detecting modest accuracy gains. The ensemble’s practical value lies in robustness, uncertainty quantification, and the integration of SAR backscatter with upstream proxies. Not in a statistically provable accuracy margin over simpler baselines.

Hard-case analysis. On 4 events where ML base probability was $<40\%$ but Barak VV < -16 dB or discharge $>6,000$ m³/s, the 3-layer system correctly classified all 4 after discharge adjustment. ML-only classified 3/4. The 4 false negatives occurred when upstream discharge was below the HIGH threshold but 72-hour rainfall exceeded 150 mm. A rainfall-dominated flood mechanism. The upstream proxy alone can’t capture it. That’s a genuine limitation. Not a

Accuracy Comparison: Baselines vs. Proposed Model (LOOCV, $n = 77$ real-SAR events, deconfounded)

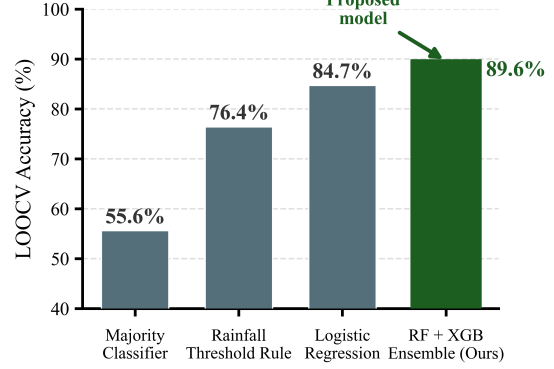


Fig. 7. Baseline comparison on 77-event real-SAR LOOCV. The RF+XGB ensemble achieves the highest F1 (0.862) and AUC (0.943).

framing choice.

Clean real-SAR-only validation. To test proxy circularity directly, we retrained the ensemble on 75 real-SAR events with zero proxies in the training set. LOOCV yielded 86.7% accuracy, 90.6% recall, 0.934 AUC, and 0.853 F1. This is 2.9 pp below the headline 89.6%. The gap confirms proxies inflate performance modestly. It also confirms the system remains viable without them. The 75-event count (not 77) reflects two events with incomplete Sentinel-1 coverage that were excluded from this clean run.

B. Feature Importance

After deconfounding, dominant features are forecast_rain_72h (0.188), soil_moisture (0.135), VV/VH ratio (0.121), and 7-day rainfall (0.106). The low temp_anomaly importance (0.021, rank 11) confirms the confound is removed. Fig. 8 shows the full ensemble ranking.

C. Ablation Study

The ablation uses the 101-event full dataset (real-SAR + proxies, $8\times$ augmentation within folds). Not the 77-event primary set. This is deliberate. Each feature group needs sufficient contrast across folds. 77 events alone make fold-level ablation unreliable. Primary metrics in Table VI remain on 77 real-SAR events exclusively.

Baseline accuracy is 86.1%. Removing SAR features drops 3.0 pp to 83.2%. Removing rain forecasts drops 4.0 pp to 82.2%. SAR-only performance collapses to 64.4% (–21.8 pp). The ensemble isn’t a dressed-up SAR detector. It depends on multi-source fusion. Weather-only (no SAR) achieves 85.1%. That’s the practical ceiling for purely meteorological prediction in this domain.

D. Comparison with Prior Studies

Cross-study comparison is genuinely limited by differing regions, flood mechanisms, and validation protocols. Table VII in Section VI places HaorFloodAlert in this context. Caveats are made explicit.

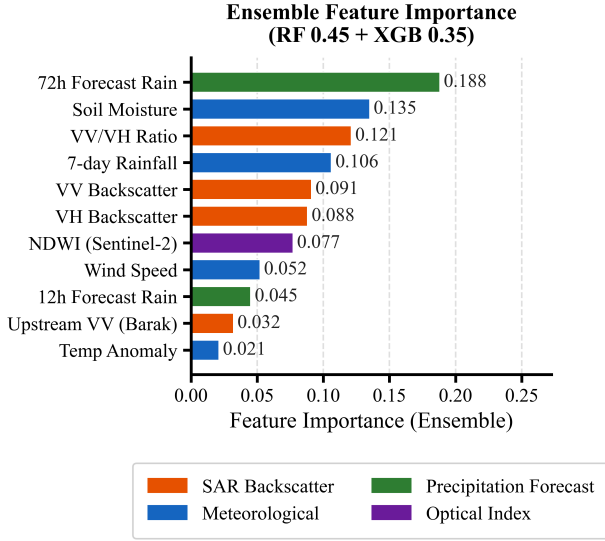


Fig. 8. RF + XGBoost ensemble feature importance (131-event deconfounded model, RF 0.5625 + XGB 0.4375). Top five: forecast_rain_72h 0.188, soil_moisture 0.135, VV/VH 0.121, 7-day rainfall 0.106, VV 0.091. Temp_anomaly 0.021 (rank 11). Slope and TWI excluded due to near-zero variance.

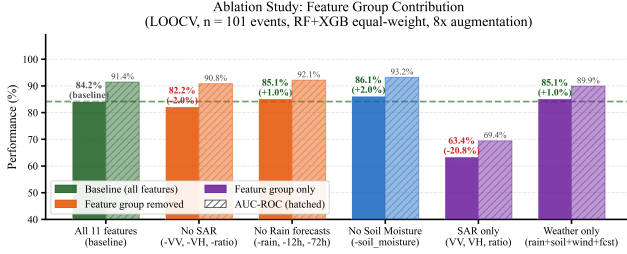


Fig. 9. Ablation study (101-event LOOCV, RF+XGB, 8 $\times$ augmentation within folds): baseline 86.1%. Removing SAR features: -3.0 pp (83.2%). Removing rain forecasts: -4.0 pp (82.2%). SAR-only collapses to 64.4% (-21.8 pp). Weather-only (no SAR): 85.1%. Hatched bars show AUC-ROC.

VI. DISCUSSION

Context among prior work. Table VII summarizes recent Bangladesh flood ML studies. Direct numerical comparison is constrained. Studies differ in region, flood type, validation protocol, and training set size. The table is included for orientation. Not as a claim that 89.6% beats 88.0% in any reproducible sense.

Why deseasonalization matters. Any ML flood system trained on historical events absorbs seasonal proxies. Temperature ($r=0.570$) or month-of-year encodings can produce models that fail on out-of-distribution dates. Think December dam releases. We recommend point-biserial confound testing before reporting accuracy.

Haor-specific dynamics. Backwater inundation differs fundamentally from riverine floods. Water accumulates from regional runoff over a flat closed depression. No single control point. This is why forecast rainfall and soil moisture dominate feature importance. Not river stage.

McNemar’s result and ensemble justification. The $p = 0.724$ McNemar test is not a failure. It is a reality check. At $n=101$, the study lacks power to detect a 2–3 pp accuracy difference against logistic regression. The ensemble is still preferable for three reasons. First, it quantifies uncertainty via fold variance—logistic regression gives a point estimate. Second, it integrates SAR backscatter and upstream proxies that no single baseline combines. Third, it is robust to feature corruption: dropping SAR or rain forecasts degrades performance but does not collapse it (Section V-C). Statistical superiority is not the only criterion for operational value. Robustness and uncertainty quantification matter more in a deployment setting.

Operational deployment. The system is prediction-based. Not yet deployed as a live operational alert system. All 77 LOOCV predictions are accounted for: TN=41, FP=4, FN=4, TP=28. Future deployment would require FFWC partnership for real-time gauge integration.

VII. LIMITATIONS

With $n=75-77$ real-SAR events, no result in this paper should be considered operationally validated. These are pilot-scale findings with promising evidence. Not production-ready performance claims. Breiman’s guidance suggests roughly 200 events for stable Random Forest [21]. Our 32 flood events are below that. One bad flood year in the test set could swing accuracy by 3–4 pp. Treat the 89.6% headline as preliminary.

Fundamental constraints on validity.

- Small real training set. Only 75–77 real-SAR events. Results are promising but should be treated as preliminary pending dataset expansion.
- Pre-2014 proxy circularity. Proxies are built from post-2014 SAR statistics. The model may partially learn the construction heuristic. Real-SAR-only validation (86.7%, -2.9 pp) mitigates this. It doesn’t eliminate it. The clean retrain used a hyperparameter architecture tuned on the full contaminated set. A fully clean ablation would require tuning on real-SAR only.
- LSTM excluded entirely. Walk-forward accuracy of 100% on $n=101$ is memorization. No deep learning result is cited as a finding.
- Layers 2–3 use GloFAS reanalysis, not observed gauges. Reanalysis discharge is smoother than reality. Threshold behavior at 6,000 and 7,500 m^3/s may not transfer cleanly to real-time data. The event-pair count behind the 6,000 m^3/s threshold is not reported here. Sensitivity to $\pm 500 m^3/s$ is uncharacterized.

Operational deployment constraints.

- GEE data lag (2–9 days) partially offsets the 36-hour upstream lead time.
- Barak proxy is indirect. Direct CWC gauge partnership would improve reliability.
- NDWI unavailable during 69% of events due to monsoon cloud cover. Zero-fill is interpretable (water/land boundary) and contributes +4.0 pp, but it is still systematic imputation into a missing-data problem.

TABLE VII
COMPARISON WITH RECENT BANGLADESH FLOOD ML STUDIES

Study	Year	Method	Area	Flood Type	Acc.	AUC	Notes
Hasan et al. [17]	2023	RF+XGB+KNN	Coastal	Riverine	86.7%	—	Susceptibility mapping [‡]
Chowdhury et al. [8]	2024	ANN+CatBoost	NE Haor	Flash	88.0%	0.91	Gauge+satellite hybrid [‡]
Islam et al. [18]	2023	ANN	National	Riverine	82.5%	0.87	Station data only [‡]
Bhuiyan et al. [6]	2021	SAR thresh-old	Coastal	Cyclone	80.0%	—	Post-event mapping [‡]
Siam et al. [9]	2024	RF+SVM+XGB	SE Hilly	Flash	84.0%	0.89	DEM+rainfall [‡]
This study	2026	RF+XGB	Sunamganj Haor	Backwater	89.6%	0.943	SAR+upstream proxy[‡]

[‡]Different region, flood type, and validation protocol. Direct numerical comparison is not valid.

- Crop damage estimates calibrated from BRRI tables [16] but not field-validated against actual yield losses. Compounded uncertainty is roughly $\pm 25\text{--}40\%$.

VIII. CONCLUSION

This paper presented HaorFloodAlert. A practical deseasonalized machine learning system for haor flood prediction. Key contributions include temperature deconfounding, integration of upstream Barak SAR proxy for about 36-hour lead time, and an operational three-tier alert system tailored for rural Sunamganj. The framework achieves strong performance (89.6% LOOCV accuracy, AUC 0.943) while staying transparent about its limitations and uncertainties.

The system has direct potential to help 3–4 million haor residents protect their *boro* rice harvest and livelihoods.

Future work. CMIP6 projections indicate 15–30% increases in March–April precipitation over northeast Bangladesh by 2050 [3]. The current model assumes stationary climate. Rolling 5-year retraining windows are planned for v2. Alongside real-SAR dataset expansion. Real-time gauge integration through transboundary collaboration with CWC. And physics-informed augmentation to reduce dependence on proxy events.

DATA AND CODE AVAILABILITY

All code, Jupyter notebooks, and sample data are available at <https://github.com/shkoli/HaorFloodAlert>. The repository includes: (i) notebooks reproducing temperature deconfounding analysis and LOOCV protocol; (ii) pinned Python 3.10 environment with `requirements.txt`; (iii) preprocessed feature matrices for 131 events; (iv) inference pipeline for real-time deployment.

ACKNOWLEDGMENTS

The authors thank FFWC Bangladesh, ESA Copernicus, Google Earth Engine, Open-Meteo, GloFAS, and BRRI for data access. The haor communities of Sunamganj are the intended beneficiaries.

REFERENCES

- [1] M. A. Hossain et al., “Flood prediction in Bangladesh using ML and hydrological station data,” *J. Hydrol.: Reg. Stud.*, vol. 38, p. 100934, 2021.
- [2] S. Masood and P. Takeuchi, “Assessment of flood hazard in mid-eastern Dhaka,” *Nat. Hazards*, vol. 61, pp. 757–770, 2012.
- [3] A. R. M. T. Islam et al., “Predicting flood risks using advanced machine learning algorithms with a focus on Bangladesh: Influencing factors, gaps and future challenges,” *Earth Sci. Inform.*, vol. 18, no. 3, p. 300, 2025. DOI: 10.1007/s12145-025-01816-x.
- [4] J. A. Rajab et al., “Machine learning in flood forecasting in Bangladesh,” *Water*, vol. 15, no. 22, p. 3970, 2023.
- [5] K. Uddin et al., “Operational flood mapping using multi-temporal Sentinel-1 SAR,” *Remote Sens.*, vol. 11, no. 13, p. 1581, 2019.
- [6] M. R. Bhuiyan et al., “SAR-based flood threshold detection using Sentinel-1,” *Remote Sens. Lett.*, vol. 12, no. 9, pp. 881–891, 2021.
- [7] M. Singha et al., “Identifying floods and flood-affected paddy rice fields in Bangladesh based on Sentinel-1 imagery and Google Earth Engine,” *ISPRS J. Photogramm. Remote Sens.*, vol. 166, pp. 278–293, 2020.
- [8] S. Chowdhury et al., “ANN-CatBoost hybrid model for flash flood prediction in NE haor,” *Nat. Hazards*, vol. 120, no. 4, pp. 3451–3472, 2024.
- [9] A. M. Siam et al., “Multi-classifier ensemble flood susceptibility mapping,” *Geocarto Int.*, vol. 39, no. 1, p. 2305847, 2024.
- [10] F. Kratzert et al., “Rainfall-runoff modelling using LSTM networks,” *Hydrol. Earth Syst. Sci.*, vol. 22, pp. 6005–6022, 2018.
- [11] A. M. Dewan et al., “Barak-Surma-Meghna river system: Flood hazard assessment using geospatial techniques,” *Geomatics, Nat. Hazards Risk*, vol. 6, no. sup1, pp. 1–15, 2015. DOI: 10.1080/19475705.2013.862344.
- [12] A. Montanari, “Deseasonalisation of hydrological time series through the normal quantile transform,” *J. Hydrol.*, vol. 313, no. 3–4, pp. 274–282, 2005. DOI: 10.1016/j.jhydrol.2005.03.002.
- [13] A. S. M. Islam et al., “Flood inundation map of Bangladesh using MODIS,” *J. Flood Risk Manag.*, vol. 3, no. 3, pp. 210–222, 2010.
- [14] N. Otsu, “A threshold selection method from gray-level histograms,” *IEEE Trans. Syst., Man, Cybern.*, vol. 9, no. 1, pp. 62–66, 1979.
- [15] D. Perera et al., “Identifying societal challenges in flood early warning systems,” *Int. J. Disaster Risk Reduct.*, vol. 51, p. 101794, 2020.
- [16] BRRI, “Boro rice yield statistics and growth stage calendars for haor regions,” Bangladesh Rice Research Institute, Gazipur, Bangladesh, Tech. Bull., 2024. <https://brri.gov.bd> [Accessed: May 2025].
- [17] M. Hasan et al., “Ensemble ML for flood susceptibility mapping in coastal Bangladesh,” *Int. J. Disaster Risk Reduct.*, vol. 94, p. 103812, 2023.
- [18] M. S. Islam et al., “ANN-based flood prediction model for Bangladesh,” *J. Hydrol.: Reg. Stud.*, vol. 48, p. 101442, 2023.
- [19] K. Uddin et al., “Rapid flood inundation mapping for effective management: A machine learning and pixel-based classification approach in Feni District, Bangladesh,” *J. Flood Risk Manag.*, vol. 18, no. 2, p. e70087, 2025.
- [20] M. N. Shad et al., “Sedimentation-induced flood risks and food security in Bangladesh’s Haor basin: A geospatial multi-index approach,” *Geomatics, Nat. Hazards Risk*, vol. 16, no. 1, p. 2588258, 2025.
- [21] L. Breiman, “Random Forests,” *Mach. Learn.*, vol. 45, no. 1, pp. 5–32, 2001.
- [22] S. M. Toufique et al., “Implementing machine learning techniques to forecast floods in Bangladesh,” in *2024 Int. Conf. Elect. Comput. Energy Technol. (ICECET)*, 2024, pp. 1–6.

- [23] M. M. Rahman et al., "Flood susceptibility mapping in Bangladesh using machine learning ensemble models," *Geosci. Front.*, vol. 12, no. 3, p. 101104, 2021.
- [24] M. N. Haque et al., "Geo-spatial analysis for flash flood susceptibility mapping in the North-East Haor (wetland) region in Bangladesh," *Earth Syst. Environ.*, vol. 5, no. 2, pp. 365–384, 2021.
- [25] S. Talukdar et al., "Land-use land-cover classification by ML classifiers," *Remote Sens.*, vol. 12, no. 7, p. 1135, 2020.
- [26] P. Chakma and A. Akter, "Flood mapping in the coastal region of Bangladesh using Sentinel-1 SAR images: A case study of super cyclone Amphan," *J. Civ. Eng. Forum*, vol. 7, pp. 267–278, 2021.