



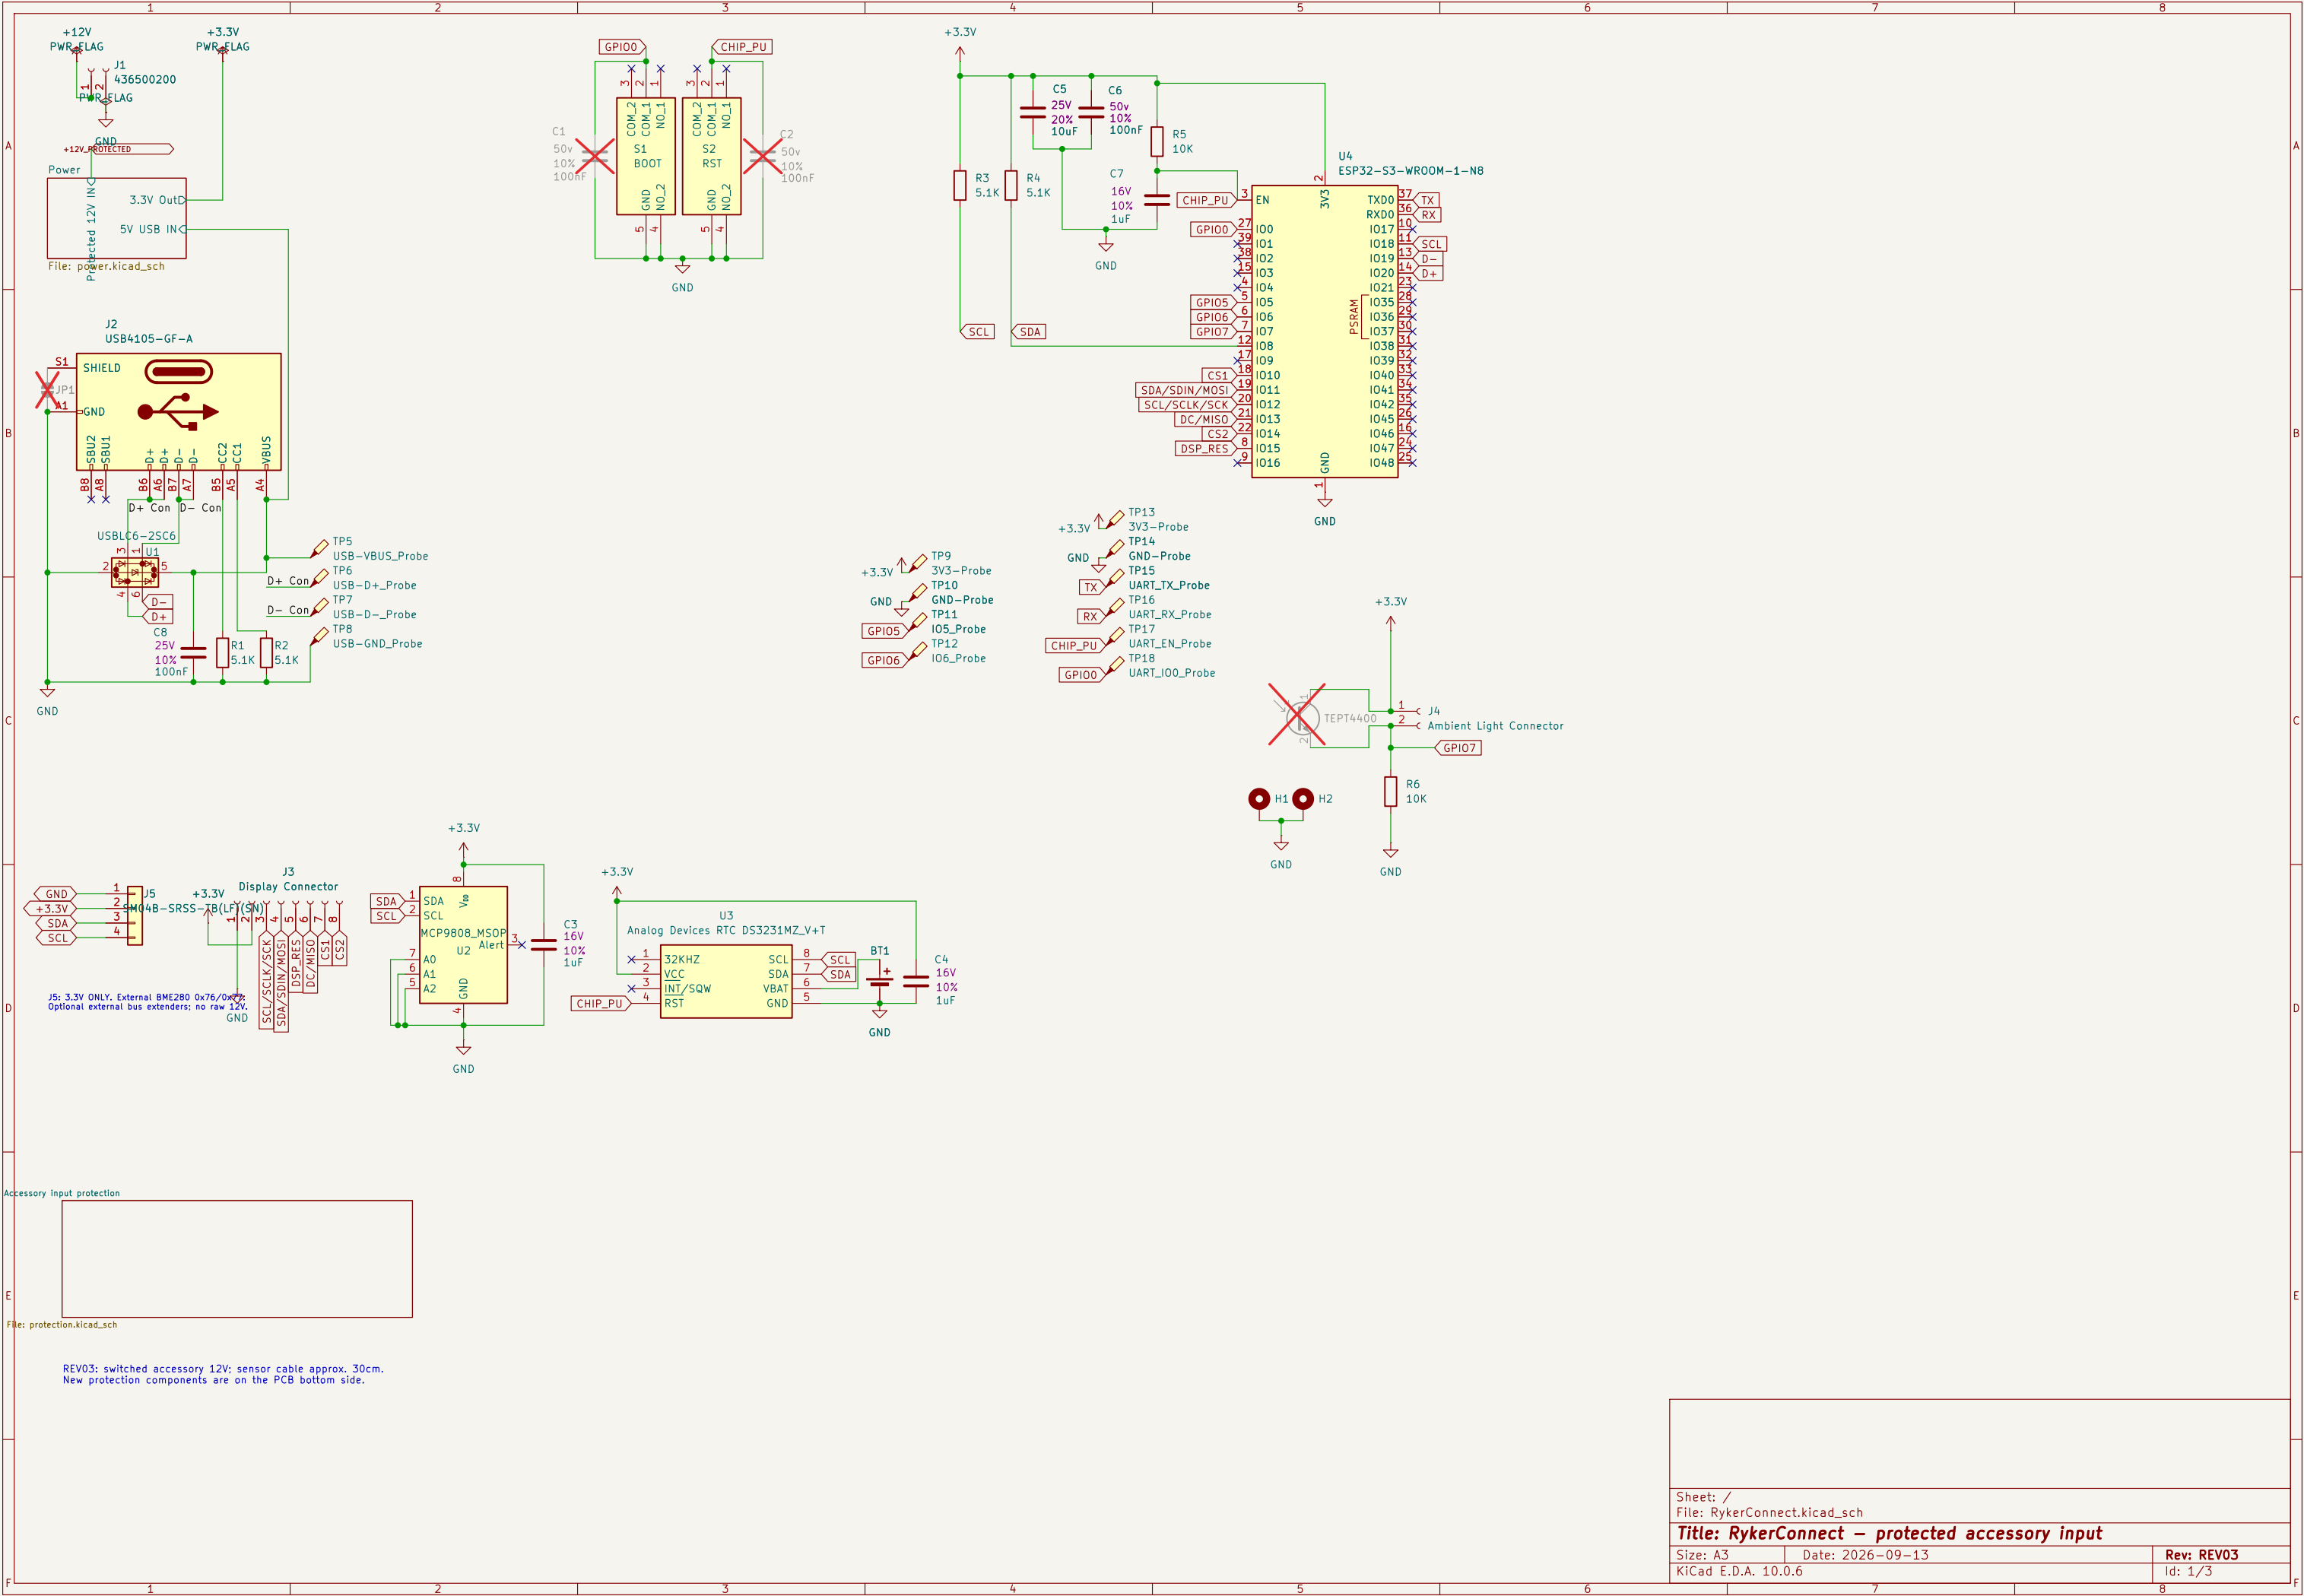

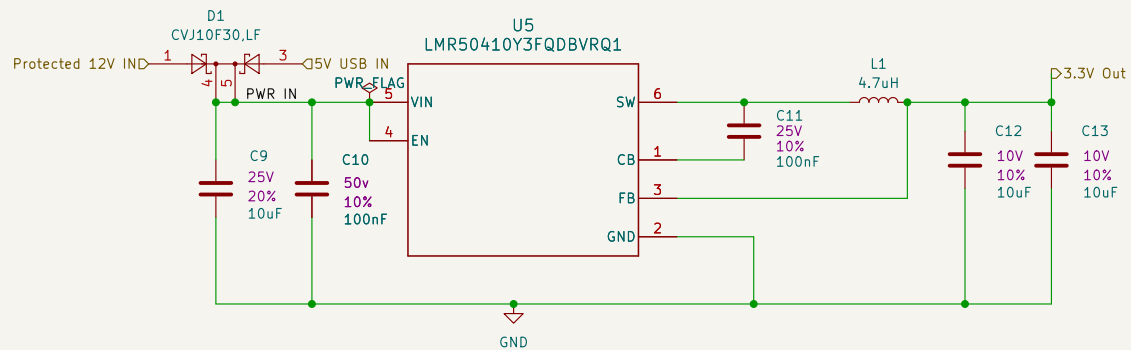

Sheet: /Power/
File: power.kicad_sch

Title: RykerConnect – protected accessory input

Size: A4 Date: 2026-09-13









Rev: REV03

KiCad E.D.A. 10.0.6

Id: 2/3

REV03 – switched accessory power protection

Normal 9-16V; nominal UVLO 5.95V, OV cutoff 17.85V, current limit 1A.
RTN is isolated from GND. MODE and SHDN intentionally open (internal bias).

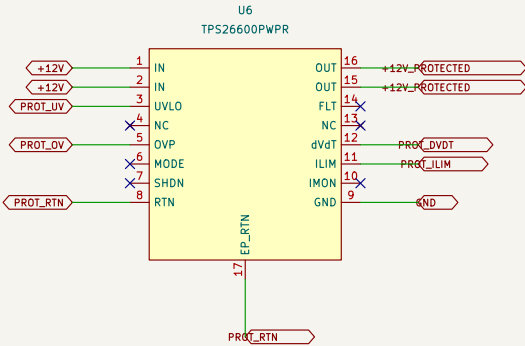

D2/D4: asymmetric TVS pair, common anodes; D3: cathode to protected output, anode to GND.
Requires fused accessory branch. Prototype surge/thermal tests required.
35V suppressed-load-dump target; unsuppressed load dump is not qualified.