

[illegible]

E	
---	--

File: sheet3.kicad_sch

File: sheet4.kicad_sch

Title: RykerConnect – Controller and connectors

Size: A3	Date: 2026-09-13	Rev: REV05-USB
KiCad E.D.A. 10.0.6		Id: 1/4

	7	8
--	---	---

8

Accessory protection

12V variant only: fused accessory input. RTN is isolated from GND.
USB variant: vehicle protection is external to this board.

+5V_EXTERNAL



Sheet: /Accessory protection/
File: sheet2.kicad_sch

Title: RykerConnect – Accessory protection


Size: A3

Date: 2026-09-13


Rev: REV05-USB

Size: A5	D
KiCad E.D.A. 10.0.6	

Id: 2/4

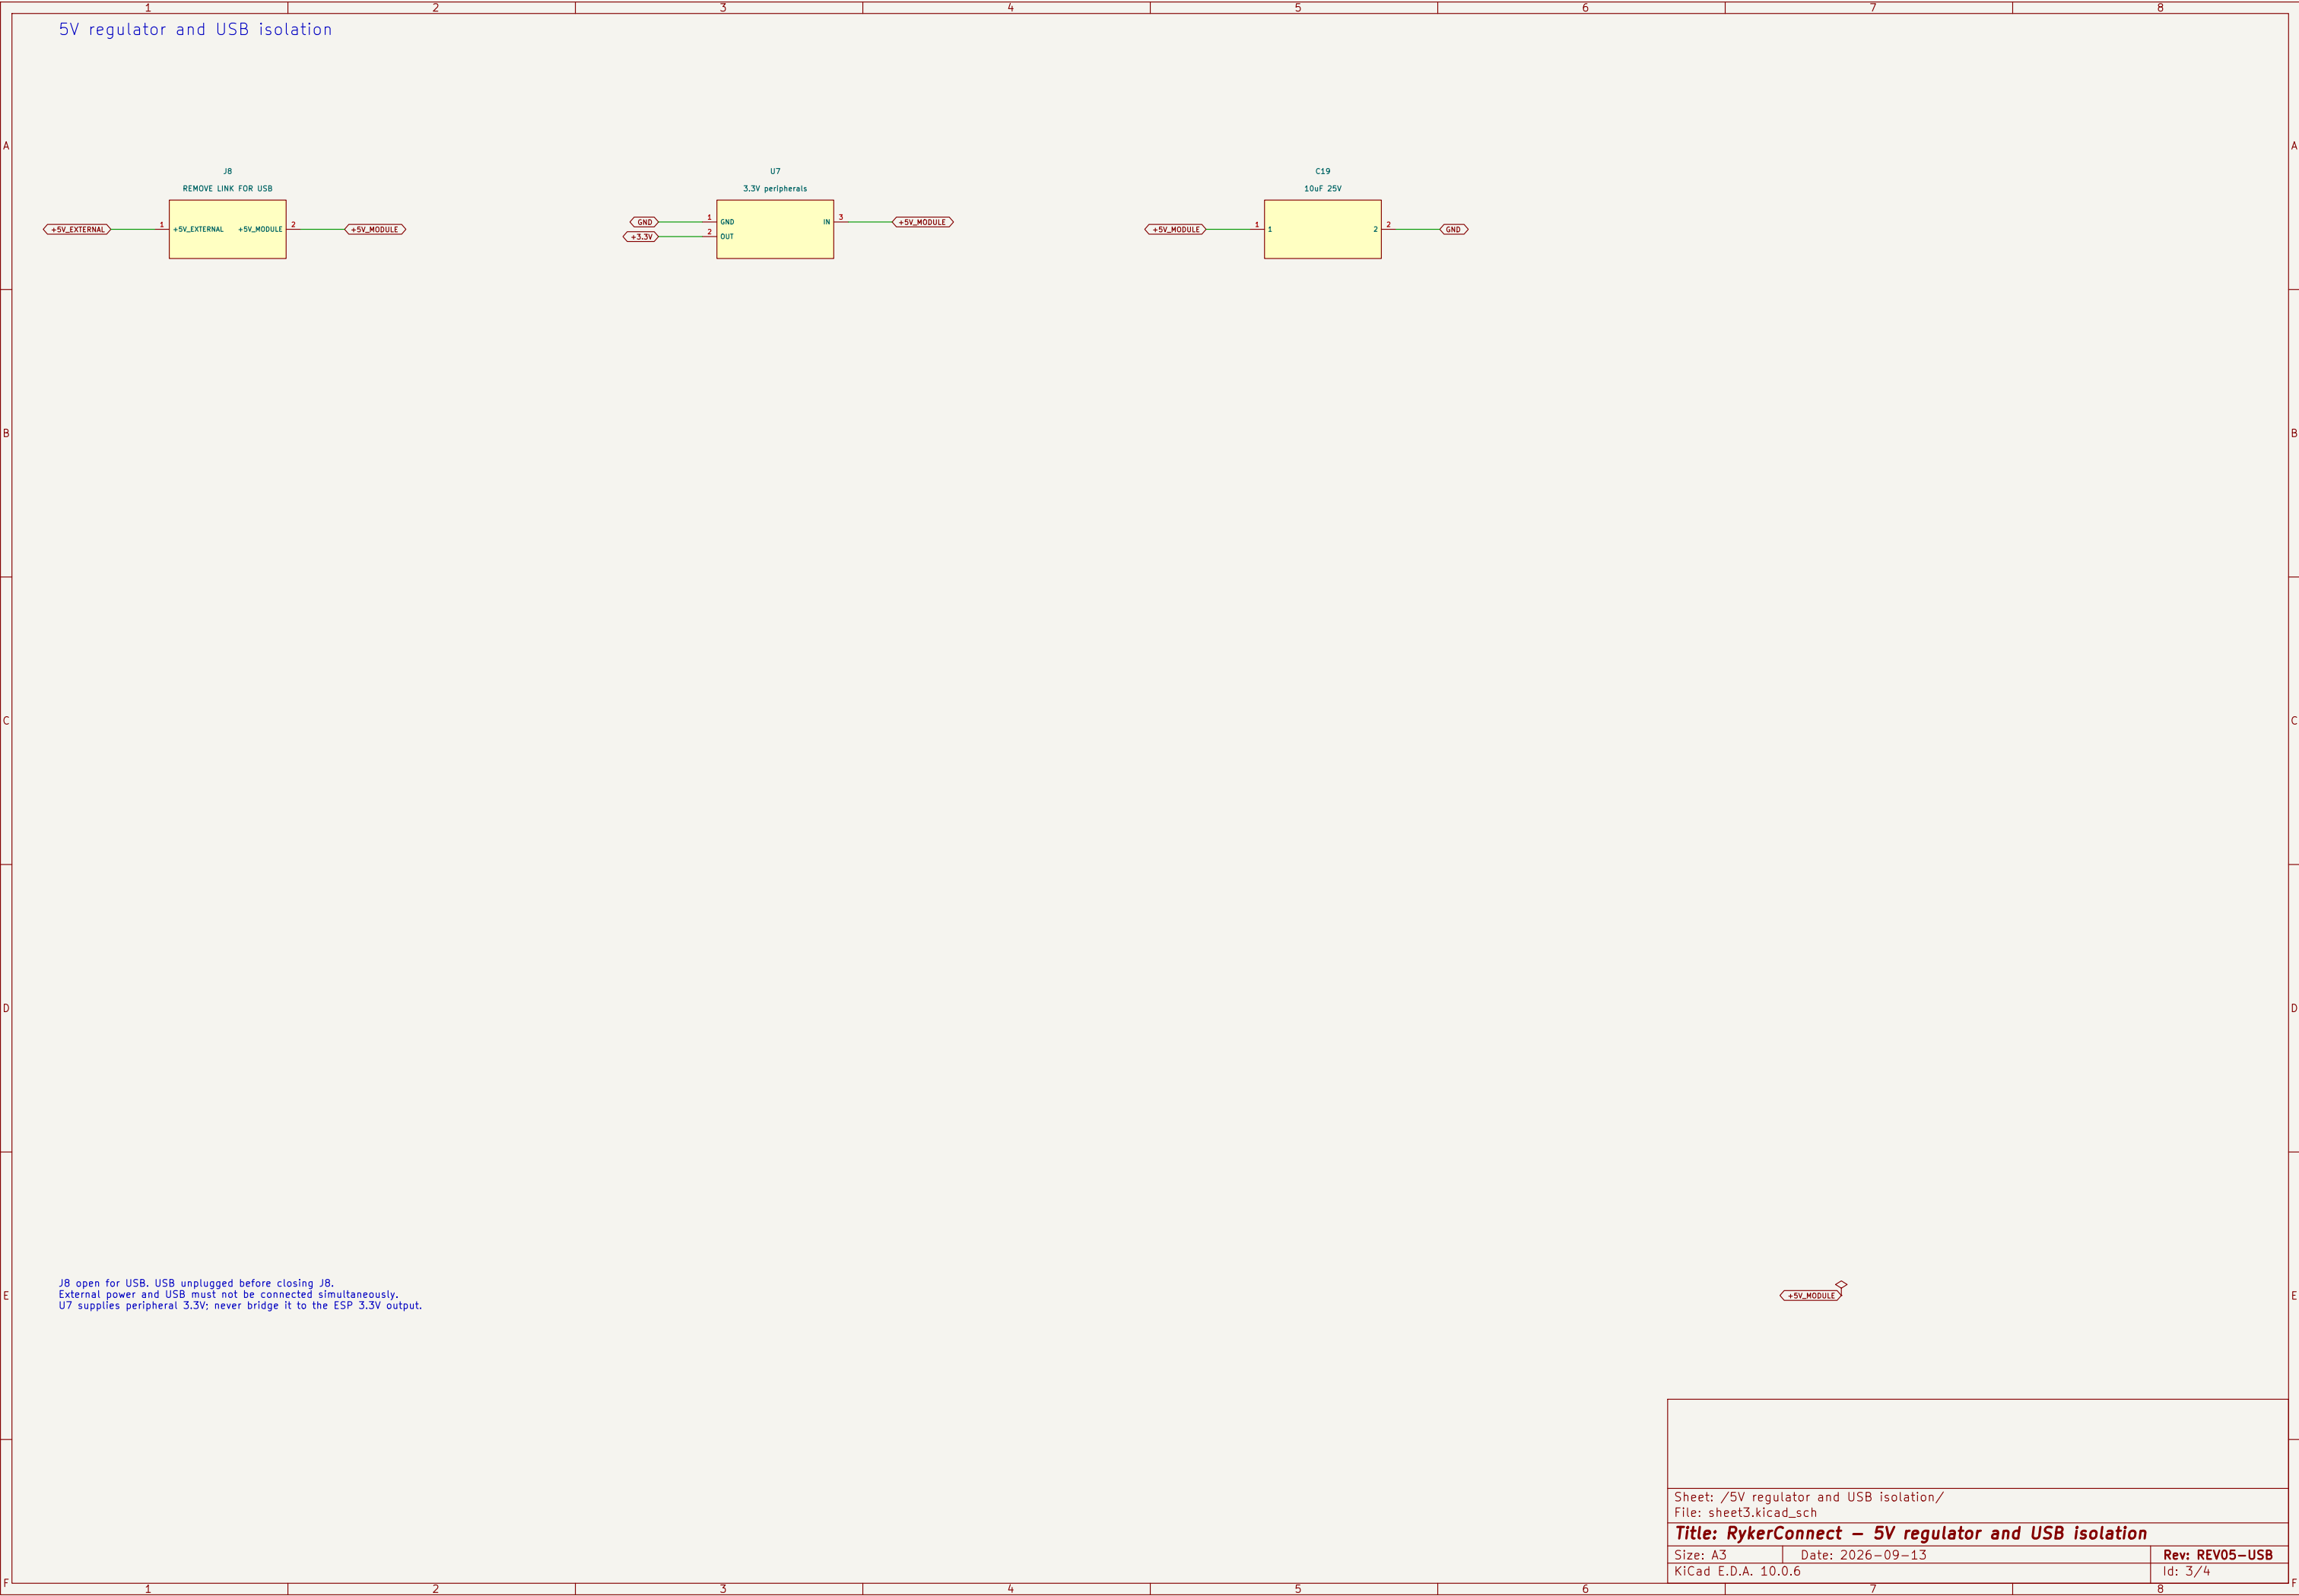

Battery-backed clock and light sensor

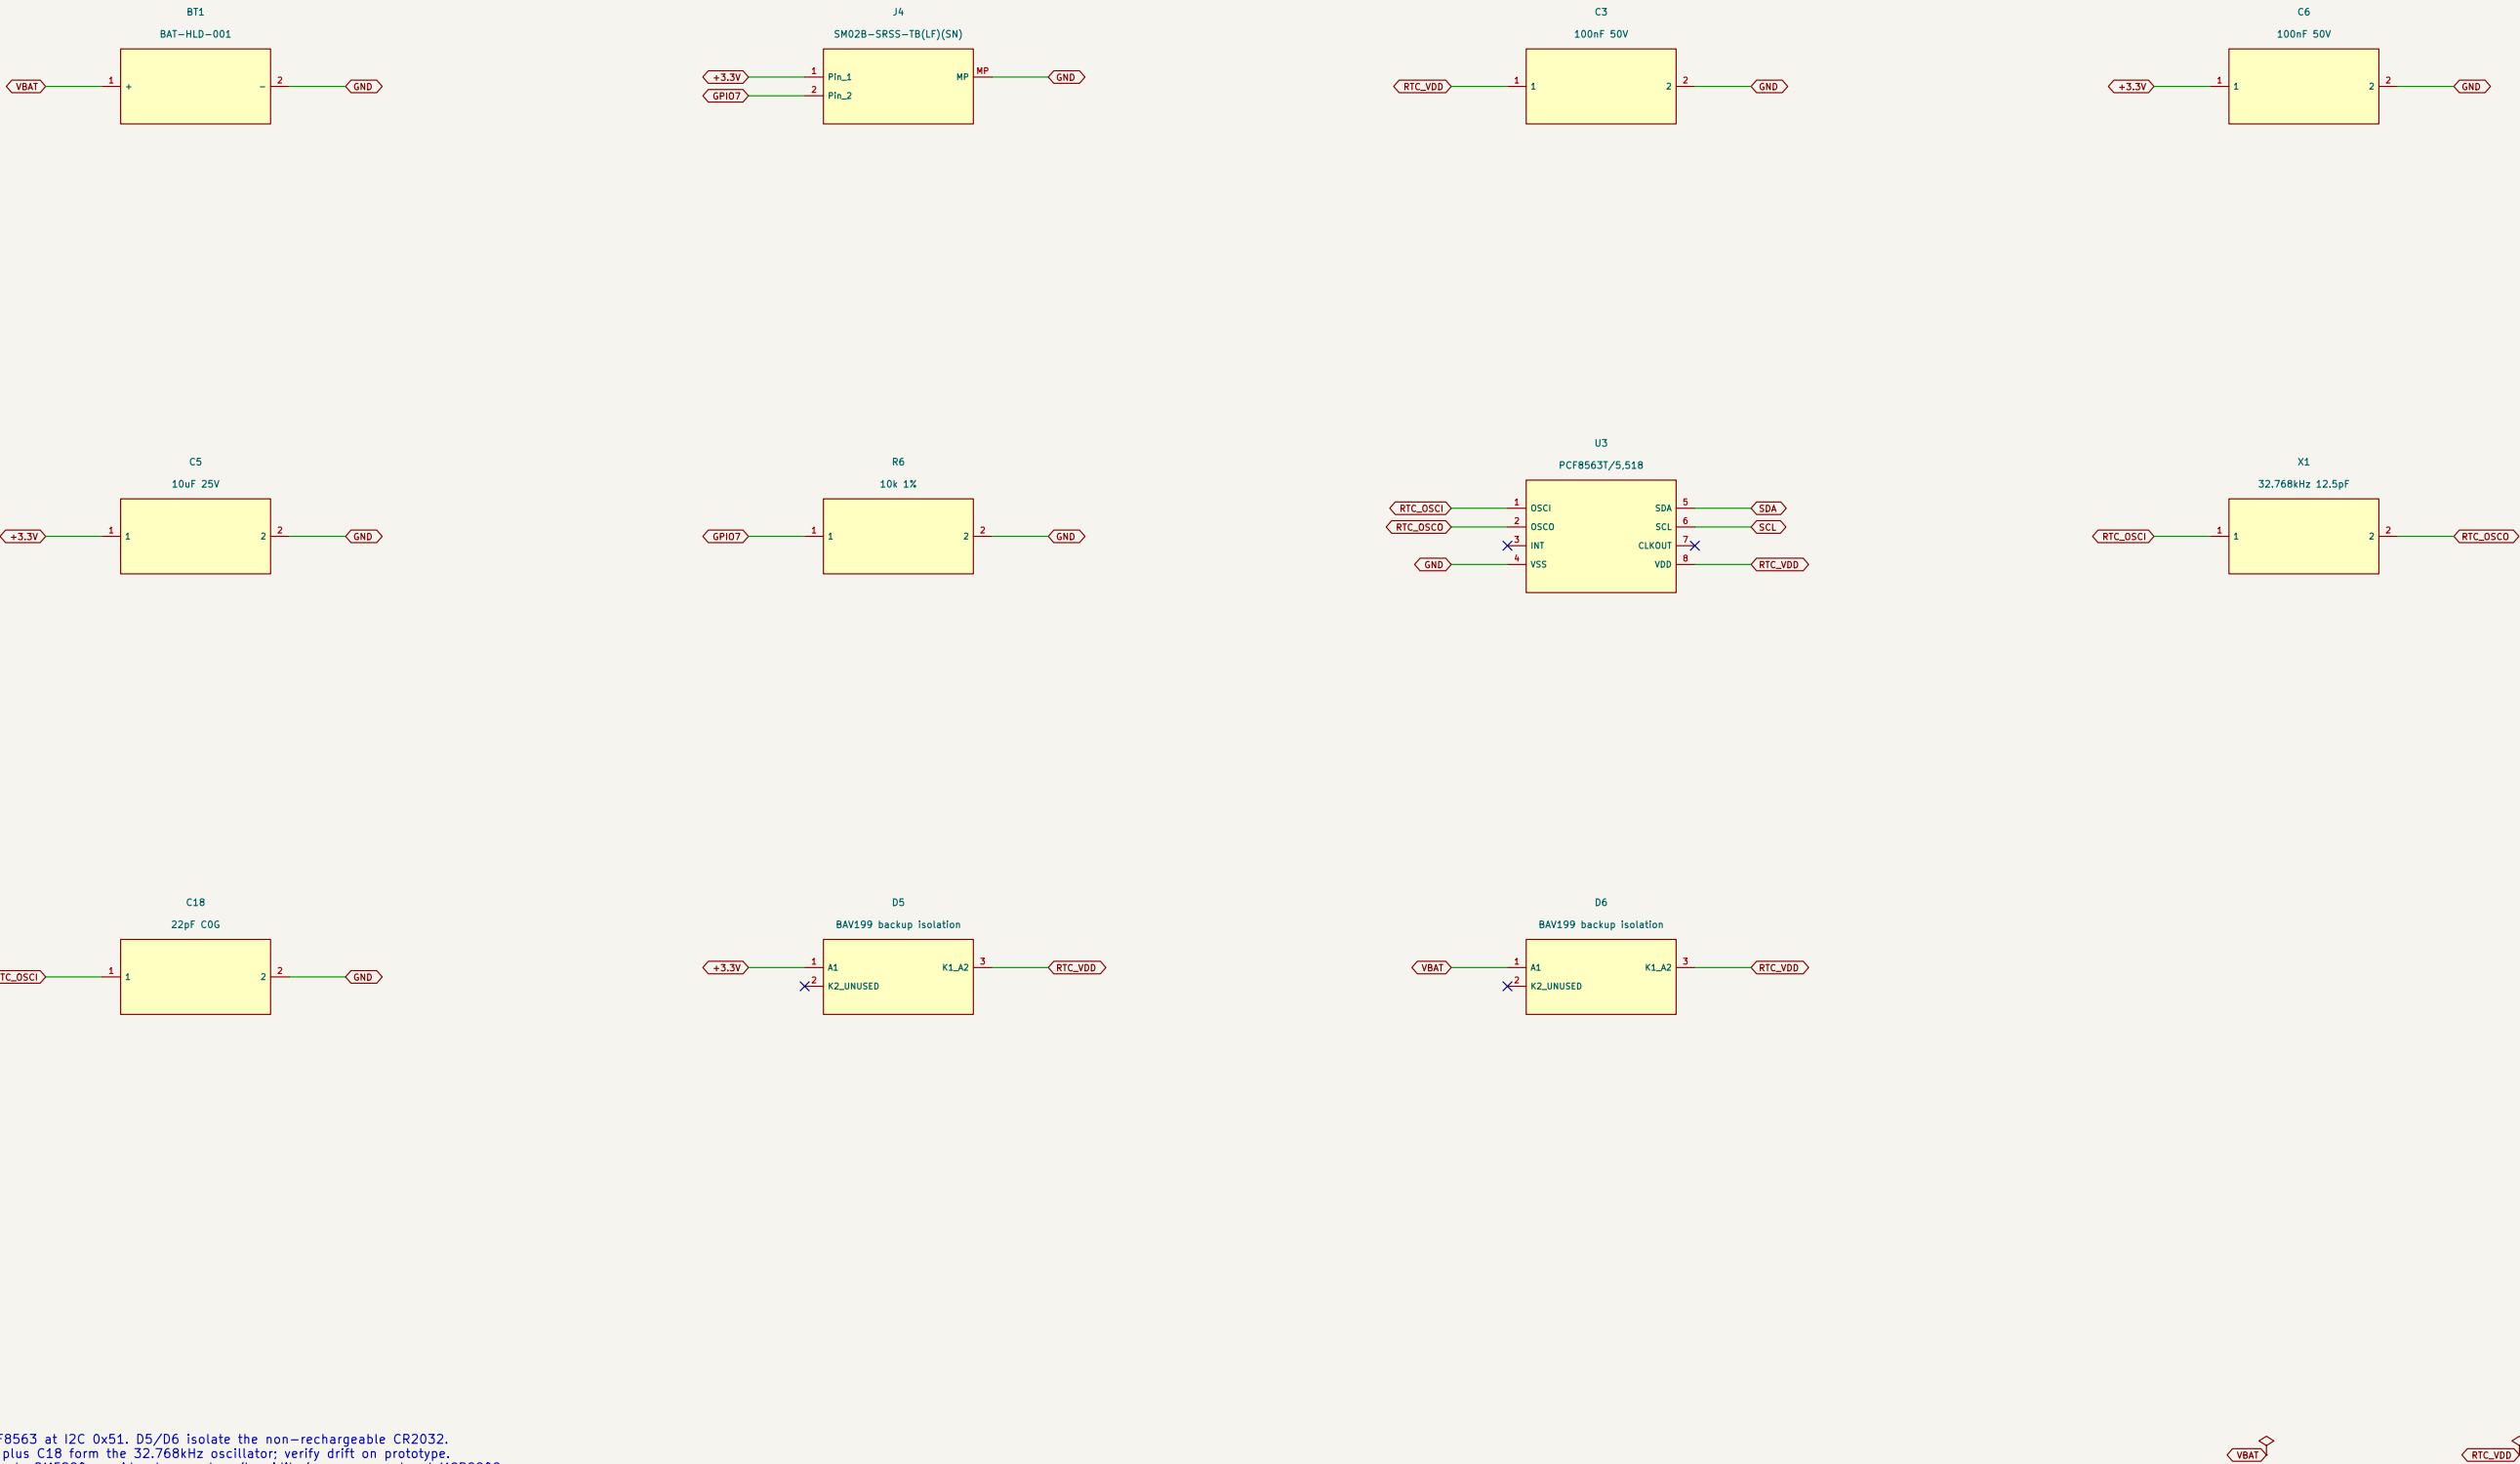

PCF8563 at I2C 0x51. D5/D6 isolate the non-rechargeable CR2032.
X1 plus C18 form the 32.768kHz oscillator; verify drift on prototype.
Remote BME280 provides temperature/humidity/pressure; no local MCP9808.