



Model: Roller Blinds

• Size: Custom

Support Material: Aluminum

Finish: Custom Finish

Installation: Optional

Brand: NERVAL

 Additional Feature: Wireless remote control available

 Operating Options: motorized or hand crank wand controls

Warranty: Limited 1 year

Features:

- · Stunning Roller blind fabric designs
- · A tremendous collection of colours
- Energy saving Roller blind fabrics
- · Can be motorized




General Information:

- Window Blind System is motorized or hand crank wand operated roller system utilizing a bidirectional, wrap spring clutch. The system is capable of smoothly raising and lowering the blind to any desired height and maintaining that height with no slippage. Different sizes are available based on the weight of fabric.
- Control End does not require any adjustment after installation. Clutch is mounted in the Control end of the roller tube. The Control End is made from glass filled nylon 5 construction..
- End plug(s) are spring loaded for easier installation. They shall be available in black or white and fit tightly into the roller tube.
- Mounting brackets are capable of mounting inside, outside, or to the ceiling, with the clutch on either the right or left end of the roller. All brackets are made of galvanized steel zinc plated and powder coated finish.
- Roller tube is 40mm aluminium tubing, with the maximum degree of Torsional strength and maximum resistance to tube deflection. Tubes are available in 1-1/4" or 1-1/2" sizes, based on overall width of roller(s)
- Fabric is attached to the tube with an adhesive strip. A minimum of one turn of fabric must be placed on the roller before the working section of fabric starts.
- Bottom options includes an internal and external bottom bars. External bottom bar is aluminum in an oval shape, and are available in white, black, alabaster, and anodized.



Hardware Details:

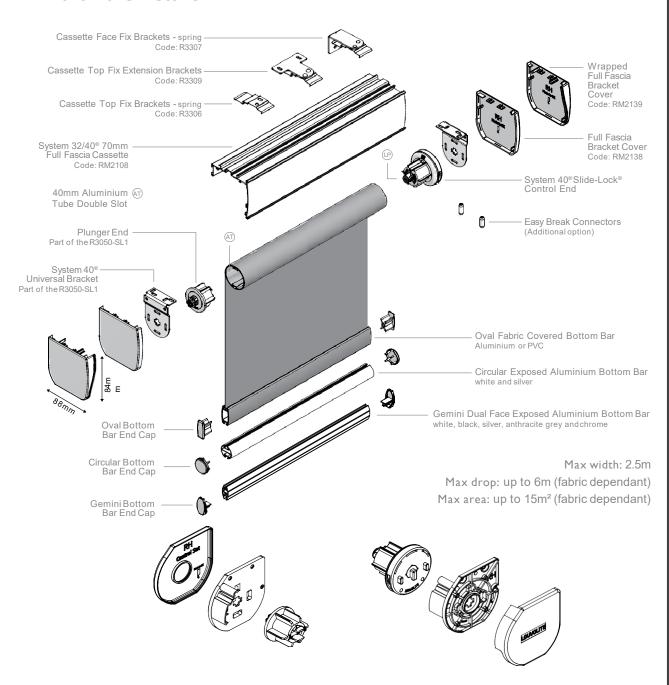





NOTE: Blocking is recommended for secure connection.

LOUVOLITE SIDE CONTROL SYSTEMS MAXIMUM BLIND SIZE

SYSTEM	FABRIC GROUP	BLIND WIDTH (m) FOR BLIND DROP (m)					MAX HOLDING WEIGHT
		0.5	1.0	1.5	2.0	2.5	
System 40®	up to 200g/m sq 200 > 320g/m sq 320 > 485g/m sq	5.0 3.75 5.0	5.0 3.75 5.0	5.0 3.75 5.0	5.0 3.75 3.55	5.0 3.75 2.7	9lb blind at 6mmdeflection
Also available for System 32®							