

1

2






3

4

Raspberry Pico

signal-direction is from
Host point of view
(Target is Guest)

Target-Port

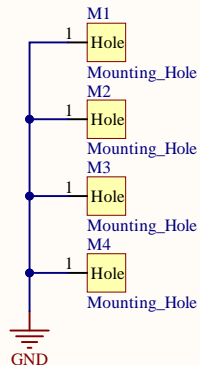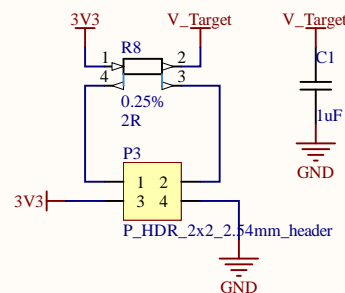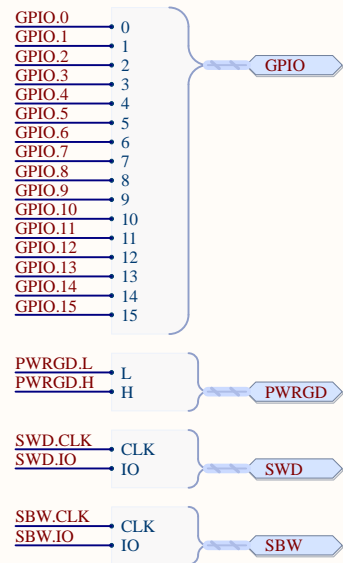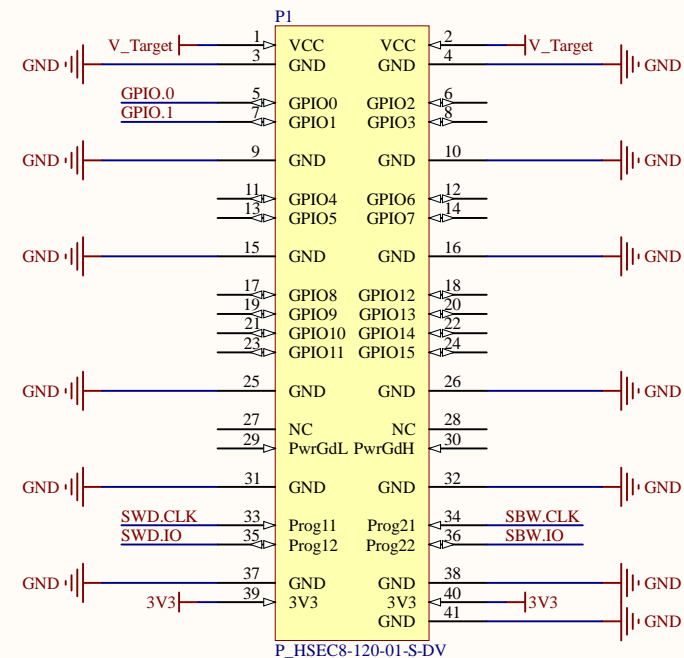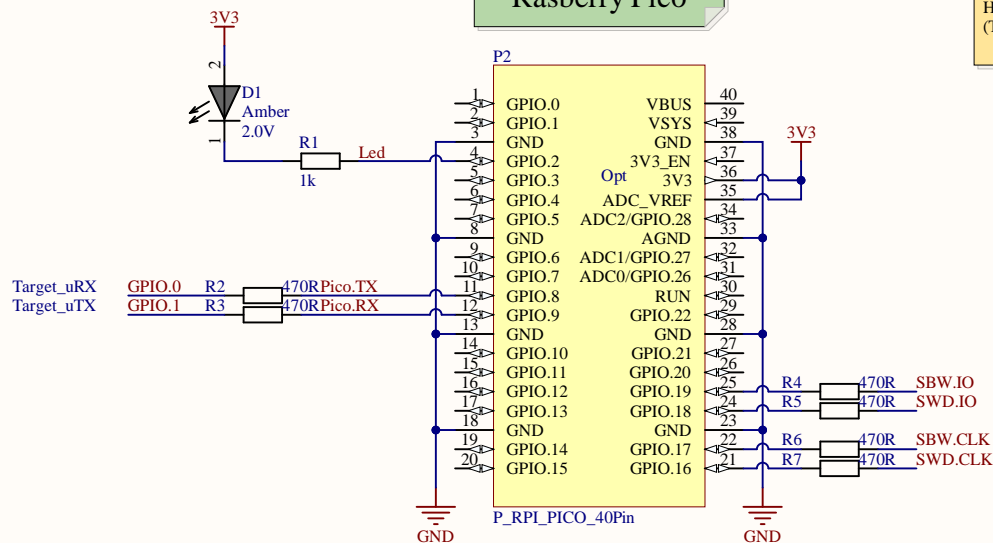

Adapter for
Shepherd Cape >=v2.5

Allow to power and program a target board via USB.

Firmware of RP2040 compatible to Riotee-Board-Firmware

https://github.com/NessieCircuits/Riotee_Board
https://github.com/NessieCircuits/Riotee_ProbeSoftware

| | | |
|---|----------------------------------|----------|
| Title Target-Board Overview NES Lab / TU Dresden | | |
| Size A4 | Number | Revision |
| Date: 7/07/2025 | Sheet of target_adapt_usb.PrjPcb | |
| File: C:\Users\...\overview.SchDoc | Drawn By: Ingmar | |

1

2

3

4

