



I2C DATA READING


10 Kasim 2024 Pazar 04:40

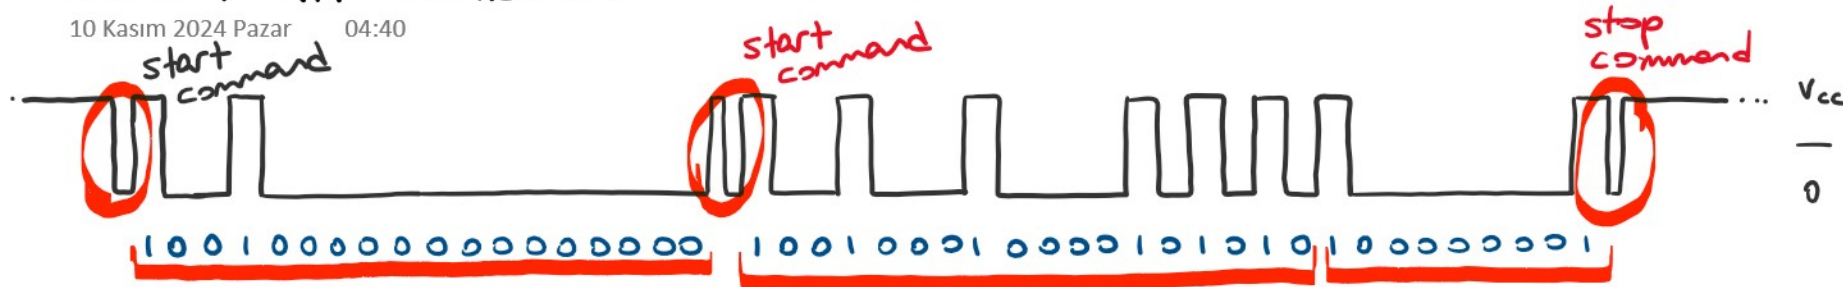

1- Set the LM75 up for a temperature reading

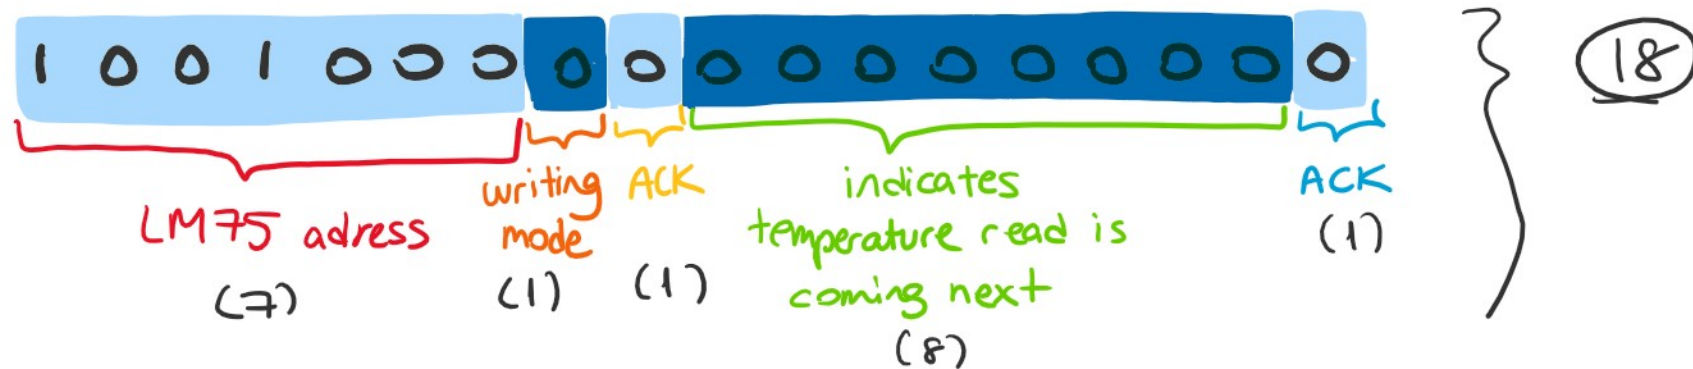

2- AVR will receive first byte

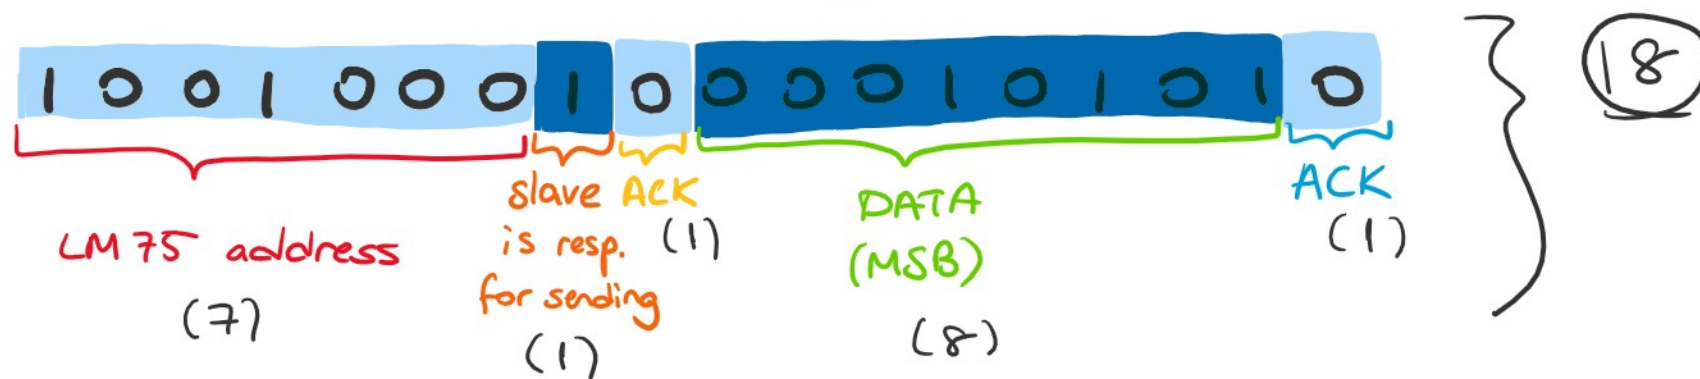

3- Receive second byte

