



M500RGB4D-A: 5mm RGB LED Lamp (Anode)

5mm T1 ¾ RGB 30 Degree Clear LED Lamp

PRODUCT DESCRIPTION	
(1) RoHs Compliant Part	(4) Moisture & UV Resistance Epoxy Len
(2) Super Bright Tri-Color 5mm Red, Green & Blue LED	(5) Sun Light Viewable LED Lamp
(3) Excellent color mixing characteristics	(6) Rugged design suitable for both indoor & outdoor use

Absolute Maximum Rating (Ta = 25°C)


PARAMETER	MAXIMUM RATING	UNITS
DC Forward Current	30	mA
Peak Pulse Forward Current (1)	100	mA
Avg. Forward Current	30	mA
Operating Temperature	-40 to +85	°C
Storage Temperature	-40 to +100	°C
Lead Soldering Temperature	260°C for 6 seconds (1.0mm or 0.63 inch from Body)	

(1) Pulse conditions of 1/10 duty and 0.1msec width, for long operating life, max. of 20mA recommended

Electro-optical Characteristics (Ta = 25°C)

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNIT
Forward Voltage (Red)	V _F	I _F = 20mA	1.7		2.1	V
Forward Voltage (Green)	V _F	I _F = 20mA	3.0		3.3	
Forward Voltage (Blue)	V _F	I _F = 20mA	3.0		3.3	V
Dominant Wavelength (Red)	λ _D	I _F = 20mA		630		nm
Dominant Wavelength (Green)	λ _D	I _F = 20mA		525		
Dominant Wavelength (Blue)	λ _D	I _F = 20mA		465		nm
Viewing Angle	2θ1/2	I _F = 20mA	30			Deg.
Luminous Intensity (Red)	I _V	I _F = 20mA	3,000		5,000	mcd
Luminous Intensity (Green)	I _V	I _F = 20mA	4,000		6,000	mcd
Luminous Intensity (Blue)	I _V	I _F = 20mA	1,800		3,200	mcd

DEVICE DRAWING

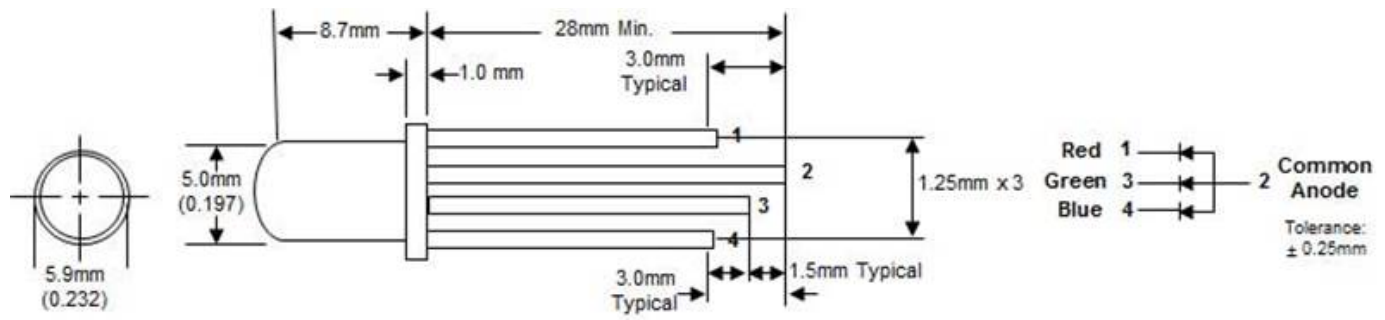

LC LED Corporation