

IEEE/IFIP  
Network Operations and Management Symposium (NOMS)  
6-10 May 2024, Seoul, Korea

Tutorial TU4, Monday 6 May 2024, 14:00 – 17:30

# Greening the Network: Advancing Network Sustainability – Challenges and Solution Approaches

**Alexander Clemm**

*ludwig@clemm.org*

Sympotech  
California/USA

**Cedric Westphal**

*cwestphal@gmail.com*

California/USA

**Toerless Eckert**

*tte@cs.fau.de*

Futurewei  
California/USA

# Motivation

What is “Sustainability”?


Meeting the needs of the present  
without compromising the ability of future generations to meet their own needs  
[UN Brundtland Commission, 1987]

Specifically associated with environmental sustainability and “carbon footprint”

The amount of carbon emitted from burning fossil fuels to generate power

Reducing carbon footprint to Net Zero to combat climate change is considered one of mankind’s “Grand Challenges”

# Energy demand continues to grow

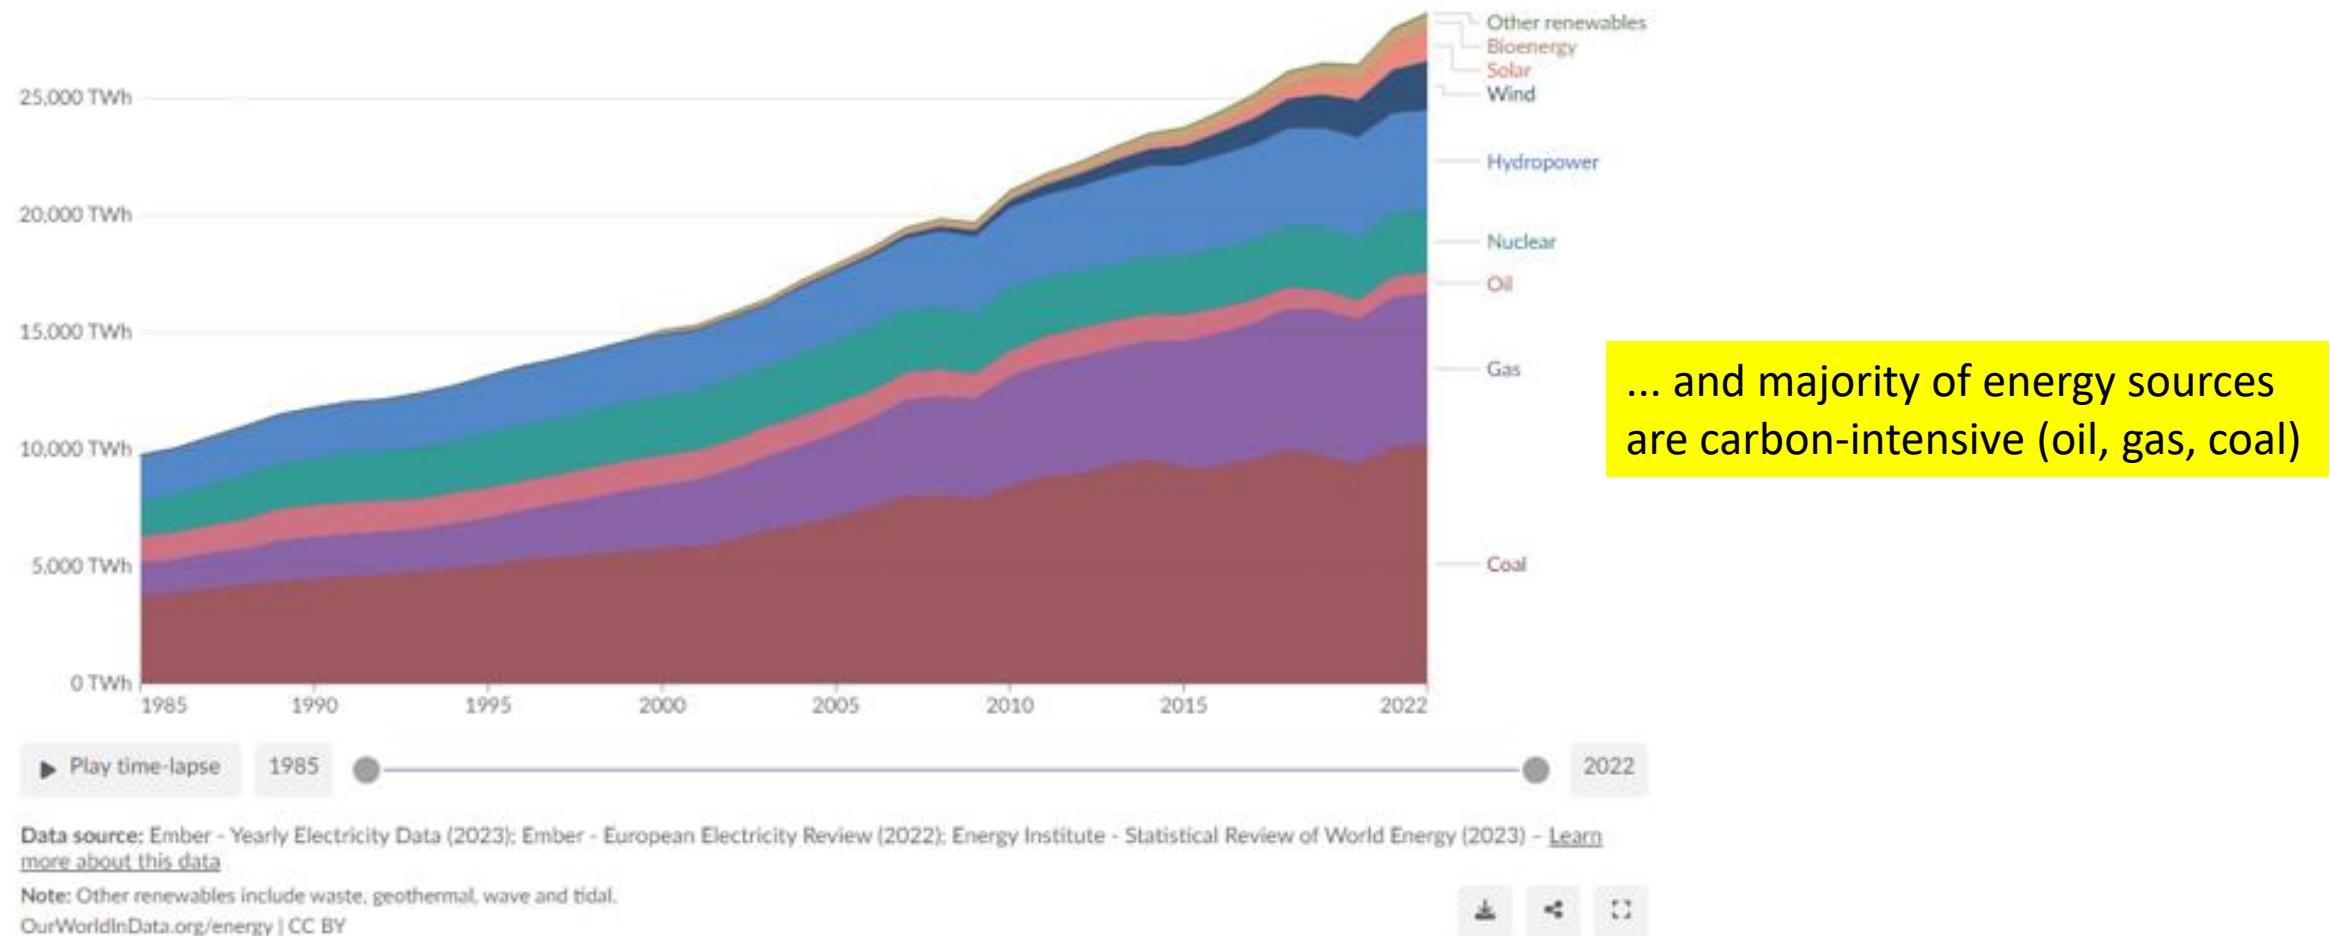

# Networks as a solution enabler

- Substitute physical mail with e-mail
- Substitute travel with Web meetings
- Teleworking from home
- Replace truck rolls with remote maintenance
- Telemedicine
- IoT solutions
  - Remote surveillance (reducing need for patrols)
  - Smart cities (e.g. smart garbage cans)
  - Smart Agriculture (resource efficiency beyond energy: water, fertilizer, area)

*This is great!  
So what's the  
problem?*


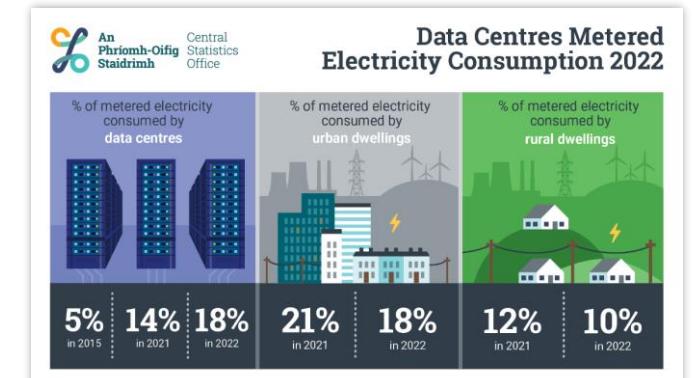


Image credits: John Deere, Bigbelly



# ICT and networking share is considerable

- Precise numbers are surprisingly hard to come by
  - Hard to measure, hard to add up
- SMARTer 2030 report: ICT responsible for 2.7% of global emissions [[https://unfccc.int/sites/default/files/smarter2030\\_executive\\_summary.pdf](https://unfccc.int/sites/default/files/smarter2030_executive_summary.pdf)]
  - 1/3 from communications
- Other reports arrive at a range from 0.5%-1.2%
- Comparable to emissions of medium-sized country
  - e.g. UK: 0.86% [<https://ourworldindata.org/co2-emissions>]
- As a share this will continue to grow
  - Ireland 2022: DC energy demand surpassing that from urban housing  
[Reference / image credit: <https://www.cso.ie/en/releasesandpublications/ep/p-dcmec/datacentresmeteredelectricityconsumption2022/>]

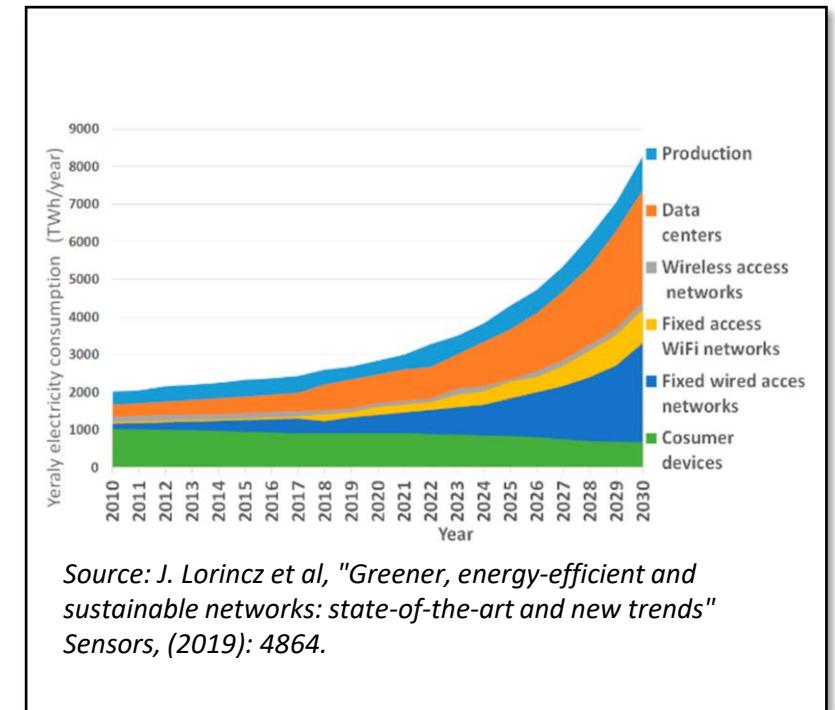


# Motivation (contd)

- Networks are a key solution enabler for greater sustainability...
- ... but also a problem contributor themselves (even if to a lesser degree)
  - Overall contribution is noticeable, on the order of medium-sized countries
  - Higher power efficiency offset by bandwidth demand
  - Not all substitutions positive – and many inconclusive
    - Compare crypto mining
    - Traffic continues to grow (at a rate of currently 24%/year – roughly doubling every 3 years)
    - Everything everywhere at all times does have a cost
- **Jevons paradox**: greater efficiency in use of a resource (and associated falling cost) / increases resource use overall
- It's not all bleak – substantial progress is being made
  - Telefonica report: In 2021, Telefonica's network's energy consumption per PB of data was 54MWh, a 5-fold reduction over 5 years
  - Telefonica achieved reduction of *total* carbon emissions by 70% since 2015, with goal of NetZero (Source: Telefonica Consolidated Annual Report 2021)

How can we do better still?

# Advancing Network Sustainability

- Key contributors to network sustainability today
  - General hardware advances (e.g. Moore's law – but slowing) ✓✓
  - Deployment factors (e.g. Nordic locations for datacenters) ✓
  - Antenna technology, transmission (e.g. physical layer stuff) ✓
  - Shift towards sustainable power sources (where available) ✓
- What about other network-specific factors (above L1)?
  - How could protocols help reduce carbon footprint?
  - What about control logic – can we build a “carbon-aware network”?
  - How much of an impact can management technology make?

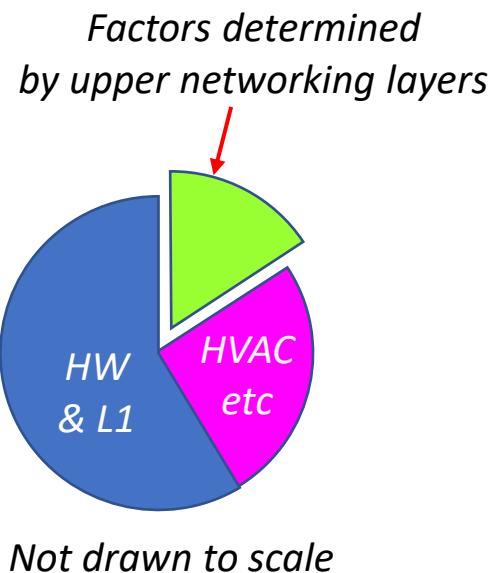

The focus of our tutorial

# Alexander Clemm



- Currently in the stealth phase of new project “Sympotech”
- Formerly Distinguished Engineer at Futurewei
- 70+ papers, 70+ patents
- 15 RFCs
- Longtime member of the network management community (including as SC and OC member of NOMS)
- Contributions include programmable networking, network telemetry (e.g. YANG-Push), measurement (e.g. IPSLA), smart monitoring (e.g. DNA), network instrumentation, service provisioning, high-precision networking, and more
- Author of several Internet Drafts related to Sustainable Networking; co-chair of IEEE CNOM SIG on Sustainable Network Operations (SNO)
- Recipient of Salah Aidarous Award in 2020
- MS Stanford Univ, Dr. rer. nat. Univ of Munich

# Cedric Westphal



- Until recently, principal research architect at Futurewei
- Before that, Nokia, Docomo and UCSC
- Over 120 papers, 30 patents, 3 IETF RFCs + some green networking draft working its way through the process
- PhD UCLA, MSs from UCLA & Ecole Centrale Paris
- Recipient of 2018 Technical Achievement Award from IEEE Information Infrastructure and Networking Technical Committee to *“recognize a lifelong set of outstanding technical contributions in the area of information infrastructure and networking”*

# Toerless Eckert



- Distinguished Engineer @ Futurewei
- 50+patents, 13 RFCs, 10? Research publications (papers, book chapters)
- Network Solutions and Technology Architect, SME on Multicast, MPLS, QoS, IPv/IPv6, routing, autonomous networking, networking with video/media, large scale LAN/MAN/WAN network design and deployment Enterprise/SP.
- Standards work in IETF, DOCSIS, ITU-T, ETSI
- Co-Chair IETF WG “Autonomic Networking Integrated Model and Approach” (anima)
- Two times Cisco Pioneer award winner (autonomic networking and media networking).
- Industrial public speaker/teacher
- IPv6 Hall of Fame Expert
- Dipl.Inf. C.S. Friedrich Alexander University Erlangen/Nürnberg

# Tutorial Outline

1. Motivation
2. Network sustainability foundations (Alex)
  - a. Foundational sustainability concepts
  - b. Energy proportionality and its implications
  - c. Structuring the opportunity space
3. How far have we come – past approaches (Toerless)
  - a. A history of networking as history of Digitization
  - b. Scale & Moore's law drive reduction of joule/bit
  - c. Tenets of the Internet to drive scale and lower cost
4. Network sustainability challenges and opportunities (Cedric)
  - a. Deployment aspects: power sourcing, HVAC, warm networking
  - b. Architecture level
    - Communication patterns and function placement
    - Edge, Core, Compute inside and outside the network
    - Lessons from CDN

-- Coffee Break --

# Tutorial Outline (contd)

## 4. Network sustainability challenges and opportunities (contd.)

### c. Equipment level (Alex)

- Instrumentation and metrics

### d. Network level (Alex)

- Overprovisioning and peak shaving
- Tradeoffs

### e. Protocol level (Toerless)

- Use cases and scenarios and their energy / protocol aspects
- LLN – Low Power and Lossy Networks
- Networking for Electricity control

## 5. Were are going (Cedric)

### a. Current initiatives and solution approaches

### b. Pollution-aware and context-variant routing

### c. Research opportunities going forward

## 6. Conclusions

# Tutorial Outline


1. Motivation
2. Network sustainability foundations (Alex)
  - a. Foundational sustainability concepts
  - b. Energy proportionality and its implications
  - c. Structuring the opportunity space
3. How far have we come – past approaches (Toerless)
  - a. A history of networking as history of Digitization
  - b. Scale & Moore's law drive reduction of joule/bit
  - c. Tenets of the Internet to drive scale and lower cost
4. Network sustainability challenges and opportunities (Cedric)
  - a. Deployment aspects: power sourcing, HVAC, warm networking
  - b. Architecture level
    - Communication patterns and function placement
    - Edge, Core, Compute inside and outside the network
    - Lessons from CDN

-- Coffee Break --

# Energy-efficiency vs carbon footprint

- Environmental sustainability associated with climate neutrality
  - It's about greenhouse gas emissions, including (but not limited to) CO<sub>2</sub>
  - Carbon equivalence is a measurement term to make greenhouse gas emissions comparable
    - 1 ton of methane has same warming effect as 84 tons of CO<sub>2</sub> → 84 tons CO<sub>2</sub>eq
  - CO<sub>2</sub> is emitted when burning fuels to generate electricity
  - Fossil fuels especially problematic as they release “fossilized” carbon (which had been removed for ages from the atmosphere)
- IT equipment runs on electrical energy
  - If energy mix were 100% renewables, that would not be a problem
  - Generated (at least in part) from burning of fossil fuels

# Energy mix

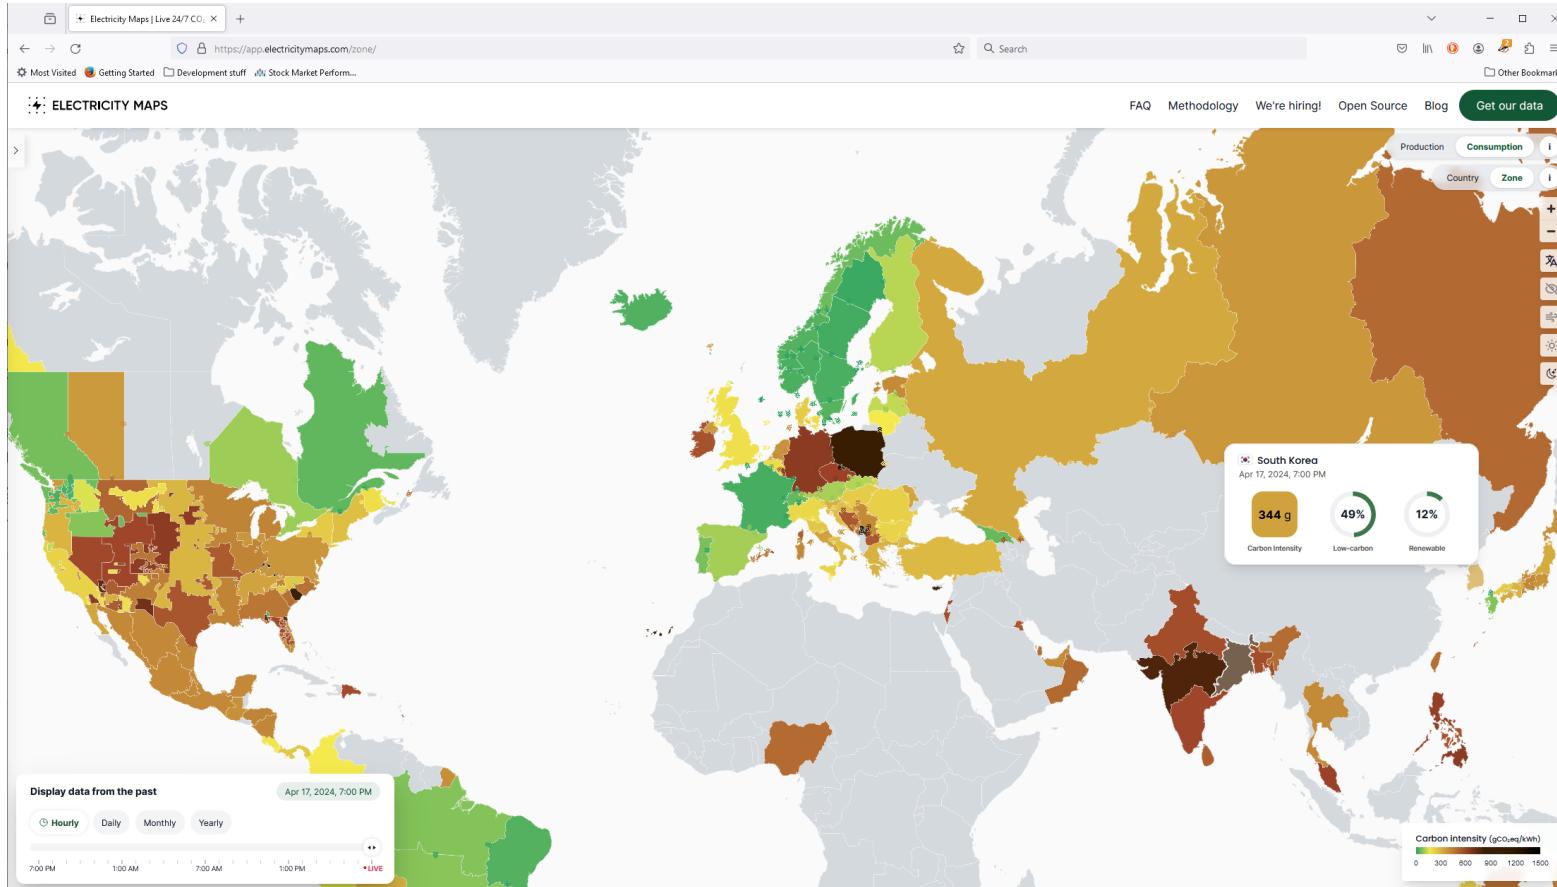

- Varies by
  - Geography
  - Season
  - Time-of-day
- Carbon intensity not the whole story
  - Nuclear
  - Destruction of habitats

Reference: <https://app.electricitymaps.com/zone/>

# Energy vs power vs efficiency

- Power: rate of energy consumption (e.g., kW)
  - $1\text{W} = 1\text{J/s}$
  - Actually, it is not consumed but “drawn”
- Energy: amount of energy (Joule)
  - 1 Wh: one Watt of power delivered for one hour – 3600 J
- Efficiency: amount of energy per unit of value
  - Higher amount of energy used may be acceptable with commensurate amount of value delivered

# Energy consumption as proxy for carbon footprint

- Carbon footprint =  $f(\text{energy consumption}, \text{energy mix})$
- Energy mix usually a given, but efficiency in energy use can be influenced...  
... and a useful indicator of carbon footprint
- Hence, a lot of emphasis given to energy use and energy efficiency
- Often this is associated with energy consumed while equipment is operated/in use  
... but this is not the entire picture

# Energy usage beyond equipment usage

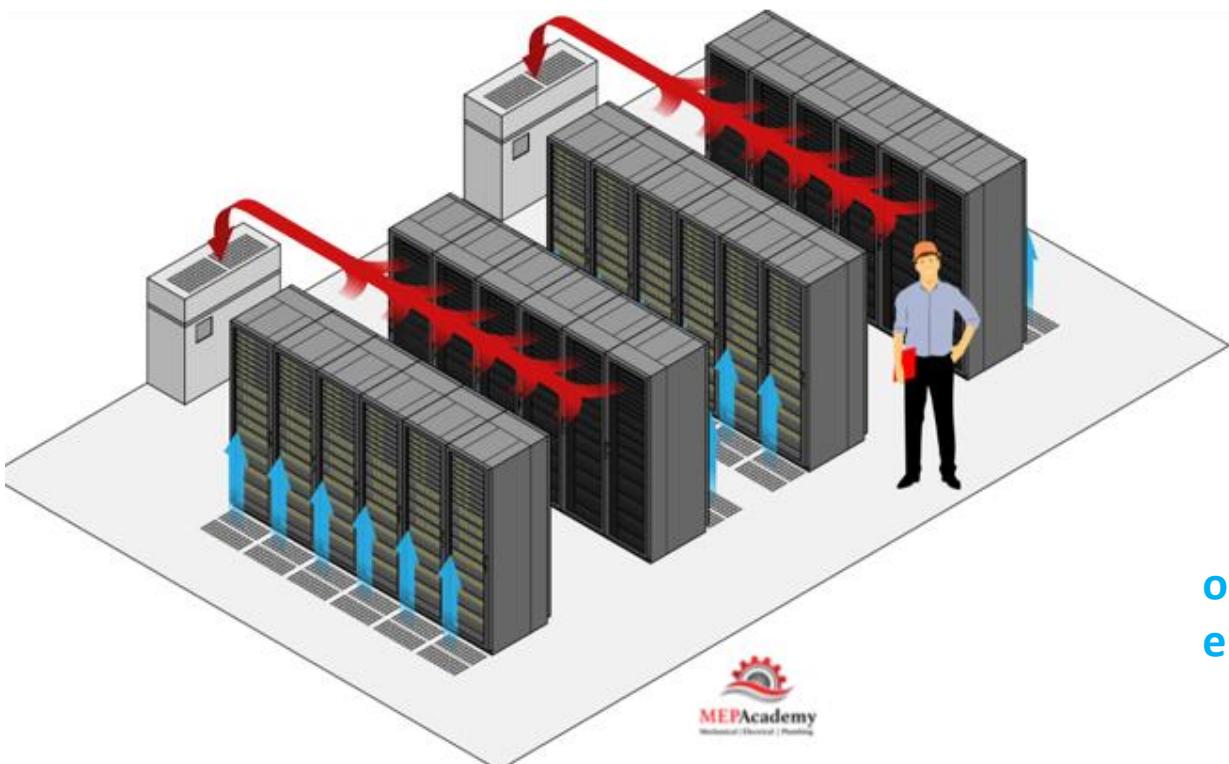


Image: <https://mepacademy.com/data-center-hvac-systems/>


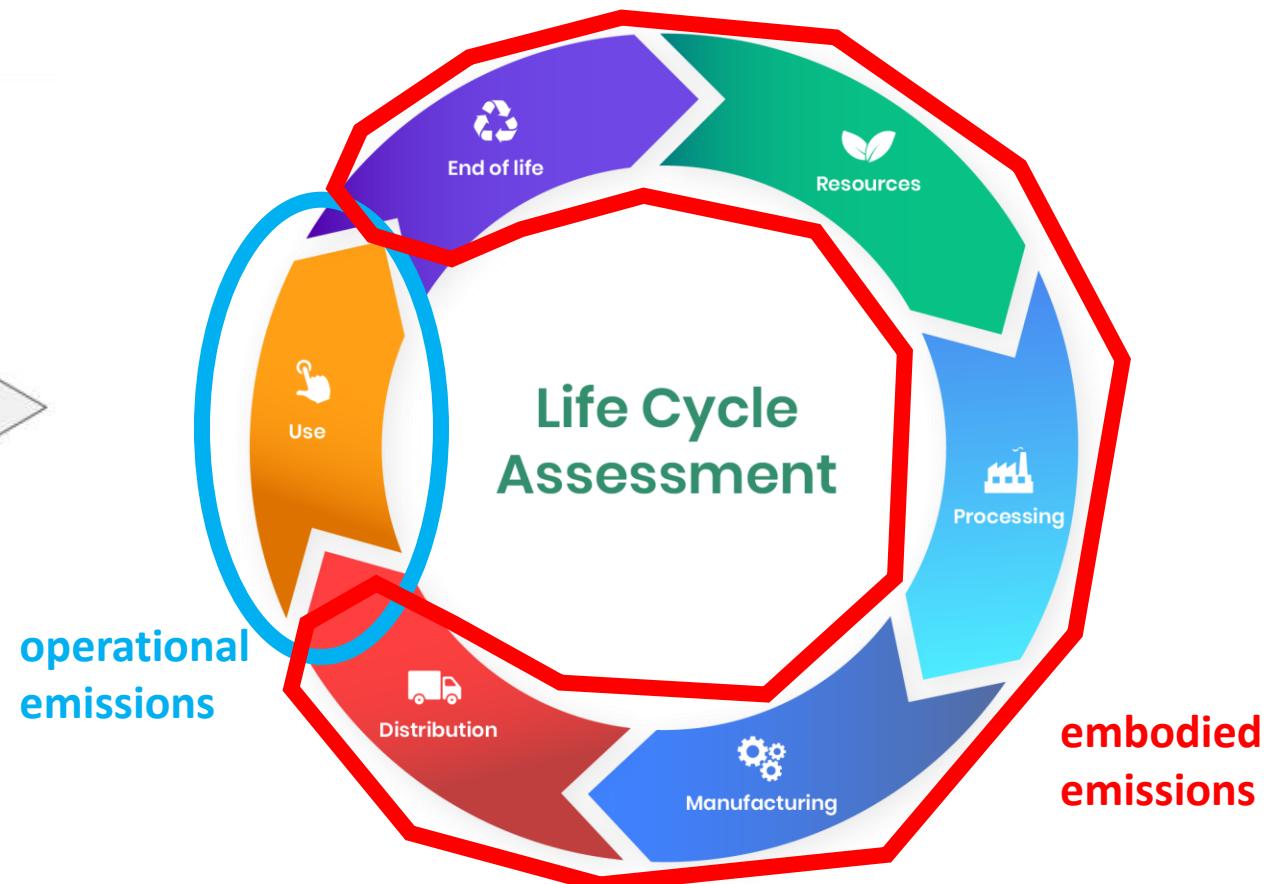


Image: <https://www.oneclicklca.com/life-cycle-assessment-explained/>

# Embodied vs operational emissions

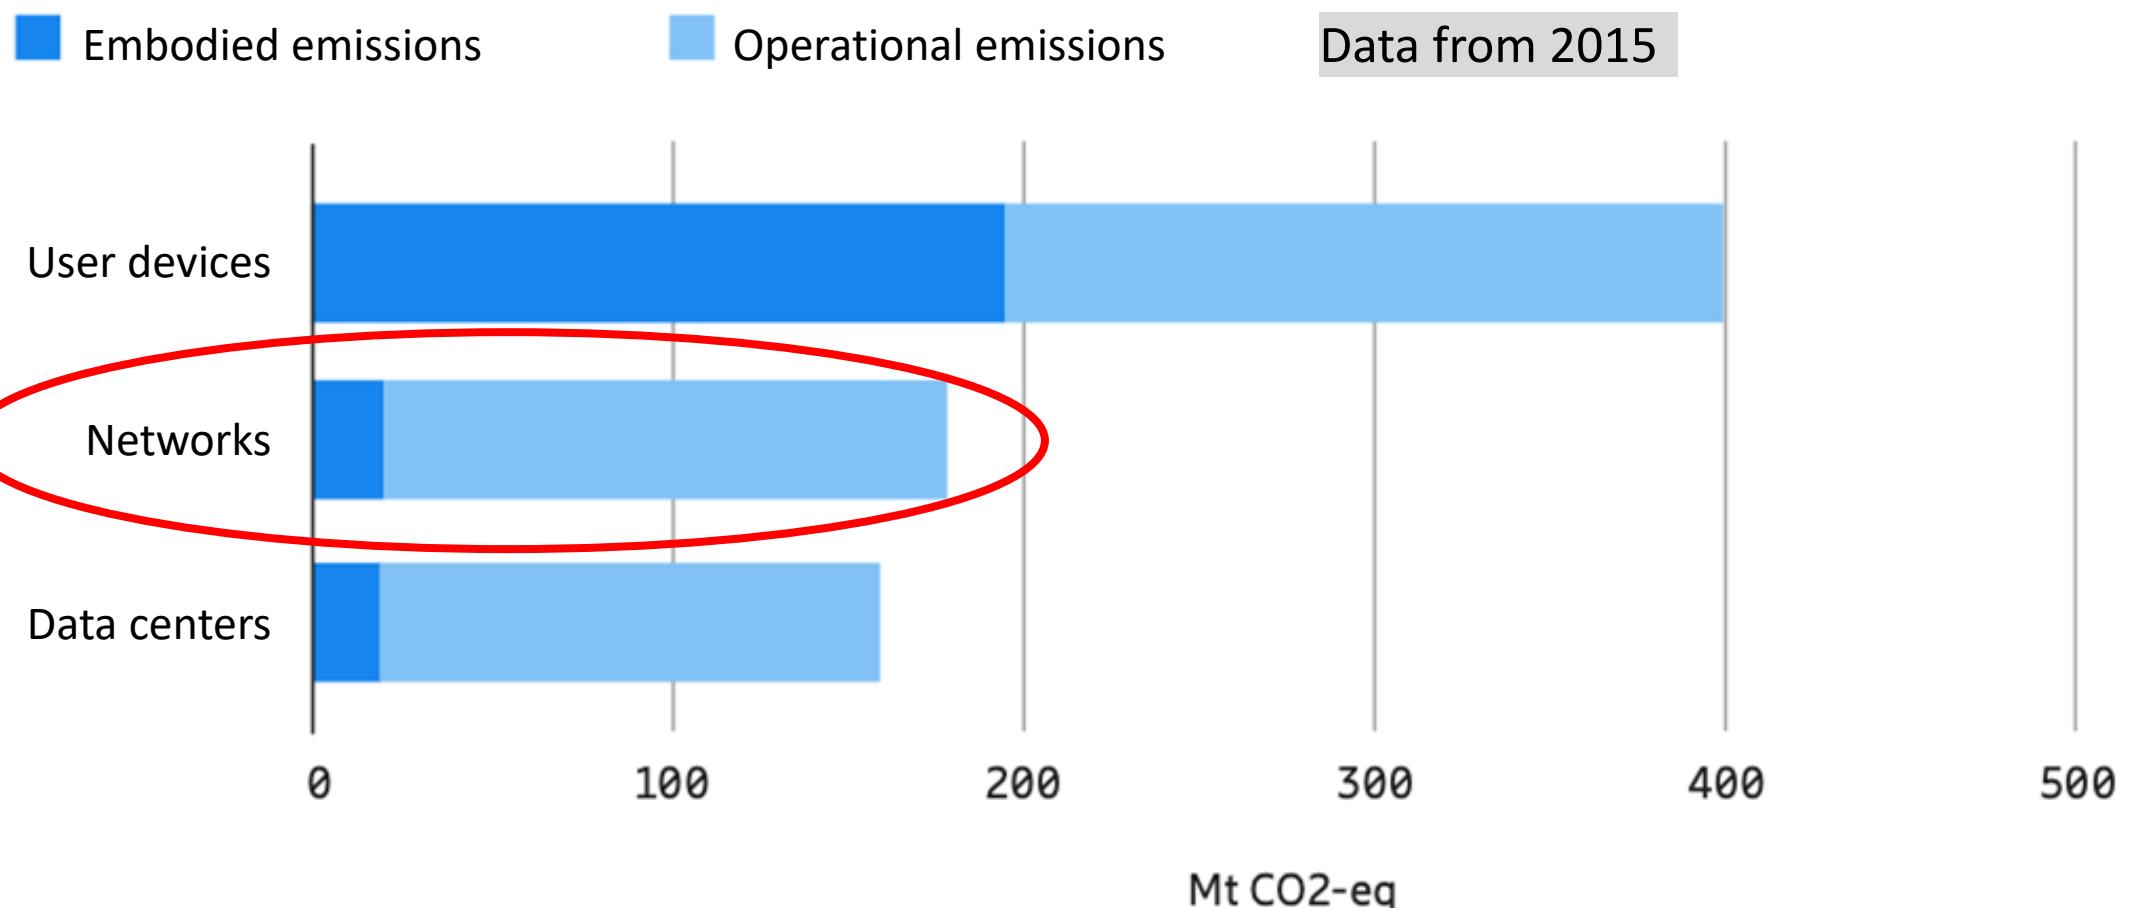

<https://www.ericsson.com/en/reports-and-papers/industrylab/reports/a-quick-guide-to-your-digital-carbon-footprint>

# Power Usage Efficiency


- Network sustainability is in many ways tied to energy usage
- Advancing network sustainability hence needs to ask, how can we minimize energy usage while still having the network deliver what is expected
  - Meeting traffic demands
  - Meeting service level expectations
  - Resilient, Secure, Elastic, ...
  - Cost effective (fortunately, minimizing energy usage helps with that)
- Power Usage Efficiency (PUE): How much energy is used to deliver the value that is ultimately derived from the network

# Energy proportionality

- Ideally, energy usage would be proportional to the value delivered
  - Can directly attribute energy use to service demands
  - E.g. transmitting  $n$  TB of data results in  $n$  units of energy used
    - Wh/TB
- This would allow to map the problem of how to minimize energy usage to the problem of how to minimize the amount of traffic, e.g.
  - Data compression
  - Smart placement of data and functions (tradeoffs exist – eg compute, need to maintain state)
- These types of solutions have their role (→ later)
- If it were only so simple...

# Idle power

- Power consumption is not linear but incremental
- Most of the power is drawn already when idle
  - CPU, Backplane
  - Transmission ports may be more proportional (eg optical lasers)
- Idle power dominates “productive” power

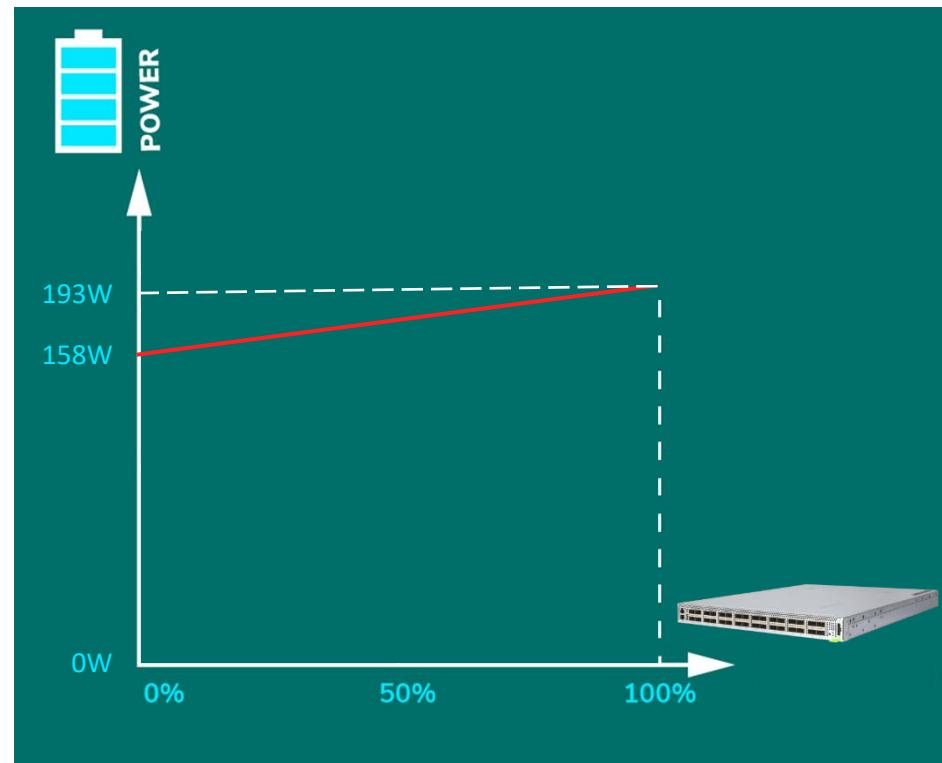

Credit: Romain Jacob, ETH Zurich


# Analogy: public transportation




- Say a train or bus has capacity for 50 passengers
- Same energy usage regardless of whether the bus rides empty or at capacity
  - As long as you have capacity, you can take additional passengers at 0 incremental “cost”
- Implication
  - You do not conserve energy by minimizing the number of passengers
    - Caveat: your 51<sup>st</sup> passenger will increase (double!) the amount of energy (for 2<sup>nd</sup> bus)
  - You conserve it by minimizing the number of busses
- How much energy usage do you attribute per passenger
  - 1/50 – share of available capacity that is used? (perhaps more “fair”?)
  - Or 1/n – share of actually used capacity (perhaps more accurate?)

# Key observations

- Reducing power that is wasted idling is key
- High resource utilization is good (as it maximizes PUE)
- From a sustainability perspective, there is much more gained in taking a resource offline than in, say, reducing resource utilization
  - Of course there are tradeoffs (e.g. resilience) & embodied carbon does not go away

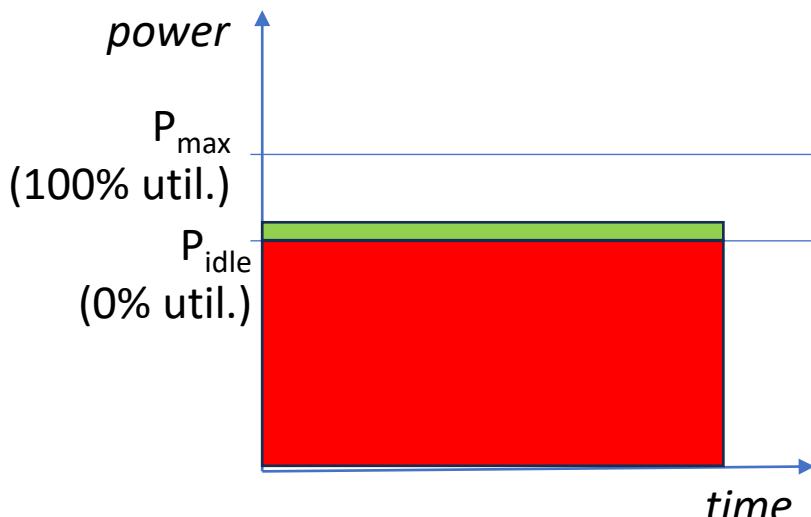


vs.  
**which is  
preferable?**

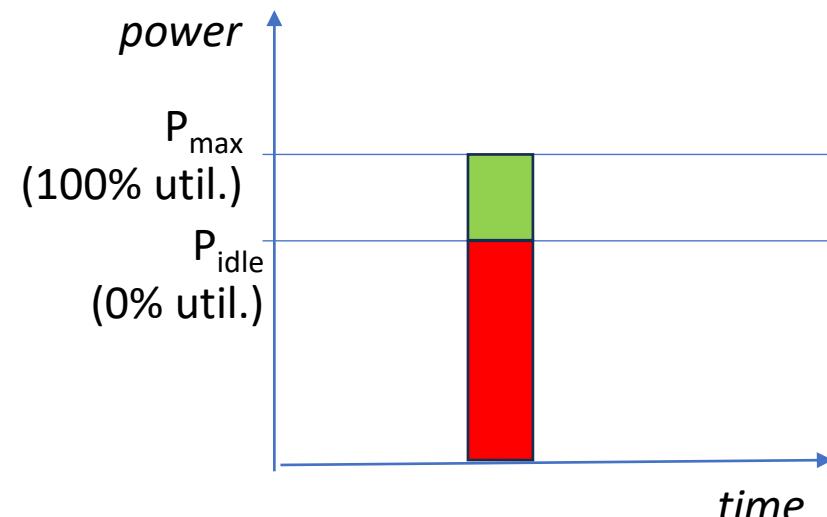


# Key observations

- Reducing power that is wasted idling is key
- High resource utilization is good (as it maximizes PUE)
- From a sustainability perspective, there is much more gained in taking a resource offline than in, say, reducing resource utilization
  - Of course there are tradeoffs (e.g. resilience) & embodied carbon does not go away

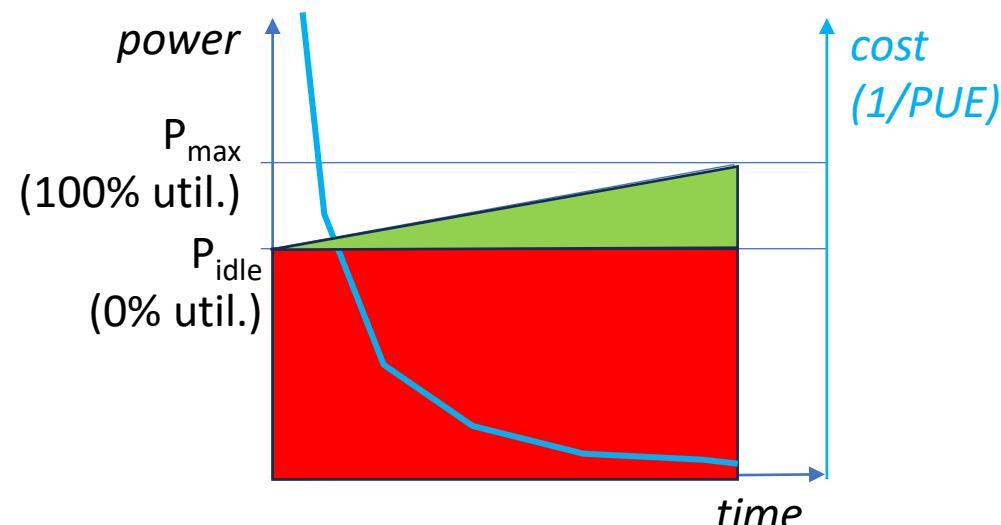


# If it only were so simple

- There is overhead and complexity in turning resources on/off
  - Bootup
  - Synchronization
  - Discovery
  - Convergence and propagation of state (including across the network)
- Worse, during that time the resource is not even available

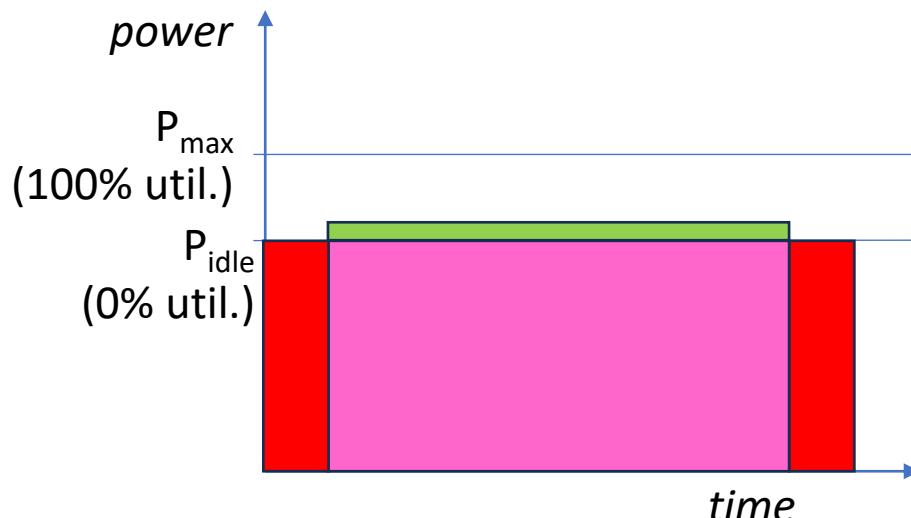


vs.

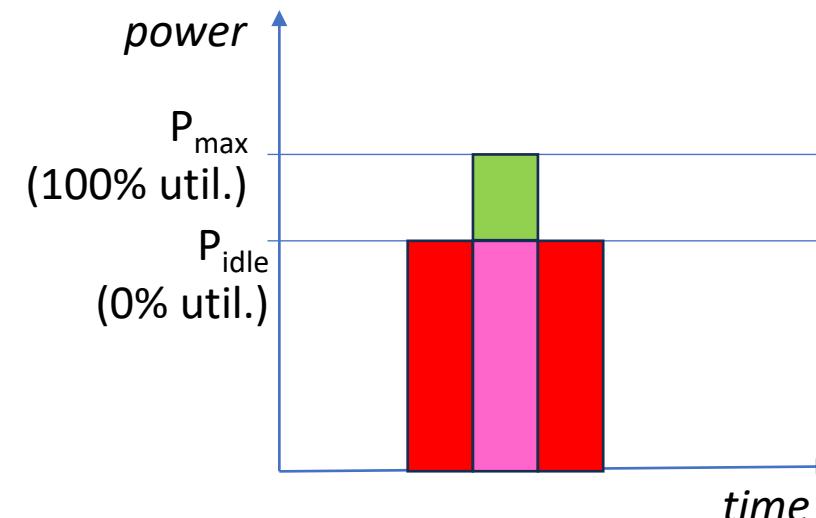


# Time scales matter

- Cost/benefit implications
  - Any complexity introduced by solutions must be justified by clear gains
- We will discuss this further later

*little benefits in savings  
large cost in reduced availability  
requires long forecasting horizon*

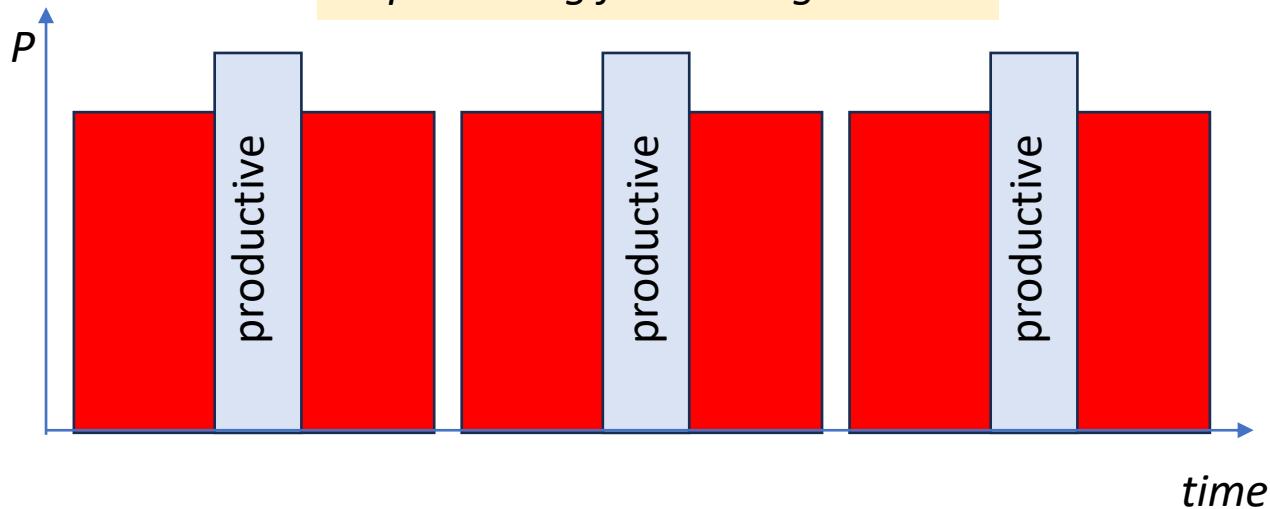

*large benefits in savings  
little cost in reduced availability  
short forecasting horizon sufficient*

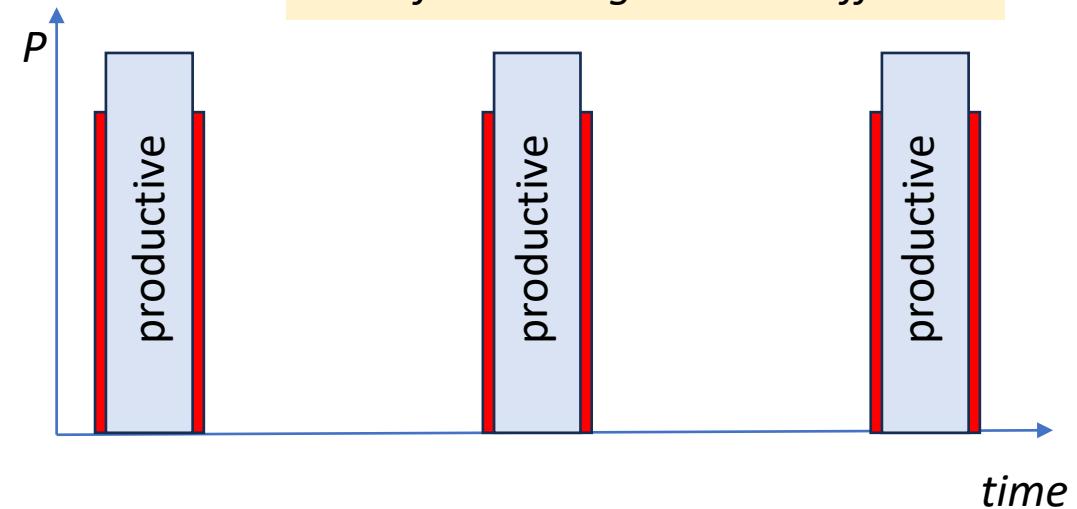

# Structuring the opportunity space

- Most obvious (& arguably largest) opportunities at the hardware layer
  - Ultimately, it is here that power is used
  - Hardware technology
  - Transmission technology
  - Power saving modes
    - e.g. WOL, means for downgrading/"rightgrading" of line speeds
  - Extending equipment life cycles
    - SDN plays a role here
    - Less HW upgrades → less raw materials → less land use → greater bio diversity
  - Other sustainability aspects: recycling, warm computing, ...
- Very important, but we are not hardware engineers
  - A bit fatalistic to wait for others to save us
  - Also, Moore's law is coming to an end – it alone will not save us
- What about upper networking layers? Management technology?

# Sustainable networking opportunity space

**Providing of visibility into power usage  
as a foundational opportunity!**

- **Assess usage, validate effectiveness**
- **Enable control loops** for energy/sustainability optimization schemes
- Requires **Instrumentation for energy metrics**
- Selected challenges+opportunities
  - Definition and instrumentation of management data models
  - Certification and compliance assessment methods
  - Virtualized energy and pollution metrics
  - Accounting for energy mix, energy sources
  - Fair carbon footprint attribution to flows & paths

Device / Equipment

Hardware

# Challenges and Opportunities in Management for Green Networking

**One device does not make a network  
What about the bigger picture?**

Network


Device / Equipment

Hardware

- **Network optimization**
  - Energy/carbon/pollution-aware routing & path configuration
  - Deployment / placement of VNFs
  - Optimize carbon footprint while maintaining other goals
  - AI and ML methods
  - Applicability of game-theoretic approaches
  - “Control knobs” for intent-based tradeoffs
- **Energy-related control protocol extensions**
  - Energy as a cost factor – in IGP, SDN controllers
  - Assess carbon intensity of paths,  
optimize networks to minimize overall footprint
- **Carbon-aware traffic steering, pollution-aware routing**  
to steer traffic along greener paths (might vary overtime)
- **Green abstractions**  
taking into account memory, processing, transmission  
can often trade off one versus another


# Challenges and Opportunities in Management for Green Networking

## How can communication protocols contribute?

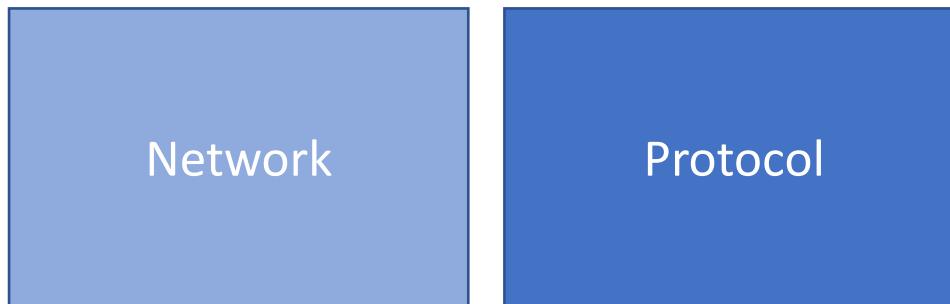

- **Protocol enablers for network energy saving mechanisms**
  - Blur mgmt. and control – taking resources on/offline on short time scales requires mechanisms for fast discovery, fast state reconvergence
  - Role of autonomics? of IBN?
- **Protocol optimization**
  - Traffic adaptation (e.g. bursty vs smoothed transmission to maximize efficiency; control knobs for carbon-aware traffic pacing)
  - Data volume reduction (e.g. codings, efficient retransmissions)
- **Instrumentation (again)**
  - e.g. energy telemetry at flow & path level

# Challenges and Opportunities in Management for Green Networking

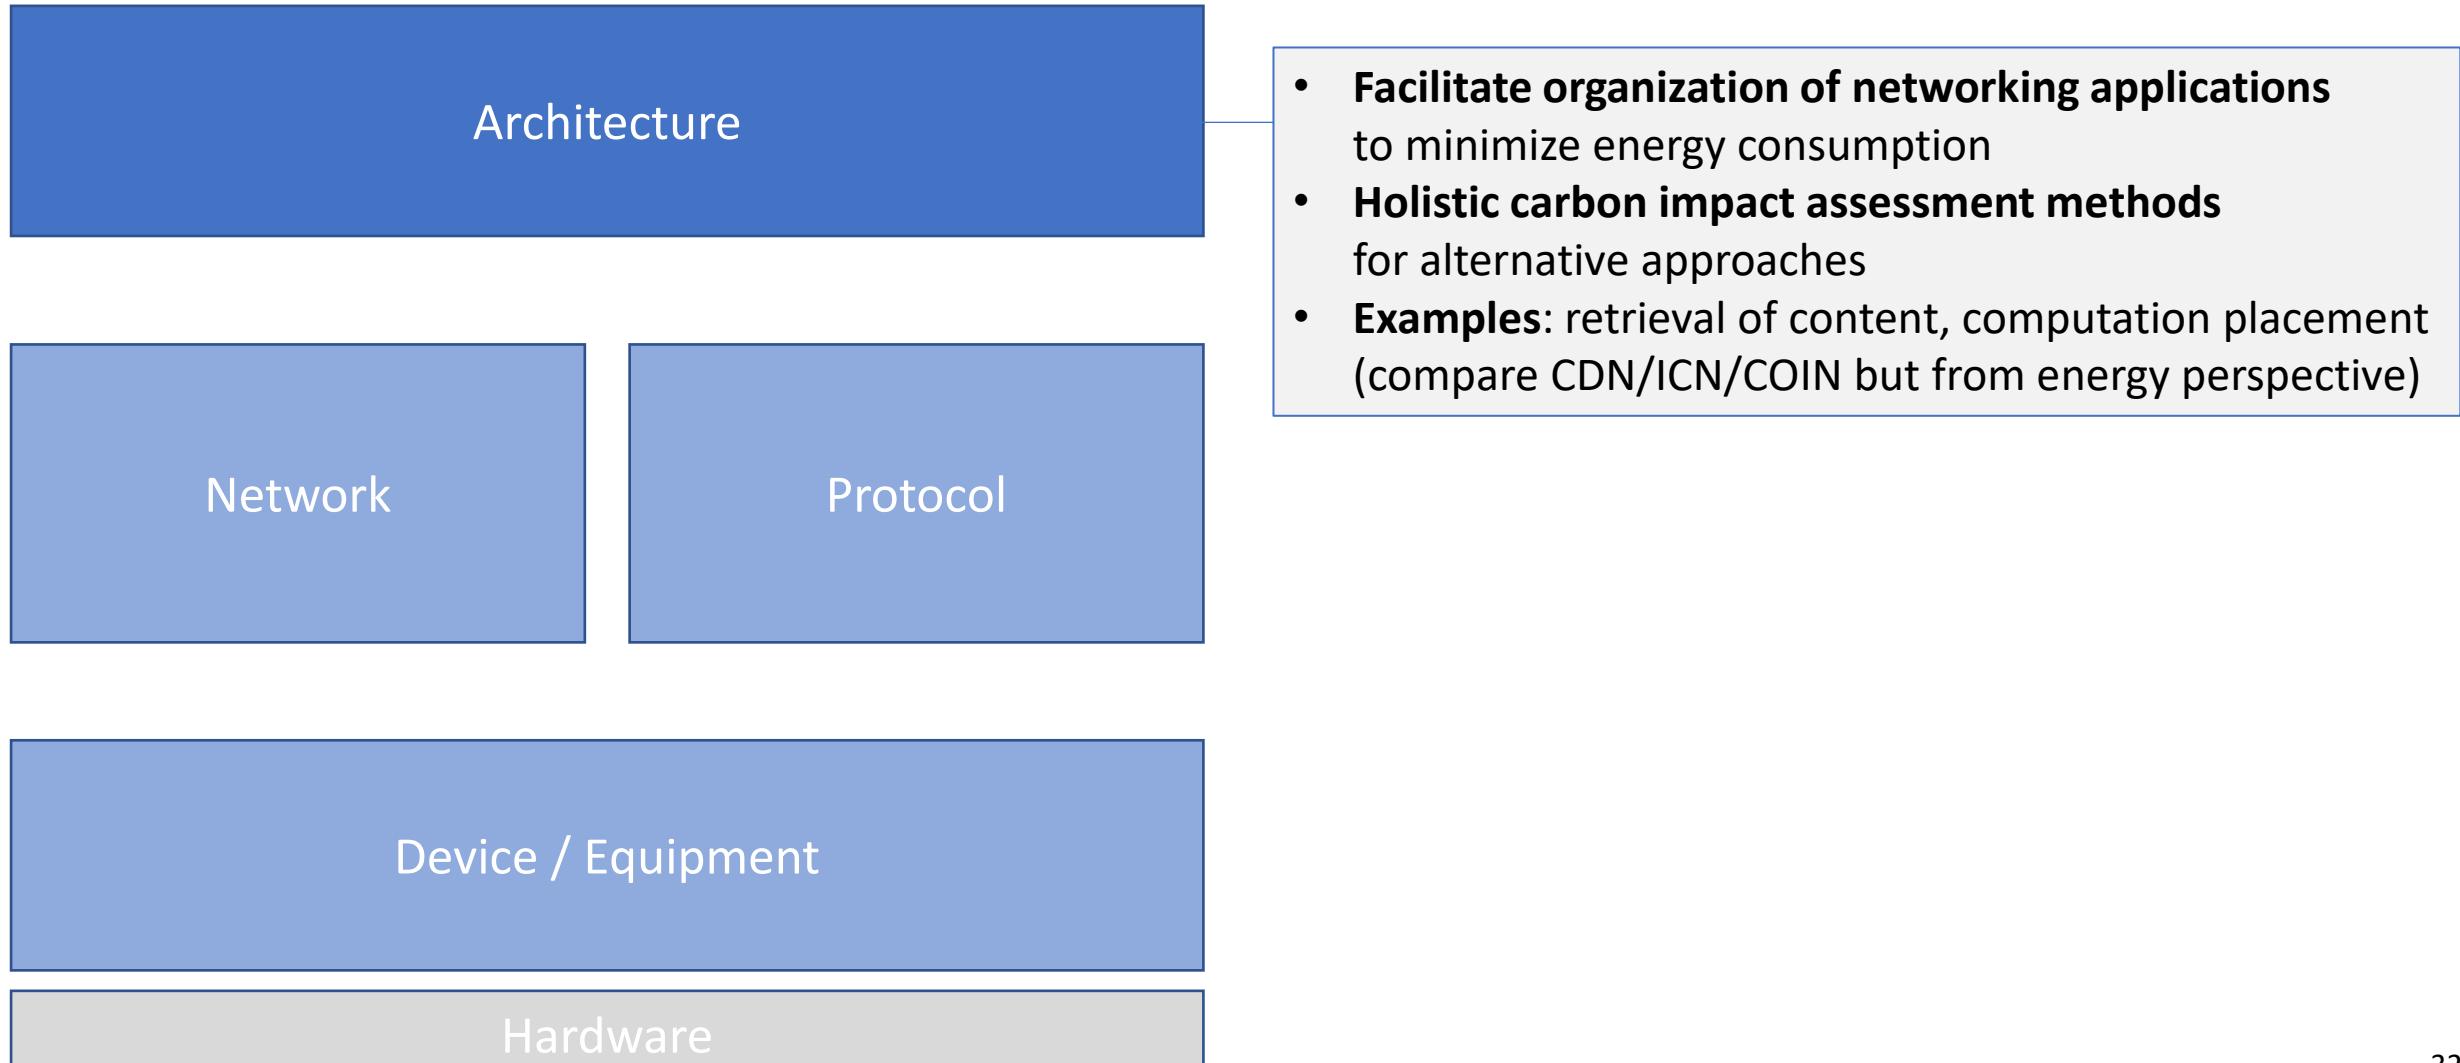

# Tutorial Outline

1. Motivation
2. Network sustainability foundations (Alex)
  - a. Foundational sustainability concepts
  - b. Energy proportionality and its implications
  - c. Structuring the opportunity space
3. How far have we come – past approaches (Toerless)
  - a. A history of networking as history of Digitization
  - b. Scale & Moore's law drive reduction of joule/bit
  - c. Tenets of the Internet to drive scale and lower cost
4. Network sustainability challenges and opportunities (Cedric)
  - a. Deployment aspects: power sourcing, HVAC, warm networking
  - b. Architecture level
    - Communication patterns and function placement
    - Edge, Core, Compute inside and outside the network
    - Lessons from CDN

-- Coffee Break --

# ~~How far have we come ?~~

Digital



## What have networks ever done to make the planet greener ?

*Not talking about energy was in data-centers (Cloud) like Proof-of-Work... And many analysis look at Network = actual network plus cloud*



**ALL RIGHT, BUT  
APART FROM  
  
THE SANITATION,  
THE MEDICINE,  
EDUCATION, WINE,  
PUBLIC ORDER,  
IRRIGATION, ROADS,  
THE FRESH WATER  
SYSTEM  
AND PUBLIC HEALTH.**

**WHAT HAVE THE  
ROMANS EVER  
DONE FOR US ?**

*Movie: Life of Brian  
(Monty Python team)*

# Digitization

*Replacing “analog”/“physical” processes  
with “digital” immaterial processes.*

“Often” (hopefully) reduces energy consumption:

- Moving bits instead of moving atoms.

- Avoiding production of atom based products

Can (become) more easily greener:

- Moving bits can always use green energy  
(even if it does not do today).

# Digitization: Where to start ?

**Ancient Greece (or before ?): Optical signaling by fire**

*The Phryctoriae were a semaphore system used in for the transmission of specific prearranged messages. Towers were built on selected mountaintops, so that one tower, the phryctoria, would be visible to the next tower, usually 30 km (20 mi) distant.*

**Long 19th century: 1789 - 1914**

First “Internet” ?

Optical ... Wired Electrical .. Radio Telegraphy / Telephony

Similarities to todays evolution (business, technology)  
astounding


Era of optimization (until after second world war) ?

Second area of Networking

New technologies had to come together to start a second revolution ?!

Integrated Circuits, ...

**The Internet & friends: 1970 ...**

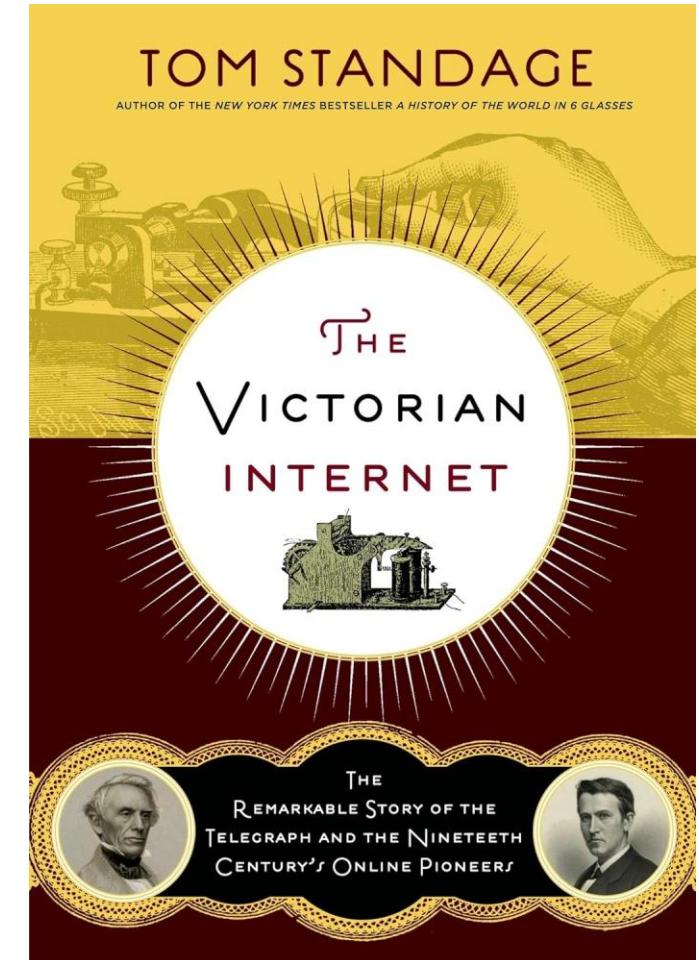

# The Internet vs. (all) TCP/IP networks

## “The Internet”

*“just” the (BGP) interconnection of a TCP/IP network service to provide global address space IPv4/IPv6 connectivity AND DNS naming.*

## “You are ON the Internet (with IPv6)”

*If your home uses IPv6, that is also part of the Internet.*

## “You are (only) CONNECTED TO the Internet”

*if your home uses IPv4 with NAT (192.168.x.y), and/or need to pass application gateways (IOT/industrial/enterprises)*


## HERE: “The Network” = Internet + Limited Domains

No significant networking **NOT** using (IETF/) TCP/IP

Most L2-only (e.g.: industrial Ethernet) also use TCP/IP

For energy, we look at the whole Iceberg

Aka: “Internet” is a simplification.

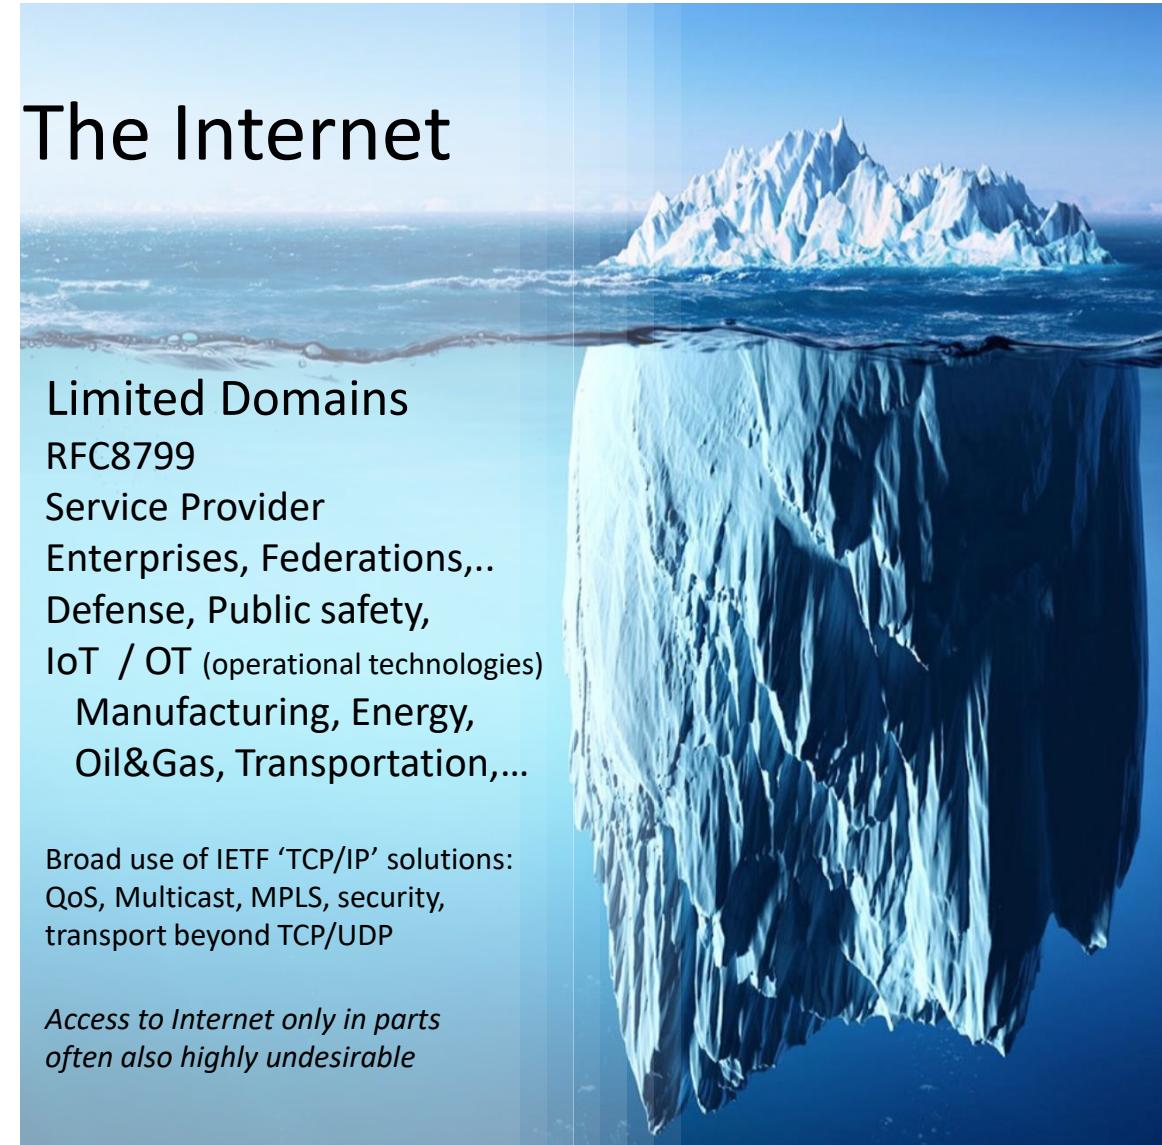

## The Internet

Limited Domains

RFC8799

Service Provider

Enterprises, Federations,..

Defense, Public safety,

IoT / OT (operational technologies)

Manufacturing, Energy,  
Oil&Gas, Transportation,...

Broad use of IETF ‘TCP/IP’ solutions:  
QoS, Multicast, MPLS, security,  
transport beyond TCP/UDP

*Access to Internet only in parts  
often also highly undesirable*

# What is “The Network” ?

**Here:** Network “Host interface” to “Host interface” (actual network transport)

**NOT: The Cloud** – *somebody else’s computers / data-center* – compute & storage

Do include/consider DC networks (< 10%) of DC compute/storage

**NOT: End / User devices**

Network energy consumption of streaming a 4K movie is the same ...

Whether displayed on a low-power 4k display laptop (10W) – or on a movie theater projecor (1 KW).

**However:** Energy savings of “Digitization” use-cases is “eye-to-eye”

Energy saving of a remote industrial monitoring is to replace technician travel with bits over the network

Energy saving of digital movie theater is avoidance of shipping physical movie

**BUT:**

“Networking People” can only optimize/reduce the actual networking energy consumption

Can only call out the energy use (sometimes waste) of the attached equipment

# Scale & Speed

The faster networks become...

**The lower  
the energy consumption/bit**

*300 bps modem ... 1 Tbps links*

*Over time: Same type of packet processing device roughly maintains same degree of power consumption. Many device power consumption has gone down (PC at home!).*

Distance matters:

*Electrical / Optical transmission over longer distance dwarfs other power consumption in wide-area networks (packet processing)*

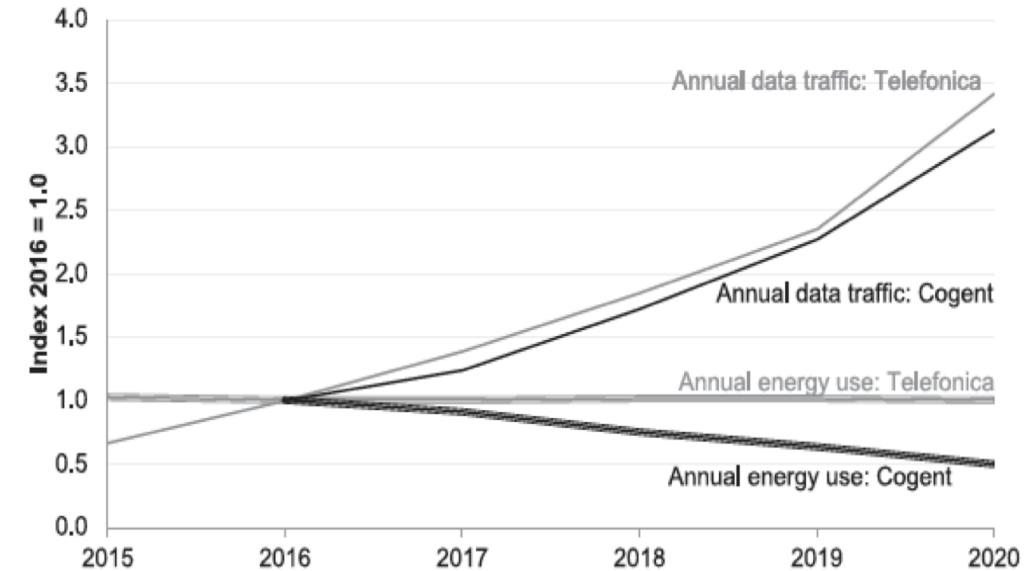


Figure 1. Annual energy use and network data flows for two large network providers, expressed as an index relative to 2016 = 1.0

<https://doi.org/10.1016/j.joule.2021.05.007>

Source: E. Masanet, J. Koomey, "Does not compute: Avoiding pitfalls assessing the Internet's energy and carbon impacts, Joule, vol. 5, pp. 1-4, July, 2021 .

# Ongoing reduction of Energy / bit

## **Moore & Scale:**

Over product generations, networks for same speed will use less energy

Smaller / optimized chips / hardware to build cheaper products!

Often depends on larger sales number (e.g. Recover chip design cost)

*Moore's Law coming to an end though !!*

## **Cost of energy**

Most of the time irrelevant factor. Now (more expensive energy) more relevant

## **Heat per volume**

Per Rack Unit cooling performance in Data Center

## **Battery powered, size reduced equipment**

Anything "mobile" (phone, notebook, ...)

Including solar powered infrastructure, ...

# Summary #1

**Energy saving NOT a driver for evolution of “The Network”**

Not even reduction of cost of energy

... up to a few years ago (in most cases)

Green energy also not a driver

**Why Network still improved astronomical (*in energy/bit*)**

Digitization

Scale & Speed / Moore’s Law

Will examine tenets for “Internet scale & speed”

Optimizations: Cost, Battery (2nd 30 min slot)

# Digitization: Email, Web, Realtime collaboration

**Email / (multi-media mail)** : Various -> SMTP (1982):

Replaced physical letters/documents and Fax

Created explosion of demand for Internetwork technologies

Often (still) (ab)used as generic digital data transfer mechanism

**The „Web“** (1990 , 1995, .. HTTP: 1996)

Replaced „physical/catalog“ shopping and later evolved to „remote“ access/interact with almost any computer application

## Realtime Tele-Collaboration

Telephony already replaced a lot of human travel (especially by plane)

Video-conferencing (1990'th) -> „Telepresence“ (2000th) arguably replaced even more

Where would the planet have been during covid without Zoom&Co ?

*Very painful adoption curve though.*

*It did take a pandemic to create more acceptance*

Core technology: WebRTC (IETF 2015..2024)

# Scale through network convergence

Before convergence into „The Internet“ (up though 2000'th in parts)

Separate physical network infrastructures:

As many as one physical network for every application (group)

Telephony Network

Video/TV Networks

Data / Application Networks

Research networks

Computer vendor networks

Separate wires, protocols, operations, applications

1980'th Gateways for „compatible“ application (email !)

1990'th Multi-protocol (network-layer) networks


Merge physical infrastructure

Novell, DecNet, BitNet, ISO/OSI, AppleTalk, X.25, ..

*Gateways/Multiprotocols*

*Still a fad today in industrial networking !!!*

*Remember: Scale => fewer energy / bit*

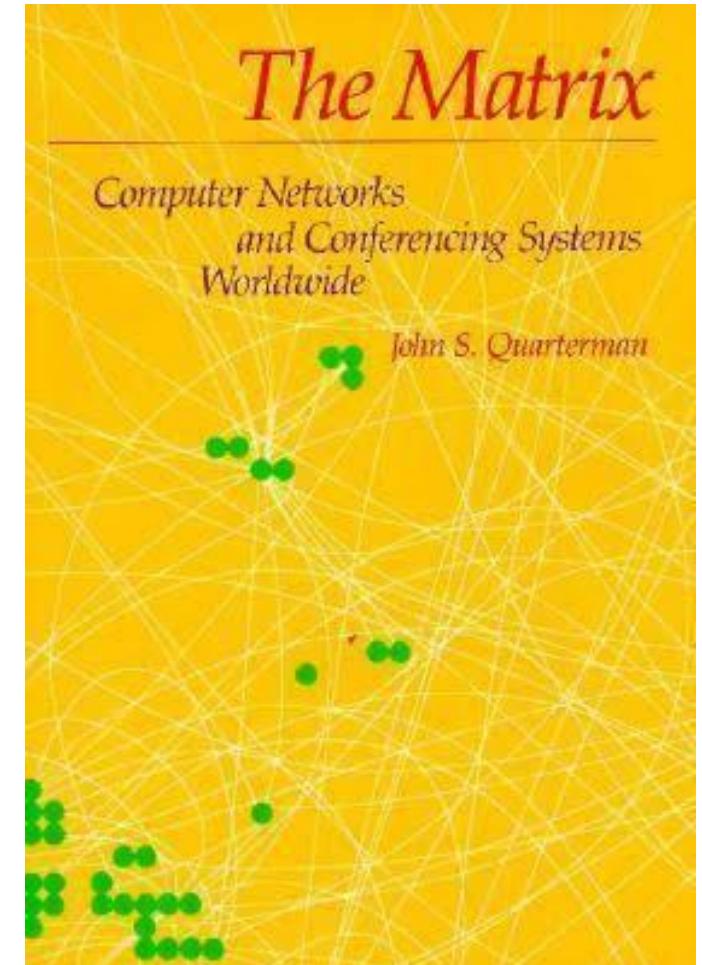

End of 1980'th describes all the different data networks, interconnections, ...

# Datagram Multiplexing

Most successful approach to run all applications across converged infrastructure

Single physical infrastructure with 10x speed vs. 10 separate networks == **lowest energy consumption**

IEEE/Ethernet (L1.5/L2) and IETF/Internet (L2.5/L3/L4) architectures

absorbed almost all application use-cases and built common protocols to allow for converged infrastructure.  
This was one factor for the exponential growth of the Internet technologies

Converged infrastructure „softwareized“ adding applications!

**Datagram Multiplexing Principle – simpler / cheaper / faster => most energy efficient**

Billions of host (CPU) but exponentially fewer packet forwarding „CPU“ in network devices the closer you get to the core.

Needed to optimize / simplify data forwarding to make it scale!

*„Datagram = Lossy/Lousy packet forwarding is enough (for most application)“*

Move complex parts to hosts / transport layer (UDP/TCP->QUIC)

This principle is still being refined now – for > 40 years: TCP/QUIC congestion control BufferBloat – real-time communications via this principle still „in the making“ (see e.g.: L4S work in IETF) . But already „good enough“ for many cases. *How often do you fail to „jump into“ a conversation across Zoom (queuing latency)...*

# The Internet: Scale through converged networks

## Integrated Service:

Every application flow is handled explicitly on every hop in network („per flow“)

Only way to guarantee per-hop latency in general case

1990'th invented – never widely adopted

## Differentiated Service:

Application traffic is mapped to one of few „Classes“

**Best-Effort Class** = normal internet traffic, no strict latency requirements

**Various real-time classes**: Aggregate bandwidth of applications is managed

Controlled admission of traffic to network. You may have to wait before your traffic can begin unless you previously reserved bandwidth.

*Think of highway entrance points with traffic light throttling!*

Same principles also in local networks solutions (802.1/3/...x from IEEE) including WiFi

## Multiplexing (Sharing) increases utilization ... => lower energy/bit

Converged network make „expensive“ real-time traffic cheaper:

Steal bandwidth from „best effort“ traffic – aka: simple, „free“ latency „management“

# The Internet: Scale through Federation

## Federated Networks, no central control!

„Autonomous System“, Inter-AS routing via BGP

THE core aspect to enable unprecedented growth & scale!

Most prior networks did not have the concepts to support this.

## Grow Fast / KISS, „underdesign first“:

Successful Internet technologies always lead a foundation that FIRST made upscale easy & fast  
(now it's called a Silicon Valley design principle – outgrow competition fast)

And delayed problems that only happen under success (under-design first)

IPv4 Address space -> IPv6

Security (ongoing battle). IETF attempts (rightfully ?!) to solve this now, which is one reason why innovation now slows down. Vendors themselves (still) do often not do this.

# The Internet: Scale though Freedom to innovate

## The End-to-end principle (from 1980'th)

„End-to-end address and L4 and up transparency“

Do not let the network get in the way of network users innovating any type of application

We could not keep this true because of IPv4 address exhaustion

But we built out a well-known toolset around NAT (especially home, enterprise networks)

Often quite painful – reinforcing the principle

We also learned how isolation is helped through address fragmentation (but that's a different story)

## End-to-end Encryption (from the 2000th)

Became a tenet (mandate) for the Internet community because of „Snowden“.

End-to-end principle had previously been (ab)used for a lot of traffic interception by network operators to make money

... And of course also „intelligence“ and „criminal“ entities.

End-to-end encryption reinforced building the world's biggest businesses on top of „The Internet“ (not really Internet)

The Internet is devolving into many silo'ed global „Over the Top“ networks. (but that is a different story)

End-to-end encryption reinforced ability for a lot more privacy security critical applications to start using „The Internet“

# Digitization & Scale: Digital Media & Streaming

## Elimination of physical transport

Book, magazines, newspaper (50 Kg printed Cisco IOS documentation shipped across the globe 1992)

Music: Cassette, LP, CD

Video: VHS, DVD, BD/UHD

## Replacement of separate networks for TV

Terrestrial, Cable, Satellites

## Streaming Video THE #1 driver for Internet / traffic growth

Often cited with >80% traffic being media/video in many networks

Greening of Streaming“ aka: further details on Energy consumption/considerations in Cedrics part

## Scale by „abuse“ adaptation of pre-existing infrastructure

IP Multicast (live video) was new infrastructure software / also hardware – expensive to add

„Streaming Video“ leveraged existing/deployed infrastructure!

Web-caches ... (10 years) ...DASH servers.

Allowed fast & „free“ growth.

Invalidated a lot of prior research/planning how to introduce video! (real-time VoD)

# Summary #2 How the network did/does save energy

## **Internet architecture core principles**

to support fast growth with lower cost/energy

- Converged networks

- Datagram multiplexing, IntServ, DiffServ, Re-use of caching

- Federated Networks

- No central control

- End-to-end principle

- Addressing, Transport

- End-to-end encryption

## **Internet Growth + Moore's law**

allowed for never before seen reduction of energy/bit

300bps ... 1Gbps data connection at roughly same energy use: 3 Million times faster

## **Digitization**


Networked solutions are most often more energy efficient than non-networked Physical transport / production of physical products / people

# Tutorial Outline

1. Motivation
2. Network sustainability foundations (Alex)
  - a. Foundational sustainability concepts
  - b. Energy proportionality and its implications
  - c. Structuring the opportunity space
3. How far have we come – past approaches (Toerless)
  - a. A history of networking as history of Digitization
  - b. Scale & Moore's law drive reduction of joule/bit
  - c. Tenets of the Internet to drive scale and lower cost
4. Network sustainability challenges and opportunities (Cedric)
  - a. Deployment aspects: power sourcing, HVAC, warm networking
  - b. Architecture level
    - Communication patterns and function placement
    - Edge, Core, Compute inside and outside the network
    - Lessons from CDN

-- Coffee Break --


# Challenges and Opportunities in Management for Green Networking

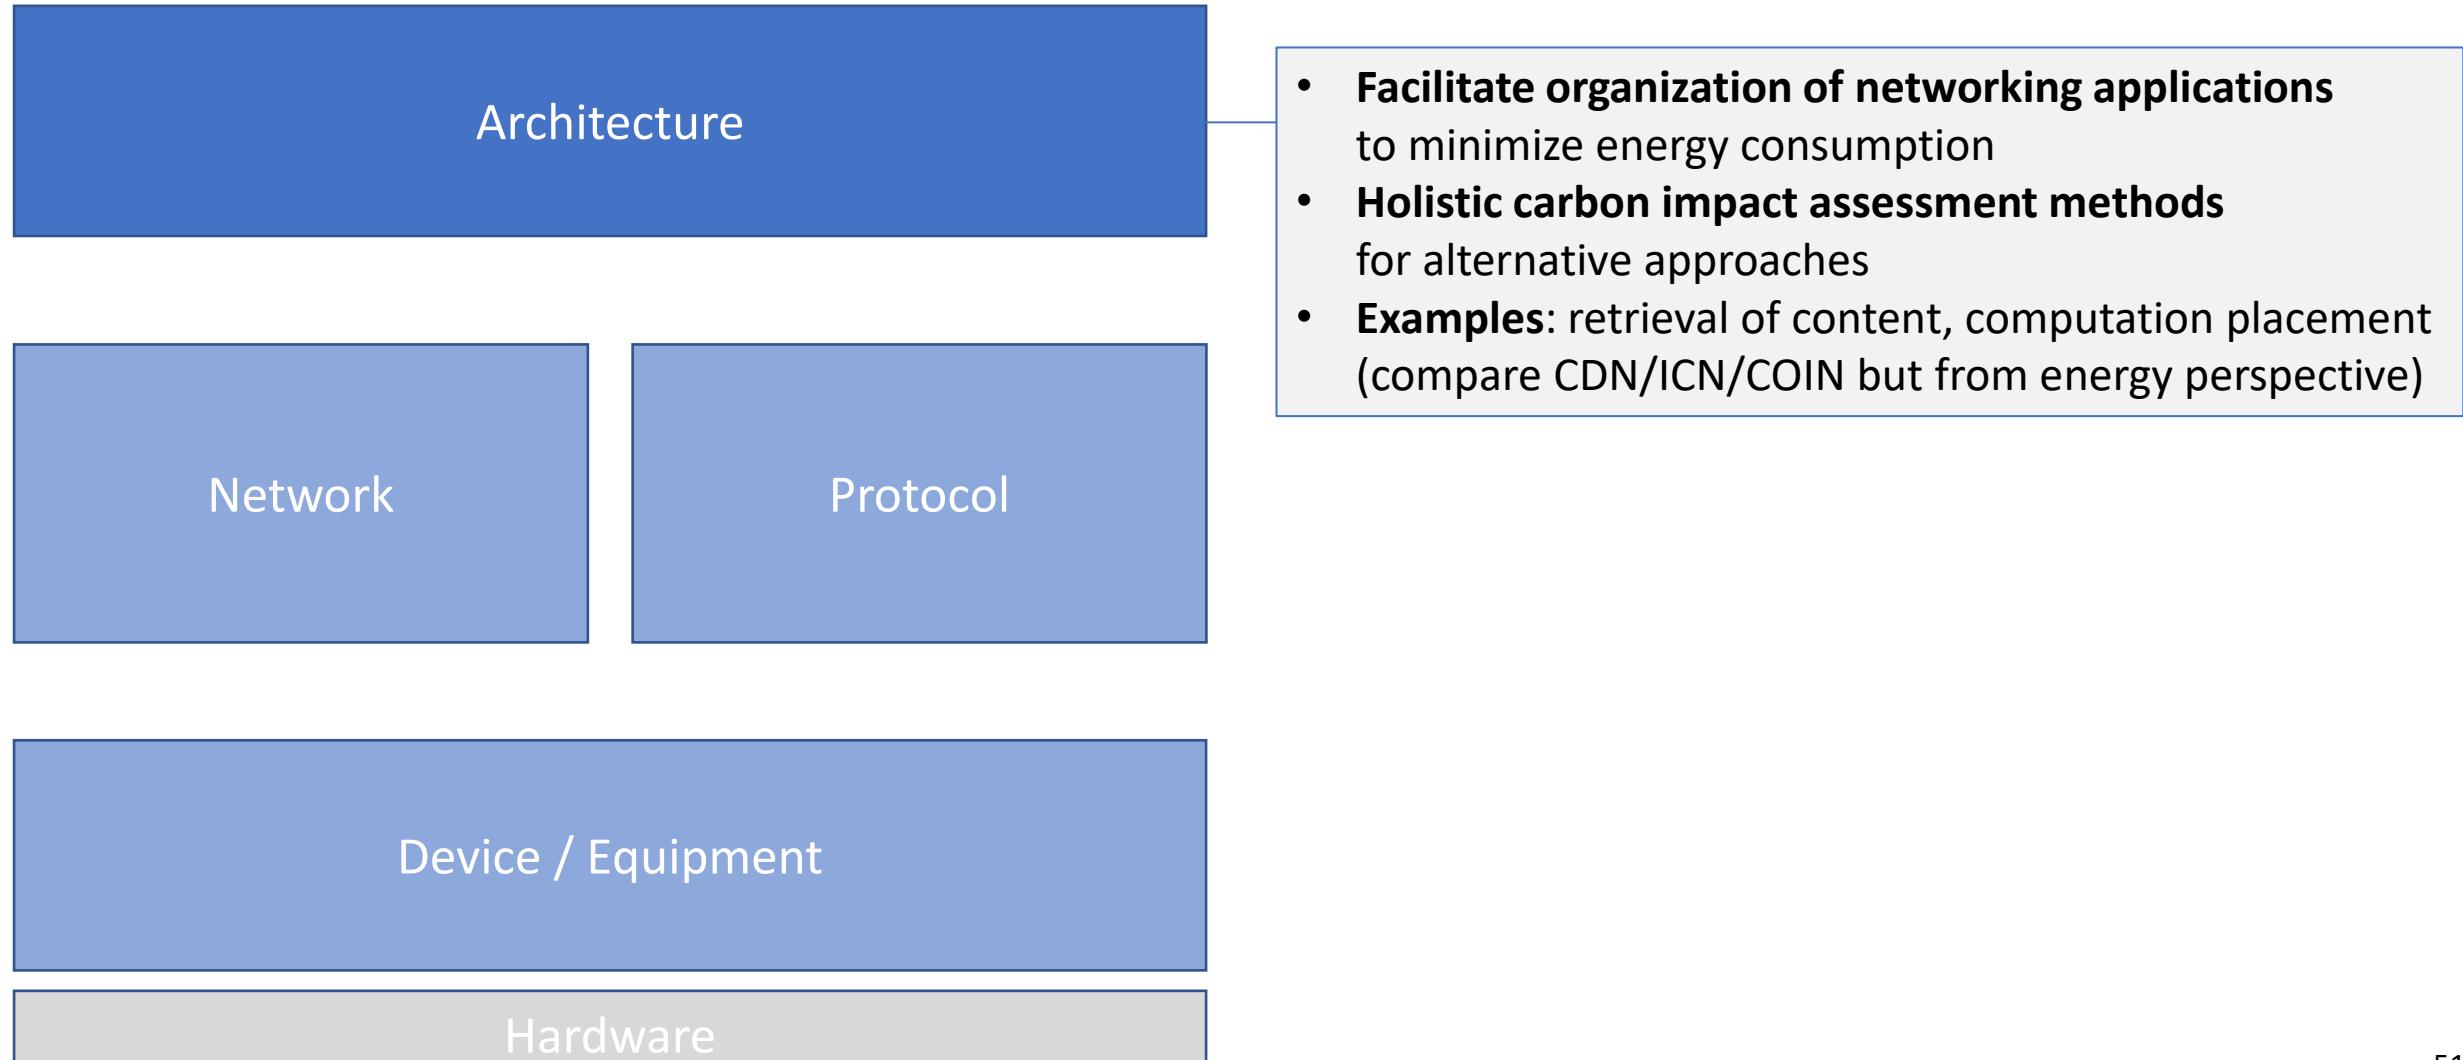

# Deployment Aspects

Basic  
Energy

In par-  
- the

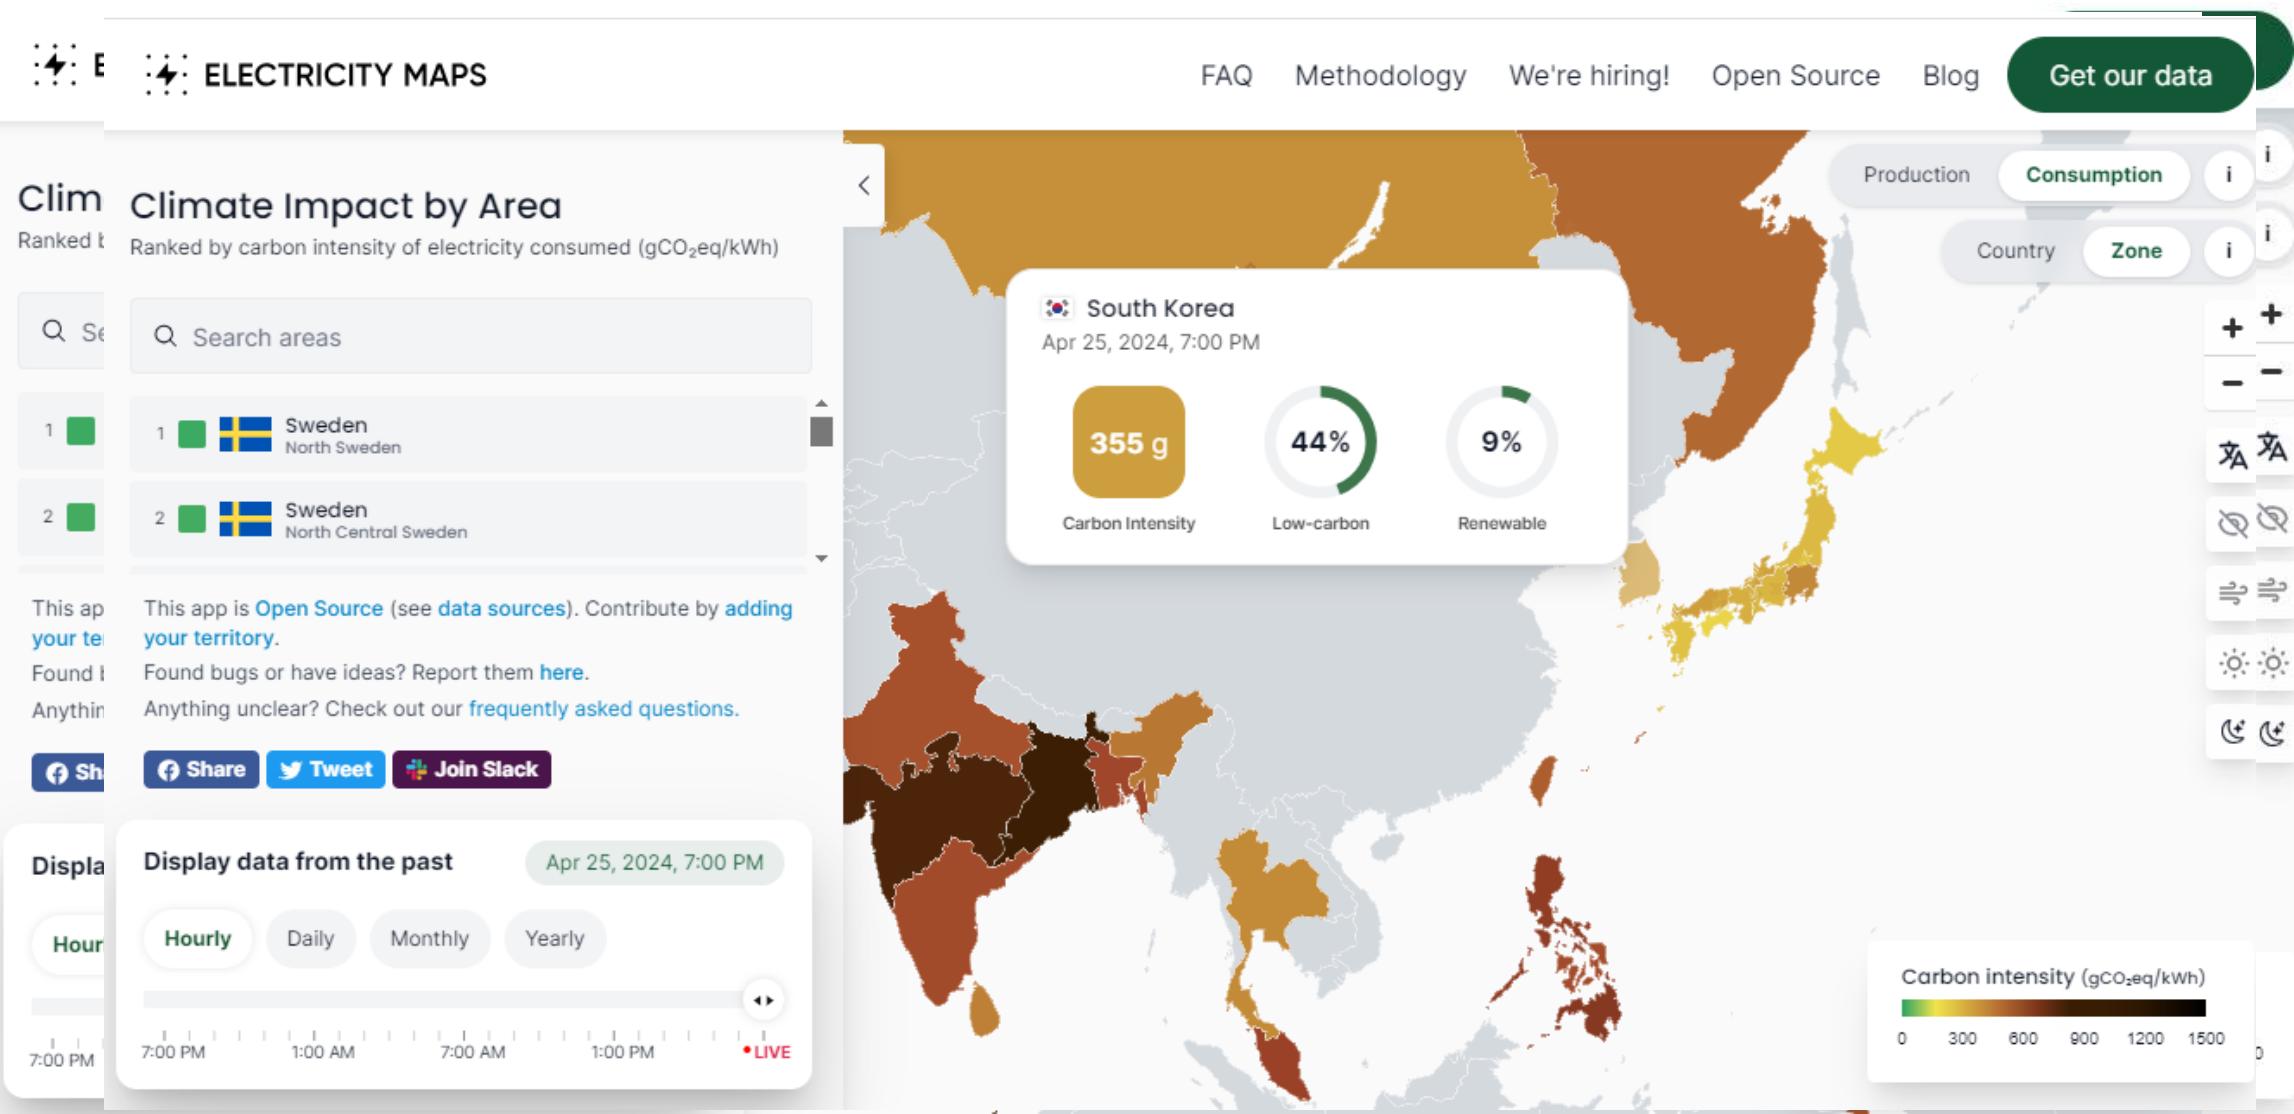

# Power source

Spacial/geographic dimension, but al

Energy may be temporarily efficient

- seasonal drivers to renewable (snow, hydroelectric)
- diurnal patterns for solar/wind

electrek ▾

Exclusives   Autos ▾   Alt. Transport ▾   Autonomy ▾   Energy ▾   Tesla Shop   Store

GREEN ENERGY   ELECTREK GREEN ENERGY BRIEF   EGEB   SOLAR POWER   WIND POWER

## California exceeds 100% of energy demand with renewables over a record 30 days

 Michelle Lewis | Apr 15 2024 - 10:29 am PT | 206 Comments



"Solar on Palm Desert Walmart" by Walmart Corporate is licensed under CC BY 2.0

In a major clean energy benchmark, wind, solar, and hydro exceeded 100% of demand on California's main grid for 30 of the past 38 days.

Stanford University professor of civil and environmental engineering Mark Z. Jacobson has been tracking California's renewables performance, and he shares his findings on Twitter (X) when the state breaks records. Yesterday he posted:

# Deployment Aspects

Energy efficiency is a w  
- the energy produced



**Feature**

**DESIGN > POWER AND COOLING**

## 4 Creative Ways to Reuse Excess Data Center Heat

Here are ways to repurpose excess data center heat to reduce the carbon footprint of the facilities.

Christopher Tozzi | Oct 31, 2023

### General Terms

# Energy Harvesting Small Cell Networks: Feasibility, Deployment, and Operation

Yuyi Mao, Yaming Luo, Jun Zhang, and Khaled B. Letaief

## ABSTRACT

Small cell networks have attracted a great deal of attention in recent years due to their potential to meet the exponential growth of mobile data traffic, and the increasing demand for better quality of service and user experience in mobile applications. Nevertheless, wide deployment of small cell networks has not happened yet because of the complexity in the network planning and optimization, as well as the high expenditure involved in deployment and operation. In particular, it is difficult to provide grid power supply to all the small cell base stations in a cost-effective way. Moreover, a dense deployment of small cell base stations, which is needed to meet the capacity and coverage of next generation wireless networks, will increase operators' electricity bills and lead to significant carbon emission. Thus, it is crucial to exploit off-grid and green energy sources to power small cell networks, for which energy harvesting technology is a viable solution. In this article, we conduct a comprehensive study of energy harvesting small cell networks and investigate

zation manner further helps save operating expenditures [1, 2].

However, as SCBSs are densely and irregularly located, some of them may be inaccessible to the power grid. Moreover, the network power consumption of the SCNs will be high despite the small power consumption of a single SCBS, which will produce a significant amount of carbon emissions. As a result, it is desirable to exploit off-grid and green energy sources to power the SCNs. Energy harvesting (EH) technology is a viable and promising solution, which can harvest ambient renewable energy (e.g., solar and wind energy) to power SCBSs [3]. It is estimated that applying EH techniques to SCNs can achieve a 20 percent CO<sub>2</sub> reduction in the information and communication technology (ICT) industry [4].

Communication networks with EH capability have been extensively studied in recent years, from point-to-point systems [5, 6], two-hop systems [7], multi-user systems [8], to EH heterogeneous networks [9]. However, so far, there has been no systematic study on how to effectively utilize the EH techniques in SCNs, that is, how to  $\epsilon > 0$ , while ensuring that the network congestion and the required capacity of the energy storage devices are deterministically upper bounded by bounds of size  $O(1/\epsilon)$ . We then also develop the Modified-ESA algorithm (MESA) to

## sting Techniques for Low Power Wide Area Networks (LPWANs)



atics, University of Siena, 53100 Siena, Italy;

E-mail: +39-0577-233-702

Received: 3 July 2020



(IoT) architectures and applications has been the gies for the Machine-to-Machine domain. In this alled Low Power Wide Area Networks (LPWANs), to satisfy three main system requirements: low cost, mption. This last requirement is especially crucial riods on limited quantities of energy: to cope with d every day more frequently, and several different The aim of this survey paper is to provide a detailed ring on energy harvesting for their powering. In this roocols will be discussed and, for each technology, e described as well as the architecture of the power

ems. It frees the network devices from having an "always on" energy source and provides a way of operating the network with a potentially infinite lifetime. These two advantages are particularly useful for networks that work autonomously, e.g., wireless sensor networks that perform monitoring tasks in dangerous fields [6], tacti cal networks [7], or wireless handheld devices that operate over a longer period [8], etc.

# Energy Efficiency


In the data center, energy consumption is a major OpEx.

Energy goes to: computing, but also cooling, lighting, etc.

Key performance indicator:

Power Usage Effectiveness - PUE

Namely, the ratio of *total power* into the data center divided by the *power that goes to the servers/IT equipment*

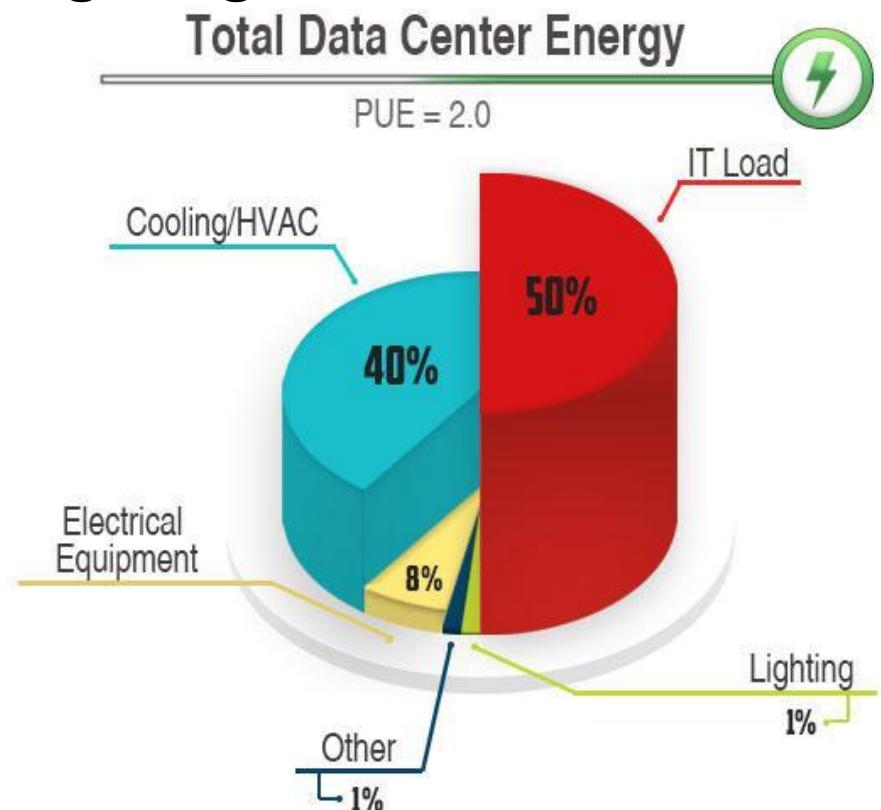

The

## Continuous PUE Improvement

Average PUE for all data centers


PUE of 1.

PUE very

- very ε

What is t

What is t

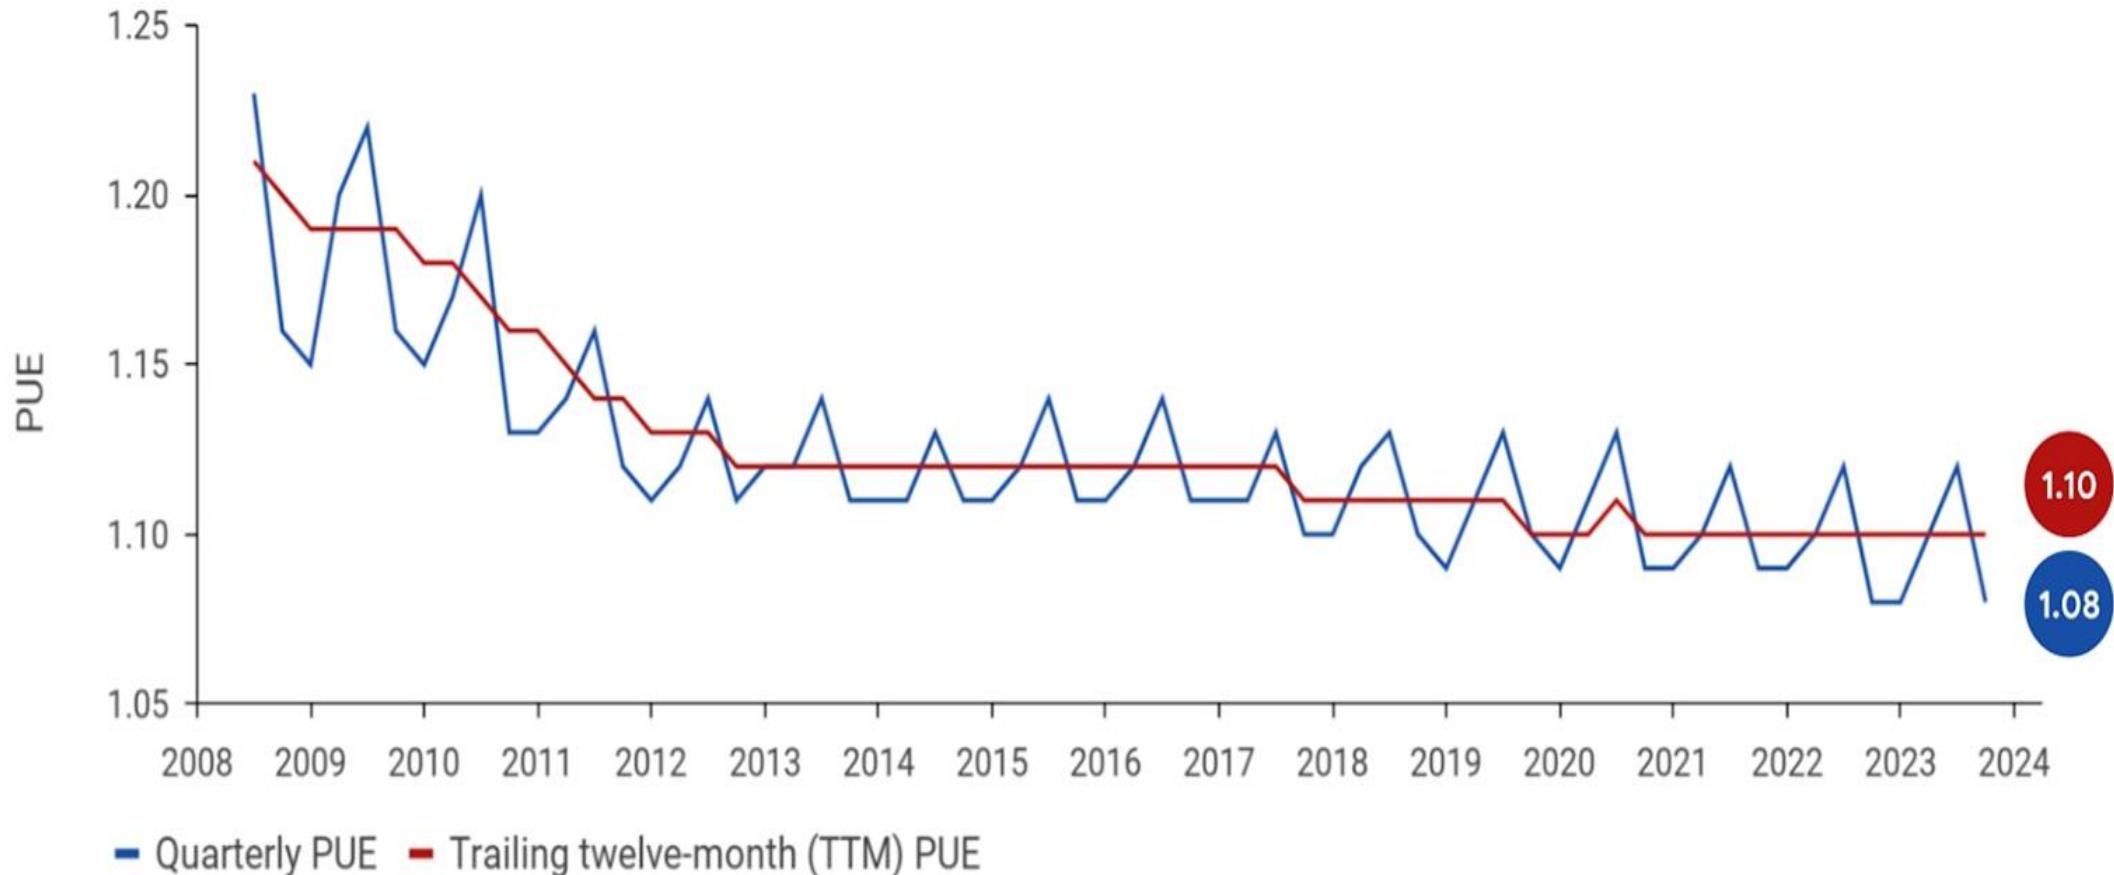

# Efficient Cooling of the DC Infrastructure

Techniques to cool DC:

- Air cooling
- Free cooling
- Hot/cold aisle containment
- Direct evaporative cooling
- Liquid immersion cooling
- Direct-to-chip liquid cooling (- lowest PUE)


Can the network operate efficiently?

Key questions:

- how far do the similarities extend?
- what about the part of the infrastructure that can't be consolidated in one place?

# Architecture Level

## CDN, a case study

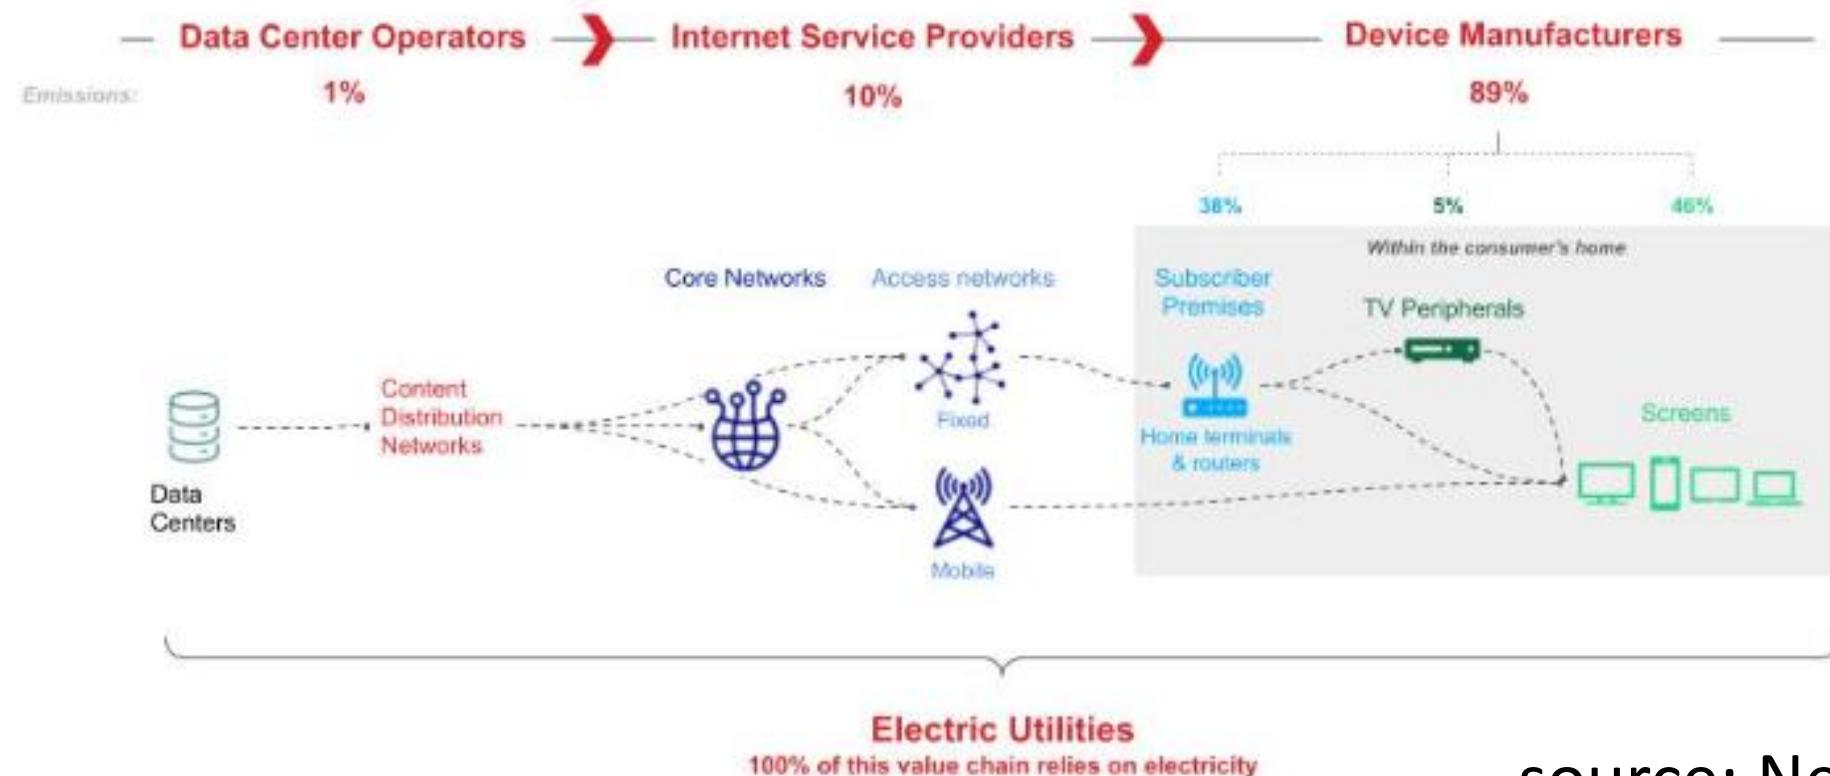

# Greening of Streaming

← → G iea.org/commentaries/the-carbon-footprint-of-streaming-video-fact-checking-the-he... ☆ | New Chrome available

comparable in scope to the Shift Project analysis – accounted for only 0.36kgCO<sub>2</sub>e per hour.

However, because the energy efficiency of data centres and networks is improving rapidly – doubling every couple of years – energy use and emissions from streaming today should be substantially lower.

**Another claim estimates that watching a YouTube video uses over 1600W of electricity, equivalent to the consumption of 15 big screen TVs**

Looking at electricity consumption alone, the original Shift Project figures imply that one hour of Netflix consumes 6.1 kilowatt hours (kWh) of electricity. This is enough to drive a Tesla Model S more than 30km, power an LED lightbulb constantly for a month, or boil a kettle once a day for nearly three months. The corrected figures imply that one hour of Netflix consumes 0.8 kWh.

With 167 million Netflix subscribers watching an average of two hours per day, the corrected Shift Project figures imply that Netflix streaming consumes around 94 terawatt hours (TWh) per year, which is 200 times larger than figures reported by Netflix (0.45TWh in 2019).

Another recent claim on Channel 4 Dispatches estimated that 7bn YouTube views of a 2017 hit song – “Despacito”, by Luis Fonsi and Daddy Yankee, featuring Justin Bieber –

## Carbon Footprint of Video Streaming

Keller\*, Marco Dinuzzi\*, Zhejiayu Ma†

† EDF d'Azur, France  
‡ EDF cast, France

March 2, 2023

parameters of the models, e.g. the energy efficiency per GB of the delivery network; (2) We analyse and compare the models under study in a number of scenarios; (3) We question some of the modeling assumptions made using a real deployment of a streaming server in a controlled environment with up to 2000 clients; (4) We propose a technique to reconcile the models and obtain a CO<sub>2</sub> estimate in between 60 and 140 grams when considering the average worldwide electricity efficiency.

## 2 Models Analysis

Borrowing the life cycle assessment (LCA) vocabulary,

# Netflix

Some knobs are customer

The screenshot shows a web browser window with the URL [help.netflix.com/en/node/87](https://help.netflix.com/en/node/87). The page title is "How to control how much data Netflix uses". Below the title, there is a paragraph of text: "Watching TV shows or movies on the Netflix app uses varying amounts of data per hour, depending on the video quality. You can adjust your data usage settings by following the steps below." On the right side of the page, there is a sidebar titled "Related Articles" with several links.

## How to control how much data Netflix uses

Watching TV shows or movies on the Netflix app uses varying amounts of data per hour, depending on the video quality. You can adjust your data usage settings by following the steps below.

### Web browser

Netflix offers 4 data usage settings.


#### Data used per hour, per device:

1. **Low:** Basic video quality, up to 0.3 GB
2. **Medium:** Standard video quality, up to 0.7 GB
3. **High:** Best video quality:
  - Standard definition: up to 1 GB
  - High definition: up to 3 GB
  - Ultra high definition (4K): up to 7 GB
4. **Auto:** Adjusts automatically to deliver the highest possible quality, based on your current internet

### Related Articles

- [Internet connection recommendations](#)
- [Getting started with Netflix](#)
- [TV show or movie keeps buffering](#)
- [What is Netflix?](#)
- [How to get more from Netflix](#)

# Netflix ESG

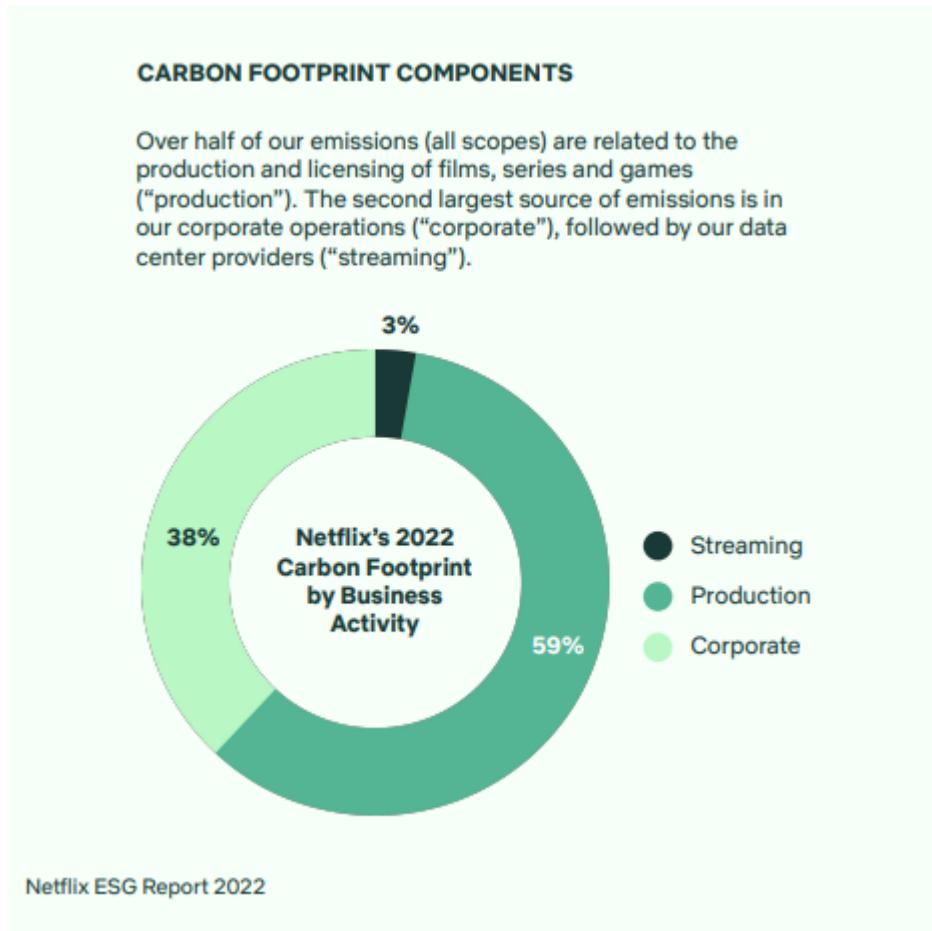

## Emissions Reductions

### TRACKING PROGRESS AGAINST OUR 2030 SCIENCE-BASED TARGET

We track progress against our Scope 1 and 2 emissions target using target-based emissions figures noted in the carbon footprint table above. Target-based emissions only account for emissions reductions resulting from specific decarbonization actions and those related to direct renewable energy supply (e.g., onsite generation, utility and landlord supply, power purchase agreements or direct investments), but not for emissions reductions resulting from our annual purchase of renewable energy certificates (or environmental attribute certificates).

- 2022 Scope 1 and 2 emissions are **12% lower<sup>15</sup>** year-over-year, though they remain slightly higher than our 2019 baseline year due to growth in the business.
- The combined impact of our emissions reductions initiatives across our four priority levers in 2022 resulted in a **30% lower** Scope 1 and 2 footprint value than would have otherwise been reported.
- The vast majority of our emission reductions still come from renewable energy and renewable fuels. Transitioning from diesel to electric will take time to scale to a level that will have a measurable impact on emissions reductions.

<sup>15</sup> In addition to emissions reductions from our decarbonization efforts, external factors also influence the calculated emissions total, including data improvements (e.g., improved data quality, updated emissions factors) and changes in core business activities from year to year (e.g., number of self-managed vs. partner-managed productions which can shift the emissions representation between Scopes).

# Netflix ESG

## DATA CENTERS AND CONTENT DISTRIBUTION NETWORK (CDN)



Carbon Trust's [white paper](#) on the Carbon Impacts of Video Streaming determined that the use-phase emissions associated with data center and CDN operations are small (<1%) compared to the rest of the video streaming value chain.

Netflix partners with Amazon Web Services (AWS) for our data storage and cloud computation needs. AWS has a goal of using 100% renewable energy by 2025. In 2022, AWS reported via their [customer carbon footprint tool](#) that our carbon footprint was reduced by approximately **98%** compared to last year. This is due to AWS's renewable energy usage and purchasing, and energy efficiency initiatives.

This trend is consistent with research findings, which show that the energy intensity of global data centers has decreased by 20% annually since 2010. This is a notable improvement compared with recent annual efficiency gains in other major demand sectors (e.g., aviation and industry), which are an order of magnitude lower<sup>20</sup>.

When it comes to distributing our content to our members, Netflix invests heavily in making this process as efficient as possible with our [Open Connect](#) program. We make 18,000 servers available for free to Internet Service Providers who operate them in their data centers across 6,000 locations in over 175 countries<sup>21</sup>. So when our members press play, instead of the film or series being streamed from halfway around the world, it's streamed from around the corner — increasing efficiency for operators while also ensuring a high-quality, no-lag experience for consumers. On top of that, we've developed encoding technology to reduce file sizes and optimize bandwidth use while maintaining high video quality for consumers. Over the past five years, we have been able to cut our bit rates by roughly **50%**. This is in addition to the significant efficiency gains the telecom industry has achieved within their own networks<sup>21</sup>.

We are encouraged by the strong energy efficiency and renewable energy usage trends of both AWS and our own Open Connect program, and are committed to continually decarbonizing these processes over time. Refer to our recent blog post [Energy Efficiency in Streaming: Innovation Reaping Rewards](#) to learn more.

# Architecture Level

From Netflix data:

- CDN is an energy efficient way to deliver the service
- No baseline comparison to “without CDN” scenario
  - Cost on the network would be prohibitive
    - 15% of Internet traffic as it is
    - Who remembers the throttling of Netflix?
- Design of CDN architecture most likely a net energy reduction
- Can it be generalized?

# Softwarization/Containerization

Function placement:

- NVF moves functions into containers
- SDN softwarize the control plane

Shift from appliance to software

- increase data center energy use
- reduce client use

But what about the edge?

- is there a scaling effect if servers at edge?

# Architecture Level

Key methods to reduce consumption:

- consolidate usage on a platform with high utilization
  - potentially turn off other resources
  - no down time when the idle power consumption is drawn: always churning
- optimize that platform to deliver the service efficiently
  - dedicated hardware acceleration for this platform/service
  - economically feasible to get a more efficient platform since high utilization
- CDN -> reduce network consumption by placing function at the edge and reduce overall network utilization

At the network architecture level, can we use this line of thinking beyond content distribution?

# Compute in the Network

- COIN: multiple efforts
  - COINRG in the IETF
  - From the charter: “comprehend the requirements for compute, and storage”
- Other efforts in academia
  - For instance, ClickINC (*longer considered as a research effort than an infrastructure which can support real-world latency and throughput*) or

## ClickINC: In-network Computing as a Service in Heterogeneous Programmable Data-center Networks

Wenquan Xu<sup>†</sup>, Zijian Zhang<sup>†</sup>, Yong Feng<sup>†</sup>, Haoyu Song<sup>\*</sup>, Zhikang Chen<sup>†</sup>, Wenfei Wu<sup>§</sup>, Guyue Liu<sup>‡</sup>, Yinchao Zhang<sup>†</sup>, Shuxin Liu<sup>†</sup>, Zerui Tian<sup>†</sup>, Bin Liu<sup>†\*</sup>  
<sup>†</sup>Tsinghua University, <sup>\*</sup>Futurewei, <sup>§</sup>Peking University, <sup>‡</sup>New York University Shanghai

### ABSTRACT

In-Network Computing (INC) has found many applications for performance boosts or cost reduction. However, given heterogeneous devices, diverse applications, and multi-path network typologies, it is cumbersome and error-prone for application developers to effectively utilize the available network resources and gain predictable benefits without impeding normal network functions. Previous work is oriented to network operators more than application developers. We develop ClickINC to streamline the INC programming and deployment using a unified and automated workflow. ClickINC provides INC developers a modular programming abstractions, without concerning to the states of the devices and the network topology. We describe the ClickINC framework, model, language, workflow, and corresponding algorithms. Experiments on both an emulator and a prototype system demonstrate its feasibility and benefits.

### CCS CONCEPTS

- Networks → In-network processing; Programmable networks; Programming interfaces.

servers). Such a paradigm shift, dubbed as *In-Network Computing* (INC), has benefited many applications (e.g., key-value store [17, 22], machine learning (ML) aggregation [20, 29, 30], consensus [5, 6], coordination [16], and streaming [15]). These applications are typically enabled by the programmable switches (e.g., Tofino [12]) which however is limited by hardware capability and capacity [19], arising a trend to extend on *heterogeneous programmable network devices* [2, 4, 13, 35] (e.g., Tiara [35] achieves a layer-4 load balancer), where the switch is used to perform throughput-intensive task (packet encap/decap) and FPGA is used for memory-intensive task (physical server selection).

While this momentum is inspiring, a closer look reveals a less optimistic reality: the adoption of INC is currently limited to network operators and has not yet to be embraced by application developers, which hinders the development of new applications and their large-scale deployment. The fundamental reason, we believe, is the lack of a high-level programming framework that can abstract away the complexities associated with issues such as device heterogeneity, network topology, and function mapping. Early efforts [8, 11] attempted to improve the programming abstraction by hiding hardware details. Although this is a valuable first step,

# Compute in the Network

Intuition is that it benefits from the same efficiencies to reduce power consumption

- optimization/reduction of the network traffic
- high utilization of the server (hopefully)

However, content distribution has economies of scale

- > 80% of Internet traffic

What in-network-computation service would require the same level of integration with the network?



- no clear candidate at this point;
- ultra-low latency would mostly be the driver, but that is typically aligned with energy consumption

# Potential candidate: (federated) AI

AI is replacing bitcoin mining as the energy hog in the Internet

## LLM market landscape

Platform	G	OpenAI	AI21labs	DeepMind	NVIDIA	+ others
Model	LaMDA	GPT-3	Jurassic	Gopher	Megatron-Turing	Inflection
SIZE [Bn parameters]	137	175	178	280	530	Meta
Training tokens [bn]	168	300	300	300	270	Tencent Baidu Sberbank

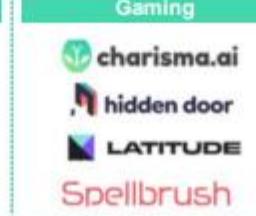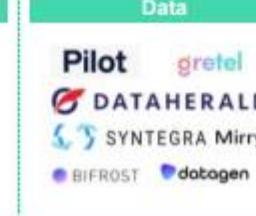Text	Image	Audio	Video	Code
				
Chatbots	Search	Gaming	Data	ML platforms
				

... Supporting hundreds of startups focused on end-user applications

A limited number of major players as cornerstone platforms...



# The Energy Cost of AI

AI cost in energy:

Power consumption when training artificial intelligence (AI) based large language models (LLMs) in 2023

(in megawatt hours)



# Coffee break

# Tutorial Outline (contd)

## 4. Network sustainability challenges and opportunities (contd.)

### c. Equipment level (Alex)

- Instrumentation and metrics

### d. Network level (Alex)

- Overprovisioning and peak shaving
- Tradeoffs

### e. Protocol level (Toerless)

- Use cases and scenarios and their energy / protocol aspects
- LLN – Low Power and Lossy Networks
- Networking for Electricity control

## 5. Where are going (Cedric)

### a. Current initiatives and solution approaches

### b. Pollution-aware and context-variant routing

### c. Research opportunities going forward


## 6. Conclusions

# Recap: Aspects where networking can contribute

- Management, deployment, network optimization
  - Provisioning, dimensioning, managing oversubscription, ...
  - Energy usage is a great parameter to optimize, just like utilization, cost, etc
  - VM+VNF placement, planning of routes/segments/paths
  - Moderating tradeoffs: carbon intensity versus service levels, utilization versus service levels, caching versus access, etc
- Control
  - Selecting from greener path alternatives, carbon intensity as a cost
- Network architecture (e.g. where to cache from carbon standpoint)
- Protocol design (chattiness, traffic smoothing vs bursting, etc)
- **It starts with visibility**
  - “If you can’t measure it, you can’t manage it” (Peter Drucker)
  - ... or assess effectiveness of solutions, or devise solutions relying on control loops...
- **And visibility starts with the right metrics – foundation for everything else**
  - Actionable and where IETF may be able to make an impact

# Metrics


- What metrics are needed
  - To assess effectiveness of a solution?
  - To compare alternative designs?
  - To optimize network deployments?
  - To make better control decisions?
  - To make better management decisions?
- What should metrics cover
  - Energy usage efficiency (scope: network itself)
  - Energy sources (scope: network++)
  - Other aspects: HVAC, manufacturing lifecycle, ...
- How can a holistic picture be provided
  - Account for the whole picture, not just a part
  - E.g. device energy usage vs device lifecycle vs deployment environment energy usage
  - Tradeoffs – e.g. edge vs core, storage/memory vs bandwidth

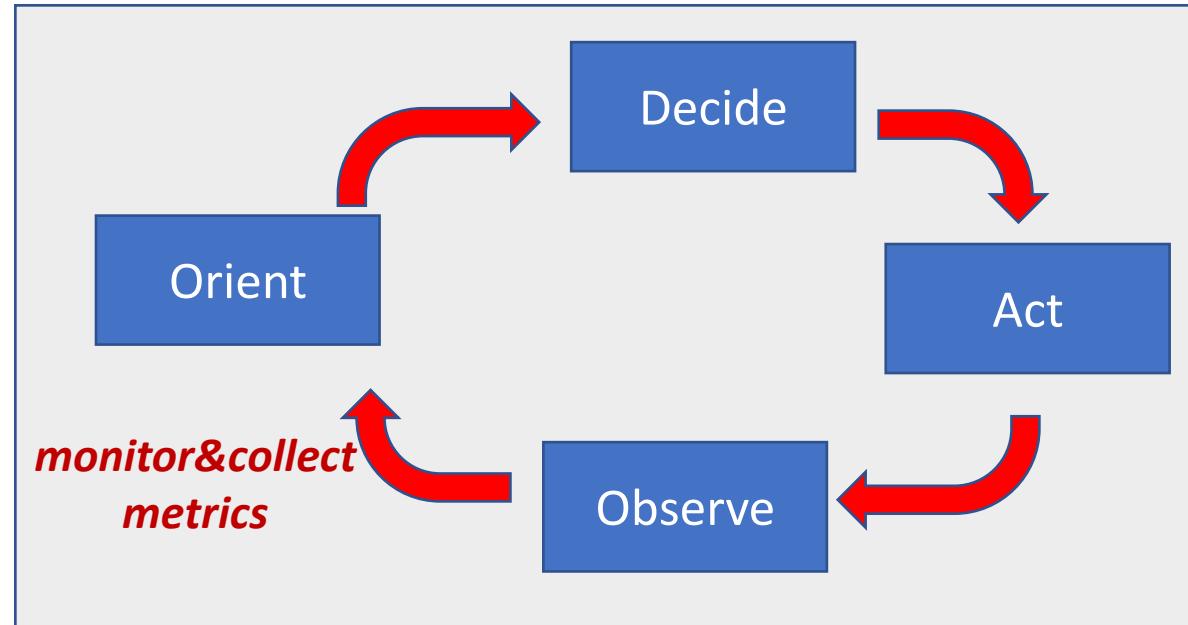

# Green Networking Metrics

- <https://datatracker.ietf.org/doc/html/draft-cx-opsawg-green-metrics-01>
- Internet Draft under auspices of the e-impact program
- Starter set of metrics, augmented with use cases / applications / motivation

# Structuring the metrics space

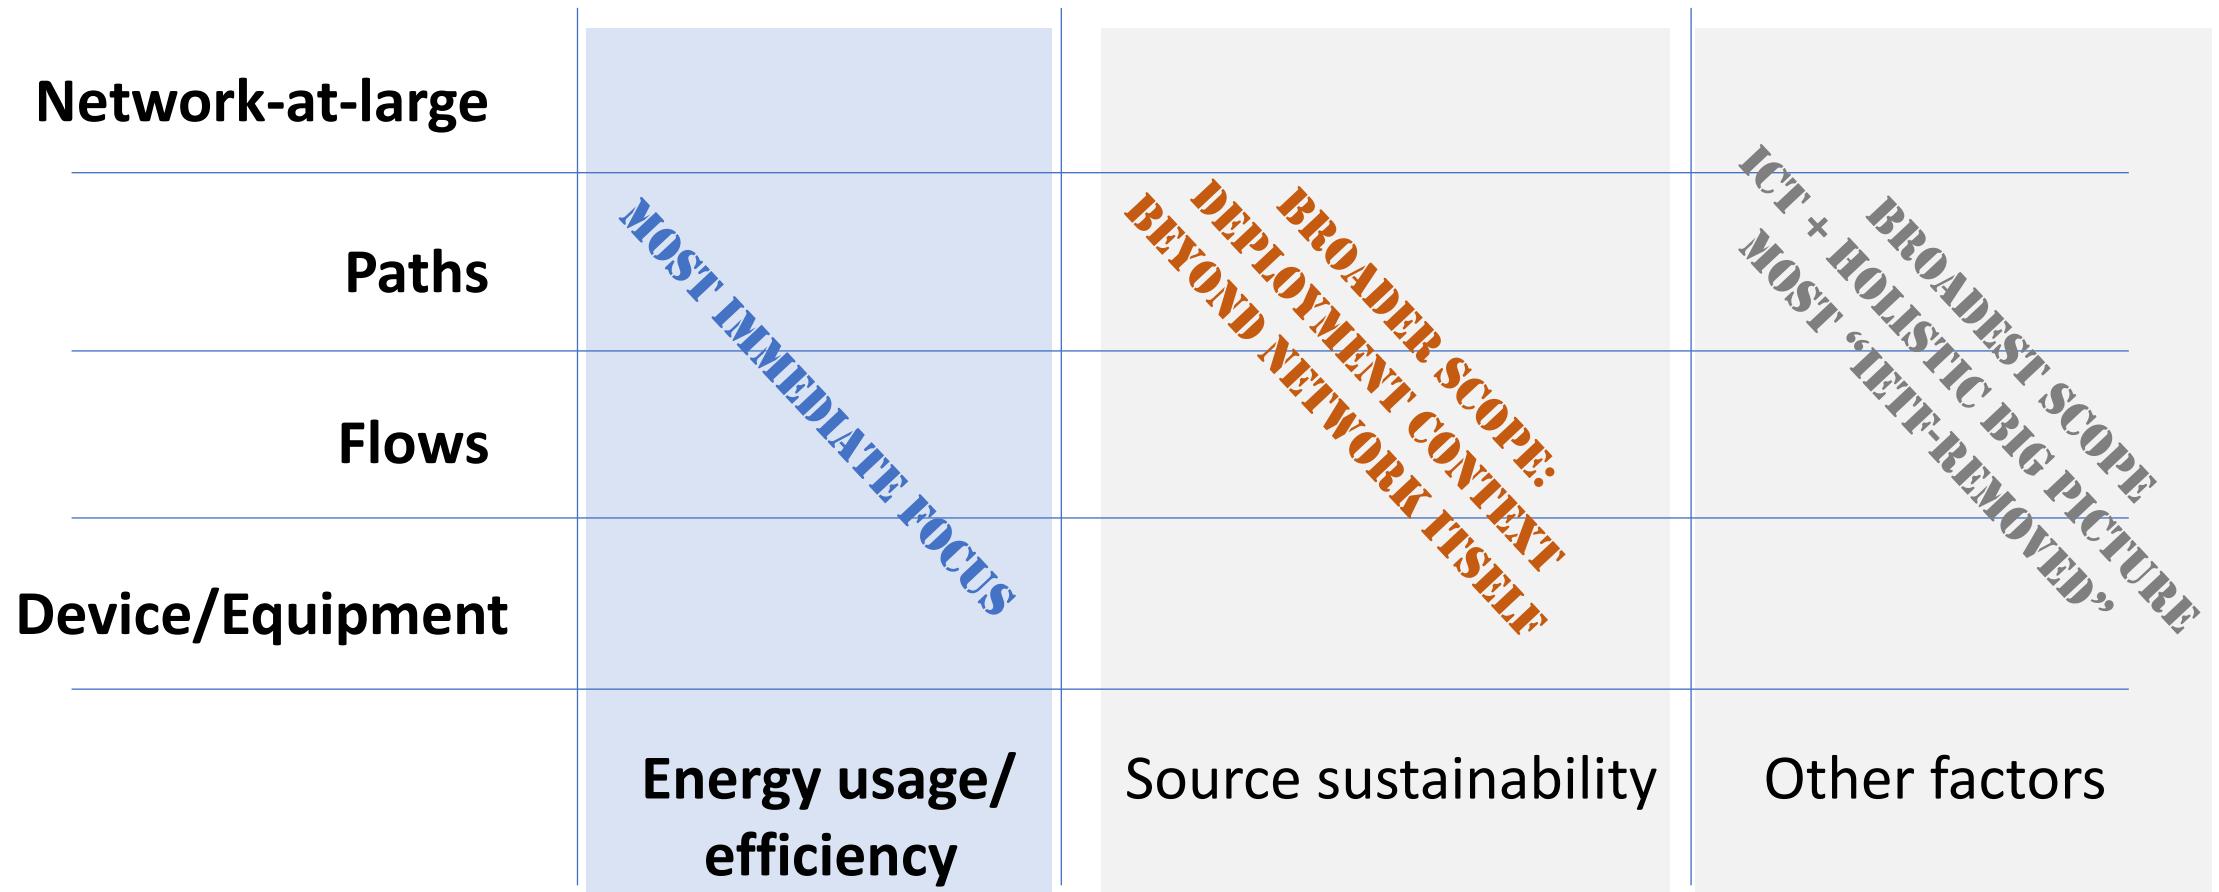

***Disclaimers for what follows:***

*Not a comprehensive list of metrics, some may be speculative,  
some may be less straightforward to instrument than others, usefulness may hinge on particular use cases*

# Energy usage / efficiency metrics

- Device / Equipment level
  - Device ratings – data sheet stuff
    - Power consumption when idle, at various loads (e.g. 50% utilization, 90% utilization)
    - For subcomponents: chassis, line cards, ports
    - For defined configurations: e.g. memory
    - Does not require instrumentation but should be easily discoverable (e.g. provisioned to retrieve on request)
  - Current energy usage
    - Current power consumption
      - for equipment as a whole, for subcomponents – chassis, line cards, ports
    - Power drawn since system start, for the past minute, ...
  - Derived metrics in relation to efficiency
    - Current power consumption per unit of traffic – “energy per bit” (e.g. mJ/KB)
      - e.g. current power consumption / in-octets rate
    - Incremental power consumption per kilobyte (limited relevance unless energy-proportionality)

# Energy usage related to flows


- Energy used by a flow (L2/3)
  - Upper layers: by an instance of a service, by a datastream (L7)
  - May involve correlating telemetry across flows
- Why: may provide a basis for carbon-based accounting
  - Raise awareness of carbon impact of network usage
  - Conceivable: green accounting schemes as an enabler for incentive-based schemes
- Straightforward determination: amortize energy consumed over flow duration
  - E.g. as a share of a flow's traffic
  - Could be determined on a controller
- Alternatively, observe on a device: possible extension for IPFIX
  - Flow statistics today include flow volume, duration, ...
  - Could expand energy consumption metrics
- Issues
  - Should account for packet replication & duplicate elimination  
tradeoff resilience&loss vs energy use
  - Goodput vs throughput (loss, retransmissions)

# Energy metrics related to paths

- Assess carbon intensity of paths and route alternatives
- Examples:
  - Path energy/carbon ratings (function of carbon ratings of hops)
    - Path carbon rating might be average of hop carbon ratings – or maximum – or average
    - Ratings might change dynamically (e.g. solar-powered, battery-powered hops)
  - Current PUE across a path (function of hop PUE)
  - Path Energy Traffic Ratio  
<https://datatracker.ietf.org/doc/draft-petra-path-energy-api/>
- Why
  - Energy-/ Carbon-/ Pollution-Aware Networking
    - Select “greener” path alternative when choices are available
    - May use to wean traffic off less energy-efficient paths
      - PUE decreases with utilization – less traffic to amortize energy use of a hop
      - As PUE deteriorates, even less traffic gets routed across the path
      - As devices get starved for traffic, they may be taken offline when feasible

# Obtaining path metrics

- Option 1: Compute at a controller that monitors device telemetry (current utilization, power usage) and path configurations (provisioned or discovered)
  - Straightforward
  - Does require a controller
- Option 2: Aggregate data inside the network across path itself
  - IOAM Path Aggregation Trace Option  
<https://datatracker.ietf.org/doc/draft-cxx-ippm-ioamaggr/>
  - Basic idea: data plane packets carry IOAM metadata fields
    - Which data item(s) to aggregate
    - Which aggregation function – e.g. max/min, count, sum, average
    - Aggregated data, updated at each hop

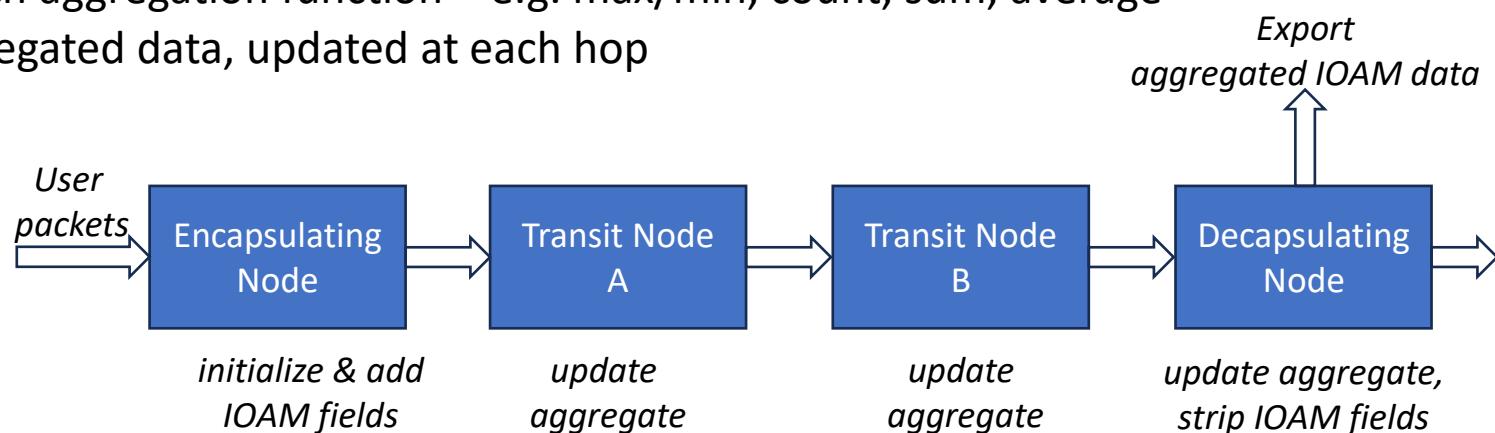

# IOAM Aggregation Trace Option - Discussion

- Variation of IOAM and INT
  - IOAM: In-Situ Operations, Administration, Maintenance; INT: Inband Network Telemetry (P4)
  - Basic idea: collect & append data with node data as paths are traversed
  - Processing occurs offline
  - Growing packet size issue (or complexity of correlation in case of postcard telemetry)
- Aggregation Trace Option avoids those issues
  - Data is aggregated during traversal: eg min/max, sum, avg
  - Very simple operations (comparison, addition, increment)  
 $\text{Aggregate}[\text{hop}_i] := \text{function}(\text{Aggregate}[\text{hop}_{i-1}], \text{data item})$   
Can possibly be performed at line speed (depending on component data)
  - Limited and fixed packet overhead, reduced data volume, greater network intelligence
  - Use cases beyond energy path metrics
    - Identify bottle necks
    - Calculate complete cost (e.g. delay) incurred across the path
    - Take a local action depending on aggregate (e.g., if average exceeds a limit)

# Energy metrics related to network as a whole

- At the end of the day, this is what really matters
  - Total energy consumption (MWh)
  - Issues
    - How to measure – e.g. hidden devices
    - What to measure – production network versus context (incl HVAC etc)
  - Network energy efficiency (MWh/PB)
    - Widely used but surprisingly controversial
    - Efficiency = units of energy per units of utility
      - Issue: data transfer volume as a useful measure of utility
        - What about service levels, loss, retransmissions, etc
        - What would be alternative efficiency metrics

# Beyond metrics and instrumentation

- Metrics and instrumentation are an important enabler for sustainability solutions, but by themselves do very little
- What else can we do?
  - Hardware improvements
  - Power saving modes, port speed downgrades
    - lighter version of taking resources offline
    - needs to be accompanied by solutions that capitalize on that
  - Backward-compatible software...
    - ... and communication protocols
  - Software-defined networking
- Be wary of security considerations
  - Carbon awareness introduces potential new attack surfaces (e.g. to waste energy)
  - Sustainability and net-zero mandates introduce new incentives – expect certification and compliance to become of growing importance


***How can we reduce rip-and-replace  
to reduce embodied carbon?***

# Improving network sustainability at the level of the network

- At the end of the day, this is what really matters
  - Network sustainability may be more than the sum of equipment sustainability
- Networks can be optimized for many criteria, carbon is one of them
  - Minimize the number of resources & the amount of energy required to provide service
  - Applying the lessons of energy proportionality:
    - Minimize resources needed to provide a service online (longer time scales)
    - Apply energy saving modes, downgraded port speeds (shorter time scales)
  - Resource weaning schemes
    - Facilitate putting resources in power saving modes (or on/off, where practical), downgrading port speeds
- Important focus of current research → next section “Where are we going”

# An important caveat


- Sustainability optimization is good, but it needs to occur under constraints
  - Purpose of the network is to provide services
  - Primary operational goals include resilience (against failures), elasticity (to meet spikes in traffic demand), QoE and SLA compliance
  - Clear tradeoffs with sustainability apply – but many of those goals are fairly rigid and non-negotiable

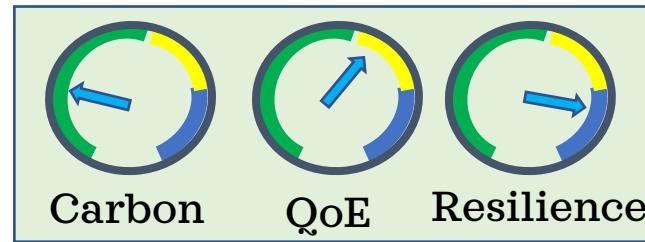

*A use case for Intent-Based Networking?*

# Overprovisioning and dimensioning

- Many operators would not consider letting resources that are deployed go unused
  - Incurring capital expenses for unused equipment does not look to bean counters
  - Avoid potential complications with avoidable churn in the network – from control complexity to troubleshooting
- Networks are typically dimensioned for peak demand
  - At the expense of lower PUE during periods of non-peak demand

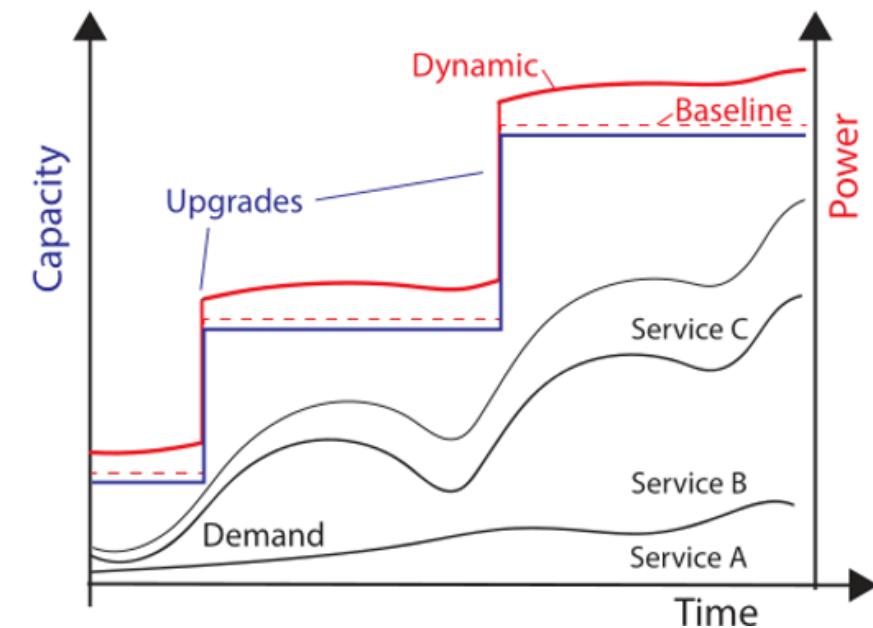

Source: Dan Schien, "Carbon Footprinting of Networks for Digital Services – Factoring in Energy Proportionality". [6]  
IAB Workshop on Environmental Impact of Internet Applications and Systems, <https://www.iab.org/activities/workshops/e-impact/>, 2022 [5]


# Bus analogy revisited



- Goal: minimize the number of busses to conserve energy (and cost) while providing acceptable service level
- But you need to run a certain number of busses to maintain customer satisfaction (keep travel times, service intervals acceptable)
  - This may mean running your bus service with excess capacity → overprovisioning  
Wasted (really, under-utilized) energy
- As long as busses have capacity, additional passengers don't matter
  - To the contrary, they increase utilization and revenue
- As buses get filled to near the levels of capacity, action is required
  - Option 1: increase frequency of schedule (and #of busses)  
(or send a new bus when needed – elastic bus service  
but then it may already be too late, and either way you need a spare)
  - Option 2: modify and/or introduce new bus routes

# Peak Shaving to the rescue!

- By reducing peak demand, you reduce the capacity at which the network needs to be dimensioned – and along with it, wasted capacity that goes unused

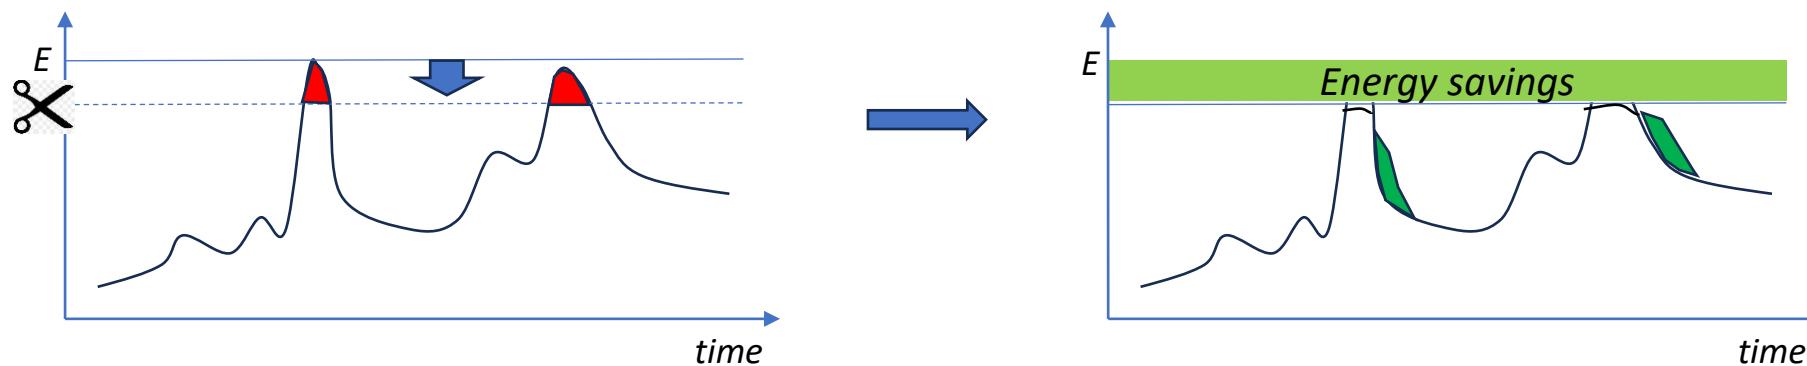

- Compare with “Smart Grid” (energy infrastructure)
  - Many power sources like coal, nuclear are “inelastic” - cannot be rapidly fired up on demand
  - Capacity needs to be able meet peak demand to avoid power outages
  - Techniques
    - Incentives (e.g. peak pricing or rebates to incentivize reduced use during peak periods)
    - Time shifting of demand (e.g. batteries – charge during valleys, use during peaks)

(There are other aspects to Smart Grid: accommodate large numbers of dynamic suppliers, etc)

**What are the possible networking techniques for peak shaving of traffic demand?**

# Tutorial Outline (contd)

4. Network sustainability challenges and opportunities (contd.)
  - c. Equipment level (Alex)
    - Instrumentation and metrics
  - d. Network level (Alex)
    - Overprovisioning and peak shaving
    - Tradeoffs
  - e. Protocol level (Toerless)
    - Use cases and scenarios and their energy / protocol aspects
    - LLN – Low Power and Lossy Networks
    - Networking for Electricity control
5. Were are going (Cedric)
  - a. Current initiatives and solution approaches
  - b. Pollution-aware and context-variant routing
  - c. Research opportunities going forward
6. Conclusions

# Protocol Level

Optimizations in protocols to actually save energy

Presented through their scenarios / business cases  
„[www.showmethemoney.com](http://www.showmethemoney.com)“

# What can Network Researchers do ?

*to green the planet...*

## Speeds & Feeds

Investigate Moore's law and Utilization Growth

But Moore has already ended for RAM:

<https://datatracker.ietf.org/meeting/117/materials/slides-117-anrw-sessa-keynote-its-the-end-of-dram-as-we-know-it-02>

More (network) innovation/growth now in Africa and other developing countries ?!

## Network layer routing & Energy Optimization

Highly depending on hardware – constrained uses easier than non-constrained uses.

Missing hardware features today, E.g.: energy linearity in forwarding / fiber links

## Full-Stack – and beyond

Enable new digitization use-cases

New physical network infrastructures, Enabled

Management across whole stack for optimizations

Manage electricity consumption (and migration to green power) beyond network

# Example areas

Intelligent network management

**Energy optimization in mobile networks**

Low Power and Lossy Networks:

Constrained nodes - DKIM

Constrained radio networks/PAN – Personal Area Networks

Constrained radio networks/LPWAN – Low Power Wide Area Networks

Full Stack: Networks for Electricity Management

**Power Over Ethernet**

Smart Grid

**Syncro Phaser Networks**

Green Ethernet

Enabling Technologies: Autonomic Networking

# Example areas

- Intelligent network management
- Energy optimization in mobile networks
- Low Power and Lossy Networks:
  - Constrained nodes - DKIM
  - Constrained radio networks/PAN – Personal Area Networks
  - Constrained radio networks/LPWAN – Low Power Wide Area Networks
- Full Stack: Networks for Electricity Management
  - Power Over Ethernet
  - Smart Grid
  - Syncro Phaser Networks
- Green Ethernet
- Enabling Technologies: Autonomic Networking

# Energy optimization in mobile networks

## Dynamic Cell Sizing

Measure demand for each cell (#user, #bandwidth-used)

Measure location of users

Increase/Reduce power of towers to best match demand


E.g.: Shrink power of tower at center of big crowd, increase power for adjacent towers so the crowd is now served by multiple towers (more bandwidth).

Scatter/direct spectrum use (when multiple frequencies in use)

MiMo - send/receive into smaller/larger degress within a cell

Re-optimizations in order of 10th of minutes

Introduced by specialized management companies 15? years ago.

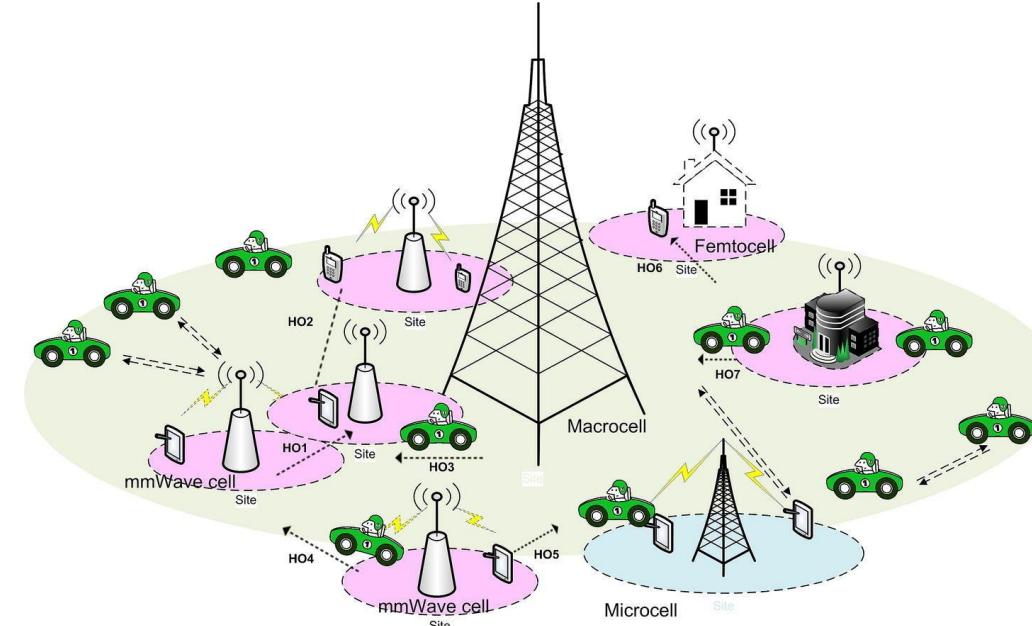

## Time based network availability / limited performance

E.g.: since covid in Germany (high energy prices)

Actively switch off 5G, keep just 2G running at night in country side

Not good for teleworker with night shifts...

Source:

<https://www.sciencedirect.com/science/article/pii/S2215098623000964>

# Networking with constrained nodes

## Battery powered / energy harvesting

Constrained memory: 128KByte ...

Not typically constrained compute!

Example: ESP32 : > 200 MIPS

Non-constrained radio networks

WiFi / bluetooth (not only BLE!)

## Delivery Traffic Indication Message (DTIM)

Allows to only periodically enable radio to receive

Interval 100msec .. 1sec

Packets buffered until interval

ESP32 cpu pause: 0.8 mA

ESP32 ULP cpu pause: 0.025 mA

Low compute, fewer RTT protocols  
highly beneficial for energy use reduction



Wi-Fi/BT Tx packet 0dBm 120mA

Wi-Fi/BT Rx and listening 80~90mA

## Modem Sleep



# Networking with constrained radios

## 802.15.4 – local area mesh networking 20...250kbps

In-Home - 2.4Ghz

Used by many incompatible solutions

Similar RF technologies (different frequencies) in other technologies

ZWAVE, Homematic, ... – also lower, country specific frequencies

Zigbee ca. 2002 (non IPv6) -> 6LoWPAN, e.g.: „Thread“

Zigbee Alliance -> Connectivity Standards Alliance („Thread“)

Matter App/Solution on top of Thread, WiFi, BLE

**Estimated lifetime of 2018 IEEE 802.15.4 radios**

Total average current: 7.29 $\mu$ A (environmental sensor example)



Average for sleep: 1.6  $\mu$ A

Average for reporting every 60 seconds:  $(37 \mu\text{A} - 1.6 \mu\text{A}) / 60 \text{ seconds} = 0.59 \mu\text{A}$

Average for polling every 4 seconds:  $(22 \mu\text{A} - 1.6 \mu\text{A}) / 4 \text{ seconds} = 5.1 \mu\text{A}$

Lifetime: 3.13 years =  $200\text{mAh}/(7.29\mu\text{A}/1,000)/(24 \times 365) = 3.13 \text{ years.}$

CR2032/200mAh coin-cell device

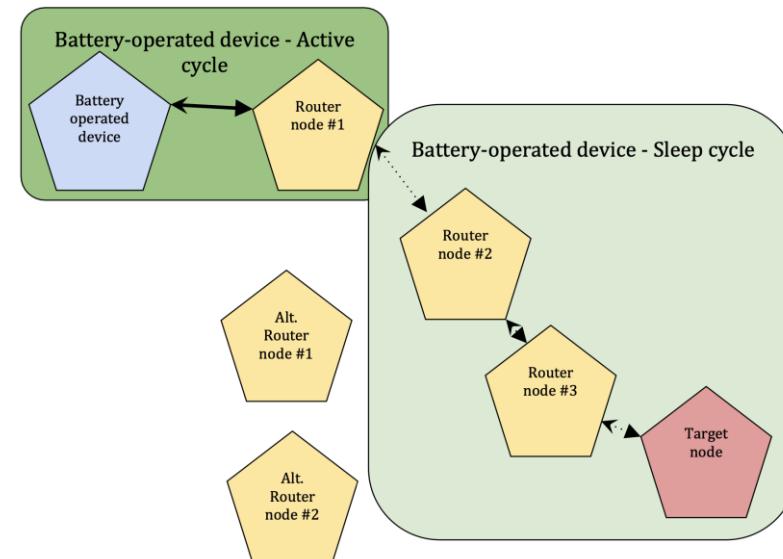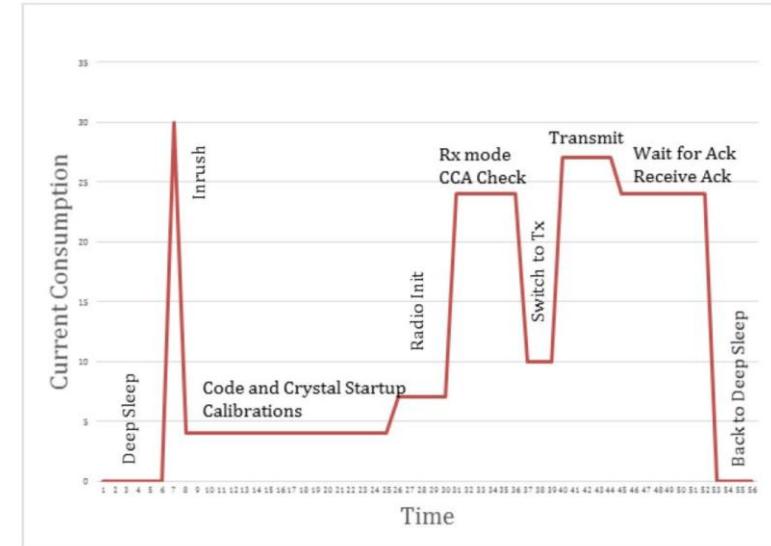

„Parent Buffering“ of 802.15.4

# Networking with constrained radios

## LPWAN – Low-Power Wide Area Networks

[https://en.wikipedia.org/wiki/Low-power\\_wide-area\\_network](https://en.wikipedia.org/wiki/Low-power_wide-area_network)

RFC8376 (2018) – also includes protocol gap analysis

Some RFC on static header compression since then – but various other gaps

### Examples:

LoRa (USA), Sigfox (France), 3GPP LPWAN (e.g.: NB-IoT), Wi-SUN (802.15.4g)

Differences in speed of message passing (0.01 sec to several sec)

0.3 ... 50kbps speed

Up to 4Km range - „line of sight“

10mA during transmission. *No more than one message/5 minutes*

Battery lifetime 2..15 years (larger than coin cell)

Commonly simple topologies: battery client <-> powered gateway networks

# Protocol work / standardization

*Protocol soup  
Learn on your own time*

## IEEE

All L2 technologies for WiFi, Bridging, Low-Power Radio short/long-reach

Various other well-known technologies: PTP (clocking)

## Other SDO

Bluetooth SIG, 3GPP, various others

## IETF

Most IETF work for LLN opened with opportunity to introduce IPv6

Working groups:

**6LOWPAN, LPWAN, 6TISCH, 6LO, ROLL, LWIG, CoRE, CBOR, MANET, ...**

IPv6 over various L2, header compression, Mesh-routing, ...

Network Management / YANG (not specifically for LLN)

Now active work towards energy metrics (different section of this tutorial)

Security, e.g.: DTLS, Elliptic Curves (better for small memory)

# Power over Ethernet

2/4-pair: Non-std: 24V, 802. Std: 44..50v: 802.1af (15.4W) ... 802.1at/bt (90W)

Energy efficiency ? < 5% ?! Overhead vs. 120V (more vs. 240V ?!)

Consider overall energy building/installing single network+power system

Total amount of copper wasted ? PoE better ? (fewer 120/240 wirings needed in greenfield)

Do not use CCA (aluminum) ethernet cables – copper is king!

Electrical Safety, Data security/DoS/privacy (vs. WiFi), „Intelligent =more powering down“

„In ceiling networks“ – replace majority of new building cabling

Lighting! (LED !!!) + dimming + presence sensor = light when/as-much-as needed

Home automation (Environmental, security/doors, cameras)

IT equipment: Screens, printers, computers, TV, radio (alexa everywhere ?!)

Ca. 2010: EMAN WG IETF – management protocols for Power

Any device power (- PoE or else)

„Single Pair Ethernet“ + PoE: 802.3bu (2016): <= 0,5 .. 50W in 10 steps

Various standards for rates 10 Mbps, 100 Mbps, ... 25 Gbps – different lengths

# Smart Grid

France 40 years ago (Cedric ?!)

Optical indication of tarif (turn on/off appliances)

Smart Meter – since 2000

LPWAN/WiFi-Mesh/3GPP for smart meter

Evolution slowing down ?

Electricity consumer/producer management / intelligent billing

Prediction of grid requirements

Predictive electricity trading

Ongoing move to IP protocols  
(RFC6272)

200x issue of wheel reinvention.


Now a lot more good IPv6 protocol stacks

„Big“ new scenarios ?

@Home solar production / management

Predict when it will go back into the grid

Electric cars charging / ab-use as big batteries ?

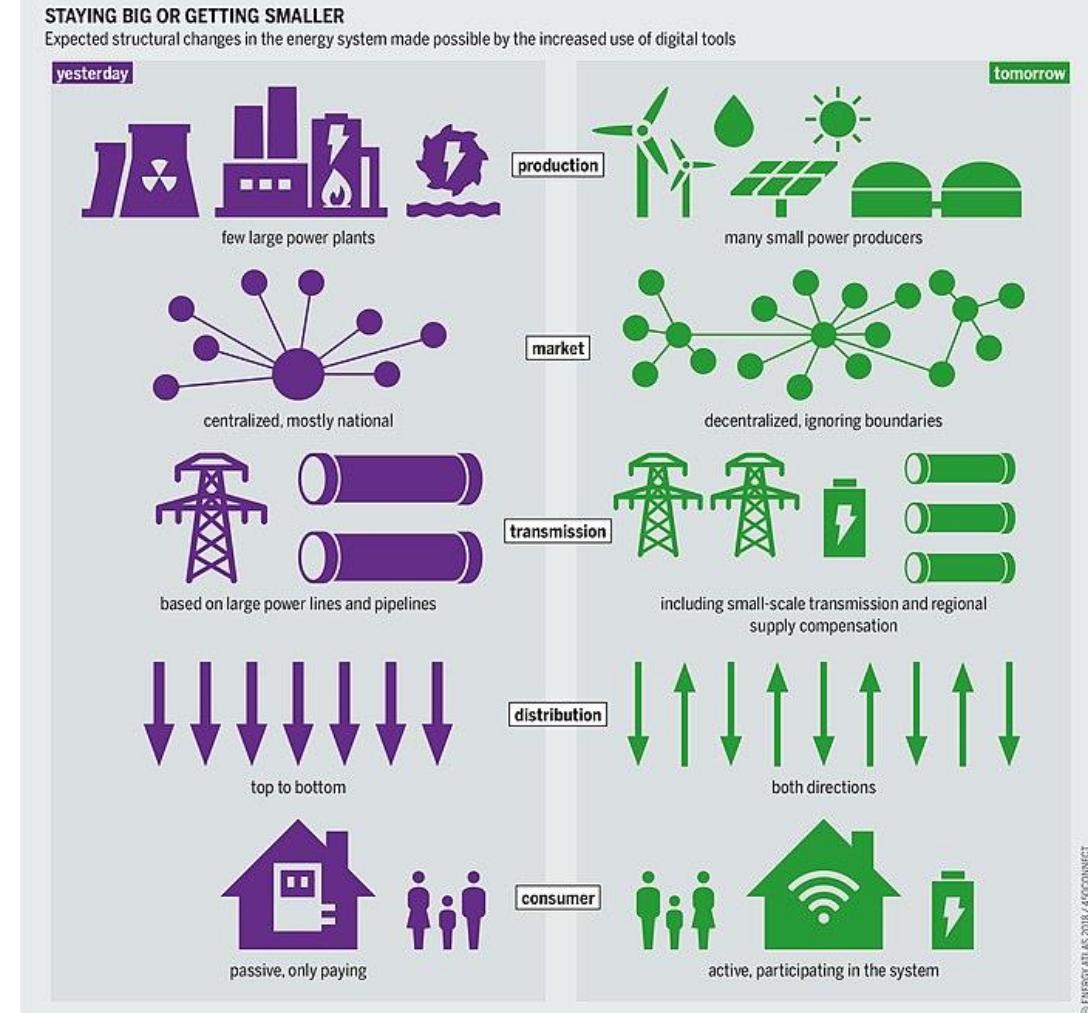

# Syncro Phaser Networks

Power generators/plants need to feed power with correct phase (50/60Hz) into grid.

Slightest deviation causes energy-grid/plant meltdowns  
Generator/DC-converter phase need to be continuously adjusted from adjacent (hundred miles away) plant data (PMU – Phaser Measurement Unit)

Transmission wire length under heat as much as 30% longer,  
aka: continuous dynamic change in phase relationships  
Seen first experiments of measuring length of power cables (also to limit load) in the early 90th – run clock-sync over power cable.

Misfunction often (part of) reason for severe blackouts  
[https://en.wikipedia.org/wiki/Northeast\\_blackout\\_of\\_2003](https://en.wikipedia.org/wiki/Northeast_blackout_of_2003)

Example: NASPI


NASPI.org

North American Syncro Phaser Initiative

TCP/IP networking for accurate clock and PMU data distribution to better synchronize and faster detect errors / faster react

PTP clock synchronization

30 PMU measurement points/sec - 100 times faster than prior technologies.

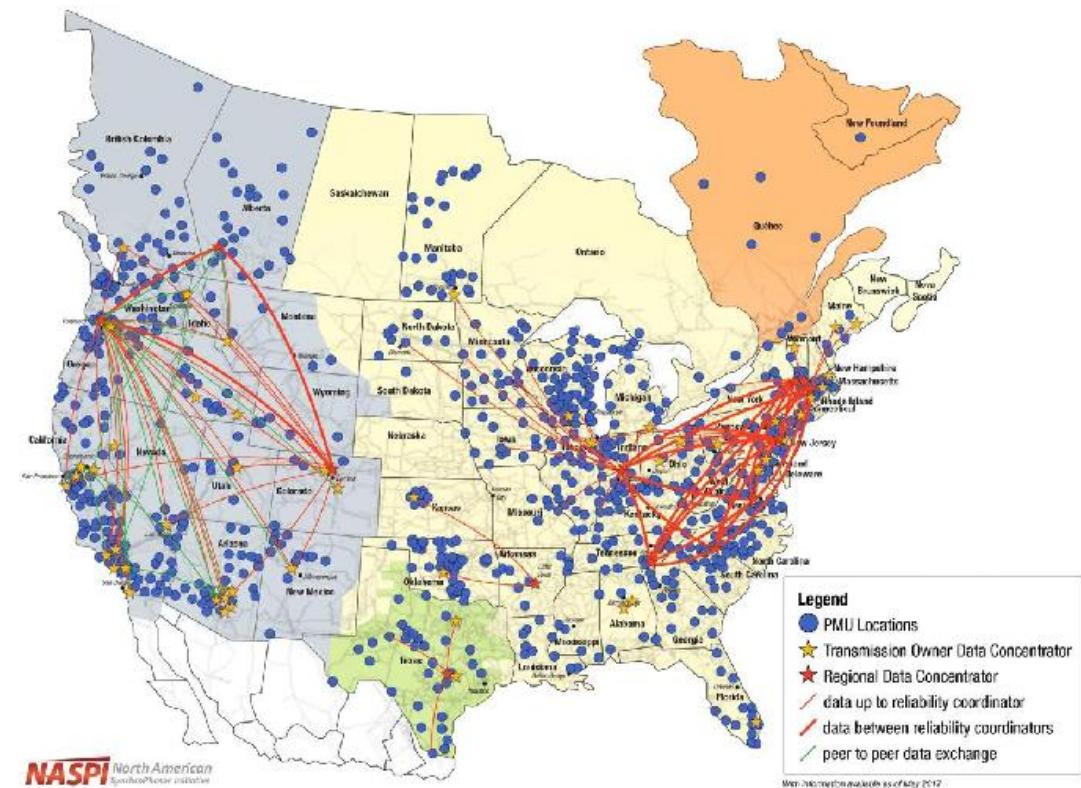

2015 map of PMI, NASPI networks

# Energy-Efficient Ethernet / „Green Ethernet“

[https://www.ieee802.org/3/100GCU/public/mar11/bennett\\_01\\_0311.pdf](https://www.ieee802.org/3/100GCU/public/mar11/bennett_01_0311.pdf)


## 802.3az (2006-2010)

Automatically switch ethernet TX port to low-power when idle (no packets)

Sends „Low-Power Idle“ (LPI) for period  $T_q$  (msec) to remote RX

Hold packets on TX for wakeup time

- RX Wakeup time: 1Gbps: 11.25 usec, 10Gbps: 9.25 usec ... 14.25 usec (with FEC)
- Green Ethernet: 802.3az +
  - Low power ports PHY when no device connected,
  - Power adjust TX based on discovered cable length (100m max, 10m common)
- Some vendor call 100 Mbps „Green“ (20% saving per port ?)
- Not available for Fiber based ethernet!
- Interesting TBD ?! Extense/Use on transit links and with low-latency traffic

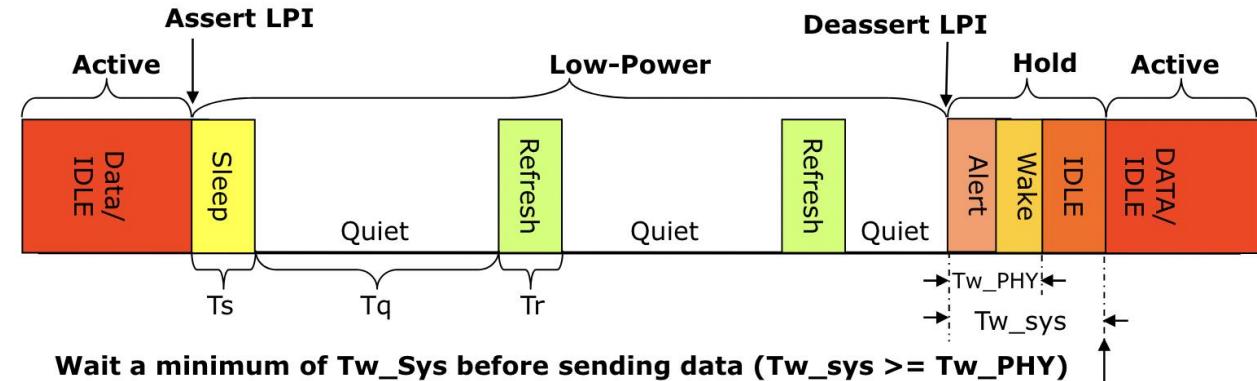

# Candidate Enabling Technology:

Autonomous Networking

*Personal Advertisement*

IETF ca. 2012: Desire to energy save in Internet WAN

- Automatically switch off redundant equipment (links, linecards, routers) during low-load periods
- Was rejected by operators: too risky, network/protocols not reliable enough to guarantee everything (transitive) will be able to be brought back up (remotely).

IETF ANIMA – Autonomous Networking Working Group

- Standardize new architecture of protocols
- High resilience against any type of failures for safe remote manageability is one core use-case
- Replaces separate „out-of-band“ management networks with secure in-band „virtual management network“
- If/When implemented, would allow to provide reliability for remotely „SDN“ controlled port adjustments
- „Full Stack“ solution – most hard requirements are at network router Operating System / Software level  
– not IETF protocol level (resilient OS setup)

# Tutorial Outline (contd)

## 4. Network sustainability challenges and opportunities (contd.)

### c. Equipment level (Alex)

- Instrumentation and metrics

### d. Network level (Alex)

- Overprovisioning and peak shaving
- Tradeoffs

### e. Protocol level (Toerless)

- Use cases and scenarios and their energy / protocol aspects
- LLN – Low Power and Lossy Networks
- Networking for Electricity control

## 5. Where are going (Cedric)

### a. Current initiatives and solution approaches

### b. Pollution-aware and context-variant routing

### c. Research opportunities going forward

## 6. Conclusions

# Current Initiatives and Solution Approaches

- Just a few data points of relevant stuff
- Open area of research, many interesting projects
- Key issues: identifying the problem, measurement studies
- For instance: greening of streaming problem
  - how much energy is really spent
  - within that consumption, what are the most egregious culprits?
- Then, operational solutions
- Today: 1) optimization framework for greening the network; 2) pollution-aware routing;

# Optimization Framework

## Optimization Framework for Green Networking

Cedric Westphal, Alexander Clemm  
Futurewei Technologies,  
Santa Clara, USA  
[{cedric.westphal,alex}@futurewei.com](mailto:{cedric.westphal,alex}@futurewei.com)

**Abstract**—Reducing energy consumption - and especially carbon emissions - is one of the most important challenges facing humankind. ICT (Information and Communication Technology) is a powerful tool to reduce emissions as it offers alternatives to activities that are costly in energy: video streaming saves energy vs driving to a movie theater, for instance. Still, the carbon footprint of ICT in general and networking in particular have been growing, despite better energy efficiency per transmitted bit, due to the sheer growth in Internet usage and traffic.

The information and communication technology (ICT) sector is currently estimated to create 2.7% of all global CO<sub>2</sub> emissions [1] and expected to continue to increase. Hence, monitoring and reducing the CO<sub>2</sub> emissions from ICT is increasingly important. Networks are responsible for around 13% of ICT energy consumption [2], a third of which in turn is attributable to backbone (core) networks [3]. As such, it is important to offer new mechanisms

conference, where the main budget is air travel. For the IETF standardization organization meetings, which tabulated this in an effort to reach Net Zero emission [4], the cost of air travel amounts to 99% of the total energy cost of an event.

While ICT saves energy by such substitution effects, networks themselves still spend a lot of energy and a lot of effort goes into making them more efficient. Telefonica [5] reports that in 2021, its network's energy consumption per PB of data added up to 54 MWh. This amount has dramatically decreased by a five-fold factor over the previous five years. However, gains in efficiency are quickly offset by simultaneous growth in data volume. This report states a goal to reduce carbon emissions by 70% over the next five years.


There are two ways to reduce carbon emissions:  
switching to clean energy sources which is outside of

# Motivation

- Optimizing the energy usage efficiency of networks is important to reduce cost and make networking more sustainable.
- Turning off individual links that are not needed is a way to reduce energy usage. Another way concerns to adapt transmission rates and having end systems adapt the rate and burstiness with which they send their traffic. Turning off links implies rerouting traffic on the on-links and trigger rate adaptation mechanisms, as fewer links imply making less bandwidth available to end system, which causes them to adapt their rates and reduce traffic demand and thereby the energy consumption.
- The problem is how to do so in ways that do not comprise network operations and service constraints, from complying with SLOs to maintaining network resilience.
- Here we define a framework that allows a network controller to dynamically configure the network in such a way that energy consumption is minimized while networking demands are being met.


# Strawman Example

- HTTP adaptive streaming (HAS) such as DASH accounts for 80% of traffic over the Internet

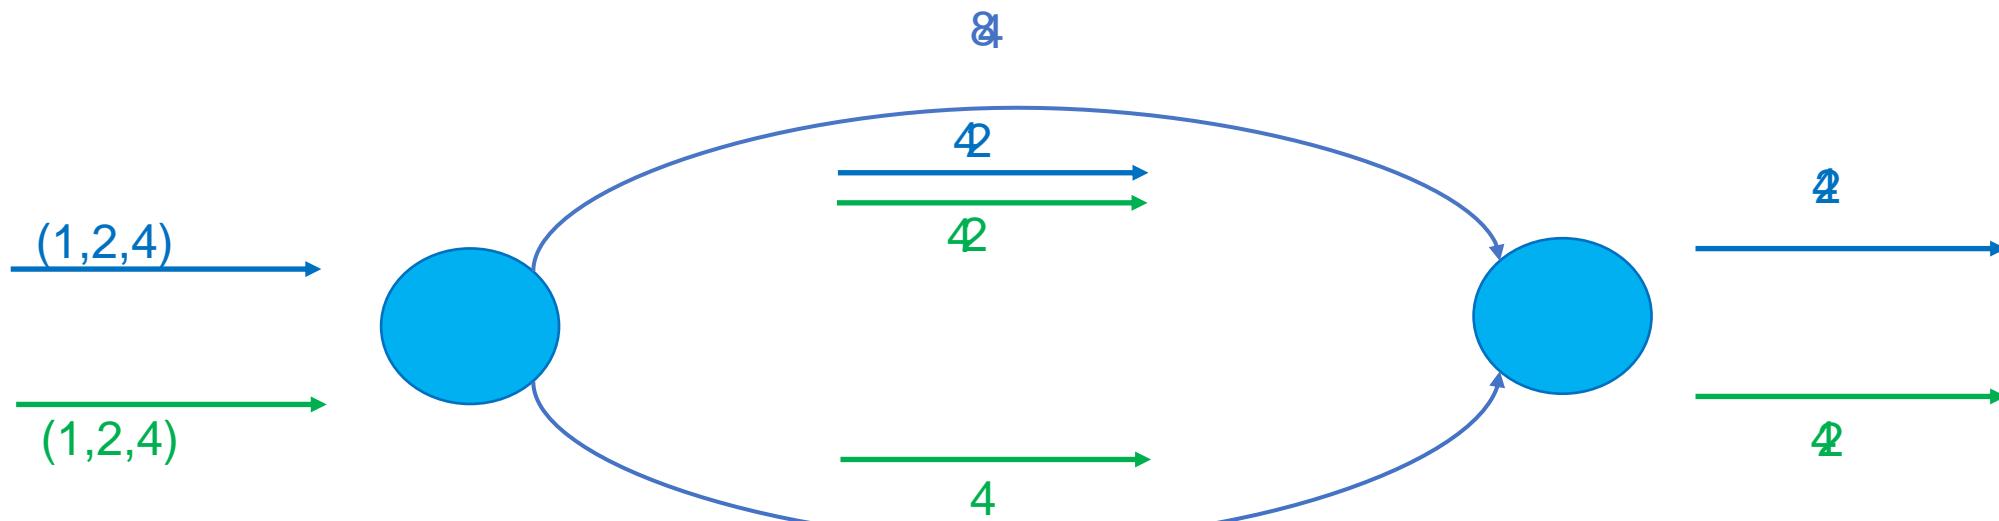

- Cut link energy in half, no impact on QoE
- Cut link energy in half, trigger adaptation  
(e.g. adapt frame rates, color depth, resolution)
- QoE impact still acceptable within bounds of SLA)

# System Overview

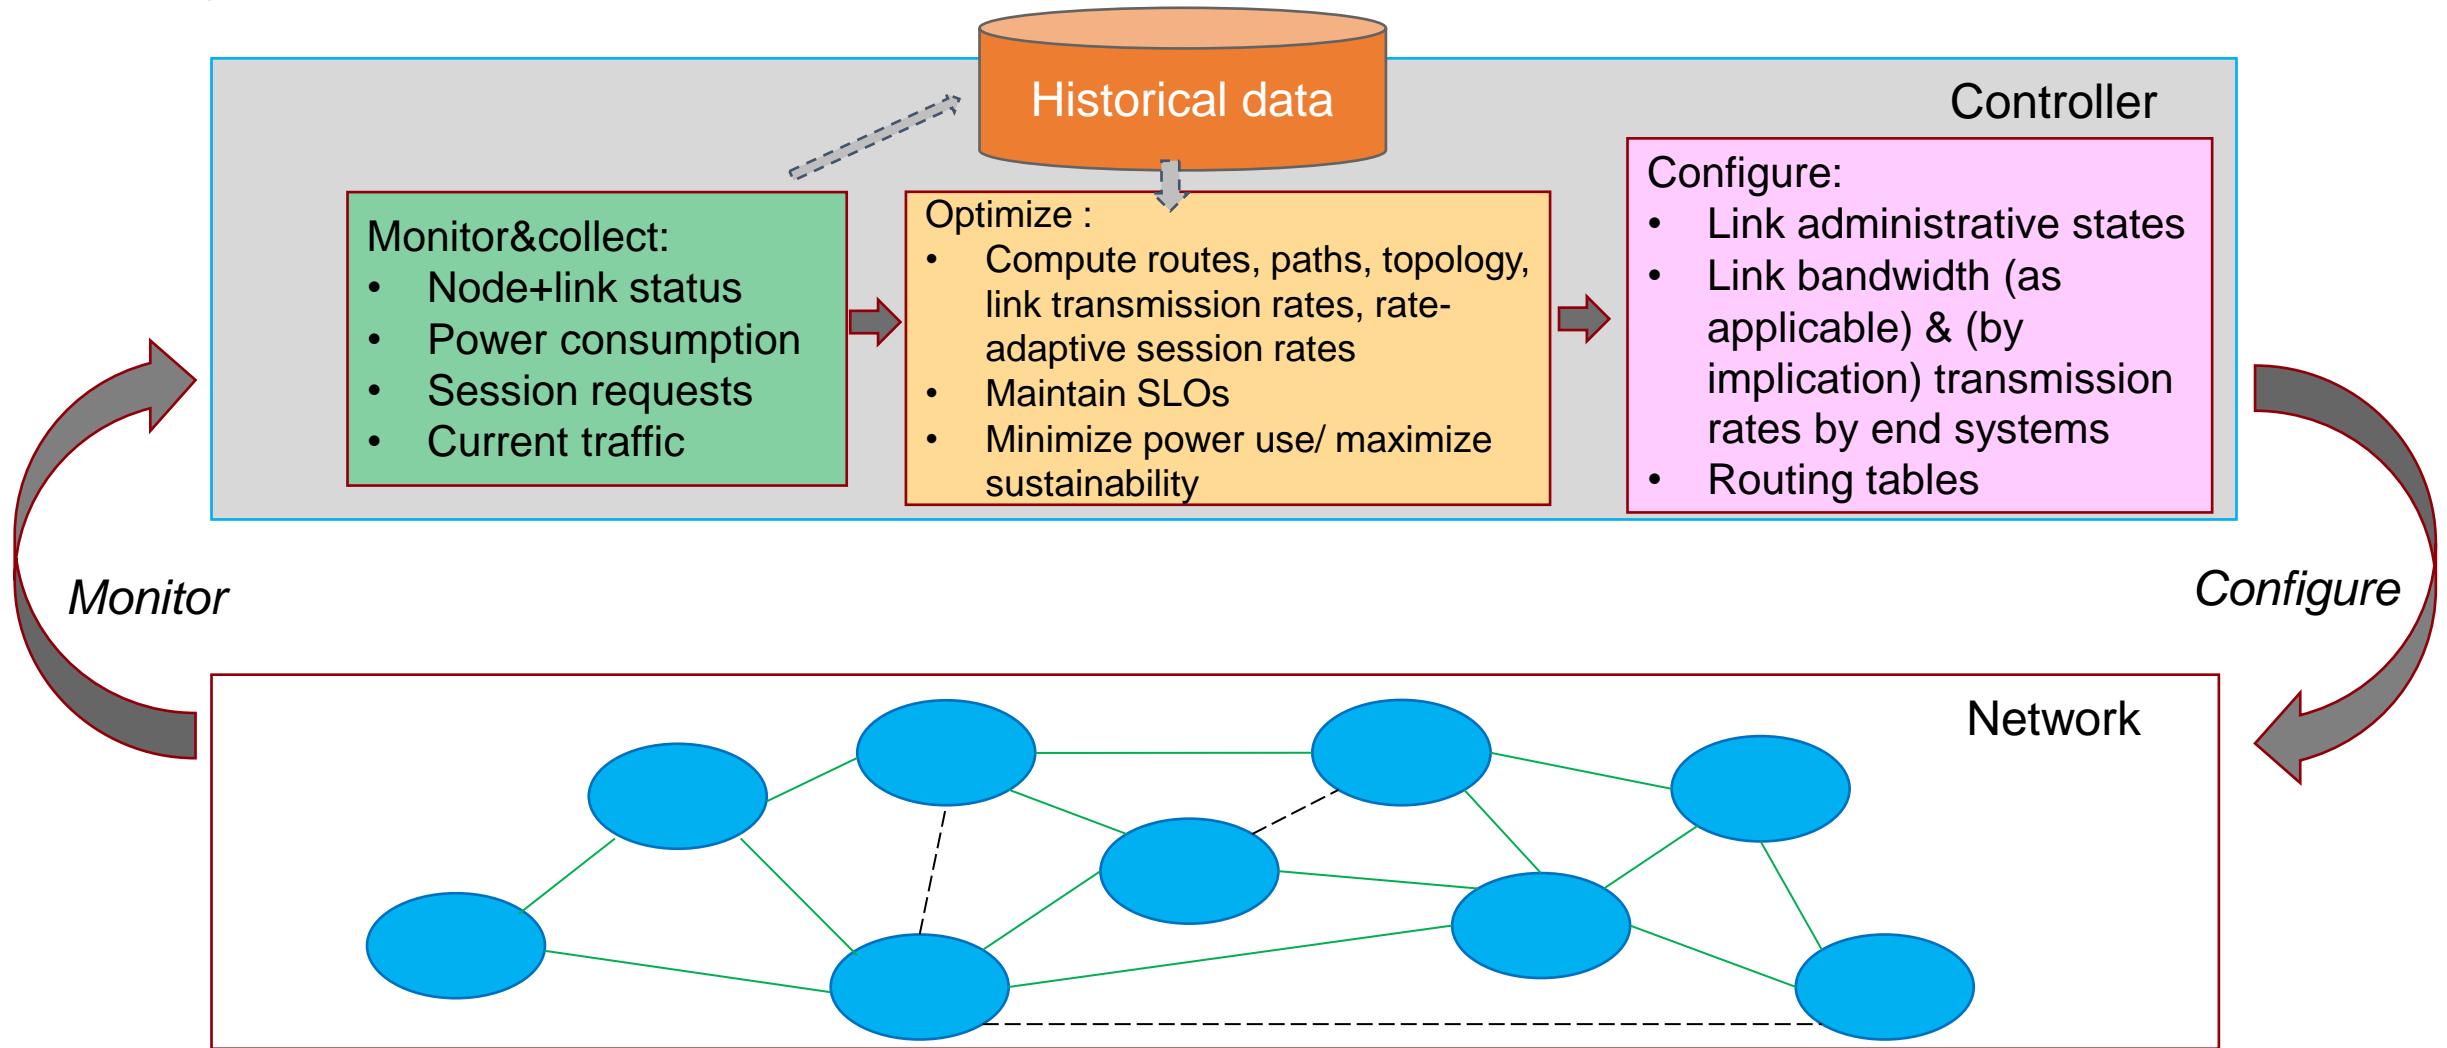

# Framework components

- Controller
  - For a given network and a given traffic demand (per a given set of session requests and traffic matrix), computes paths, routes, and topology (links administratively up / down or in various power savings states and at various transmission rates) in a way that energy consumption is minimized, while maintaining the constraint of meeting required SLOs
  - More formally:  $\min \sum_{j,k} f_{ij}$  under the constraint:  $U(r_k) > U_w$ 
    - where  $f$  denotes the energy cost for a link from  $i$  to  $j$  and  $U$  refers to the user utility
    - For more details, please view the accompanying paper.
  - Can be applied also to maximize sustainability (can be defined as 1 / power consumption, and include other factors such as weighed sustainability ratings of links that are administratively up)
- Monitoring / Collection Function
  - Collect the required inputs, such as current topology, link and node state, energy consumption, session requests, current traffic
  - May utilize a variety of mechanisms incl SNMP polling, YANG-push, etc
- Provisioning / Configuration Functions
  - Control function that configures administrative link states based on computed topology
  - Routing function that configures routing and forwarding tables based on computed paths
  - Functions utilize a variety of mechanisms incl Netconf, P4, etc.

# Refinements

- Controller can take additional inputs, such as historical data, to allow for algorithmic refinements
  - Allow for possibility of **reinforcement learning**, assessing effectiveness of certain actions
  - Allow for the development and incorporation of refined traffic / demand forecast models
- In addition to energy usage / consumption data, other sustainability metrics can be supported and/or factored in
  - “Sustainability scores” of devices and/or links
  - Discounted energy consumption cost based on cleanliness of power sources used to power a device in a particular deployment.

# Optimization Formulation

Two possible approaches are therefore:

- jointly minimize

$$-\alpha \sum_k U(r_k) + \beta \sum_{i,j} f_{i,j} \quad (1)$$

for two positive coefficients  $\alpha$  and  $\beta$  chosen to properly weight the two objectives.

- Set a value for the minimal desired QoE of the users, namely  $U(r_k) > U_w$  and then minimize:

$$\min \sum_{j,k} f_{i,j} \text{ under the constraint: } U(r_k) > U_w \quad (2)$$

## B. Constraints

Recall that  $r_{i,j,k}$  is the rate of session  $k$  going through link  $e_{i,j}$ . The link capacity constraint is therefore:

$$\sum_k r_{i,j,k} \leq c_{i,j} \forall e_{i,j} \in E \quad (3)$$

The flow conservation constraint is:

$$\sum_{e_{i,j} \in \Gamma^+(v)} r_{i,j,k} - \sum_{e_{i,j} \in \Gamma^-(v)} r_{i,j,k} = 0, \forall k \in K, v \neq s_k, d_k \quad (4)$$

$$\sum_{e_{i,j} \in \Gamma^+(v)} r_{i,j,k} = r_k, \forall k \in K, v = s_k \quad (5)$$

$$\sum_{e_{i,j} \in \Gamma^-(v)} r_{i,j,k} = r_k, \forall k \in K, v = d_k \quad (6)$$

where  $\Gamma^+(v)$  is the set of incoming links to  $v$  and  $\Gamma^-(v)$  is the set of outgoing links.

The problem becomes:

**Problem 1:** Minimize (1) under Link Capacity Constraint (3), Flow Conservation Constraints (4)-(6) and Variables  $r_k \in Q, r_{i,j,k} \geq 0$ .

## II. ALGORITHM DESIGN

Solving Problem 1 is difficult, as the rate vector  $Q$  is not linear, and as the energy cost is not concave.

We therefore propose a heuristic solution to a different problem, where we relax some of the requirements of Problem 1.

We can linearize  $r_k$  and then select the nearest lower rate within the vector  $Q$ .

This is a well defined problem for which an approximation can be found.

## I. PROBLEM FORMULATION

### A. Network Model

We consider a network graph  $G(V, E)$  where the vertices  $V$  are connected by edges in  $E$ .  $V$  is the set of nodes in the network, and  $e_{i,j}$  is the link from node  $i$  to node  $j$ . Each link has a capacity  $c_{i,j}$ . The link utilization  $l_{i,j}$  is equal to the bandwidth allocated to link  $e_{i,j}$  divided by the capacity  $c_{i,j}$ .

We consider an energy model where each link is on, and consumes an amount of energy  $\epsilon_{i,j}$ . This amount is zero if the link is off. We assume the link is off if it carries no traffic.

Customers (or users) want to exchange data over the network. To do so, they initiate session  $k$  with bitrate  $r_k$ , where  $k$  is the highest achievable vector drawn from  $Q$ , where  $Q$  is the set of possible rate vectors for the sessions. If the session is not elastic, then  $Q$  contains only one vector. If the session is for adaptive video streaming (as most of the traffic on the Internet currently is), then  $Q$  contains a discrete list of possible rates.

$k$  has a source and a destination within the network graph  $s$  and  $d$  in  $V$  respectively. Under a set of requests from the users, the network needs to allocate the traffic to the different possible paths between each (source,destination) pairs for each user  $k$ .  $r_{i,j,k}$  is the amount of traffic on link  $e_{i,j}$  for session  $k$ .

We consider the users derive a utility  $U(r_k)$  for session  $k$ , where  $U$  is the user benefit function that is a positive, concave, positive function. The sum of  $U(r_k)$  for all users  $k$  is the total user benefit.

We define the energy cost of an allocation. Denote by  $\mathbb{1}$  the indicator function that is equal to 1 if its input is true, and 0 otherwise. Then the energy cost of a link  $e_{i,j}$  is  $f_{i,j} = \epsilon_{i,j} \mathbb{1}\{\sum_k r_{i,j,k} > 0\}$ . We can also equivalently write  $f_{i,j} = \epsilon_{i,j} \mathbb{1}\{l_{i,j} > 0\}$ .

We would like to minimize the energy cost while delivering a satisfying experience to the users. This means that we would like to jointly optimize for maximizing  $\sum_k U(r_k)$  while minimizing  $\sum_{i,j} f_{i,j}$ .

# Optimization Framework Lessons


- Green networking is one of the key problems of our time
  - Switching from dirty energy to renewables is one aspect
  - Reducing the energy consumption of the network (including the embedded energy) is another
- We have presented research challenges to reduce the energy consumption
  - At different layers in the network: architecture, protocols, networks, devices
- Here, we put together an optimization framework to try to solve some of the challenges
  - Takes advantage of the elasticity of the demand caused by adaptive streaming applications
  - Need to be further evaluated and improved!

# Pollution-Aware Routing

Product features >  Google Maps

- *Carbon-Aware Global Routing in Path-Aware Networks*
- *Exploring the Benefits of Carbon-Aware Routing*

## Fuel-efficient routing

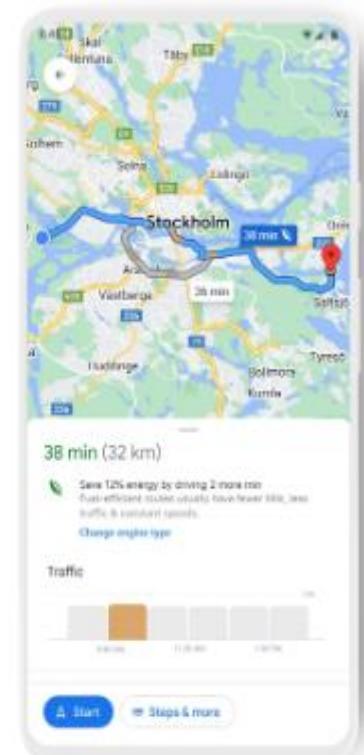

# Carbon-Aware Routing in PANs.

- SCION is a Path-A
  - Can specify a source
- Define a Carbon-aware metric based on forecasts and disseminate it across a PAN architecture
- So that end point can choose paths with lower emissions of that metric
- If end users pick it, then the network can compete on reducing carbon emissions

## Carbon-Aware Global Routing in Path-Aware Networks

Seyedali Tabaeiaghdaei  
ETH Zürich

Jonghoon Kwon  
ETH Zürich

Simon Scherrer  
ETH Zürich

Adrian Perrig  
ETH Zürich

### ABSTRACT

The growing energy consumption of Information and Communication Technology (ICT) has raised concerns about its environmental impact. However, the carbon footprint of data transmission over the Internet has so far received relatively modest attention. This carbon footprint can be reduced by sending traffic over carbon-efficient inter-domain paths. However, challenges in estimating and disseminating carbon intensity of inter-domain paths have prevented carbon-aware path selection from becoming a reality.

In this paper, we take advantage of path-aware network architectures to overcome these challenges. In particular, we design CIRo, a system for forecasting the carbon intensity of inter-domain paths and disseminating them across the Internet. We implement a proof of concept for CIRo on the codebase of the SCION path-aware Internet architecture and test it on the SCIONLab global research testbed. Further, through large-scale simulations, we demonstrate the potential of CIRo for reducing the carbon footprint of endpoints and end domains: With CIRo, half of domain pairs can reduce the carbon intensity of their inter-domain traffic by at least 47%, and 87% of end domains can reduce their carbon footprint of Internet use by at least 50%.

### 1 INTRODUCTION

Growing concerns regarding climate change encourage companies to measure and reduce their carbon footprint, i.e., the amount of carbon emission that can be attributed to them. This also applies to their use of Information and Communication Technology (ICT), as ICT has a notable contribution of 2.7% to global CO<sub>2</sub> emissions [39], which is expected to grow significantly – approximately four times – until 2030 [3]. Hence, reducing the carbon footprint of ICT use is becoming increasingly relevant for enterprises, manifesting in carbon-neutrality statements of major technology corporations.

While these efforts are laudable and impactful, promising opportunities for further carbon-footprint reduction exist. Indeed, previous research has identified a range of such opportunities. However, most of these proposals apply to local aspects: intra-domain networking (i.e., within a single domain), data-center optimizations, or neighbor-domain cooperation (cf. §8). In contrast, inter-domain networking (i.e., among multiple domains), which accounts for around 13% of total ICT energy consumption, has so far received less attention. An exception is the work by Zilberman et al. [70], who identify carbon-aware networking as a high-potential research area and sketch the concept of carbon-intelligent routing, i.e., to

# Evaluating Carbon-Aware Routing

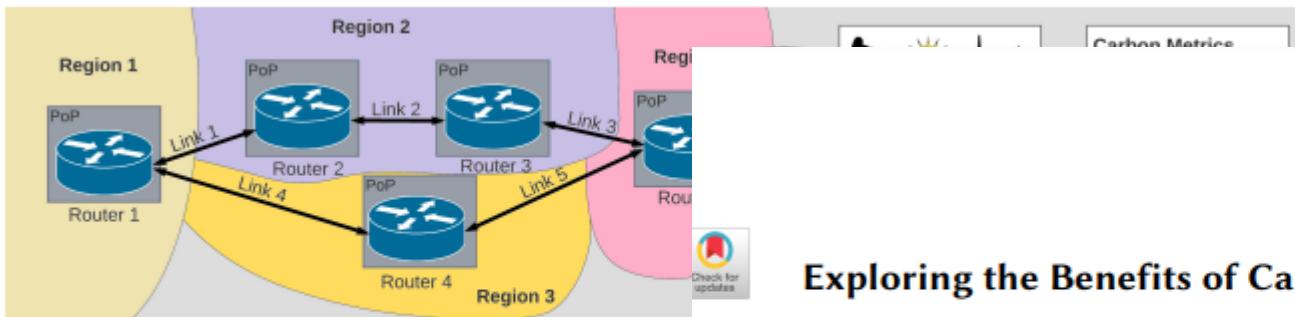


Fig. 3. Overview diagram

- Evaluates the benefit of carbon-metrics (power, energy label, carbon)
- *“Routing is one way to reduce carbon footprint. Re-design of network equipment and power is necessary”*

## Exploring the Benefits of Carbon-Aware Routing

SAWSAN EL-ZAHR, Department of Engineering Science, University of Oxford, UK

PAUL GUNNING, BT Research & Network Strategy, UK

NOA ZILBERMAN, Department of Engineering Science, University of Oxford, UK

Carbon emissions associated with fixed networks can be significant. However, accounting for these emissions is hard, requires changes to deployed equipment, and has contentious benefits. This work sheds light on the benefits of carbon aware networks, by exploring a set of potential carbon-related metrics and their use to define link-cost in carbon-aware link-state routing algorithms. Using realistic network topologies, traffic patterns and grid carbon intensity, we identify useful metrics and limitations to carbon emissions reduction. Consequently, a new heuristic carbon-aware traffic engineering algorithm, CATE, is proposed. CATE takes advantage of carbon intensity and routers' dynamic power consumption, combined with ports power down, to minimize carbon emissions. Our results show that there is no silver bullet to significant carbon reductions, yet there are promising directions without changes to existing routers' hardware.

CCS Concepts: • Networks → Control path algorithms; Network protocol design; Network measurement; • Applied computing → Environmental sciences.

Additional Key Words and Phrases: Green Networking, Sustainability, Routing, Internet Carbon Emissions

### ACM Reference Format:

Sawsan El-Zahr, Paul Gunning, and Noa Zilberman. 2023. Exploring the Benefits of Carbon-Aware Routing. *Proc. ACM Netw.* 1, CoNEXT3, Article 20 (December 2023), 24 pages. <https://doi.org/10.1145/3629165>

## 1 INTRODUCTION

The fast development and deployment of the Internet has widely focused on reliability, scalability, speed and security. Starting in 2001, many initiatives tackled the power efficiency of Information and Communications Technology (ICT) for wireless networks [12, 48] and then in 2003 for wired

# Challenges and Opportunities

- We need a PUE for the network
  - Power Usage Effectiveness for the data center: ratio of total energy vs computing energy, to quantify the overhead of the data center
  - We need a metric that states how efficient the network is – how much it costs to transmit a bit over a network
  - In energy and in carbon footprint
- Trade-offs are not obvious due to opacity of the system

# Challenges and Opportunities

What is needed:

- **Equipment instrumentation** advances for improved energy-awareness,
- Definition and **standardization** of granular management information
- Protocol advances for improving the ratio of goodput to throughput and to reduce waste: reduction **in header tax**, in protocol **verbosity**, improvements in coding, etc.
- Protocol advances to enable **rapidly taking down, bringing back** online, and discover availability and power saving status of networking resources while minimizing the need for reconvergence and propagation of state.
- Network advances to allow to **dynamically take resources offline** where feasible while minimizing churn.
- **Energy footprint aware traffic steering and routing**; carbon footprint as a traffic cost metric to optimize.
- **Reorganization** of networking architecture for important classes of applications (examples: content delivery, right-placing of computational intelligence) to optimize green footprint and holistic approaches to trade off carbon footprint between forwarding, storage, and computation.

# Some steps in the IETF

- Presented at IETF114 (Philadelphia, 7/22) and 115(London 11/22); great interest from the community for the issue
- IAB Workshop in December '22
  - See description of the workshop and material at <https://www.iab.org/activities/workshops/e-impact/>
  - Engagement from academia, operators, equipment manufacturers, and activists
  - Climate change as a social issue goes beyond the network
- We co-authored several drafts:
  - Challenges and Opportunities in Green Networking, draft-cx-green-ps-01
  - Green Networking Metrics, draft-cx-green-metrics-01
- Position paper:
  - *Challenges and Opportunities in Green Networking*, in 2022 IEEE 8th International Conference on Network Softwarization (NetSoft) workshop on Green Networking

## List of E-Impact Internet Drafts as of 2/14/2024

*anything missing?*

Identifier	Title	Authors (3+)	WG
draft-irtf-nmrg-green-ps	Challenges and Opportunities in Management for Green Networking	Clemm, Westphal, Tantsura, Ciavaglia, Pignataro, Odini	NMRG
draft-cparsk-eimpact-sustainability-considerations	Sustainability Considerations for Internetworking	Pignataro, Rezaki, Krishnan, ElBakoury, Clemm	
draft-almprs-sustainability-insights	Sustainability Insights	Andersson, Lindblad, Mitrovic, Palmero, Roure, Salgueiro, Emile	
draft-cx-opsawg-green-metrics	Green Networking Metrics	Clemm, Dong, Mirsky, Ciavaglia, Tantsura, Odini, Schooler, Rezaki, Pignataro	OPSAWG
draft-opsawg-poweff	Power and Energy Efficiency	Lindblad, Mitrovic, Palmero, Salgueiro	OPSAWG
draft-li-ivy-power	A YANG model for Power Management	Li, Bonica	IVY
draft-petra-path-energy-api	Path Energy Traffic Ratio API (PETRA)	Rodriguez-Natal, Contreras, Muniz, Palmero, Munoz	
draft-pignataro-eimpact-icmp	ICMP Extensions for Environmental Impact	Pignataro, Parikh, Bonica	
draft-eckert-ietf-and-energy-overview	An Overview of Energy-related Effort within the IETF	Eckert, Boucadair, Thubert, Tantsura, Pignataro	Indepdt stream <sub>120</sub>

# Next Steps in IETF

- e-impact IAB group
  - active mailing list
- BoF at the next IETF in Vancouver in July, and likely WG
  - Scope to be defined at this point.
- Dagstuhl Seminar in October 2024
  - Multi-disciplinary seminar

# Other Forums

Research:

IEEE CNOM SIG on Sustainable Network Operations: SNO

<https://cnom.committees.comsoc.org/sustainable-network-operations-sno/>

HotCarbon workshop <https://hotcarbon.org/>

e-Energy conference <https://energy.acm.org/conferences/eenergy/2024/>

GreenNet conference <https://sites.google.com/view/greennet2024/home>

3GPP: <https://www.3gpp.org/technologies/energy-efficiency-ee-sa5-work-and-results>

ITU:

<https://www.itu.int/en/action/environment-and-climate-change/Pages/energy-efficiency.aspx>

# In conclusion

- Greener, more sustainable networks are an important problem
- Plenty of challenges and opportunities beyond hardware advances and improved energy mix for research, standardization, development
- Energy proportionality (or lack thereof) dictates many solutions
- Advances will involve multiple vectors, not one grand solution
  - HW advances drive energy per bit & scaling, but there is also an important role for management & L2+above
  - Visibility and metrics, peak shaving as important techniques
- Activities gaining traction in IETF
- A call to action for researchers to get involved

# Questions?

Please do not hesitate to contact us

Alexander Clemm [ludwig@clemm.org](mailto:ludwig@clemm.org)

Cedric Westphal [cwestphal@gmail.com](mailto:cwestphal@gmail.com)

Toerless Eckert [tte@cs.fau.de](mailto:tte@cs.fau.de)

# Thank you!