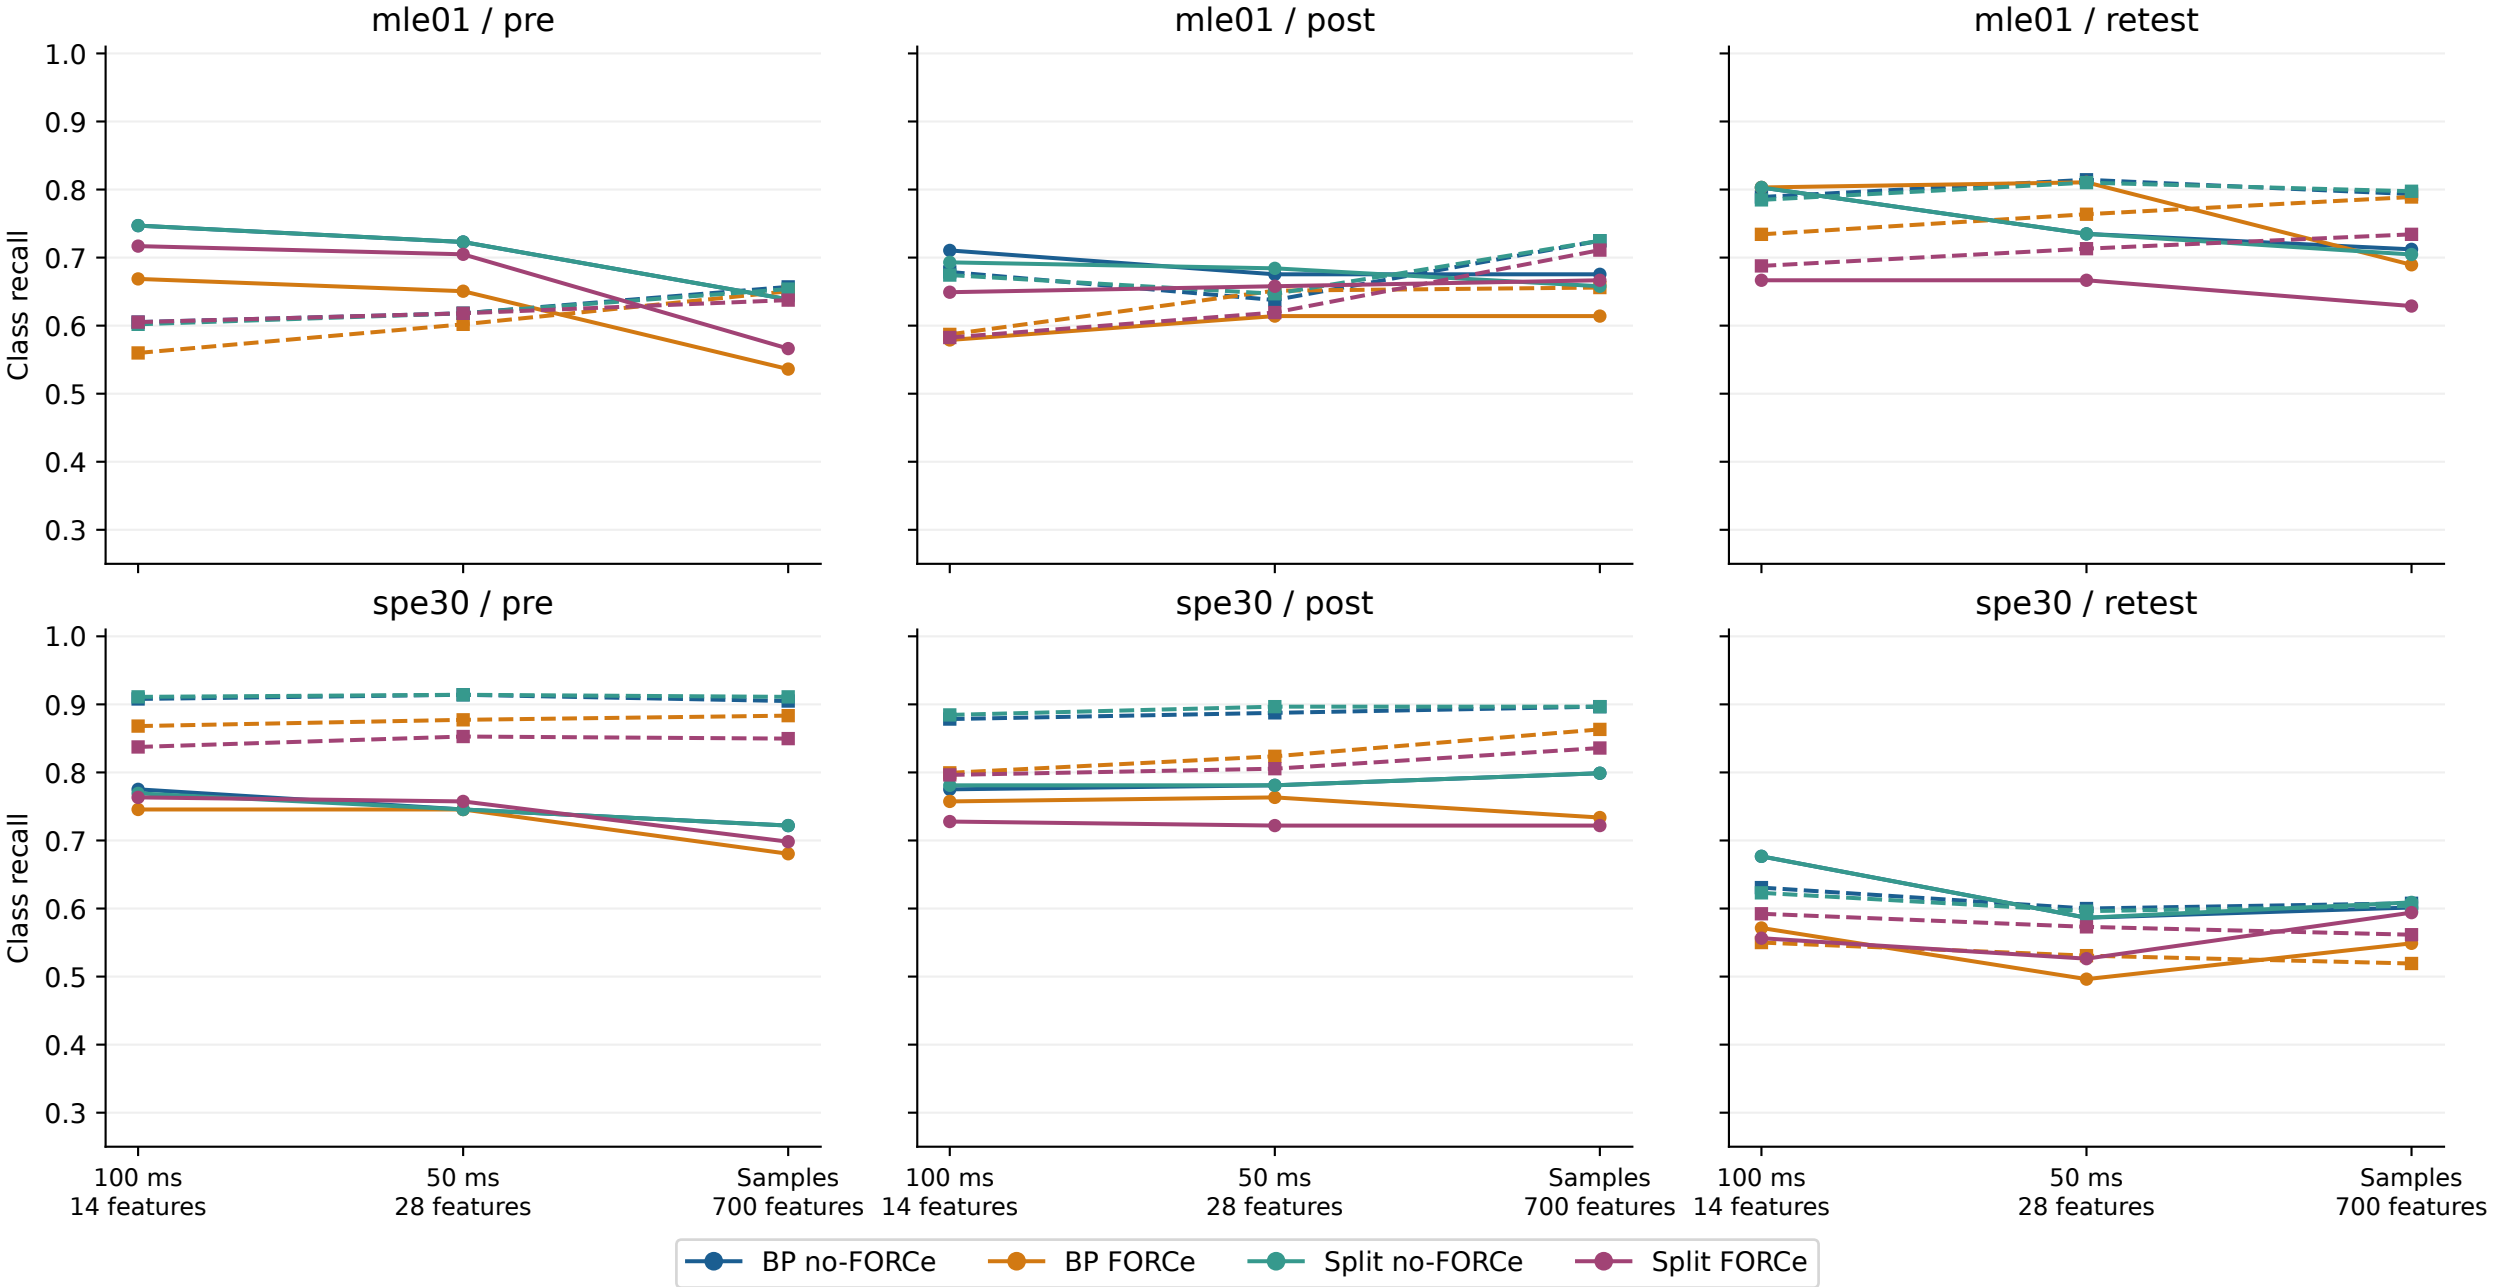
Class recall: solid = displaced sensitivity; dashed = non-displaced specificity
mle01 / pre
mle01 / post
mle01 / retest
spe30 / pre
spe30 / post
spe30 / retest
Class recall
1.0
0.9
0.8
0.7
0.6
0.5
0.4
0.3
100 ms
14 features
50 ms
28 features
Samples
700 features
BP no-FORCe
BP FORCe
Split no-FORCe
Split FORCe