XCMG

D360



D360

Crawler Bulldozer

The D360 Dozer utilizes hydraulic drive and electronically controlled gear shifting, providing optimum quality and top performance like other XCMG machines.

It is primarily used for excavating, backfilling, pushing and transporting earth and rocks on highways, railroads, airports, rivers, and other similar jobs. This machine is indispensable for national defense projects, urban construction, and water conservancy construction.

This construction equipment utilizes cutting-edge technologies, including intelligent control, limit load, hydraulic blade control, electronically controlled shift, and construction data management. It offers high efficiency, flexibility, and convenience, along with exceptional reliability.

XCMG

D360
Crawler Bulldozer


Performance and characteristics

- 7-inch touchscreen main display real-time displays engine parameters, driving status, gear information, fault alarm and other key parameters of the machine.
  The main page and sub-pages can be easily switched with finger, controller information and fault diagnosis, working hours, average fuel consumption, maintenance content, etc. can be queried.
- Ergonomic control system effectively reduces the fatigue, improves the control comfort; The machine's propulsion, steering, speed control, blade control, and rear ripper control are managed through a professional control lever.
- Operating control mechanism: pilot operating, two levers respectively control the blade and ripper (optional); propel system single-lever electric control, rocker switch controls forward and backward driving, left-hand gear shift.
- CCEC Cummins NTA855 engine configuration provides robust power, high efficiency while remaining easy to maintain. The overall machine achieves construction efficiency and low fuel consumption, resulting in cost-effective use by the user.
- Optimized transmission system, transmission electronically controlled gear shift, efficient and simple construction, high transmission efficiency;
- Cab and seat: new type of fully sealed cab, equipped with ventilation and heating device, wide visibility; adjustable seat in the middle, made of integral foam, offering comfortable working environment.
- All filters are easily accessible; large opening engine hood for convenient checks; reduced lubrication points due to less mechanical rods. All lubrication points are easily accessible.

Main dimensions

Unit: mm

Model	L1	L2	L3	H1	H2	H3	H4	W1	W2	W3
D360	9090	4815	3150	3700	1710	560	1405	4130	2170	2140

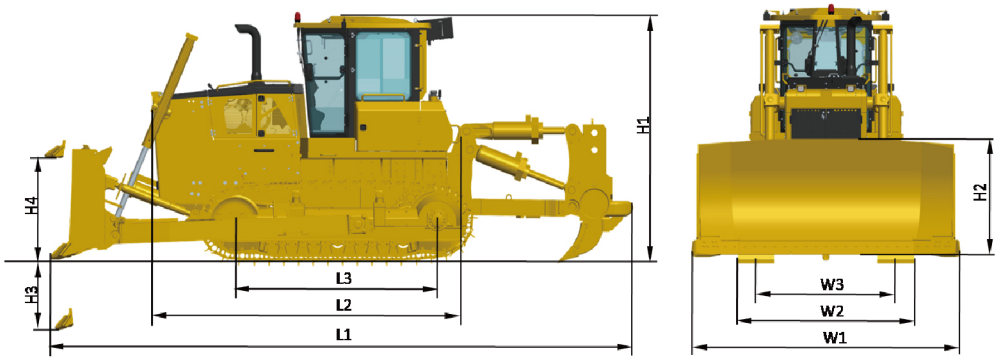

Main specifications

Item	Content	Unit	D360
Complete machine	Weight (with push blade)	Kg	39100
	Minimum Turning Radius	mm	3800
	Ground pressure	Kpa	97
	Overall dimensions	mm	9090×4130×3700
Engine	Model		NTA855
	Rated power/Rated speed	(HP/ rpm)	345/2000
Propel	Forward gear 1	km/h	3.6
	Forward gear 2	km/h	6.8
	Forward gear 3	km/h	12.3
	Reverse gear 1	km/h	4.3
	Reverse gear 2	km/h	8.0
	Reverse gear 3	km/h	13.0
Undercarriage	Ground clearance	mm	472
	Track gauge	mm	2140
	Crawler width	mm	560/610/660/710
	Ground contact length of crawler	mm	3150
	Number of track shoes	mm	41
	Chain pitch	mm	228.6
	Number of track rollers(one side)	pcs	2
	Number of carrier rollers(one side)	pcs	7
Fluids	Fuel tank	L	680
	Hydraulic oil tank	L	139
Blade	Blade type		Half U blade
	Blade width	mm	4130
	Blade height	mm	1710
	Blade capacity	m^3	9
	Blade lifting height above the ground	mm	1405
	Working depth	mm	560
Ripper	Ripper type		single-tooth/three-tooth(option)
	Working depth	mm	1250/842
	Ripper lifting height above the ground	mm	1200/883