SOLID TO SUCCEED

Add: No. 169, Heping Avenue, Economic and Technological Development Zone,
Xuzhou City, Jiangsu Province
Zip code : 221001 Hotline : 400-110-9999

XCMG OFFICIAL WEBSITE XCMG SERVICE ACCOUNT

XCMG

XDE130E

Battery Electric Dump Truck




SOLID TO SUCCEED

TECHNICAL SPECIFICATION

Model			Unit	XDE130E
Weight Parameters	Gross vehicle weight		kg	216,000
	Rated load		kg	110,000
	Unladen weight		kg	106,000
Battery Technical Parameters	Battery type		/	LFP
	Battery life		/	4500 Cycles
	Battery capacity		kwh	1657
	System voltage		VDC	832VDC
	Charging protocol		/	国标/MCS GB/MCS
	Charge rate		c	1C
Electric Drive System	AC electric drive system		/	RKE160GH082S-001
	Drive type		/	DC-AC
	AC electric drive wheel		/	XCMG-M400
	Wheel hub gear reduction ratio		/	33.85:1
	Max. travel speed		km/h	45
	Max. grade ability		%	22
Tires and Rims	Tubeless, radial ply tires, standard tires		/	33.00R51
	Five-piece rim		/	51-24.00/5.0
	Rated cold inflation pressure of rim		kPa	750 kPa 109 lbs. / sq. in.
	Total tire weight		kg	14040
	*The tires should meet application requirements such as tkph/tmph, tread, rubber material, inflation pressure, and ply rating.			
Suspension	Oil / Nitrogen suspension cylinder with overall rebound control			
	Max. stroke of front suspension		mm	320
	Max. stroke of rear suspension		mm	310
	Max. lateral swing angle of the rear axle		°	±8.9
Dump Body	Base plate		mm	Thickness 20
	Front plate		mm	Thickness 12
	Side plate		mm	Thickness 12
	Brim plate		mm	Thickness 5
	Struck capacity		m^3	53
	Heaped capacity (SAE 2:1)		m^3	78
	Customizable according to customer requirements.			
Brake System	The brake system meets the ISO3450-2011 standard requirements.			
	Service brake		/	Caliper disc brake
	Max. brake pressure	Front axle	MPa	19.3
		Rear axle	MPa	9.65
	Braking Disk Diameter	Front axle	mm	1020
		Rear axle	mm	600
	Auxiliary brake system	When the hydraulic system pressure fallsbelow the specified value, it automatically pressureization (pressure is provided by the accumulator).		
	Loading brake		/	Switch activation, rear-wheel drive brake implementation
	Parking brake		/	Spring-loaded, hydraulic release
	Electric retarding		kW	Maximum 1250
Hydraulic System	Min. turning radius		m	25.2
	Filter		μm	Suction filter 250
			μm	Return filter 12
			μm	Hoisting and steering high-pressure filter 12μm
	Hoisting		/	Two 2-stage double-acting external cylinders with built-in cushioning valves
	Hoisting time		s	17
	Lowering time		s	15
	Hoisting and braking pump		/	Series gear pump, flow rate 324L/min @ 1800rpm，Hoisting system, flow rate 648L/min @1800rpm;Max. working pressure 17 MPa
	Steering and braking pump		/	Variable displacement piston pump, flow rate 324L/min @ 1800rpm Max. working pressure 19 MPa
	System overflow pressure	Hoisting system	MPa	17
		Steering system	MPa	23
Electrical System	Two 1000 CCA,12V maintenance-free batteries, connected in series,installed on the deck			
	Lighting equipment		V	24
	Hydraulic oil tank		L	650
	Front suspension (each)		L	45
	Rear suspension (each)		L	33
	Cooling system		L	250
	Front wheel (each)		L	30
	Electric wheel (each)		L	35

OVERALL DIMENSIONS / WORKING RANGES

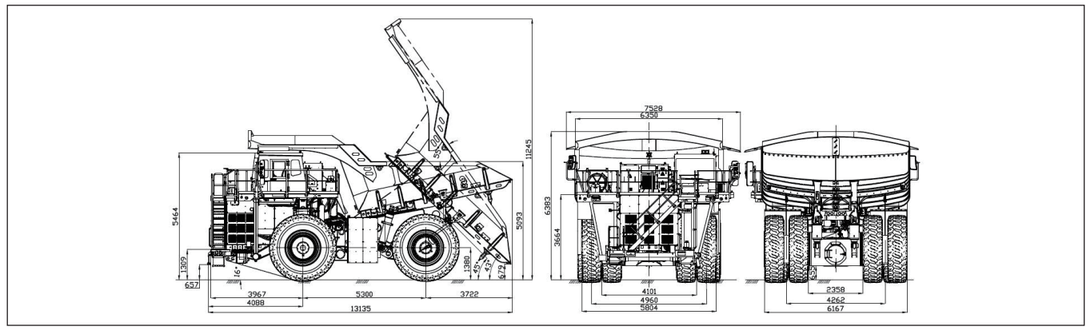

Cab

The ROPS/FOPs cab, meeting is0 3471/1s0 3449 (Level ll) rollover/falling obiectprotection standards, is spacious with a wide field of view. It is fully equipped withvarious display instruments, alarms, lighting, control switches, and a radio. Thedriver's seat is an adjustable air-suspension, high-back seat with vibration dampingand a co-driver seat is provided.The vehicle is equipped with an onboard computeran adjustable tilting and telescoping steering wheel, electric windshield wipers andwashers, tinted windows, and air conditioning (heating and cooling). Vehicleoperation data and fault alarm items are displayed using a combination of an LCDscreen and controllable instruments.

Frame

The frame consists of a pair of longitudinal beams and five cross beams, with thecross beams and longitudinal beams together forming a closed structure. Both thelongitudinal and cross beams have a box-shaped cross-section, which helps eliminatebending and cracking stress concentrations. The frame is made of high-qualitylow-alloy high-strength steel, with castings used in high-stress areas to enhance thechassis strength. All important welds undergo 100% ultrasonic testing and 100%magnetic particle inspection.

The product is still under development, Xuzhou XCMG Mining Machinery Co., Ltd. reserves the right to interpret and modify this brochure.

