XCMG
徐工集团



XS203

SINGLE DRUM VIBRATORY ROLLER
单钢轮振动压路机

XS203 self-propelled vibratory road roller is a super-heavy-duty vibratory road roller is mainly applicable for compacting the base and sub-base layers and landfill of various materials and is an ideal compacting machine for high-grade roads, airports, ports, dams, and industrial construction sites. This machine adopts high power engine and slip-resistant hydraulic drive system to better meet the construction needs in diversified regions.

XS203型自行式振动压路机为超重型振动压路机，主要适用于各种材料的基础层、次基础层及填方的压实作业，是高等级公路、机场、港口、堤坝及工业建筑工地的理想压实 设备。该机采用大功率发动机及抗打滑的液压驱动系统，能更好地满足各地区的工程施工要求。

Performance Characteristics / 性能特点

- It's equipped with Shangchai Chinese-III water-cooled engine, featuring high power reserve, low fuel consumption, and low noise.
- The closed-type hydraulic drive system composed of variable displacement pump and double variable motor realizes the all-wheel drive to guarantee the good drive performance and gradeability of the road roller. The four-speed continuously variable transmission guarantees the working at most appropriate speed under diversified working conditions.
- The home-made heavy-duty drive axle is applied
- With variable displacement piston pump and constant displacement hydraulic motor. Dual vibrating frequency and amplitude, coupled with optimized match of static linear load and centrifugal force enable the machine to deliver excellent compaction performance over materials of varied layer thickness.
- The static hydraulic brake system composed of the multi-plate brake and closed-type hydraulic system on the drive axle and vibrating drum reducer incorporates the functions of service, parking, and emergency brakes to guarantee the driving safety and reliability.
- ROPS cab is equipped with A/C, radio, and suspension seat, featuring good sealing performance and large internal space. It' s also equipped with large-area glasses to realize a broad view field and provide the driver with a safe and comfortable operation environment.
- Three-stage shock-absorbing

- 配备上柴国Ⅲ水冷发动机，功率储备大，油耗低、噪音小。
- 变量泵、双变量马达组成的闭式液压驱动系统，实现前后轮全驱动，确保压路机具有良好的驱动性能和爬坡能力。四档无级变速，确保在不同工况下以最适宜的速度进行作业。
- 采用国产重型驱动桥。
- 变量泵、定量马达组成闭式液压系统，双频、双幅，科学合理的静线载荷与激振力配 置，确保对不同类型的材料、不同厚度的铺层进行有效压实。
- 由驱动桥、振动轮边减速器上的多片式制动器和闭式液压系统的静液制动组成制动系统，具有行车、停车、紧急三种功能，确保驾驶安全可靠。
- 防滚翻驾驶室密封性能好，配备空调、收放机、悬浮式座椅，内部空间大并配装大面积玻璃，视野开阔，为驾驶员提供了安全舒适的操作环境。
- 三级减振。


XS203

SINGLE DRUM VIBRATORY ROLLER

单钢轮振动压路机

Main Dimensions

主要尺寸

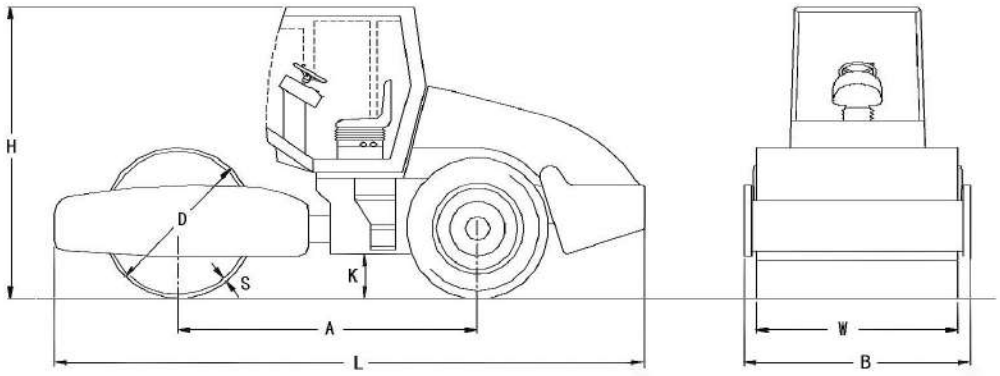

Dimension 尺寸 (mm)	A	B	D	H	K	L	S	W
XS203	3210	2350	1600	3200	466	6523	40	2130

Main Specifications

主要技术参数

	Item	项目	单位 Unit	XS203光轮型(Smooth drum)	XS203PD型(Padfoot)
Weight 质量	Operating weight	工作重量	kg	20000	21600
	Distributed mass of front drum	前轮分配	kg	13500	15100
	Distributed mass of rear drum	后轮分配	kg	6500	6500
	Static linear load	静线载荷	kg/cm	621	-
Driving performance data 行走性能数据	Driving speed (gear Ⅰ)	行走速度（Ⅰ挡）	km/h	0~3.4	0~3.6
	Driving speed (gear Ⅱ)	行走速度（Ⅱ挡）	km/h	0~5	0~5.2
	Driving speed (gear Ⅲ)	行走速度（Ⅲ挡）	km/h	0~5.2	0~5.7
	Driving speed (gearⅣ)	行走速度（Ⅳ挡）	km/h	0~10.4	0~11
	Theoretical gradeability	理论爬坡能力	%	50	50
	Minimum turning radius	最小转弯外半径	mm	6650	6650
	Tire specification	轮胎规格	-	23.1-26	23.1-26
	Ply rating	层级	-	12	12
	Air pressure	气压	kPa	150~170	150~170
Power system 动力系统	Engine manufacturer	发动机制造商	-	上柴Shangchai	上柴Shangchai
	Type	型号	-	SC7H190.1G3	SC7H190.1G3
	Rated power	额定功率	kW (hp)	140	140
	Rated speed	额定转速	rpm	2000	2000
	Voltage	电压	V	24	24
	Emission stage	排放等级	-	国Ⅲ	国Ⅲ
Vibration system 振动系统	Vibrational frequency	振动频率	Hz	28/33	28/33
	Nominal amplitude	名义振幅	mm	1.86/0.93	1.5/0.75
	Exciting force	激振力	kN	370/255	370/255
Volume 容量	machine oil	机油	L	22	22
	Fuel tank	燃油箱	L	240	240
	Hydraulic tank	液压油箱	L	240	240
	Coolant	冷却液	L	32	32
	Front drum chamber	前轮振动室	L	35	35
	Front drum reducer	前轮减速机	L	3	3
	Axle	驱动桥	L	32	32