


EchoForge simulator and evidence stack

Strict-open public-proxy assumptions stay separated from synthetic sensing, detector views, and claims.

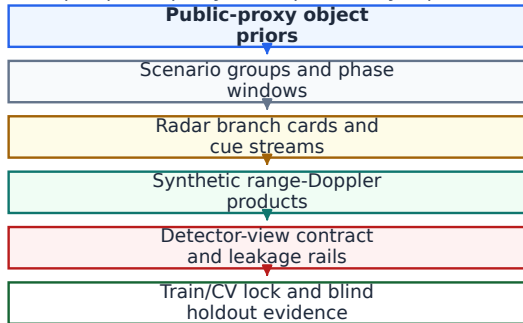

Model card: readable radar assumptions
high resolution xku cuas: 0.0 GHz, 600 MHz
tactical s band aesa: 0.0 GHz, 180 MHz
gbad 3d4d cueing: 0.0 GHz, 300 MHz
CPI 6 ms, 24 chirps/pulses
impairments: clutter, RFI, AGC, drift
claim boundary: synthetic public-proxy evidence