Guard push · hex8 SF 8.85 vs formula 26.39 (required 1.2)

300 N forward (+x) on the lobe's rear face, a 4 mm band at 60 % of h_g = 17.9 mm below the grip

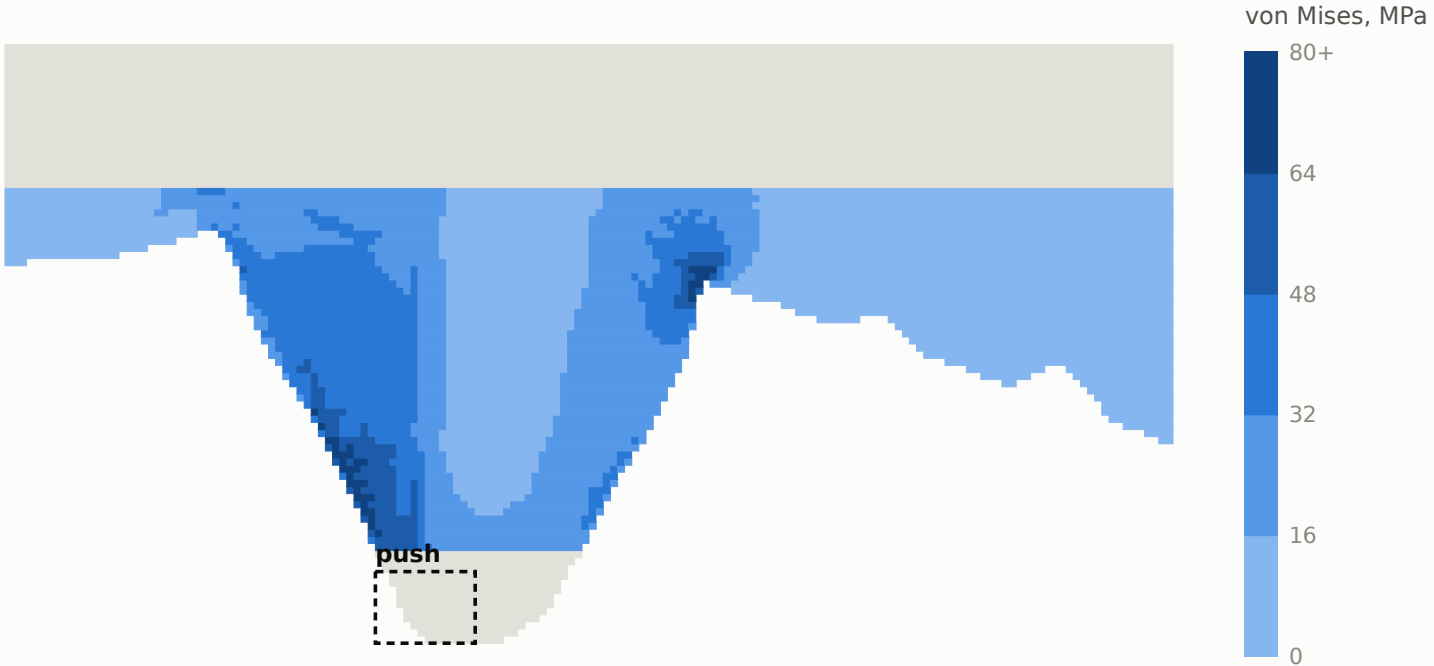

Hex8 voxel FE on the AM field (h 0.2 mm), 159207 solid voxels, clamped 4 mm inside the grip · map: max through the thickness
SF = allowable 600 MPa / 99.9 % quantile 68 MPa (max 116) · grey: not read (load band, clamp)
Cross-check of the root-section cantilever formula, not gated; the score uses the formula.