
Ring, bearing toward the handle · SF 65.388 (required 2) · margin 32.694

300 N on the bore, ±60° band facing the handle, pushing +x

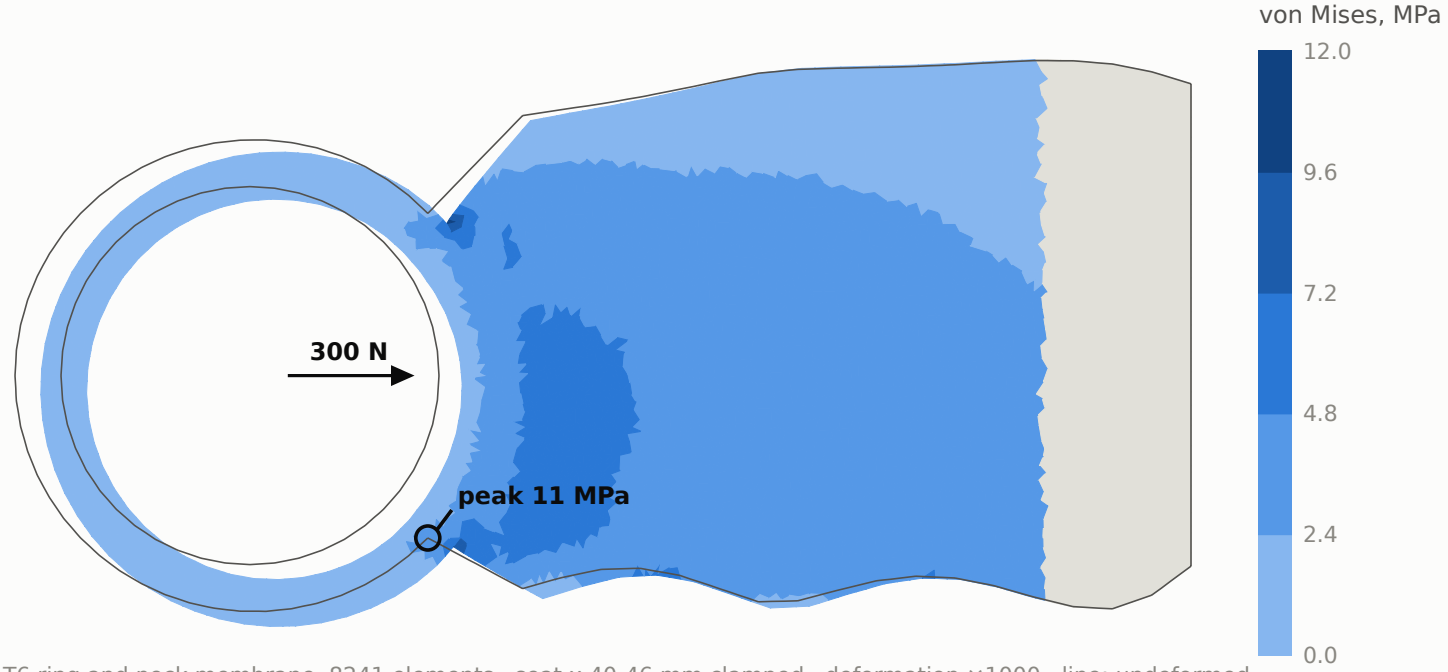

T6 ring and neck membrane, 8241 elements · seat x 40-46 mm clamped · deformation ×1000 · line: undeformed
Grey: not read (within 3 mm of the seat). The capacity is the as-built wall allowable over the peak per newton.
Reproduces the record's SF bit for bit (Tier 2 at h 0.2, same platform).