
Point, twist · SF 2.499 (required 1.2) · margin 2.083

0.3 N m about the tip bisector, 3 mm behind the point; read from 4.5 to 15 mm

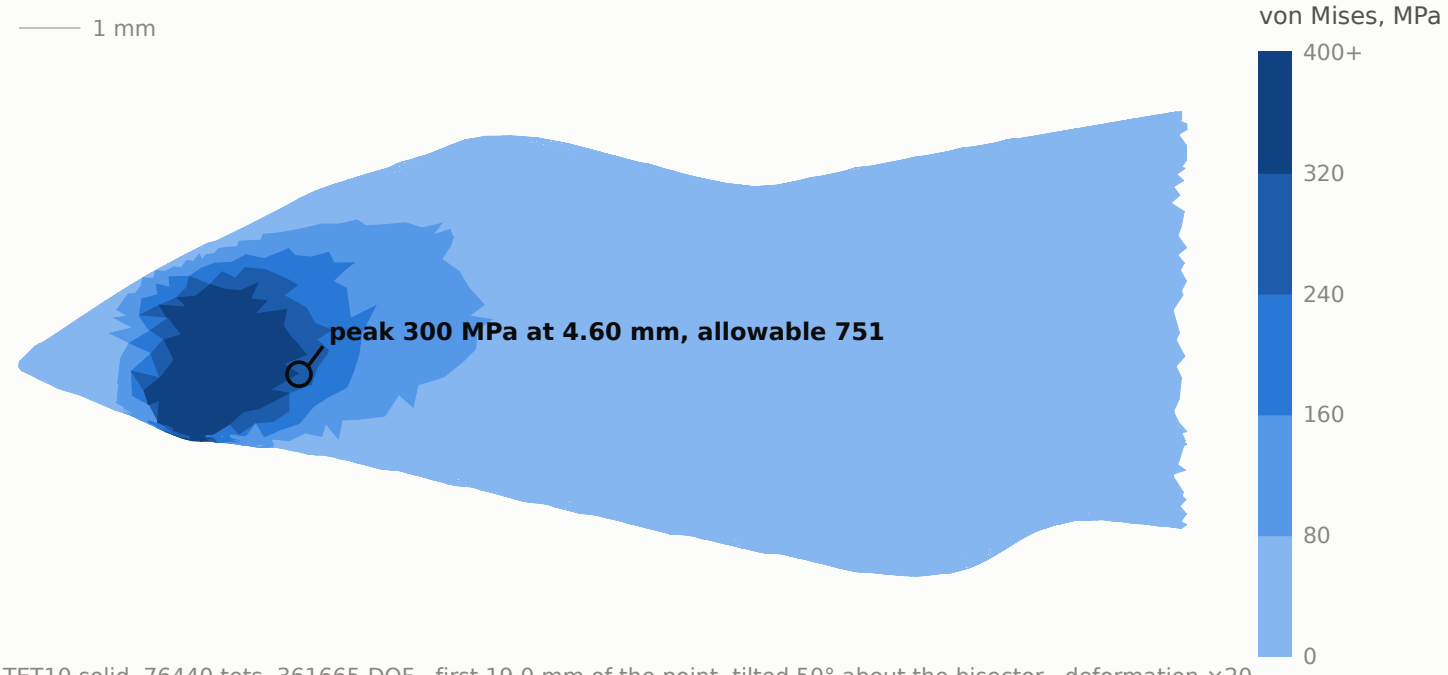

TET10 solid, 76440 tets, 361665 DOF · first 19.0 mm of the point, tilted 50° about the bisector · deformation ×20
Colour scale tops at the read-out peak (4.5-15.0 mm from the point); stresses at the loaded patch run above it.
Reproduces the record's SF bit for bit (Tier 2 at h 0.2, same platform).