

PUMP MASTER PRO - TECHNICAL DATASHEET

ISF100x65-200 2P

Model: ISF100x65-200 | Size: Standard | Type: Centrifugal

Weir Minerals / Warman

Email: engineering@weirminerals.com

Phone: +1-800-PUMPS

Web: www.global.weir

Date: August 01, 2026

TECHNICAL SUMMARY & DUTY POINT

SPEED (RPM)

2900 rpm

IMPELLER DIAMETER

282.0 mm

TEST BASIS

Trimmed Impeller


BEP FLOW / DUTY

150.14 m3h

EXACT PERFORMANCE CURVES (EVALUATED FOR ISF100X65-200 2P)


Head vs Flow (H-Q)

m

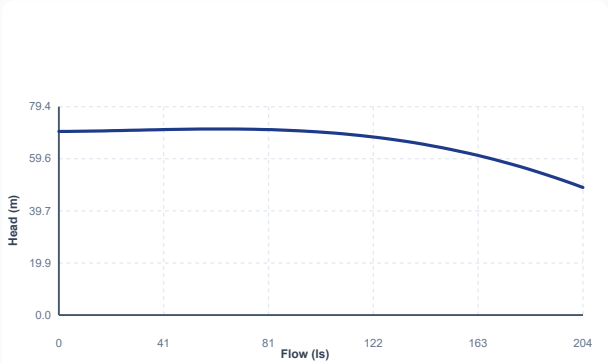


Efficiency vs Flow (η -Q)

%

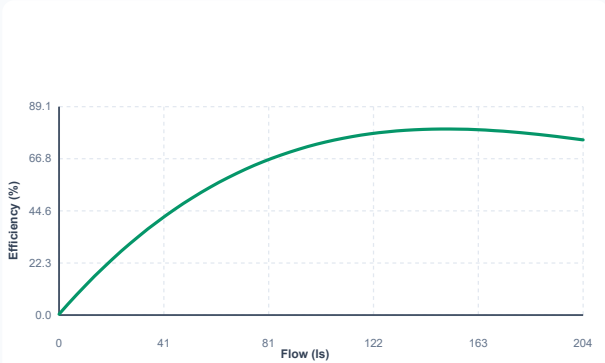


Power vs Flow (P-Q)

kw

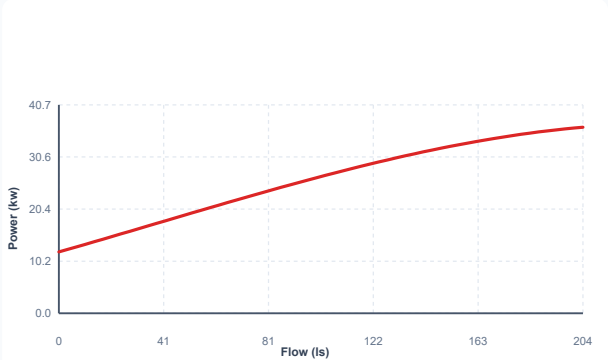

NPSHr vs Flow

m

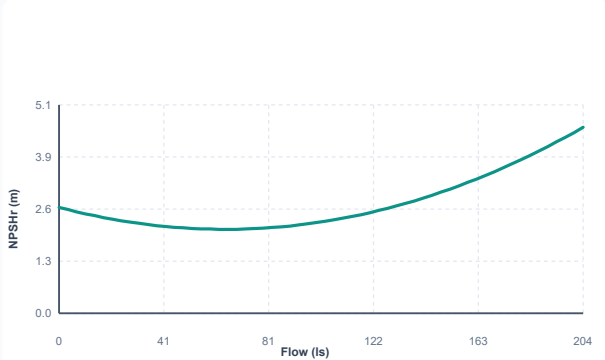

CONSTRUCTION & PHYSICAL SPECIFICATIONS

Impeller Material	High-Chrome (A05) / Duplex	Casing Material	Ductile / Cast Iron
Suction Size	150 mm	Discharge Size	100 mm
Shaft Seal Type	Dynamic / Gland Packing	Drive Arrangement	Direct Coupled (DC)

HYDRAULIC DESIGN & FLOW CONTROL LIMITS

THROTTLING CAPABLE

Yes (Capable)

MIN FLOW RECIRCULATION

0.0 m³/h

MAX ORIFICE DIA

0.0 mm

VFD OPERATING RANGE

30.0 - 60.0 Hz

