

Warman 4/3 C-AH

Model: 4/3 C-AH | Size: 4/3 C-AH | Type: Centrifugal slurry

 **Weir Minerals / Warman**

Email: engineering@weirminerals.com

Phone: +1-800-PUMPS

Web: www.global.weir

Date: August 01, 2026

TECHNICAL SUMMARY & DUTY POINT

SPEED (RPM)

1450 rpm

IMPELLER DIAMETER

330.0 mm


TEST BASIS

Trimmed Impeller

BEP FLOW / DUTY

43.93 m3h

EXACT PERFORMANCE CURVES (EVALUATED FOR WARMAN 4/3 C-AH)

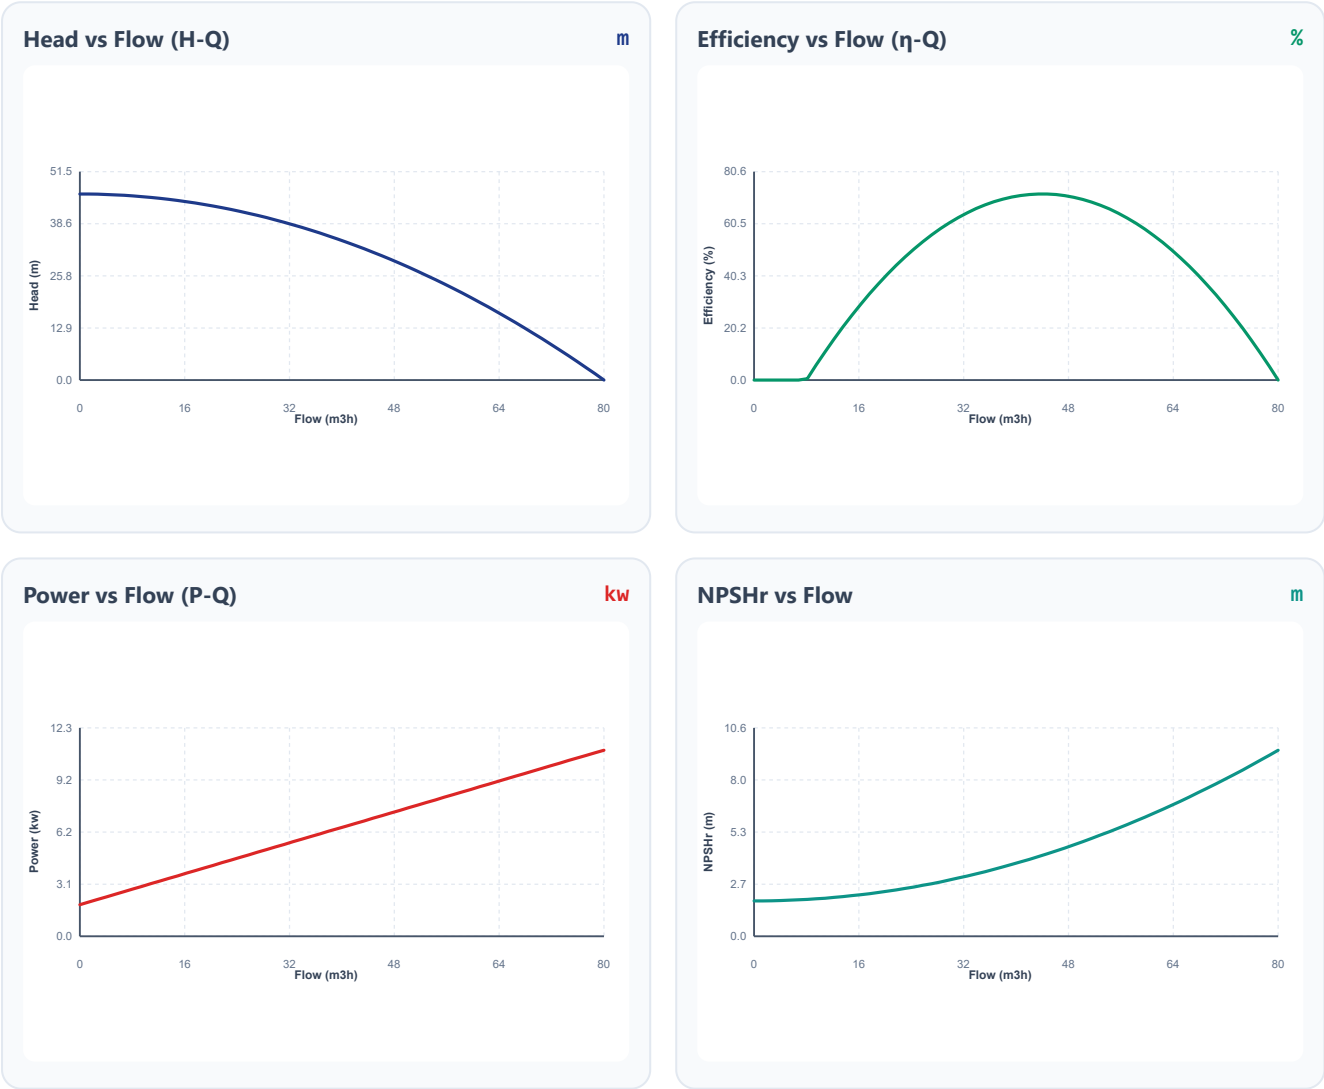

CONSTRUCTION & PHYSICAL SPECIFICATIONS

Impeller Material	High-Chrome (A05) / Duplex	Casing Material	Ductile / Cast Iron
Suction Size	150 mm	Discharge Size	100 mm
Shaft Seal Type	Dynamic / Gland Packing	Drive Arrangement	Direct Coupled (DC)

HYDRAULIC DESIGN & FLOW CONTROL LIMITS

THROTTLING CAPABLE

Yes (Capable)

MIN FLOW RECIRCULATION

0.0 m³/h

MAX ORIFICE DIA

0.0 mm

VFD OPERATING RANGE

30.0 - 60.0 Hz

