

PUMP MASTER PRO - TECHNICAL DATASHEET

Warman 4/3 C-AH

Model: 4/3 C-AH | Size: 4/3 C-AH | Type: Centrifugal slurry

 Weir Minerals / Warman

 engineering@weirminerals.com

 +1-800-PUMPS

 www.global.weir

Date: August 01, 2026

 TECHNICAL SUMMARY & DUTY POINT

SPEED (RPM)

1450 rpm

IMPELLER DIAMETER

330.0 mm

TEST BASIS

Trimmed Impeller


BEP FLOW / DUTY

43.93 m3h

 EXACT PERFORMANCE CURVES (EVALUATED FOR WARMAN 4/3 C-AH)


Head vs Flow (H-Q)

m

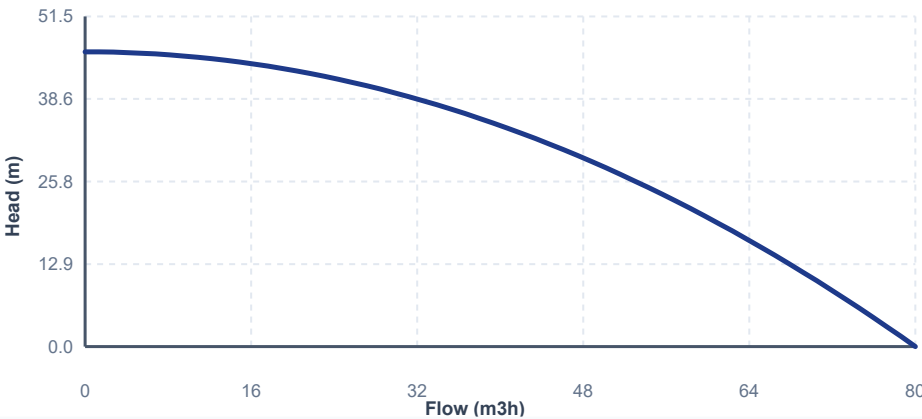


Efficiency vs Flow (η -Q)

%

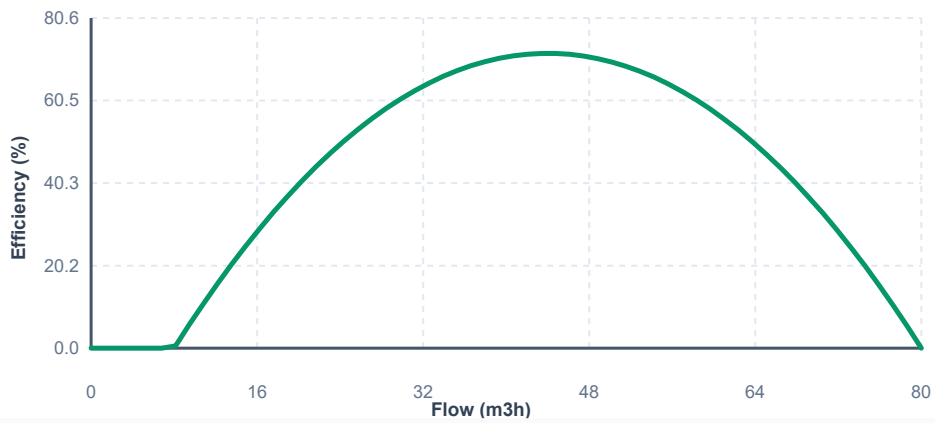


Power vs Flow (P-Q)

kw

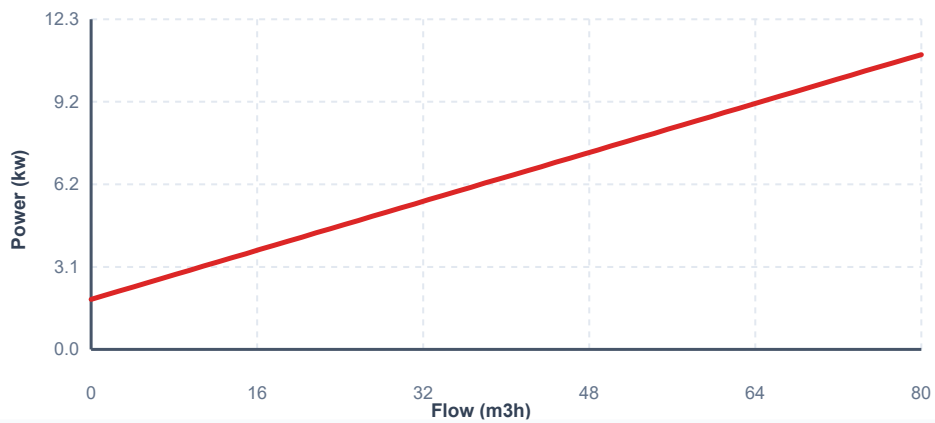

NPSHr vs Flow

m

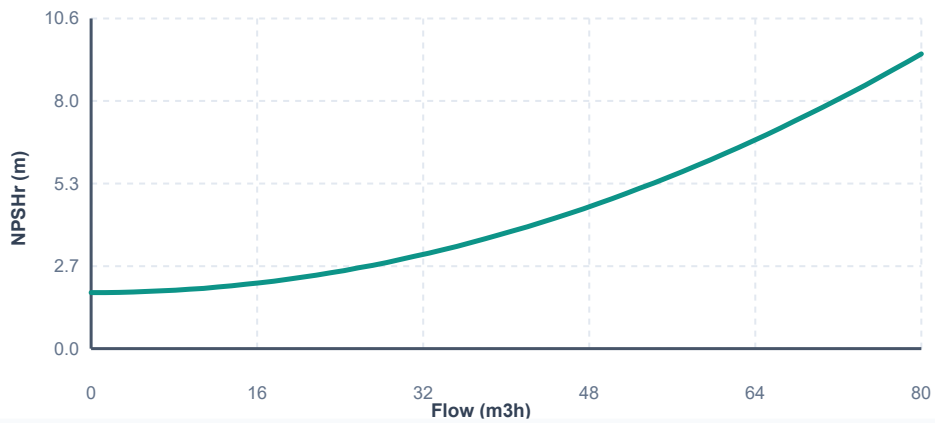

✂ CONSTRUCTION & PHYSICAL SPECIFICATIONS

Impeller Material	High-Chrome (A05) / Duplex	Casing Material	Ductile / Cast Iron
Suction Size	150 mm	Discharge Size	100 mm
Shaft Seal Type	Dynamic / Gland Packing	Drive Arrangement	Direct Coupled (DC)

 HYDRAULIC DESIGN & FLOW CONTROL LIMITS

THROTTLING CAPABLE

Yes (Capable)

MIN FLOW RECIRCULATION

0.0 m³/h

MAX ORIFICE DIA

0.0 mm

VFD OPERATING RANGE

30.0 - 60.0 Hz