




ChipSHOUTER CW521 Ballistic Gel

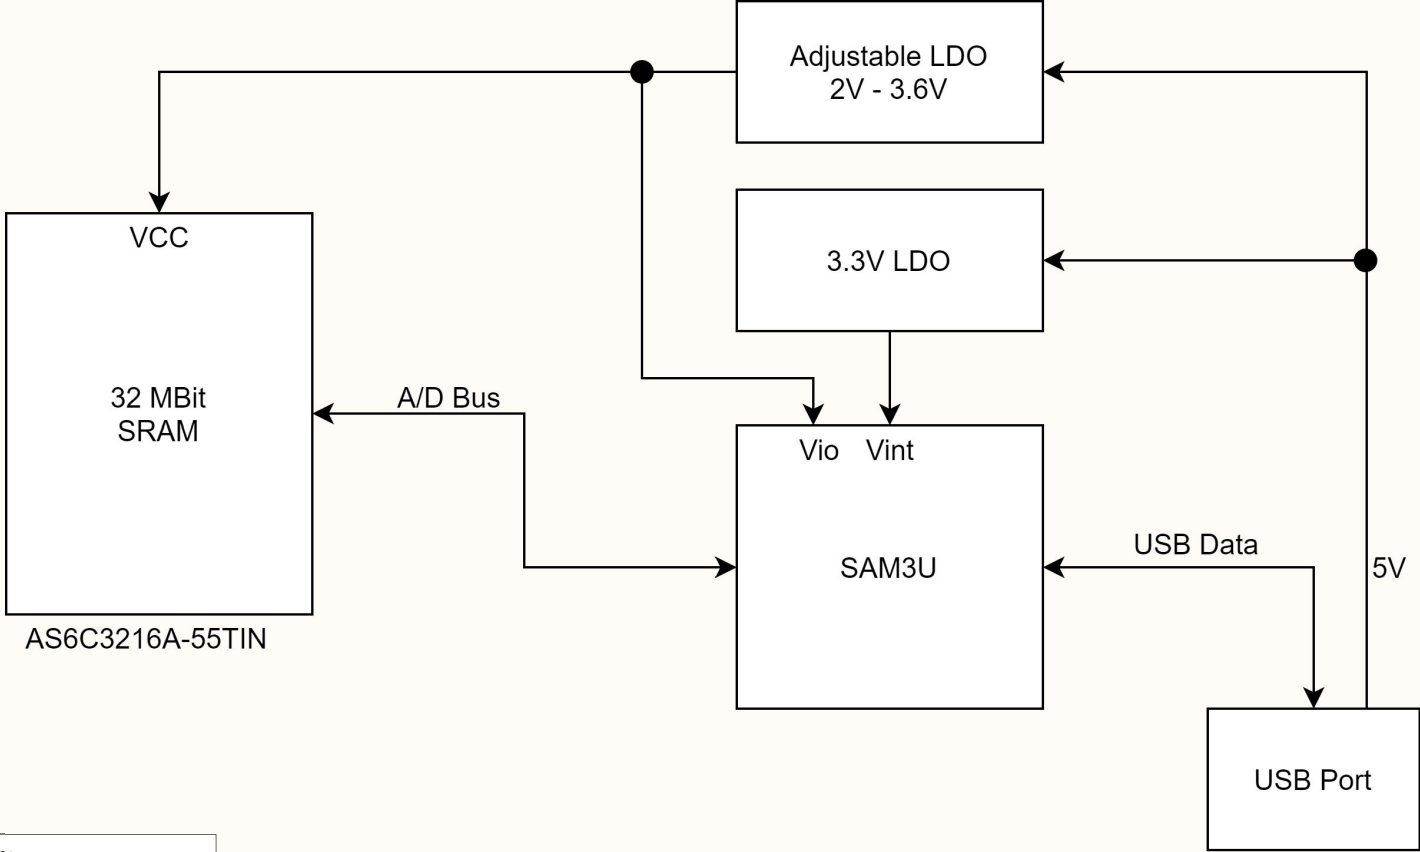

Rev 03 to Rev 04 Changes:  
\* Fix USB resistor, allow USB HS to work.  
\* Switch all parts to top-side of PCB.

Rev 01 to Rev 02 Changes:  
\* Add pull-up on RST net  
\* Connect switch to NRST  
\* Fix power-on MOSFET  
\* Add LED on target power  
\* Add more power filtering  
\* Add missing SRAM address pins

