

Study of coolant heating in LFR

– Internship proposal –
(ID No. 1000484)

Daniele Tomatis *

newcleo, Via Galliano 27, 10129 Torino, Italy

February 6, 2023

Keywords — LFR, coolant heating, neutron-photon transport, data correlation

Topics — Physical modelling, Monte Carlo calculations, statistical inference

Location newcleo Srl, Via Galliano 27, 10129 Torino, Italy

Starting date As soon as possible

Duration 4–5 months

Context

Coupled neutronics and thermal-hydraulic calculations are needed for the design and safety studies of a nuclear reactor. These calculations need proper laws and correlations for thermo-physical properties and other data at input. A new physical correlation for coolant heating is necessary for the next LFR units designed by newcleo. This internship work is about performing coupled neutron-photon calculations by the computer code OpenMC of several representative physical configurations of LFR fuel assemblies, in order to obtain a set of data for the derivation of a valid correlation predicting coolant heating in molten lead.

Description

This internship focuses on energy deposition in molten lead that constitutes the coolant of LFR units (pool-type reactors) [1]. A portion of the energy released from fission is not deposited in the fuel because of the transport of neutral particles, namely neutrons and photons, leaking out of the pellet where they originated by fission [2]. These particles can collide with the surrounding media (cladding, structure and coolant) transferring energy at every collision. Actually, the amount of energy deposited in the coolant is only a small fraction, but it is required for the setup

*Contact person, daniele.tomatis@newcleo.com

of realistic thermal-hydraulics calculations of the sub-channels in the fuel assemblies. For instance, such fraction is about 3% in PWR (thermal reactors) [3]. For LFR, coolant heating must still be studied, with lead showing a different behavior under radiation than water.

Coupled neutron-photon calculations performed by Monte Carlo computer codes can provide reliable estimates of the coolant heating by radiation, with the possibility to use corrections accounting also for the contribution of delayed emissions from fission. In addition, heating shall consider also alpha and beta decays of radioactive nuclides arising at exposure. After studying first fresh fuel at different physical conditions, a methodology to investigate burnup effects along exposure will be addressed. The results will be analyzed to find a statistical correlation capable to provide reliable predictions of the energy deposited in the molten lead.

During this internship, the student will be introduced to LFR reactor physics and engineering, with particular attention to Monte Carlo methods and neutronics. The student will develop advanced skills as user of the Monte Carlo computer code OpenMC. The preparation of a technical report with a complete analysis of the results is requested at the end of the internship.

Work plan

1. Literature review and study of the main physical phenomena
2. Problem discussion and definition
3. Setup of OpenMC calculations
4. Validation of the approach by comparisons on existing LWR and FR problems
5. Analysis of results to obtain a physical correlation for the coolant heating
6. Preparation of the final report

Applicant profile

Master or PhD student in Nuclear Engineering. Students in theoretical Physics and applied Mathematics will also be considered for the position.

Background: *fundamentals in reactor physics and Monte Carlo methods*.

Required computer skills: Python programming, linux, \LaTeX editing.

References

- [1] Pierdomenico Lorusso, Serena Bassini, Alessandro Del Nevo, Ivan Di Piazza, Fabio Giannetti, Mariano Tarantino, and Marco Utili. GEN-IV LFR development: status & perspectives. *Progress in Nuclear Energy*, 105:318–331, 2018.
- [2] Dan Gabriel Cacuci. *Handbook of Nuclear Engineering*. Springer Science & Business Media, 2010.
- [3] Shai Kinast and Daniele Tomatis. Energy deposition in coolant of PWR under normal operation and accident conditions. *Nuclear Engineering and Design*, 384:111479, 2021.

Development of a corrosion model for LFR fuel rods

– Internship proposal –
(ID No. 1001091)

Daniele Tomatis ^{*1} and Giacomo Grasso²

¹newcleo SrL, Via Galliano 27, 10129 Torino, Italy

²ENEA, Via Martiri di Monte Sole 4, 40129 Bologna, Italy

June 7, 2023

Keywords — LFR, TRANSURANUS, corrosion, liquid lead

Topics — Physical modelling, fuel performance and thermo-mechanical codes, material science

Location newcleo SrL, Via Galliano 27, 10129 Torino, Italy

Starting date As soon as possible

Duration 5–6 months

Context

newcleo is designing new Lead-cooled Fast Reactor (LFR) units for small and modular reactors using MOx fuel. At newcleo, fuel performance analysis is performed by the thermo-mechanical computer code TRANSURANUS (TU) distributed by the Joint Research Center of the European Commission based in Karlsruhe, Germany [1, 2]. newcleo has started a careful review of the code in order to ensure its suitability and fitness for the applications with LFR fuel rod types that are currently under design. Such work is also meant producing an upgraded version of the code to extend its range of applications, and in particular, to provide reliable predictions when modelling LFR fuel rods. The goal of this internship is to produce a new corrosion model for the cladding materials used for the TU calculations of LFR fuel rods.

This internship is proposed to students attending the last year of the Master program in Nuclear Engineering with particular interest in thermo-mechanical computer codes.

Description

TU already offers models to estimate the decrease in the cladding thickness caused by outer corrosion, treating separately thermal and fast reactors. But none seems suitable to the case

*Contact person, daniele.tomatis@newcleo.com

of liquid lead as coolant. During this internship, the student will perform a literature review of the existing models that describe corrosion caused by the flow of liquid metals wetting the outer clad surface. Such review will allow to understand the leading physical phenomena causing corrosion and their influence on the main observables. The Handbook [3] collecting thermo-physical and technological data of heavy liquid metals for the development of GEN-IV fast reactors will be used as starting point. The presence of possible chemistry control of the liquid lead coolant will also be considered, see for instance [4].

A new correlation for liquid lead will be proposed during this internship by fitting the experimental data available from the literature review. All working conditions of LFR fuel rods will be examined.

The student will be introduced to the use of TU and to the preparation of the engineering studies for fuel performance analysis. The student will join the team of TU developers at newcleo, learning the best practices for collaborative work and quality-assured code development. The production of a technical report is expected at the end of the internship to describe the work done by the student.

Work plan

1. Problem discussion and definition
2. Review of the existing correlations for cladding corrosion
3. Study of the most important physical phenomena for cladding corrosion
4. Preparation of a new correlation for LFR fuel rods by fitting experimental data
5. Analysis of results
6. Preparation of a technical report

Applicant profile

Master or PhD student in Nuclear Engineering. Students in theoretical Physics and applied Mathematics will also be considered for the position.

Background: *fundamentals in thermo-mechanics, thermodynamics, and material science.*

Computer skills: Python programming, linux, FORTRAN and L^AT_EX scientific editing (optional).

References

- [1] K Lassmann. TRANSURANUS: a fuel rod analysis code ready for use. *Journal of Nuclear Materials*, 188:295–302, 1992.
- [2] K Lassmann and H Blank. Modelling of fuel rod behaviour and recent advances of the TRANSURANUS code. *Nuclear Engineering and design*, 106(3):291–313, 1988.
- [3] C. Fazio et Al. Handbook on Lead-bismuth Eutectic Alloy and Lead Properties, Materials Compatibility, Thermal-hydraulics and Technologies. Technical Report No. 7268, OECD/Nuclear Energy Agency (NEA), Paris, France, 2015.
- [4] Ning Li. Active control of oxygen in molten lead–bismuth eutectic systems to prevent steel corrosion and coolant contamination. *Journal of Nuclear Materials*, 300(1):73–81, 2002.

Thermal power calculation of a closed channel of LFR

– Internship proposal –
(ID No. 1000393)

Daniele Tomatis *

newcleo, Via Galliano 27, 10129 Torino, Italy

January 5, 2023

Keywords — LFR, simplified closed channel model, multi-physics coupling

Topics — Physical modelling, coupled neutronics and thermal-hydraulics, nonlinear eigenvalue problem

Location newcleo SrL, Via Galliano 27, 10129 Torino, Italy

Starting date As soon as possible

Duration 5–6 months

Context

newcleo is designing new LFR units for which many calculations coupling neutronics and thermal-hydraulics are needed to verify the expected performances and safety requirements. This internship work is about applying a new solution method for the coupled problem that reproduces the physical behavior of a representative sub-channel in the fuel assembly. The main goal of this new method is providing fast estimates to support preliminary studies, or providing better initialization for more advanced computer codes in order to reduce the total computational runtime when looking for high-definition numerical solutions.

Description

This internship studies the multi-physics coupling between neutronics, heat transfer and thermal-hydraulics occurring inside the fundamental element of a nuclear reactor designed on a lattice of fuel pins. This element is also called sub-channel. The coupling must reproduce the thermal feedback on the neutron reactivity of the system due to changes in the fuel temperature, in the thermo-dynamical properties of the coolant and/or in possible changes of the lattice geometry. In particular, neutrons interacting with the nuclear fuel release the thermal energy, which is computed by a neutron model derived from the Boltzmann equation. The energy transferred

*Contact person, daniele.tomatis@newcleo.com

to the coolant is accounted in the conservation equations of the fluid, which is assumed as incompressible as first approximation; this approximation is often valid when liquid metals are used to cool the reactor. This work is limited to steady state conditions at normal operation and to operation under self-sustained chain reaction with fast neutron spectrum.

In general, the coupled problem is solved numerically through successive calls to different computer codes, which are solving separately the physics under coupling (Picard iterations). Specifically, the partial solution from a given solver is used to linearize the other problems solved by the other codes, and the convergence on all output quantities is sought iteratively. Other techniques using the gradient-like methods have been proposed in literature to achieve the solution with fewer calls to the separate codes. However, the existing methods can incur into the problem of false convergence, and they demand remarkable computational resources. Recently, a new method suggested to reformulate the problem by combining the coupled equations in a new form, in order to cope with these disadvantages [1]. This method was applied in the simple case of PWR sub-channel under the assumption of incompressible fluid. The goal of the current internship is to apply this technique to the typical sub-channel of a lead-cooled fast reactor, where the fluid incompressibility is a valid assumption.

During this internship, the student will be introduced to the reactor physics fundamentals, contributing actively to research with mathematical methods' development, scientific programming and technical editing of documents.

Work plan

1. Literature review and retrieval of the existing work
2. Problem discussion and definition
3. Generation of nuclear data at different physical conditions by OpenMC
4. Implementation and verification of the numerical solution
5. Analysis of results
6. Preparation of the final report

Applicant profile

Master or PhD student in Nuclear, Mechanical or Aeronautical Engineering. Students in theoretical Physics and applied Mathematics will also be considered for the position.

Background: *fundamentals in thermal-hydraulics and heat transfer, reactor physics*.

Required computer skills: Python programming, linux, \LaTeX scientific editing.

References

- [1] Daniele Tomatis. Reformulation of the coupled problem for the simplified closed channel. *Annals of Nuclear Energy*, 130:377–387, 2019.
- [2] N. E. Todreas and M. S. Kazimi. *Nuclear systems Volume I: Thermal hydraulic fundamentals*. CRC press, 2021.
- [3] N. E. Todreas, M. S. Kazimi, and M. Massoud. *Nuclear systems Volume II: Elements of thermal hydraulic design*. CRC press, 2021.

[4] Alain Hébert. *Applied reactor physics*. Presses inter Polytechnique, 2009.

Modelling of the DHR heat exchanger using the computer code AC²-ATHLET

– Internship proposal –
(ID No. 1001150)

Antonino Lombardo and Daniele Tomatis *

newcleo SrL, Via Galliano 27, 10129 Torino, Italy

June 26, 2023

Keywords — Bayonet tube, LFR, DHR, flow boiling, ATHLET

Topics — Physical modelling, two-phase thermal-hydraulics, system code modeling

Location newcleo SrL, Via Galliano 27, 10129 Torino, Italy

Starting date As soon as possible

Duration 5–6 months

Context

newcleo has planned an experimental campaign with external partners in order to optimize the design of components for lead-cooled fast reactors. In this framework, the use of thermal-hydraulic system codes is very important to reproduce the physical behavior during transients, and so to make decisions in design studies. New heat exchangers of the bayonet-shell type for the Decay Heat Removal system [3] are currently under development as passive components to remove the residual heat and to cool down the molten lead after shutdown. These heat exchangers will be installed in the reactor pool, being fed with water as secondary fluid that falls by gravity from a tank placed on top of the pool.

An experimental program is starting in the second half of 2023 at the thermal-hydraulic laboratory of the Energy Department of the Politecnico di Torino, Italy, with the goal of testing the mechanical and thermal-hydraulic performances of the prototypes for DHR heat exchangers. The current internship is proposed to students attending the last year of the Master program in Nuclear Engineering with particular interest in thermal-hydraulics. This internship work is in support of the experimental activities, and could possibly continue with a PhD program.

*Contact person, daniele.tomatis@newcleo.com

Description

The components under study are heat exchangers made up of coaxial tubes immersed in the liquid lead pool [1]. During transients, subcooled water enters the inner tube and flows downwards. Then, it enters the outer tube where it is heated up by the surrounding lead, eventually leaving the system as superheated steam. The liquid lead is not in direct contact with the outer tube because they are separated by a helium-filled gap flowing in a surrounding gap between the component walls. The full technical details will be provided during the internship, after acceptance of the candidate.

The internship work will focus on the transient simulations of the two-phases boiling heat transfer occurring inside the component, by using the code AC²-ATHLET 3.3 [2]. A complete literature review is required to find the most appropriate physical correlations to characterize the flow and heat transfer in the channels. These correlations will be compared with those available in the code, and if appropriate, used for the simulations by ATHLET using plugin functions. The setup of the calculations will make use of specific ATHLET's tools for processing input and output data. The student is expected to write a technical report at the end of the internship to describe the work done and to compile the analysis of the numerical results.

Work plan

During this internship, the student will be introduced to the system code AC₂-ATHLET for the modeling and design of thermal-hydraulics components and loops in steady state and transient conditions.

The student will develop the knowledge required for the description of hydraulic systems by means of control volumes and ATHLET's own specific fluid and solid objects. The acquired skills will be used to characterize and study an element of the Decay Heat Removal system.

The expected working plan is detailed in the following:

- a) Literature review of the phenomena occurring in the bayonet-tube DHR
- b) Discussion of the problem
- c) ATHLET introduction and training
- d) DHR modeling
- e) Setup of the calculations
- f) Analysis of results by taking advantage of ATHLET tools
- g) Preparation of a technical report

Applicant profile

Master student in Nuclear, Mechanical or Aeronautical Engineering; Applied Mathematics and Physics.

Background: *Fundamentals in thermal-hydraulics and heat transfer, multiphase flow.*

Computer skills: Linux, bash, \LaTeX , Python.

References

- [1] D. Rozzia, A. Toti, M. Tarantino, L. Gramiccia, D. Vitale Di Maio, and F. Giannetti. Doublewall bayonet tube steam generator for LFR application - preliminary characterization. *Technical Report NNFISS-LP3-032*, ENEA Ricerca Sistema Elettrico, 2011.
- [2] A. Schaffrath, M. Sonnenkalb, and A. Wielenberg. Grs code system AC2. *Kerntechnik*, 84(5):356-356, 2019.
- [3] N. E. Todreas and M. S. Kazimi. *Nuclear systems Volume I: Thermal hydraulic fundamentals*. CRC press, 2021.

Upgrade of the Python package `lbh15` with the integration of liquid-metal thermochemical properties

– *Internship proposal* –
(ID No. 1000377)

Daniele Tomatis * and Daniele Panico
newcleo SrL, Via Galliano 27, 10129 Torino, Italy

January 10, 2023

Keywords — LMFR, thermochemical properties, chemistry control, Python

Topics — Material corrosion, Elements' solubility, diffusivity and interaction with liquid metals

Location newcleo SrL, Via Galliano 27, 10129 Torino, Italy

Starting date First or second quarter of 2023

Duration 4 months

Context

Chemical control of the primary coolant in liquid-metal nuclear reactors is of crucial importance during plant operation, preventing alteration or degradation of materials such as steel and other structural alloys by corrosion. Control is usually operated by releasing hydrogen and oxygen within the coolant, and ensuring homogeneous dilution in the mixture. Eventually, the control system considers also purification of the coolant from activation products. Therefore, *newcleo*'s activities on lead chemical control are the objects of intensive studies, both in terms of experiments and theoretical modeling. In order to support both types of activities, the Python package `lbh15` is under active development to offer an unique and standardized entry point for the use of empirical correlations of physical properties.

Description

`lbh15` (**Lead Bismuth Handbook 2015**) is a Python package developed by *newcleo* based on the reference handbook edited by OECD-NEA [1], as contribution to the expert group on heavy liquid metal technologies. The first version of `lbh15` was released on September 21 2022,

*Contact person, daniele.tomatis@newcleo.com

implementing a first batch of thermal properties of molten lead (Pb), bismuth (Bi) and of their eutectic alloy (LBE). The package documentation and repository can be found at

<https://newcleo-dev-team.github.io/lbh15/index.html> and

<https://github.com/newcleo-dev-team/lbh15>, respectively.

The properties are implemented as analytical functions from empirical correlations. The package contains also elementary services for function characterization that use the standard Python packages for scientific computation, namely NumPy and SciPy.

During this internship, the student will develop new features in lbh15. Specifically, the student will work on the integration of the following topics inside the package:

- a) solubility and diffusivity of metallic elements in Pb, Bi, LBE;
- b) solubility of oxygen, its diffusivity and interaction with Pb, Bi, LBE;
- c) interaction of water with Pb, Bi, LBE;
- d) chemistry control and monitoring system.

These topics are covered in chapters 3 and 4 of the above-mentioned handbook.

lbh15 adopts high quality standards for code development. Hence, the student will develop/consolidate skills in the following aspects of software engineering with Python:

- Object-Oriented programming based on SOLID principles;
- Python Dynamic programming;
- Design patterns (template and factory patterns in particular);
- CI/CD pipelines (including regression tests);
- Write well-documented code for scientific applications.

The student will be followed by the engineering team of newcleo that is developing lbh15, together with an engineer from the safety team to identify the main correlations that the package shall provide.

Work plan

- 1) Handbook review and identification of the main correlations to implement
- 2) Code architecture design
- 3) Code implementation
- 4) Test definition and implementation
- 5) Preparation of a technical report

Applicant profile

Master student in Nuclear, Chemical or Software Engineering; Applied Physics; Chemistry; Computer science.

Skills and background:

- Fundamentals in thermodynamics and chemistry

- Basic knowledge of software programming (previous experience in Python appreciated but not fundamental)
- Basic knowledge of Linux operative system

Nice to have: experience using git, basic knowledge on liquid metal-cooled fast reactors.

References

- [1] C. Fazio et Al. Handbook on Lead-bismuth Eutectic Alloy and Lead Properties, Materials Compatibility, Thermal-hydraulics and Technologies. Technical Report No. 7268, OECD/Nuclear Energy Agency (NEA), Paris, France, 2015.
- [2] Ning Li. Active control of oxygen in molten lead–bismuth eutectic systems to prevent steel corrosion and coolant contamination. *Journal of Nuclear Materials*, 300(1):73–81, 2002.
- [3] Giridhar Chetan. *Learning Python Design Patterns*. Packt Publishing, Birmingham - Mumbai, 2 edition, 2016.
- [4] Mariano Anaya. *Clean Code in Python: Refactor your legacy code base*. Packt Publishing, Birmingham, 2018.
- [5] Lutz Mark. *Learning Python: Powerful Object-Oriented Programming*. O'Reilly Media, Sebastopol, USA, 5 edition, 2013.

Development of a Python package with thermal-hydraulic correlations for LMFR – lmth23

– *Internship proposal* –
(ID No. 1000378)

Daniele Tomatis * and Daniele Panico
newcleo SrL, Via Galliano 27, 10129 Torino, Italy

January 10, 2023

Keywords — LMFR, physical correlations, heat exchange, friction factor, fuel bundles, Python
Topics — Heat transfer, thermal-hydraulics, frictional pressure loss, python programming

Location newcleo SrL, Via Galliano 27, 10129 Torino, Italy
Starting date First or second quarter of 2023
Duration 4–5 months

Context

newcleo is preparing a large experimental campaign of thermal-hydraulic experiments to support the design activities for new LFR units. A compilation of the available empirical correlations from literature in a single and comprehensive library is currently on-going to characterize heat transfer and thermal-hydraulic phenomena with liquid metals. This library will also collect the results from the future experiments. This internship position focuses on the literature review about the existing correlations and supports the development of this library.

Description

Several empirical correlations are available in literature to describe heat transfer, thermal-hydraulics and pressure drop phenomena occurring in presence of liquid metals, which are used as coolant for nuclear fast reactors. Every physical correlation comes with its validity range given in terms of dimensionless numbers, flow conditions, and for particular geometrical configurations. The use of a correlation outside the validity range does not guarantee accurate

*Contact person, daniele.tomatis@newcleo.com

predictions of the quantity of interest. So a careful check about the correlation's appropriateness must be done before use.

Some correlations yield directly dimensionless numbers, expressing the importance of a given phenomenon with respect to other competing ones, like in the case of the Nusselt number that measures the ratio between heat transfer by convection and heat transfer by conduction alone. Indeed, heat transfer and pressure drop correlations (Darcy factor for instance) are fundamental for the design of heat exchangers, which constitutes a large part of the forthcoming experimental program planned by *newcleo*.

Unfortunately, it is difficult to find a comprehensive and compact tool to make such correlations readily available for engineers when designing LFR components. For this reason, *newcleo* is implementing a Python package as unique and standardized entry point for evaluating all the empirical correlations needed for general LMFR applications. Moreover, this package will be used to support the next experimental campaign, including possible implementation of the new correlations arising from it.

During this internship the student will participate to the development of the Python package *lmth23* (Liquid-Metal Thermal-Hydraulics).

In particular, the correlations for the friction factor and for the Nusselt number in LMFR fuel bundles and once-through heat exchangers with cross-flow will be considered. A wide list of correlations for the friction factor can be found in [1]. Instead, correlations for the Nusselt number are given in [2]. The first release of the package will provide the desired quantity given the characteristic geometric parameters and coolant velocity at input to calculate the Reynolds number appropriately. In addition to reviewing and implementing the physical correlations, the student will focus on implementation techniques and high quality standards for code development. This will make the package easier to maintain and extend in the future, serving both uses in industry and research. Therefore, the student will develop/consolidate skills in the following aspects of software engineering in Python:

- Object-Oriented programming based on SOLID principles;
- Python Dynamic programming;
- design patterns (template and factory patterns in particular);
- CI/CD pipelines (including regression tests);
- write well-documented code for scientific applications.

The internship will be supervised by an engineer from R&D team of *newcleo*.

Work plan

- 1) Literature review and identification of the main correlations to implement
- 2) Code architecture design
- 3) Code implementation
- 4) Definition and implementation of tests
- 5) Preparation of a technical report

Applicant profile

Master student in Nuclear, Mechanical or Aerospace Engineering; Applied Physics; Informatics and Computational Sciences.

Skills:

- Fundamentals in thermal-hydraulics and heat transfer
- Basic knowledge of software programming (previous experience in Python is very appreciated)
- Basic knowledge of Linux operative system

Nice to have: experience using git, basic knowledge on liquid metal-cooled fast reactors.

References

- [1] S.K. Chen, N.E. Todreas, and N.T. Nguyen. Evaluation of existing correlations for the prediction of pressure drop in wire-wrapped hexagonal array pin bundles. *Nuclear Engineering and Design*, 267:109–131, 2014.
- [2] Konstantin Mikityuk. Heat transfer to liquid metal: Review of data and correlations for tube bundles. *Nuclear Engineering and Design*, 239(4):680–687, 2009.
- [3] Giridhar Chetan. *Learning Python Design Patterns*. Packt Publishing, Birmingham - Mumbai, 2 edition, 2016.
- [4] Mariano Anaya. *Clean Code in Python: Refactor your legacy code base*. Packt Publishing, Birmingham, 2018.
- [5] Lutz Mark. *Learning Python: Powerful Object-Oriented Programming*. O'Reilly Media, Sebastopol, USA, 5 edition, 2013.

Fast-reactor MOX fuel performance modelling using TRANSURANUS

– *Internship proposal* –
(ID No. 1000394)

Giovanni Pastore *

newcleo SrL, Via Galliano 27, 10129 Torino, Italy

December 12, 2022

Keywords — Fast reactor, LFR, MOX, fuel performance, TRANSURANUS

Topics — Nuclear fuel, fuel performance codes, physical modelling

Location *newcleo SrL, Via Galliano 27, 10129 Torino, Italy*

Starting date First quarter of 2023

Duration 4–6 months

Context

The *newcleo* company is designing innovative Lead Fast Reactors (LFR) that will employ fuel rods fabricated with MOX fuel and stainless steel cladding. At *newcleo*, fuel rod design and performance analysis are based on the thermo-mechanics computer code TRANSURANUS [1], developed by the Joint Research Center of the European Commission (Karlsruhe, Germany). The accurate simulation of the LFR-MOX fuel rod types that are currently under design at *newcleo* requires a careful study of the physical models available in TRANSURANUS, to ensure appropriate model selections for the reactor conditions and materials considered. Specific code developments at *newcleo* are also envisaged. To this end, particular attention is being given to models for fission gas release (FGR) and swelling due to fission gas retention, which constitute important fuel performance factors that require reliable modeling for the purpose of fuel design and licensing. A physics-based model is available in TRANSURANUS for fission gas behaviour [2], however, the validation base of this model for fast-reactor MOX fuel is still limited. The goal of this internship is to perform fast-reactor MOX fuel rod simulations with TRANSURANUS and compare results to available experimental data for validation, with a focus on those aspects of fuel performance that are directly connected with fission gas behaviour.

*Contact person, giovanni.pastore@newcleo.com

Description

During this internship, the student will perform TRANSURANUS simulations of fast-reactor MOX fuel rods from documented irradiation experiments associated with available experimental data. These may include, e.g., fuel rods irradiated in the past in the sodium-cooled fast reactor JOJO (Japan) and subjected to post-irradiation examinations to measure FGR and the distribution of retained fission gas [3].

The student will have to survey the literature regarding the experiments to set up the TRANSURANUS simulations consistently with the fabrication data and irradiation conditions of the fuel rods, and to extract the available experimental data. Simulations will be run using the latest release of the TRANSURANUS code, which is available at newcleo, potentially including further modifications for fast-reactor MOX fuel analysis. The student will have to compare results from the simulations to the experimental data systematically and consistently. The production of a technical report is expected at the end of the internship to describe the work done and to compile the analysis of the results and experimental comparisons.

The interest for newcleo is in an extension of the validation basis of TRANSURANUS for the analysis of fast-reactor MOX fuel rods, specifically, as concerns modelling fission gas behaviour. The extended validation will add confidence in and support future applications of TRANSURANUS to newcleo's LFR-MOX fuel rod simulations. Indeed, the work is of more general scientific interest, as it will contribute to the progress of fuel performance modelling through comparisons of simulations with publicly available experimental data. For this reason, this internship proposal can lead to an academic dissertation in collaboration with an University.

Work plan

- a) Problem discussion and definition
- b) Survey of fuel rod characteristics, irradiation conditions and post-irradiation data
- c) Setup of TRANSURANUS input files
- d) Running of simulations and critical analysis of results
- e) Comparison of simulation results with experimental data
- f) Preparation of a technical report

Applicant profile

Master or PhD student in Nuclear Engineering.

Background: A University course on nuclear materials technology covering basics of nuclear fuels and the related thermo-mechanics issues. Some experience with using a fuel performance code would be an asset.

Required computer skills: MS Office, basics of computer programming.

References

- [1] K Lassmann. TRANSURANUS: a fuel rod analysis code ready for use. *Journal of Nuclear Materials*, 188:295–302, 1992.

- [2] G. Pastore, L. Luzzi, V. Di Marcello, and P. Van Uffelen. Physics-based modelling of fission gas swelling and release in UO_2 applied to integral fuel rod analysis. *Nuclear Engineering and Design*, 256:75–86, 2013.
- [3] K. Maeda, K. Katsuyama, and T. Asaga. Fission gas release in FBR MOX fuel irradiated to high burnup. *Journal of Nuclear Materials*, 346:244–252, 2005.

Assessment of neutronic data for the calculation of LFR fuel rods by TRANSURANUS

– Internship proposal –
(ID No. 1000360)

Daniele Tomatis ^{*1} and Giovanni Pastore¹

¹newcleo, Via Galliano 27, 10129 Torino, Italy

January 5, 2023

Keywords — LFR, TRANSURANUS, Monte Carlo

Topics — Physical modelling, neutronics, fuel performance and thermo-mechanical codes

Location newcleo SrL, Via Galliano 27, 10129 Torino, Italy

Starting date As soon as possible

Duration 3–4 months

Context

newcleo is designing new Lead-cooled Fast Reactor (LFR) units for small and modular reactors using MOx fuel. At newcleo, fuel performance analysis is performed by the thermo-mechanical computer code TRANSURANUS (TU) distributed by the Joint Research Center of the European Commission based in Karlsruhe, Germany. newcleo has started a careful review of the code in order to ensure its suitability and fitness for the applications with LFR fuel rod types that are currently under design. Such work is also meant producing an upgraded version of the code to extend its range of applications, and in particular, to provide reliable predictions when modelling LFR fuel rods. The goal of this internship is to produce new neutronic data by Monte Carlo calculations that is needed for the TU calculations of LFR fuel rods.

Description

During this internship, the student will perform Monte Carlo calculations of LFR fuel rods by the computer code OpenMC to prepare neutronic data needed by the simplified burnup models implemented in TU. The data represent microscopic one-group reaction rates for the nuclides

^{*}Contact person, daniele.tomatis@newcleo.com

considered in the reduced decay chain of TU. The calculations are requested for both fresh and irradiated fuel, and at different exposure periods. The approach of data preparation will be validated against existing TU data used for LWR fuel types.

Among the target data, the student will have to find feasible and valid means to estimate the radial power distribution inside the hollow fuel pellets by fine tallies, still achieving narrow statistical uncertainty around the expected values in reasonable time. Approximation in the definition of the problem to match the expected critical conditions at operation will be necessary. The production of a technical report is expected at the end of the internship to describe the work done by the student and to compile the analysis of the results.

Work plan

1. Problem discussion and definition
2. Setup of calculations by OpenMC
3. Validation of the approach by comparisons with existing data
4. Analysis of results
5. Preparation of a technical report

Applicant profile

Master or PhD student in Nuclear Engineering. Students in theoretical Physics and applied Mathematics will also be considered for the position.

Background: *fundamentals in Monte Carlo methods for neutral particle transport*.

Required computer skills: Python programming, linux, FORTRAN and \LaTeX scientific editing (optional).

References

- [1] K Lassmann. TRANSURANUS: a fuel rod analysis code ready for use. *Journal of Nuclear Materials*, 188:295–302, 1992.
- [2] K Lassmann and H Blank. Modelling of fuel rod behaviour and recent advances of the TRANSURANUS code. *Nuclear Engineering and design*, 106(3):291–313, 1988.
- [3] Paul K Romano, Nicholas E Horelik, Bryan R Herman, Adam G Nelson, Benoit Forget, and Kord Smith. OpenMC: A state-of-the-art Monte Carlo code for research and development. *Annals of Nuclear Energy*, 82:90–97, 2015.
- [4] Jerome Spanier and Ely M Gelbard. *Monte Carlo principles and neutron transport problems*. Dover Publications, Inc., Mineola, New York, 2008.

Modeling of once-through thermal channels with phase separation by centrifugal force

– Internship proposal –
(ID No. 1000073)

Daniele Tomatis ^{*1}, Giuseppe Francesco Nallo², and Fabio Moretti¹

¹newcleo, Via Galliano 27, 10129 Torino, Italy

²Politecnico di Torino, Dipartimento Energia, Corso Duca degli Abruzzi 24, 10127, Torino, Italy

September 27, 2022

Keywords — Bayonet tube, LFR, DHR, flow boiling

Topics — Physical modelling, two-phase thermal-hydraulics, numerical mathematics

Location newcleo SrL, Via Galliano 27, 10129 Torino, Italy

Starting date As soon as possible

Duration 5–6 months

Context

newcleo has planned an experimental campaign with external partners in order to optimize the design of components for lead-cooled fast reactors. In this framework, mathematical models of the components are needed to reproduce accurately their physical behavior, with the aim of supporting design studies. This internship is proposed to students attending the last year of the Master program in Nuclear Engineering with particular interest in thermal-hydraulics and heat transfer. This internship work could possibly continue with a PhD program.

Description

During this internship, the student will develop a mathematical model of a once-through heat exchanger of bayonet type presenting innovative features capable of preventing possible unstable operation. Such exchangers are made of coaxial tubes, as schematically shown in Figure 1. Subcooled water enters from the top of the inner tube and flows downwards. After, it enters the

*Contact person, daniele.tomatis@newcleo.com

outer tube, where it flows upwards while being heated by the surrounding lead, eventually leaving the system as superheated steam. The flow boiling occurs in helicoidal parallel channels within the outer tube, so that inertial phase separation is expected radially because of the centrifugal force. The outer tube constitutes an inert zone filled by helium to guarantee separation between water and lead. The physical model must describe the different flow boiling regimes encountered within the outer tube, accounting for the presence of inertial phase separation due to the centrifugal force. The full technical details will be provided during the internship, after acceptance of the candidate.

A complete literature review is requested to find the most appropriate physical correlations characterizing the flow and the heat transfer in the channels. The heat exchange between neighbouring channels can be neglected as first approximation (adiabatic assumption). The student will derive the conservation equations to describe the thermal-hydraulic model of the system, and check the validity of suitable closure relations and physical correlations used in the model. The development of a Python code solving the identified equations is requested, with the verification of the numerical solution on simplified case problems. Finally, preliminary investigations about the validation of the model are expected at the end of the internship, despite the complete validation against other computer codes is postponed for future work. At the end of the internship, the preparation of a technical report is expected to describe the work done by the student and to compile the analysis of the results.

This internship will be supervised by an engineer from *newcleo* and the academic staff at PoliTo. This study supports the preparation of an experimental facility whose construction is planned in 2023.

Work plan

1. Literature review and retrieval of the existing work
2. Discussion of the problem
3. Derivation of conservation equations in the channel (adiabatic conditions among channels)
4. Assessment of the physical correlations to characterize the flow and the heat transfer
5. Implementation and verification of the numerical solution
6. Analysis of results and proposal of validation plan
7. Model upgrade with intra-channel heat exchange (optional)
8. Preparation of a technical report

Applicant profile

Master or PhD student in Nuclear, Mechanical or Aeronautical Engineering.

Fundamentals in thermal-hydraulics and heat transfer, multiphase flow.

Required computer skills: Python programming, linux (optional).

References

- [1] N. E. Todreas and M. S. Kazimi. *Nuclear systems Volume I: Thermal hydraulic fundamentals*. CRC press, 2021.

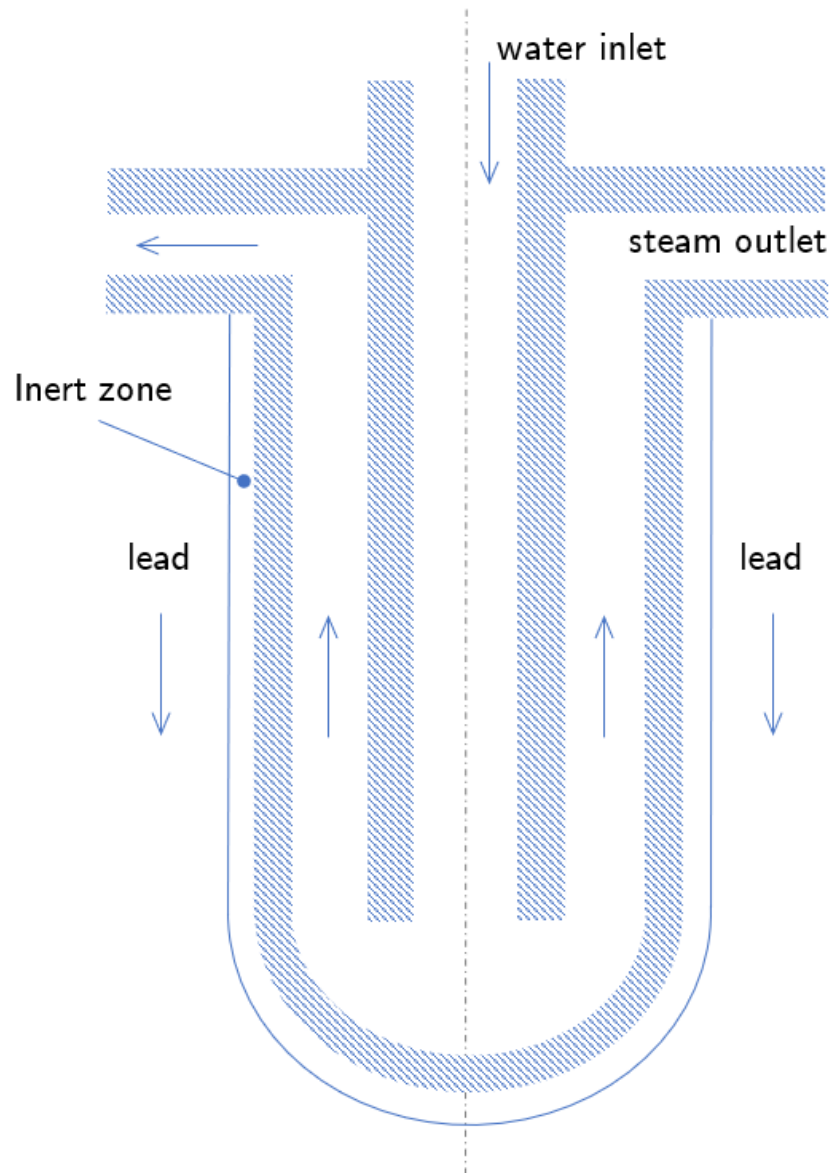


Figure 1: Schematic of a bayonet tube heat exchanger.

- [2] N. E. Todreas, M. S. Kazimi, and M. Massoud. *Nuclear systems Volume II: Elements of thermal hydraulic design*. CRC press, 2021.
- [3] A. Bersano, N. Falcone, C. Bertani, M. De Salve, and B. Panella. Conceptual design of a bayonet tube steam generator with heat transfer enhancement using a helical coiled down-comer. *Progress in Nuclear Energy*, 108:243–252, September 2018.
- [4] D. Rozzia, A. Toti, M. Tarantino, L. Gramiccia, D. Vitale Di Maio, and F. Giannetti. Double-wall bayonet tube steam generator for LFR application – preliminary characterization. Technical Report NNFISS-LP3–032, ENEA Ricerca Sistema Elettrico, Italy, 2011.

Development of the thermal model of a once-through steam generator with spiral geometry and cross-flow

– Internship proposal –
(ID No. 1000303)

Daniele Tomatis ^{*1} and Giuseppe Francesco Nallo²

¹newcleo, Via Galliano 27, 10129 Torino, Italy

²NEMO group, Dipartimento Energia, Politecnico di Torino, Corso Duca degli Abruzzi 24, 10129, Torino, Italy

October 26, 2022

Keywords — LFR, cross-flow heat exchanger, spiral tube, flow boiling

Topics — Physical modelling, two-phase thermal-hydraulics, numerical mathematics

Location newcleo SrL, Via Galliano 27, 10129 Torino, Italy

Starting date As soon as possible

Duration 5–6 months

Context

newcleo has planned an experimental campaign in collaboration with external partners in order to optimize the design of the components for the next units of lead-cooled fast reactors. In this framework, mathematical models of the components are needed to reproduce accurately their physical behavior, with the aim of supporting the design studies.

Description

During this internship, the student will develop a mathematical model of a once-through heat exchanger that presents innovative features to achieve a compact design. The exchanger is made of many layers, each containing a single spiral-shaped tube, arranged in a staggered lattice along the axial direction. The tubes are all immersed in molten lead, which flows outwards from the center to the periphery of the exchanger. The exchanger can be described in cylindrical geometry with the spirals representing the tubes lying in parallel polar planes. Subcooled

*Contact person, daniele.tomatis@newcleo.com




Figure 1: Archimedean spiral.

water enters the spirals at the periphery of the exchanger, flowing inwards inside the tubes, and exits as superheated steam, see Figure 1. The Archimedean or arithmetic spirals are drawn according to the following equation:

$$r = a + b\theta, \quad (1)$$

where a is the centerpoint offset and b is the ratio of the pitch between two consecutive arms of the spiral (pitch) over 2π .

Molten lead flows radially outwards exchanging heat with the water that flows inside the tubes, and can be considered as uniformly distributed along the azimuthal coordinate θ when encountering the first spiral loop. Lead has a very low Prandtl number, so that thermal diffusion shall be taken into account, both radially and azimuthally. Flow-boiling occurs inside the spiral-shaped tubes, and phase separation is expected in the section of the tube because of the centrifugal force applied by the curvilinear motion. Different correlations for heat transfer between lead and water are expected at the two sides of the tube as a consequence of phase separation. Heat-transfer phenomena in presence of phase separation have been extensively studied for helical configurations in the past, but not for spiral configurations. The student will perform a review of the existing literature to find appropriate physical correlations for heat transfer between lead and water in the configuration at hand. New correlations for the distributed friction in cross-flow are expected to become available during the internship thanks to the first results of the experimental campaign.

The student will derive the conservation equations to describe the thermal-hydraulic model of the system, and check the validity of suitable closure relations and physical correlations used in the model. The development of a Python code solving the identified equations is requested, with the verification of the numerical solution in simplified case problems. Finally, preliminary investigations about the validation of the model are expected at the end of the internship, despite the complete validation against other computer codes is postponed for future work. At the end of the internship, the preparation of a technical report is expected to describe the work done by the student and to compile the analysis of the results.

This internship will be supervised by an engineer from *newcleo* and the academic staff at PoliTo. This study supports the preparation of an experimental facility whose construction is planned in 2023.

Work plan

1. Literature review and retrieval of the existing work

2. Problem discussion and definition
3. Derivation of the conservation equations in the spiral-like tube
4. Assessment of the physical correlations to characterize the flow and the heat transfer
5. Implementation and verification of the numerical solution
6. Analysis of results and proposal of validation plan
7. Preparation of a technical report

Applicant profile

Master or PhD student in Nuclear, Mechanical or Aeronautical Engineering. Students in theoretical Physics and applied Mathematics will also be considered for the position.

Background: *fundamentals in thermal-hydraulics and heat transfer, multiphase flow.*

Required computer skills: Python programming, linux, \LaTeX scientific editing (optional).

References

- [1] N. E. Todreas and M. S. Kazimi. *Nuclear systems Volume I: Thermal hydraulic fundamentals*. CRC press, 2021.
- [2] N. E. Todreas, M. S. Kazimi, and M. Massoud. *Nuclear systems Volume II: Elements of thermal hydraulic design*. CRC press, 2021.
- [3] Vincenzo Luci and Vittorio Vaiarelli. THEST: an in-house tool for spiral-tube steam generator design and verification. Technical report, newcleo SrL, Turin, Italy, 2021. LFR-000-NC-A-T-25-0002.
- [4] Andrew Michael Fsadni and Justin P.M. Whitty. A review on the two-phase heat transfer characteristics in helically coiled tube heat exchangers. *International Journal of Heat and Mass Transfer*, 95:551–565, 2016.
- [5] Paisarn Naphon and Somchai Wongwises. A review of flow and heat transfer characteristics in curved tubes. *Renewable and Sustainable Energy Reviews*, 10(5):463–490, 2006.

Comparison of physics-based models for fission gas in fast reactor applications

– Internship proposal –
(ID No. 1001107)

Erik Guizzardi * and Daniele Tomatis

newcleo SrL, Via Galliano 27, 10129 Torino, Italy

June 12, 2023

Keywords — Fast reactor, LFR, MOX, fuel performance, TRANSURANUS

Topics — Nuclear fuel, fuel performance codes, physical modelling

Location *newcleo SrL, Via Galliano 27, 10129 Torino, Italy*

Starting date As soon as possible

Duration 4–6 months

Context

newcleo is designing lead-cooled fast reactors (LFR) with innovative features to address the challenges of LFR technology while meeting the sustainability, economic and safety goals required for the fourth generation of nuclear reactors. The design of the fuel elements deserves a special attention because LFR reactors use new materials and operate at higher temperature and linear power levels compared to current light water reactors (LWR). *newcleo* is currently carrying out thermo-mechanical analysis of the fuel rods by the computer code TRANSURANUS [1]. The fuel performance code TRANSURANUS is developed by the Joint Research Center in Karlsruhe (JRC-Germany) and *newcleo* under a collaboration agreement. As a general rule, it is very important to use accurate physical models to obtain reliable results from the numerical simulation. The new trend with fuel performance codes is adopting physics-based models instead of the traditional correlation-based models to take advantage of the fact that they can reproduce a wider range of applications, notably covering high burnup and many different fuel types at once. This characterized the project INSPYRE funded by the European Commission. In particular, this internship is about the comparison of two physics-based models that can be used with TRANSURANUS to describe the fission gas behavior in the fuel rod under irradiation.

*Contact person, erik.guizzardi@newcleo.com

Description

The formation and release of gaseous fission products from the fuel matrix to the free volume of the rod are among the main physical phenomena characterizing the fuel rod performance and maximum exposure lifetime. In particular, TRANSURANUS includes the model FISPRO and FISPRO2 to describe gas formation and release. The main difference in these models lies in the inter-granular treatment of the gas, with the first using a simplified approach and the second adopting a physics-based approach, which considers detailed bubble growth, coalescence and release [2]. In addition, FISPRO2 couples fission gas production and release with fuel pellet swelling. Although this module was originally developed for LWR-UO₂ fuel type, it can also be used with other fuel types thanks to its physical basis. In fact, the module has already been used to simulate MOX fuel of fast reactors, that is the same fuel type meant for the reactors designed by newcleo [3, 4]. Further validation of this model with MOX fuel types is necessary before final deployment and use in industrial applications. Validation is generally performed by comparisons with experimental data and comparisons of numerical results produced with different computer codes. In this work, we propose to compare the results produced by FISPRO2 with the results produced by another physics-based model, SCIENTIX [5], which reproduces the same physical phenomena. SCIENTIX is open-source, and it is developed at the Politecnico di Milano, Italy.

During this internship, the student will be involved in the activity of coupling TRANSURANUS with SCIENTIX. After verification of the coupling implementation, the student will calculate a few use cases featuring FBR-MOX fuel rods by using both FISPRO2 and SCIENTIX. The preparation of a technical report detailing the implementation and the analysis of the results is expected at the end of the internship. This work is directly supporting the validation of FISPRO2, and it will provide useful insight about the predictive capabilities of the two mechanistic fission gas models.

Work plan

- a) Problem discussion and definition
- b) Literature review
- c) Setup of TRANSURANUS input files
- d) Verification of the coupling between TRANSURANUS and SCIENTIX
- e) Analysis of the numerical results
- f) Preparation of a technical report

Applicant profile

Master or PhD student in Nuclear Engineering.

Background: A University course on nuclear materials technology covering basics of nuclear fuels and the related thermo-mechanics issues. Some experience with using a fuel performance code would be an asset.

Computer skills: FORTRAN, L^AT_EX.

References

- [1] K Lassmann. TRANSURANUS: a fuel rod analysis code ready for use. *Journal of Nuclear Materials*, 188:295–302, 1992.
- [2] G. Pastore, L. Luzzi, V. Di Marcello, and P. Van Uffelen. Physics-based modelling of fission gas swelling and release in UO_2 applied to integral fuel rod analysis. *Nuclear Engineering and Design*, 256:75–86, 2013.
- [3] L et Al. Luzzi. Assessment of INSPYRE-extended fuel performance codes against the SUPERFACT-1 fast reactor irradiation experiment. *Nuclear Engineering and Technology*, 55:884–894, 2023.
- [4] Filippo Verdolin, Stephen Novascone, Davide Pizzocri, Giovanni Pastore, Tommaso Barani, and Lelio Luzzi. Modelling fission gas behaviour in fast reactor (U, Pu) O_2 fuel with BISON. *Journal of Nuclear Materials*, 547:152728, 2021.
- [5] D Pizzocri, T Barani, and L Luzzi. SCIENTIX: a new open source multi-scale code for fission gas behaviour modelling designed for nuclear fuel performance codes. *Journal of Nuclear Materials*, 532:152042, 2020.

Validation of ECCO calculations of LFR fuel assemblies by Monte Carlo calculations

– Internship proposal –
(ID No. 1000247)

Daniele Tomatis*, Matteo Falabino and Roberto Spaggiari

newcleo, Via Galliano 27, 10129 Torino, Italy

January 5, 2023

Keywords — LFR, V&V, ECCO, lattice calculations, cross section preparation

Topics — Physical modeling, neutronics, fuel design

Location newcleo SrL, Via Galliano 27, 10129 Torino, Italy

Starting date As soon as possible

Duration 5–6 months

Context

newcleo is designing new units of lead-cooled fast reactors (LFR) aiming to increase the utilization of plutonium produced by the many light water reactors that are currently operating worldwide. The fuel elements are exposed to a fast neutron spectrum favoring fission of heavier actinides. The reactor is cooled by molten lead that shows low neutron absorption and shields radiation protecting the core vessel.

The computer code ECCO (European Cell COde) from the ERANOS 2.3N code suite is used for all the activities of fuel design. ERANOS is a system of computer codes developed in the 1990s for the calculation of fast reactors. ECCO solves the neutron transport equation by the collision probability method using the subgroup method to shield the cross sections of the resonant nuclides. This internship focuses on the validation of the results obtained by ECCO on typical hexagonal fuel assemblies using the Monte Carlo computer code OpenMC.

Description

The fuel assemblies used in LFRs are built upon a hexagonal lattice with hollow fuel pellets inside the fuel rods. A typical fuel assembly for LFR is shown in Fig. 1. The fuel is made of

*Contact person, daniele.tomatis@newcleo.com

mixed uranium and plutonium oxides. The rods can also contain poorly-enriched fuel along the axis that makes breeding zones for the optimization of the core cycle. A metallic wire is helically wrapped around the cladding of the fuel rods to avoid mechanical contact between neighboring rods. The assemblies are boxed and immersed in molten lead, which removes the heat released by nuclear reactions while flowing through the assemblies.

During this internship, the candidate will calculate a set of fuel assemblies by the Monte Carlo code OpenMC in order to compare pin-wise reaction rates and integral quantities like the neutron multiplication factor with the corresponding quantities obtained with the calculations performed by ECCO. Simplified calculation schemes are generally adopted with ECCO, thus introducing physical approximations in the problem to solve, but with the advantage of achieving fast calculations. Instead, Monte Carlo calculations introduce fewer approximations but at the cost of longer calculations. They are then used to validate the deterministic calculations in a representative set of cases, featuring different assembly types. Comparisons of reaction rates in the typical 33-group energy mesh of ERANOS are also requested to validate the self-shielding step done by ECCO. The validation will be performed with fresh fuel, and optionally after exposure at different burnup steps.

Finally, the student will study the anisotropy effects for this kind of assemblies, especially in presence of a central cooling tube. At the end of the internship, the preparation of a technical report is requested to describe the work done by the student and to compile the analysis of the results. This internship will be supervised by engineers from *newcleo*.

Work plan

1. Retrieval of the existing work about ECCO calculations
2. Setup and installation of OpenMC
3. Analysis of the test cases
4. Problem discussion
5. Calculation of the different cases by OpenMC
6. Analysis of results
7. Preparation of the technical report

Applicant profile

Master or PhD student in Nuclear Engineering, Theoretical or applied Physics.

Background: *fundamentals in reactor physics, neutronics and Monte Carlo methods*.

Required computer skills: Python programming (intermediate level), Linux, \LaTeX scientific editing (optional).

References

- [1] Paul K Romano, Nicholas E Horelik, Bryan R Herman, Adam G Nelson, Benoit Forget, and Kord Smith. Openmc: A state-of-the-art monte carlo code for research and development. *Annals of Nuclear Energy*, 82:90–97, 2015.

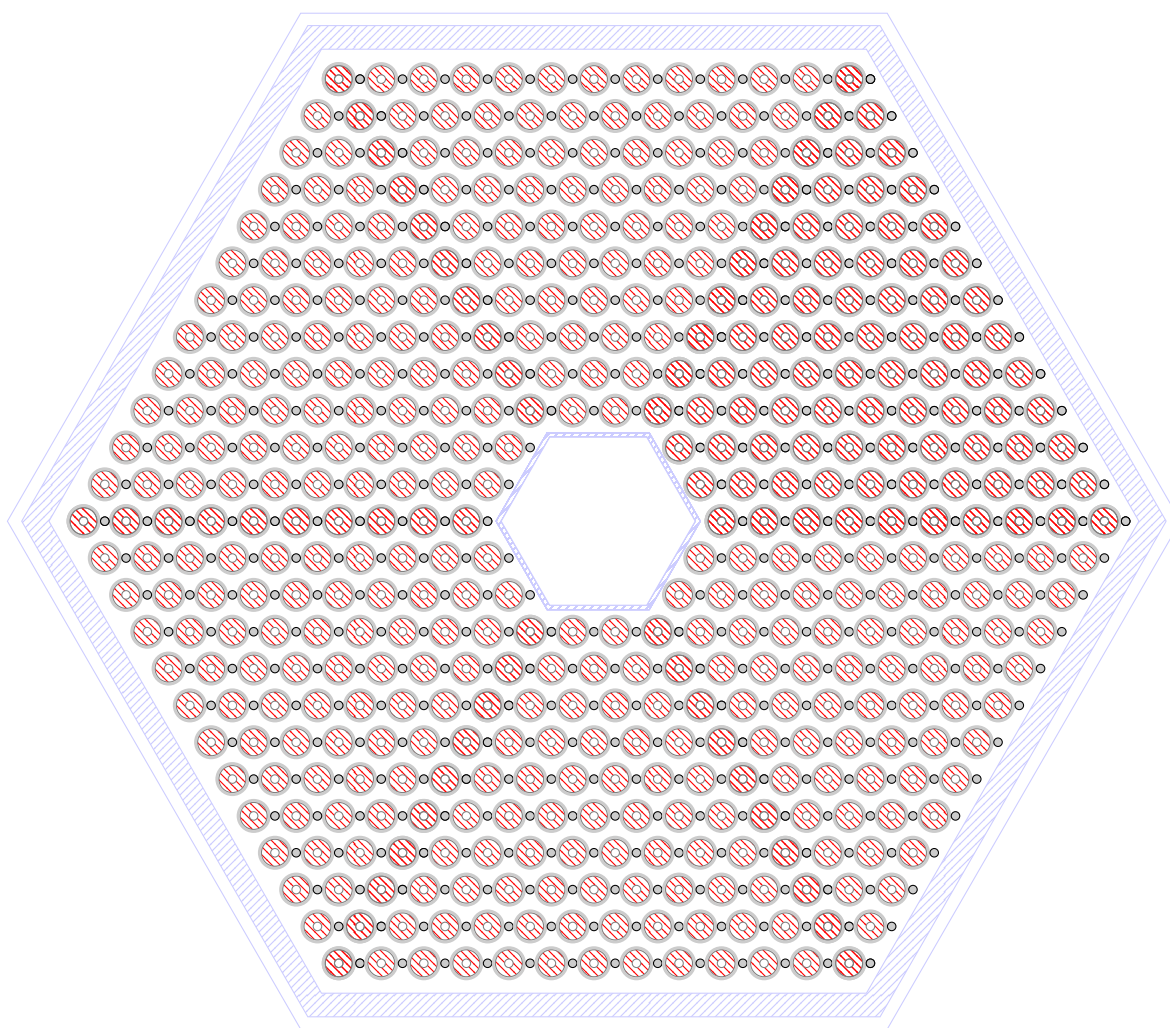


Figure 1: Section of a boxed fuel assembly with central tube.

- [2] Gérald Rimpault, Danièle Plisson, Jean Tommasi, Robert Jacqmin, Jean-Marie Rieunier, Denis Verrier, and Didier Biron. The ERANOS code and data system for fast reactor neutronic analyses. In *Proc. Int. Conf. on the New Frontiers of Nuclear Technology PHYSOR2002: Reactor Physics, Safety and High-Performance Computing, Seoul, South Korea*, Oct 7-10 2002.
- [3] E Garcia, P Sciora, T Kooyman, G Rimpault, H Guo, and B Faure. Flux distribution of the Superphénix start-up core for the validation of neutronic codes. *Annals of Nuclear Energy*, 133:889–899, 2019.
- [4] Kenneth Allen, Travis Knight, and Samuel Bays. Benchmark of advanced burner test reactor model using mcnp 2.6. 0 and eranos 2.1. *Progress in Nuclear Energy*, 53(6):633–644, 2011.
- [5] Siyu Lyu, Daogang Lu, and Danting Sui. Neutronics benchmark analysis of the ebr-ii shrt-45r with sac-3d. *Nuclear Engineering and Design*, 364:110679, 2020.