Table of Contents

- Introduction
- Masking (Quick-Start Guide)
  - Preparing the Room
  - Starting Camera Masking
  - Finishing Camera Masking
  - Quick-Start Navigation

Introduction

This quick-start guide covers:

- The automatic masking process.
- Why you should mask cameras and the effect of reflections.
- Navigating camera views and unmasked displays.
- How cameras identify reflections and subjects..

This is the first of the three-part quick-start system preparation guide:

1. ***Masking your Cameras***
2. Calibrating your Cameras
3. Setting Volume Origin and Plane

Masking (Quick-Start Guide)



Camera Mask Display

What are Masks?

Masks tell the camera *"ignore all light values coming from this area"*. The motion capture cameras strobe UV light, and track reflections of these rays to determine positions. When static object or light reflections create visual data for the camera it can degrade 3D data accuracy - this noisy data would otherwise be misinterpreted and tracked by the camera.

The **Mask Cameras** tool automatically applies these masks, represented as blue squares, to the camera view where it is detecting reflections.

Preparing the Room

Because masks are set *once* during **system preparation**, you should make sure the objects in the room are not going to move.

Since they are used in tracking - the most important thing to do before masking the cameras is to *remove all markers from the environment*.


Reflective markers


Markers are highly reflective - the ones pictured are attached to a base, but these can be removed and markers can be attached directly to objects as well. As markers are machined hemispheres, the centroid (the marker's centre) can be identified at distance by the camera. This allows for object tracking.

If markers are present in the environment when you start masking the system will treat this as an area to be ignored. They are designed to be noticed by the cameras.

For more Information see the removing reflections guide. This covers how to identify reflective objects and prepare your environment before calibration.

Important: The recommended practice is perform a calibration at the start of each day, or when beginning a capture session if the environment has changed.


Starting Camera Masking

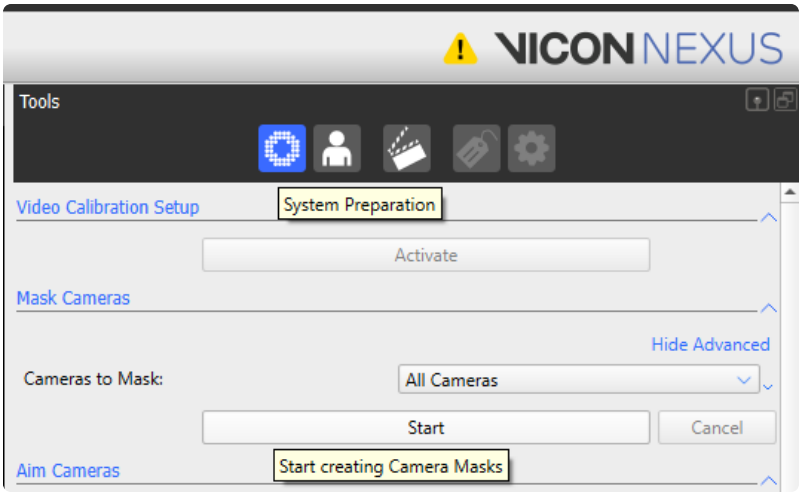

How to start camera masking


With the '**System Preparation**' tab open, on the right-hand '**Tools**' panel, you can click the *Start* button to begin creating camera masks.

When you start this process the '**Vicon Nexus**' **View** panel (located, by default, in the middle of the user interface) will change to display all cameras.

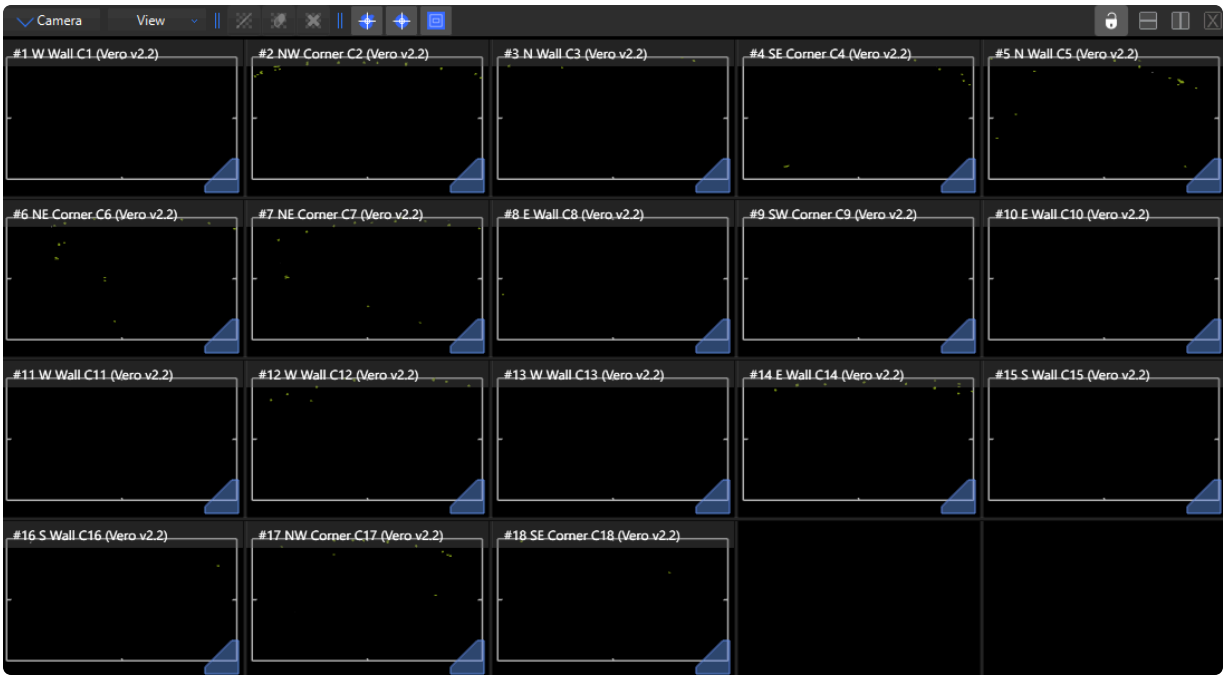


Masking View at Start - All Cameras

If you have adjusted the view you can re-select all cameras by holding *shift* and clicking the first camera in the **Resource** panel, and then the last.

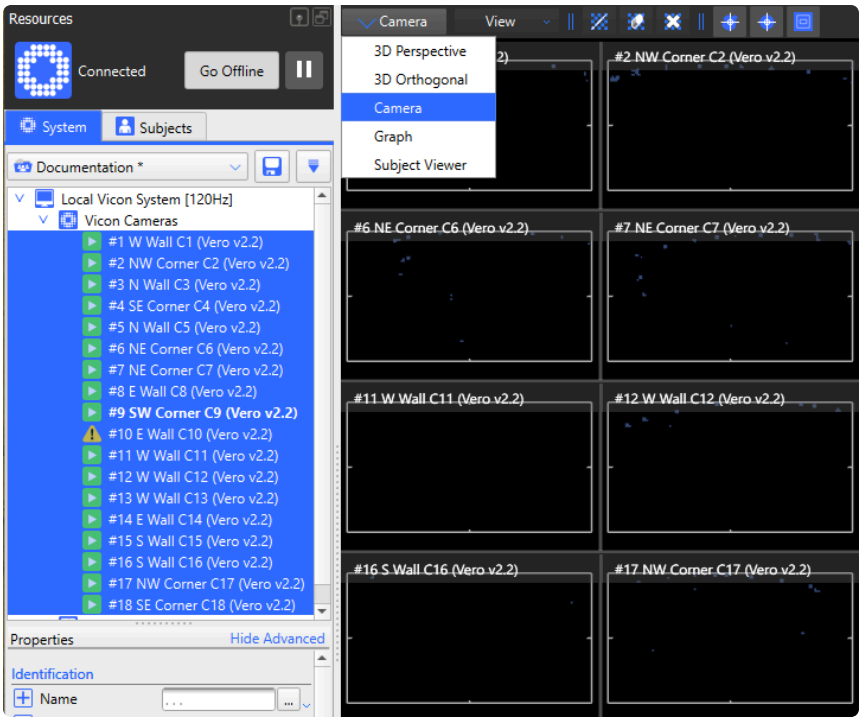

Selecting multiple camera views

Over the next couple of seconds the cameras will detect these reflections and place a marker (a blue square) over that area of the camera's sensor window.

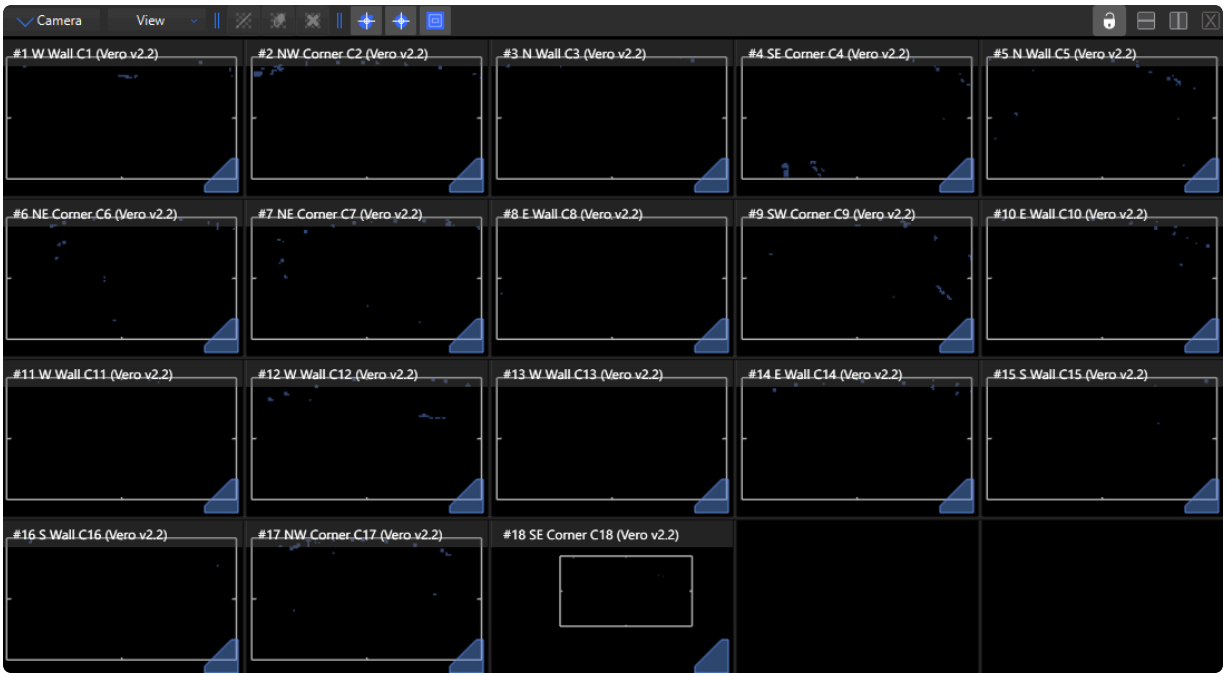


Masking View at End - All Cameras

This process is very quick and should be completed within 20 seconds.

Once all the flickers are replaced with blue mask squares (see above) the process is complete.


Finishing Camera Masking

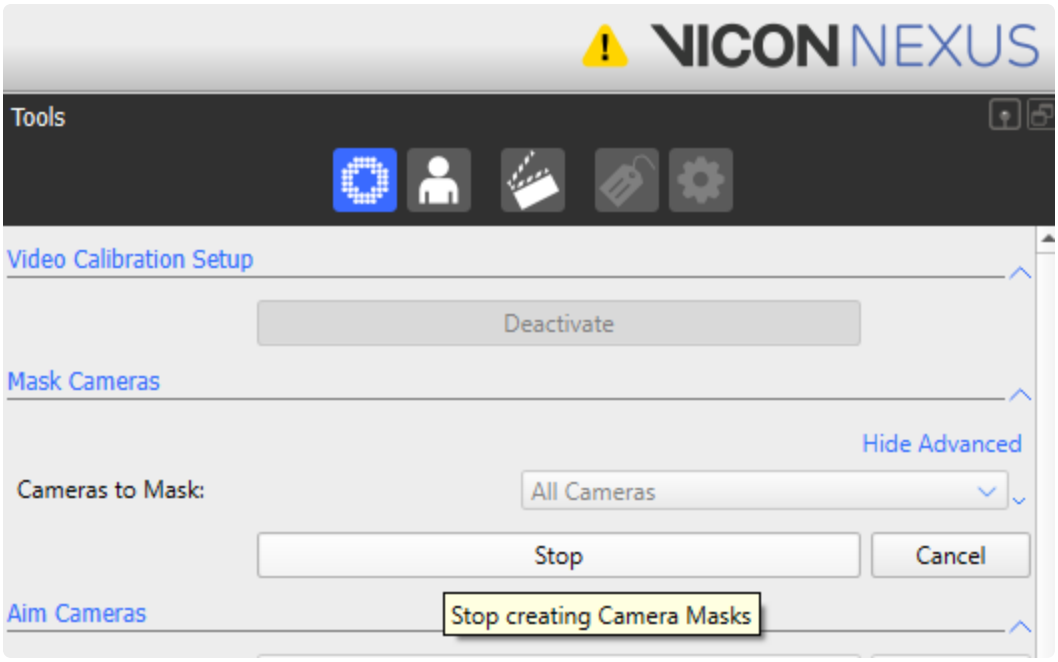

How to stop camera masking

Once the masks have been placed in the camera view you can stop the masking process, using the same button you started the process with.

You can select an individual camera, as before, to view the new masks in place over the camera sensor view.

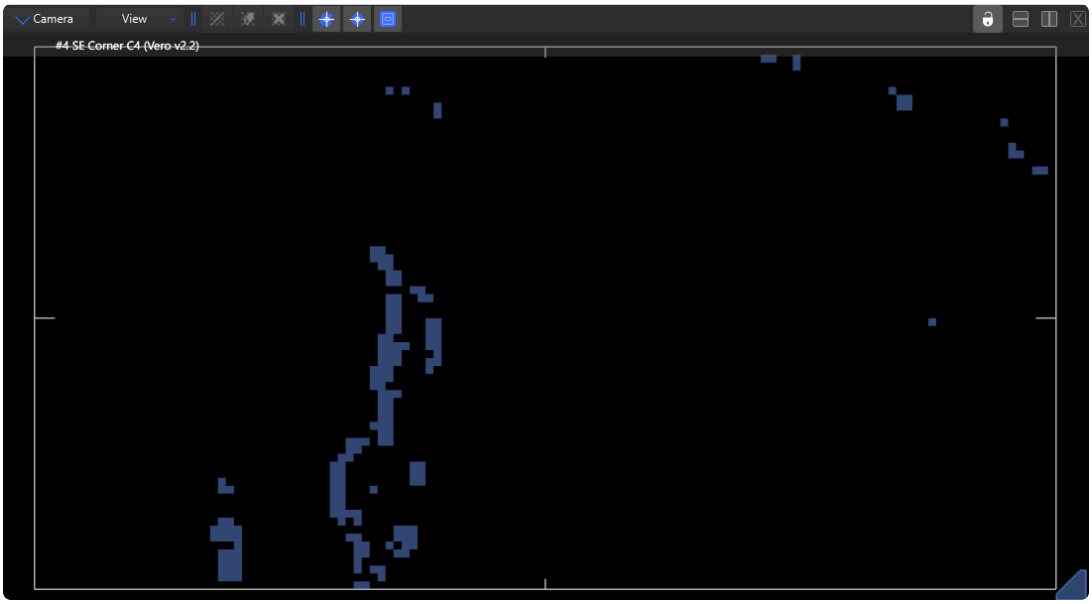

Single camera masks

If there are any reflections that have not been captured by the masking process, or a new reflection is introduced, you can also manually add masks.
For more Information on this see the manual masking guide.

Once you have successfully masked the cameras, you are ready to calibrate the system.

Quick-Start Navigation

Previous	***n/a***
Next	**Quick Start Part 2/3: Camera Calibration**
