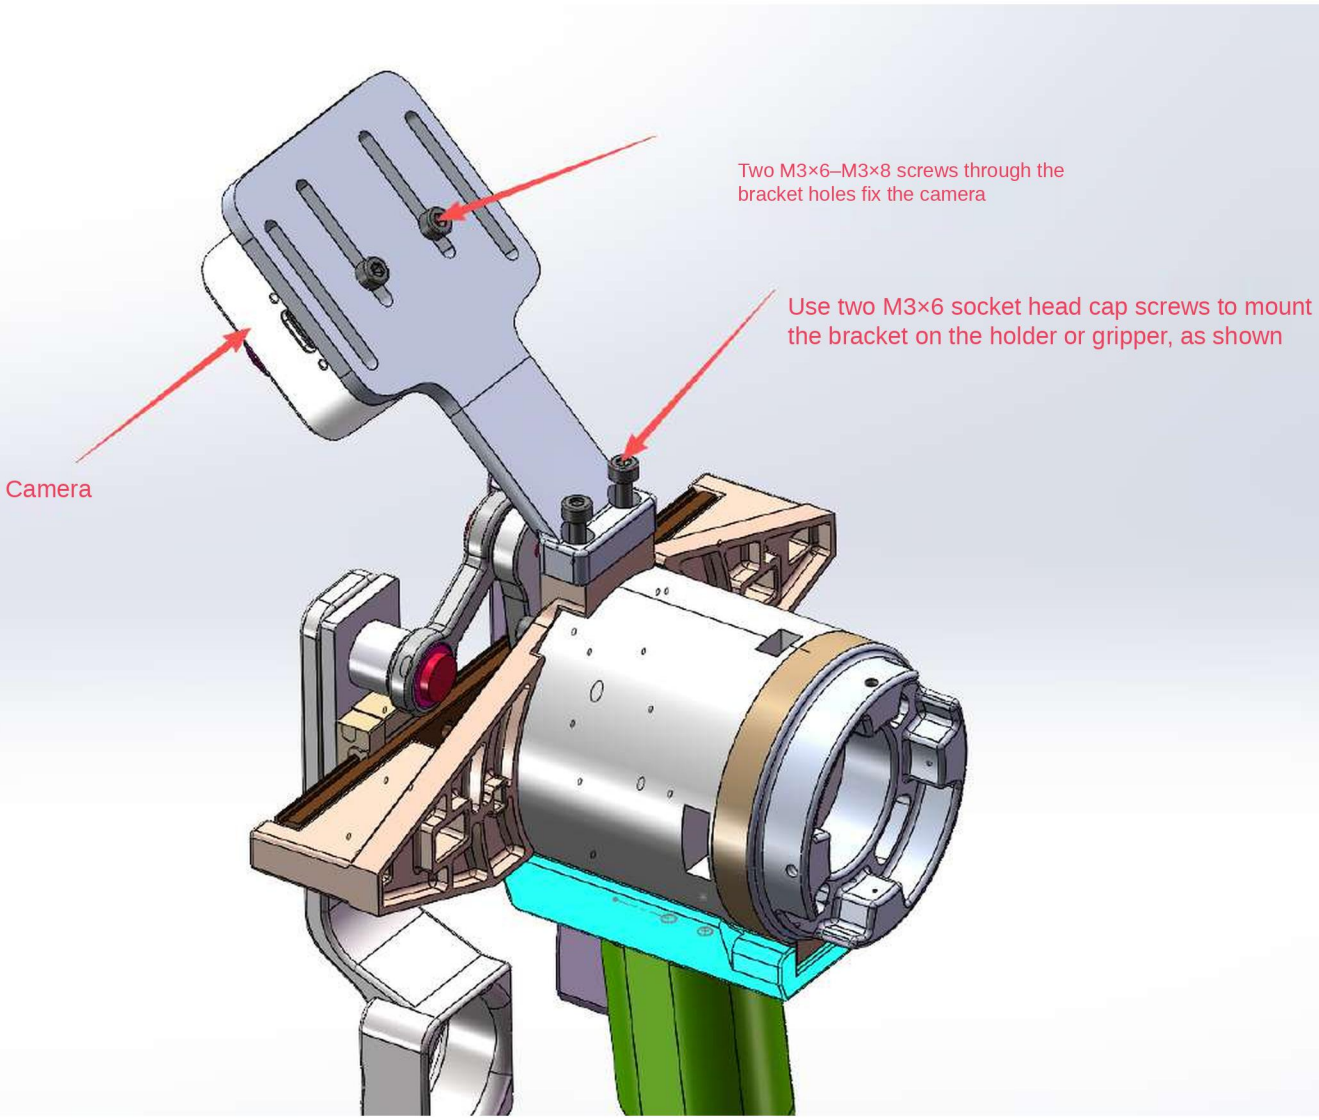
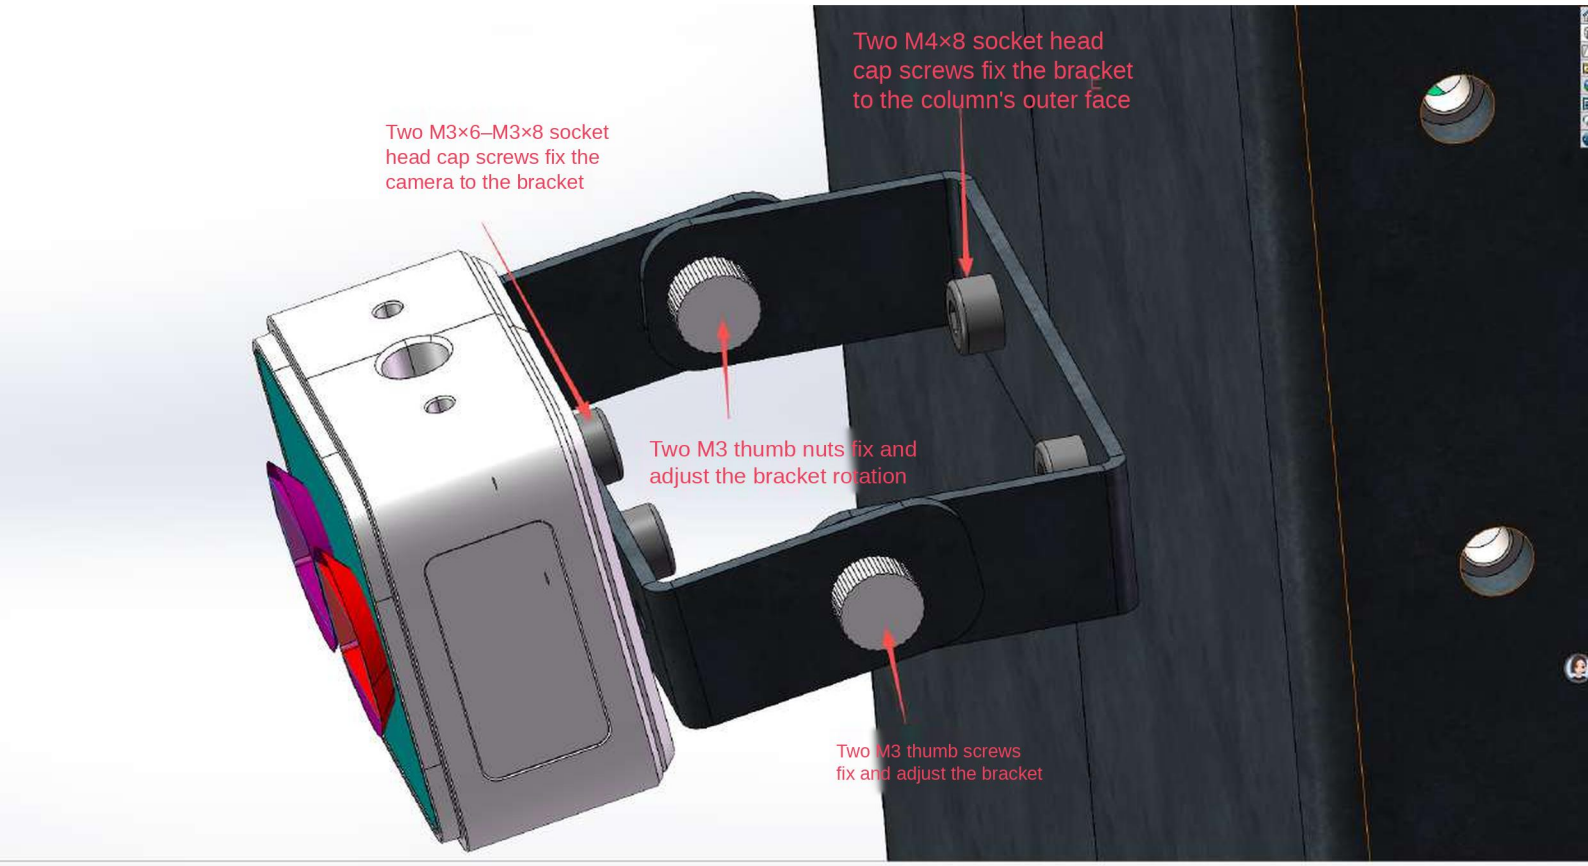
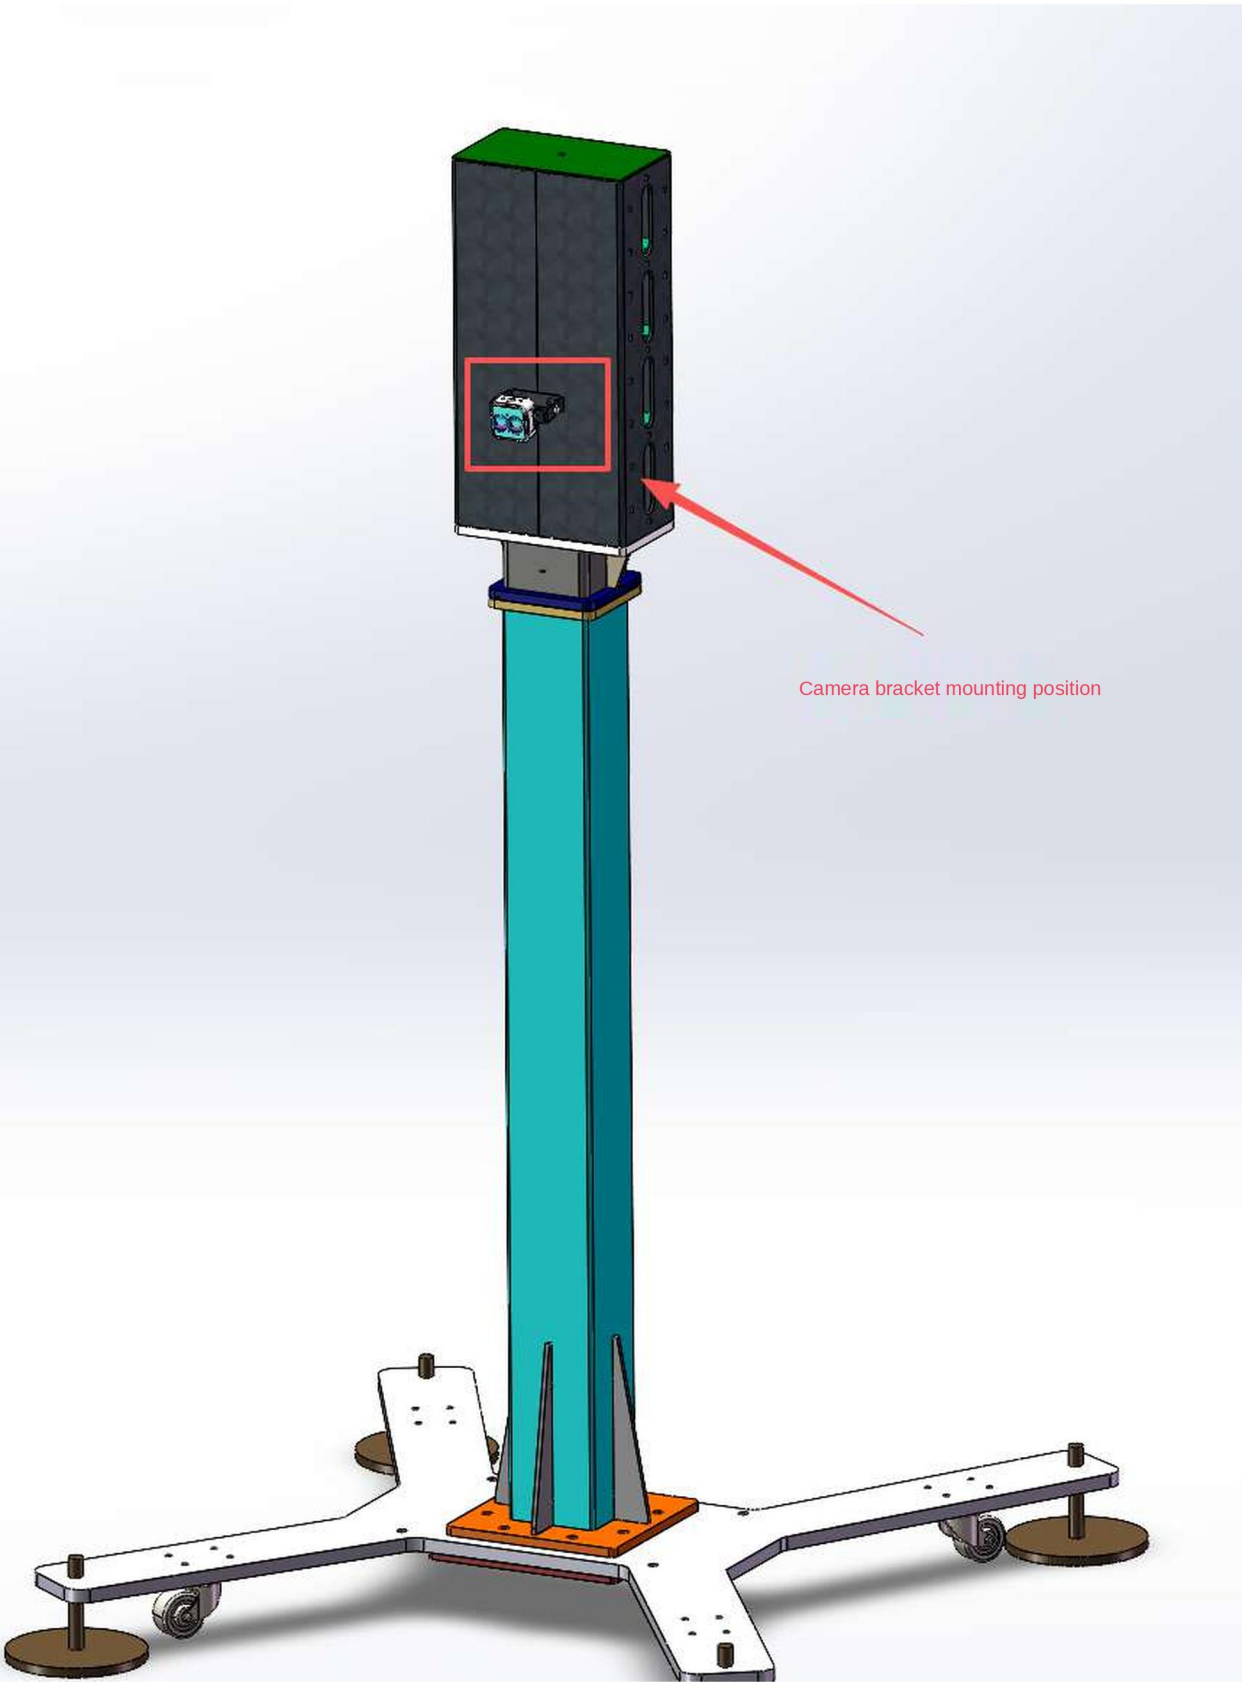

Two M3×6–M3×8 screws through the bracket holes fix the camera
Use two M3×6 socket head cap screws to mount the bracket on the holder or gripper, as shown
Camera


Two M4×8 socket head cap screws fix the bracket to the column's outer face
Two M3×6–M3×8 socket head cap screws fix the camera to the bracket
Two M3 thumb nuts fix and adjust the bracket rotation
Two M3 thumb screws fix and adjust the bracket


Camera bracket mounting position